


Slimline Shaker with Cupboard

Assembly Instructions - Please keep for future reference

164/9783

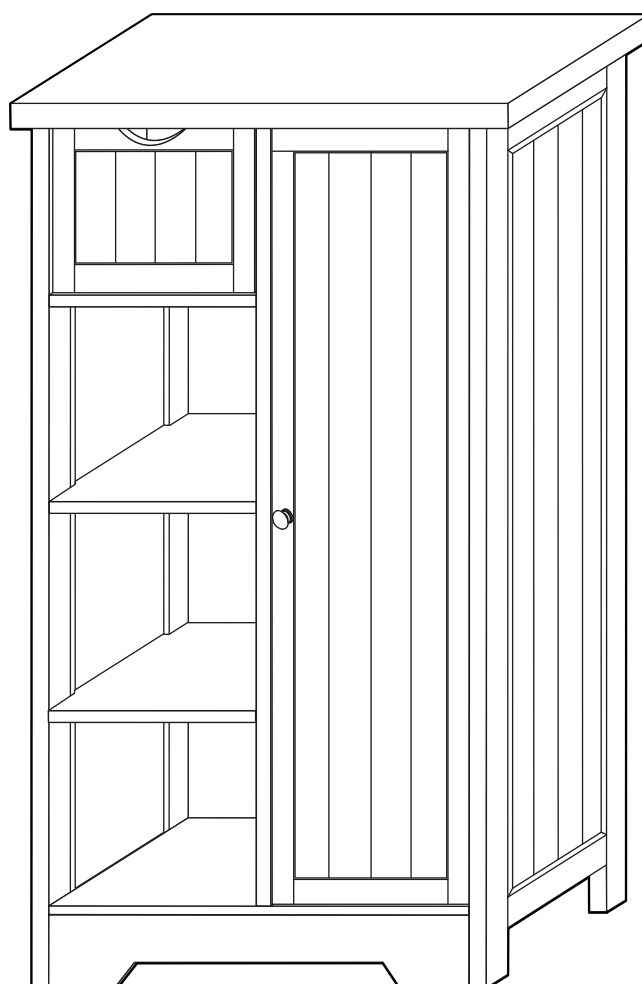

Dimensions

Width - 82cm

Depth - 30.5cm

Height - 56cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 640 0800**



Safety and Care Advice

Important—Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 1 and 2.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to lay out the parts before starting.

- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and Maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components,
call the **Customer Helpline: 0845 640 0800**

Please check you have all the panels listed below




1 Top Panel x 1
(56(h)cm x 30.5(d)cm)




2 Left side Panel x 1
(80.5(h)cm x 29(d)cm)



3 Right Side Panel x 1
(80.5(h)cm x 29(d)cm)




4 Centre Panel x 1
(71.5(w)cm x 28.5(d)cm)




5 Shelf Panel x 2
(25(w)cm x 28.5(d)cm)



6 Back Panel x 1
(25(w)cm x 28.5(d)cm)




7 Door Panel x 1
(71(w)cm x 24(d)cm)




8 Base Panel x 1
(50(w)cm x 28.5(d)cm)



9 Plinth x 1
(50(w)cm x 7.5(d)cm)



10 Shelf x 2
(25(w)cm x 26(d)cm)



11 Drawer Front Panel x 1
(24(w)cm x 15.5(d)cm)



12 Drawer side Panel x 2
(28(w)cm x 15.5(d)cm)



13 Drawer Back Panel x 1
(22(w)cm x 15.5(d)cm)



14 Drawer Base x 1
(26.5(w)cm x 22.5(d)cm)



15 Back Panel x 2
(74(w)cm x 36(d)cm)




















Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 0845 640 0800**

Please check you have all the panels listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  30mm Dowel x 24	B  35mm Male Camlock x 18	C  10mm Female Camlock x 18	D  25mm Screw x 8
E  Magnetic catch x 1	F  Catch plate x 1	G  Drawer stopper x 1	H  12mm screw x 3
I  Door Knob x 1	J  30mm screw x 1	K  Shelf Support x 8	L  Hinge pin x 2
M  12mm screw x 23	N  16mm screw x 3	O  Wall strap x 1	P  Wall Plug x 1
Q  Wall screw x 1			

Tools required



Phillips Screwdriver

Ruler – Use this ruler to help correctly identify the screws




Assembly Instructions

Step 1


Insert 6 x Male Camlock **B** into Top Panel **1**

Connect drawer stopper **G** to Panel **1** using 1 x 14mm screw **H**

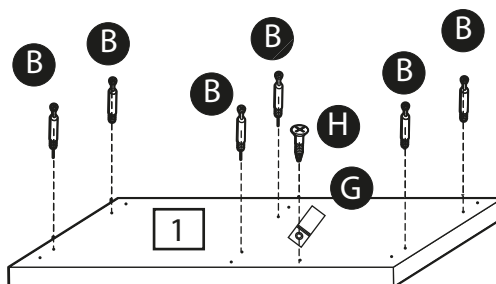

Step 2


Connect Drawer back panel **13** to 2 x drawer side panel **12** using 4 x 25mm screw **D**

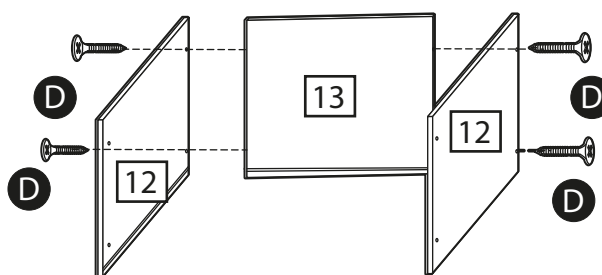

Step 3

Slide Base panel **14** into position along grooves in side panels **12**

Attach Drawer Front **11** using 4 x 25mm screw **D**

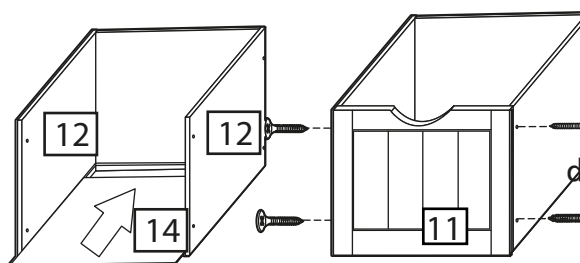


Step 4

Into Shelf panel **5** x 2, insert 4 x 30mm dowels **A**
Locate dowels into holes in middle panel **4**

Connect 2 x Male camlocks **B** into middle panel **4**. Locate these into shelf panel **6** and lock together with 2 x Female camlock **C** using Phillips screwdriver

Insert 2 x 30mm dowels **A** into the short edge of middle panel **4** as shown. Insert 2 x Male Camlock **B** into base Panel **8**. Locate these into middle panel **4** and lock together with 2 x female camlock **C** using Phillips screwdriver

Attach Plinth **9** to Base panel **8** using 2 x 30mm dowel **A**.

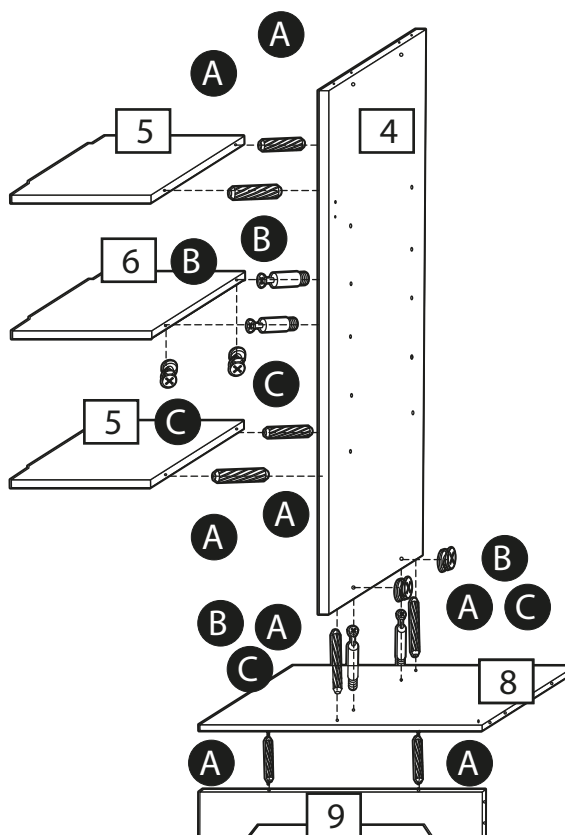

Assembly Instructions


Step 5

Into Shelf panel **5** x 2, insert 4 x 30mm dowels **A**. Connect 2 x Male camlocks **B** into central holes in Left panel **2** as shown.

Insert 2 x 30mm dowels **A** into left hand side of base panel **8** and 2 x 30mm dowels **A** into right hand side of base panel **8**. Insert 2 x 30mm dowel **A** into Plinth **9**.

Connect 3 x Male Camlock **B** into left side panel **2**. Repeat this for right side panel **3**.

You can now connect side panel **2** and **3** to base panel **8** and plinth **9**. To do this Locate all fittings to adjacent holes and connect 8 x Male camlocks **B** with 8 X Female camlock **C** using Phillips screwdriver.

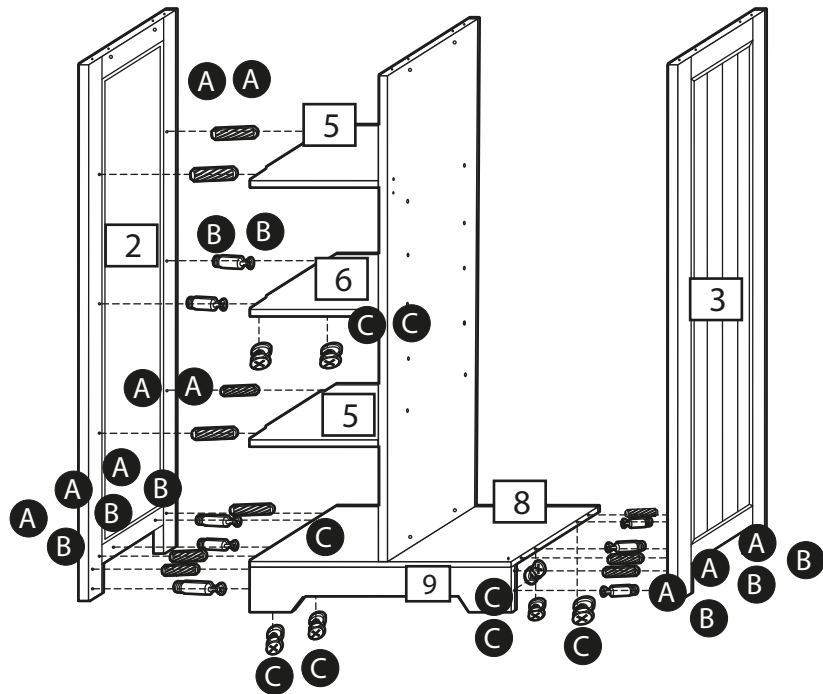


Step 6

Connect door knob **I** to door panel **7** using 30mm screw **J**. Use 2 x 14mm screw **H** to attach catch plate **F**. To connect door panel **7** to the unit, 2 x hinge pins **L** will locate into holes in base panel **8** and top panel **1** once attached.

Insert 6 x 30mm dowels **A** into the top of panels **2**, **3** and **4**. These along with Male Camlocks in top panel **1** will locate into adjacent holes. Lock together with 6 x Female Camlocks **C** using a phillips screwdriver.


Connect 8 x shelf support **K** into middle panel **4** and right panel **3**.

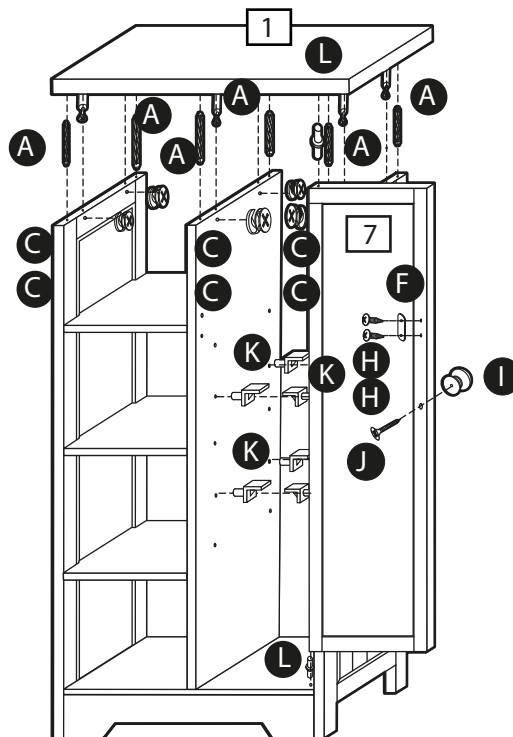

Assembly Instructions

Step 7

Attach 2 x Back panel **15** to the reverse of the unit using 23 x 12mm screw **M**

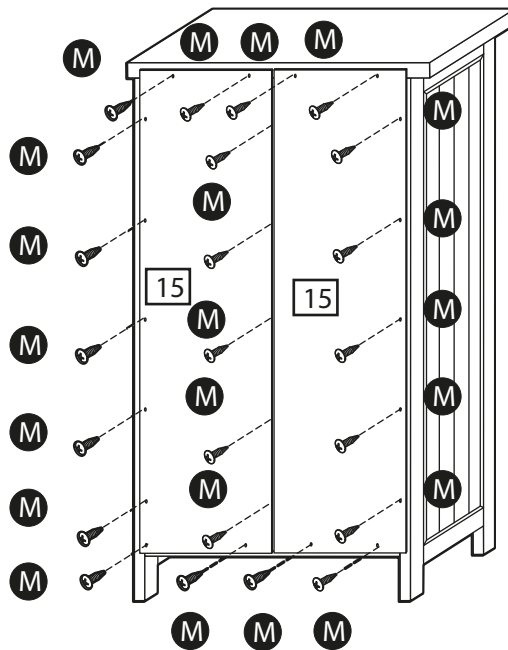


Step 8

Connect Magnetic catch **E** to middle panel **4** as shown using 2 x 16 mm screw **N**

Insert 2 x shelf **10** onto shelf supports.

Insert draw unit as shown

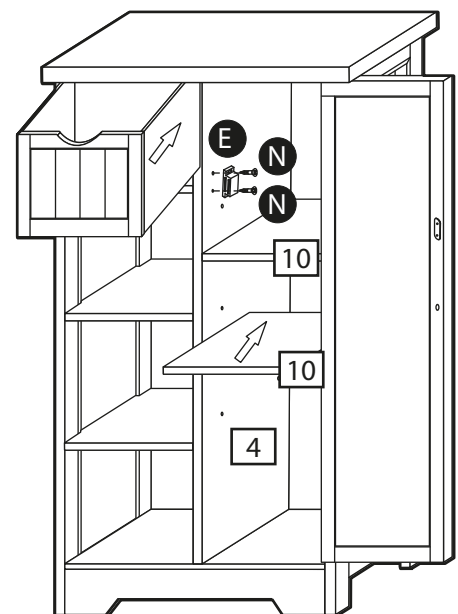

Step 9

On reverse of unit attach Wall strap **O** to the unit using 1 x 16mm screw **N**. Connect the unit to the wall using Wall plug **P** and wall screw **Q**

Assembly complete

