


Venice - Entertainment Unit

Assembly Instructions - Please keep for future reference

365/5397

339/1077

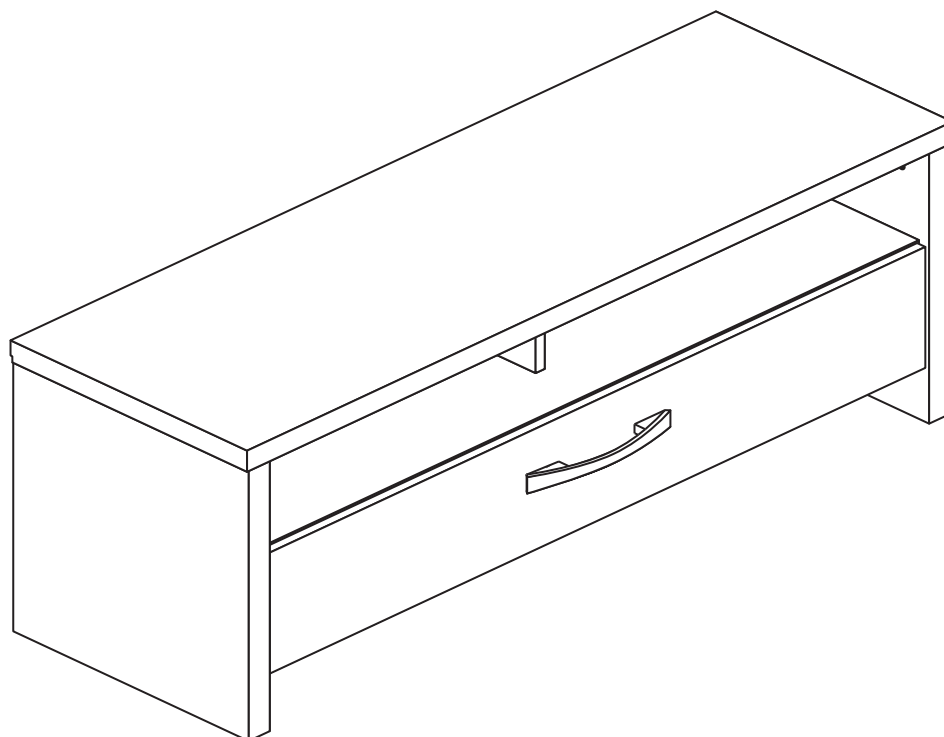

Dimensions

Width - 117cm

Depth - 39cm

Height - 48.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 21kgs. Please lift with care.

- Check you have all the components and tools listed on pages 1, 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Tools required




Rule



Scissors



Cross-head screwdriver



Hammer




Eye protection (when using a hammer or drill)

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below


Please check you have all the panels listed below




1 Left Side (D1900A)
(448 x 389mm)




2 Right Side (D1901A)
(448 x 389mm)

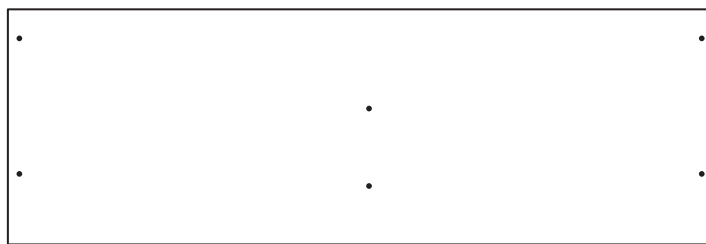


3 Top (D1968A)
(1166 x 391mm)

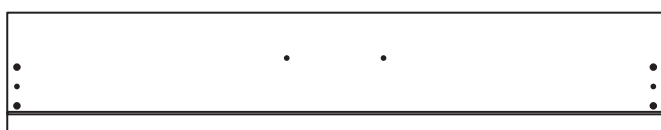


4 Drawer Front (D3080A)
(1084 x 200mm)



5 Drawer Back (W559)
(1039 x 105mm)




6 Left Drawer Side (W409LH)
(320 x 105mm)



7 Right Drawer Side (W409RH)
(320 x 105mm)




8 Drawer Base (T559)
(1050 x 317mm)

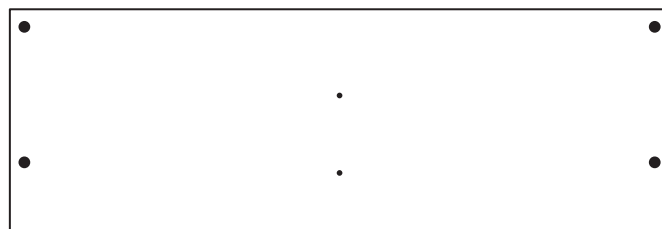


9 Shelf (D1911A)
(1090 x 369mm)



10 Plinth (D1094A)
(1090 x 96mm) x 2



11 Upright (D1147A)
(152 x 251mm)



12 Back (X939)
(495 x 402mm) x 2






















Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A </p> <p>Wooden dowel (F22) x 4</p> | <p>B </p> <p>Large metal dowel (F901) x 10</p> | <p>C </p> <p>Hollow core locking nut (F892) x 4</p> |
| <p>D </p> <p>Nail (F51) x 24</p> | <p>E </p> <p>Large locking nut (F900) x 8</p> | <p>F </p> <p>Small locking nut (F3) x 2</p> |
| <p>G </p> <p>Small metal dowel (F893) x 4</p> | <p>H </p> <p>19mm Screw (F461) x 2</p> | <p>I </p> <p>Handle (FBARH128)</p> |
| <p>J </p> <p>Knock-in Peg (F171GY) x 4</p> | <p>K </p> <p>13mm Screw (F63) x 6</p> | <p>L </p> <p>13mm Screw (F52) x 6</p> |
| <p>M a </p> <p>L Runner (F159) x 1</p> | <p>N </p> <p>Wedgefix (F639) x 6</p> | |
| <p>M b </p> <p>R Runner (F160) x 1</p> | <p>O </p> <p>40mm Screw (F910) x 2</p> | |
| <p>M c </p> <p>L Runner (F161) x 1</p> | <p>P </p> <p>Mini block (F25) x 2</p> | |
| <p>M d </p> <p>R Runner (F162) x 1</p> | | |

Ruler - Use this ruler to help correctly identify the screws

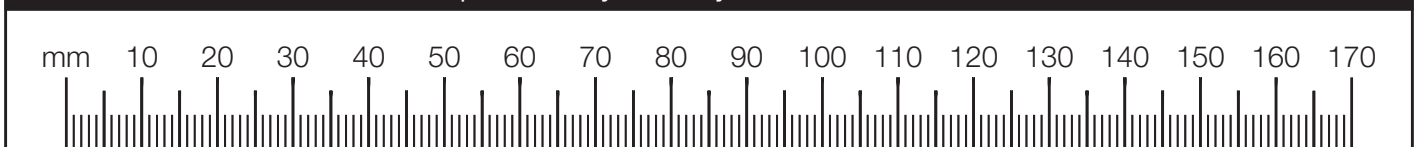

Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Step 1

Prepare the drawer front

Screw 2 large metal dowels **B** into the holes shown on the back of the drawer front **4**.

Note: Tighten metal dowels up fully against the panels.

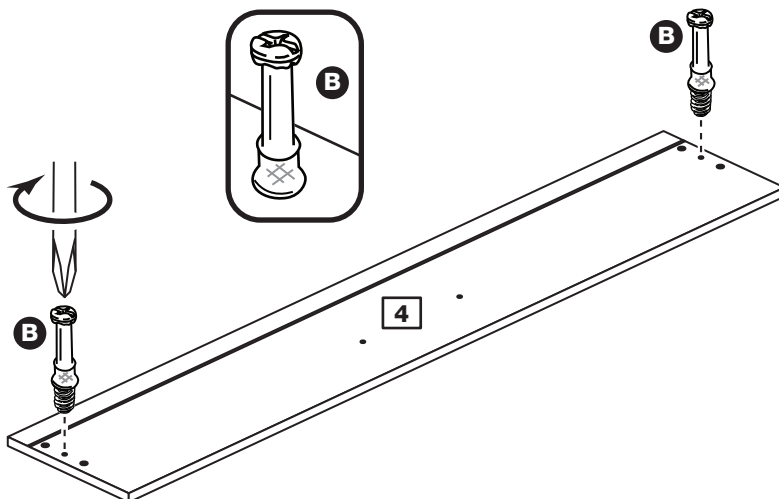


Step 2

Prepare the drawer sides

Insert a small locking nut **F** into the hole shown on the left drawer side **6** and right drawer side **7**.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

Note: Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.

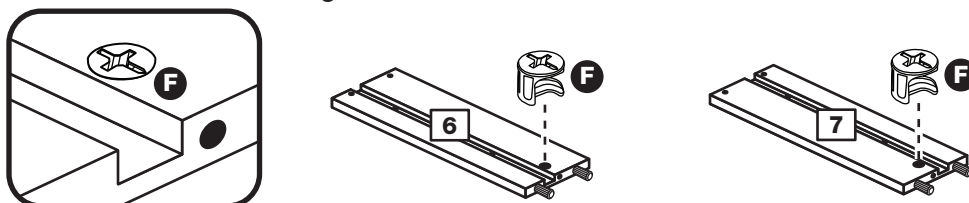


Step 3

Attach the drawer sides to the drawer front

Push the left drawer side **6** and right drawer side **7** onto the back of the drawer front **4**.

Turn the small locking nuts **F** on the left drawer side **6** and right drawer side **7**.

Note: Turn the locking nuts **F** clockwise to secure panels - more than 1/2 a turn.

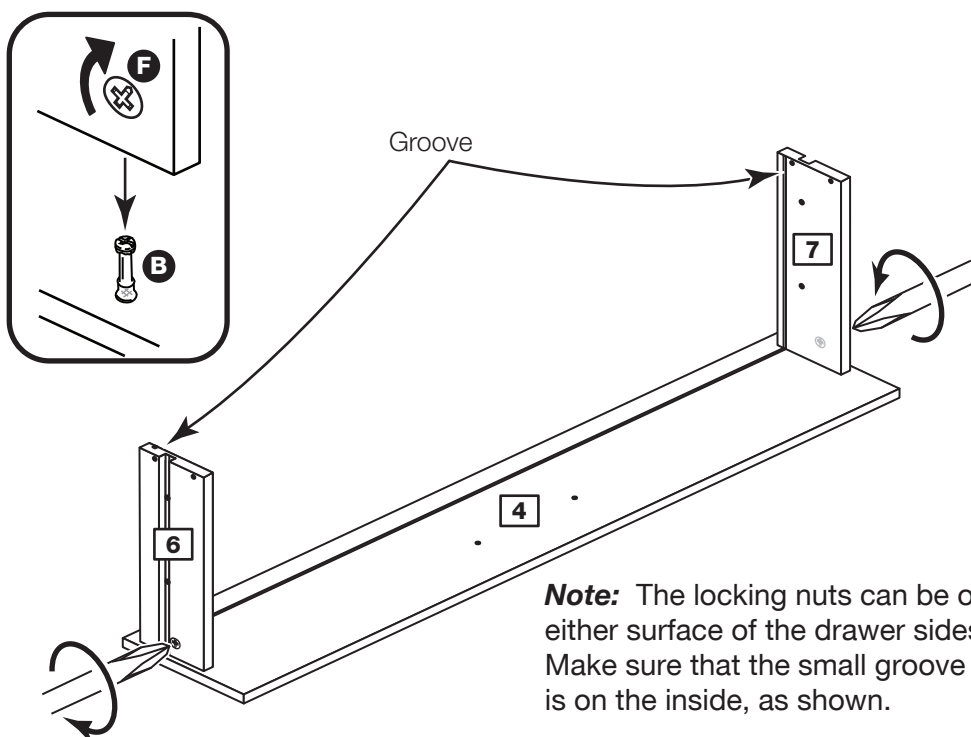


Note: The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **8** down the grooves in the drawer sides **6** and **7** and down into the groove in the drawer front **4**.

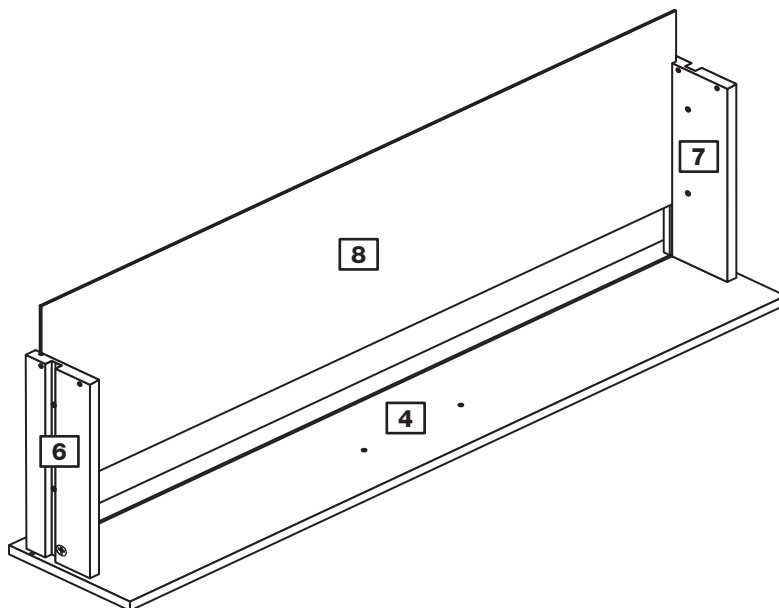


Step 5

Fit the drawer back

Fit the drawer back **5** between the drawer sides **6** and **7**.

Make sure that the drawer base **8** fits into the groove in the drawer back **5**.


Hold the drawer back **5** in position and tap the knock-in pegs **J** through the holes in the drawer sides **6** and **7**.

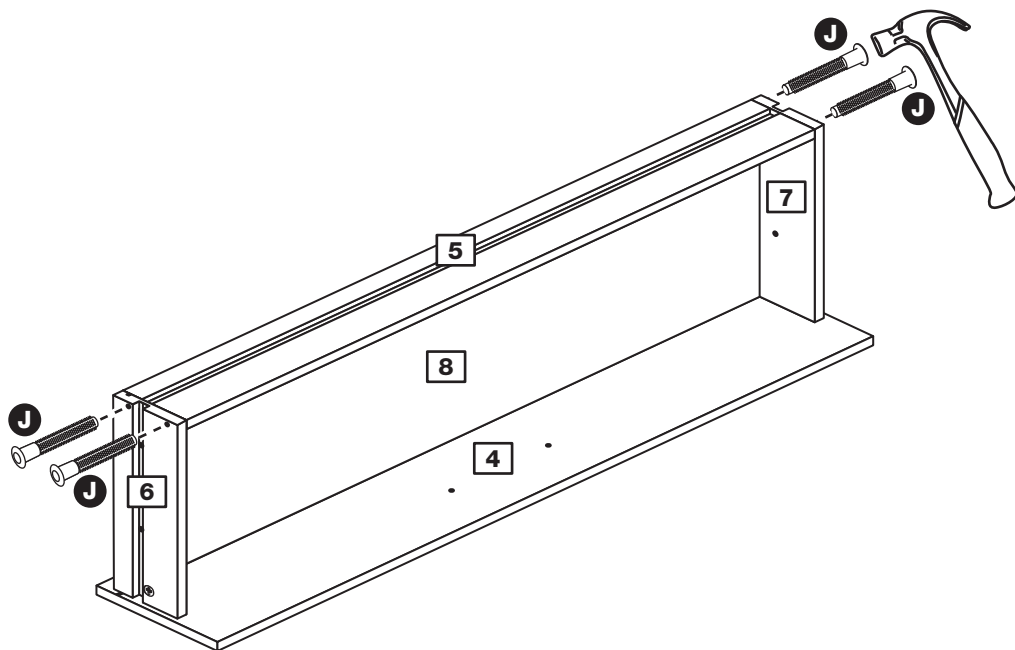

Step 6

Attach the handle

Attach the handle **I** to the drawer front **4** using screws **H**.

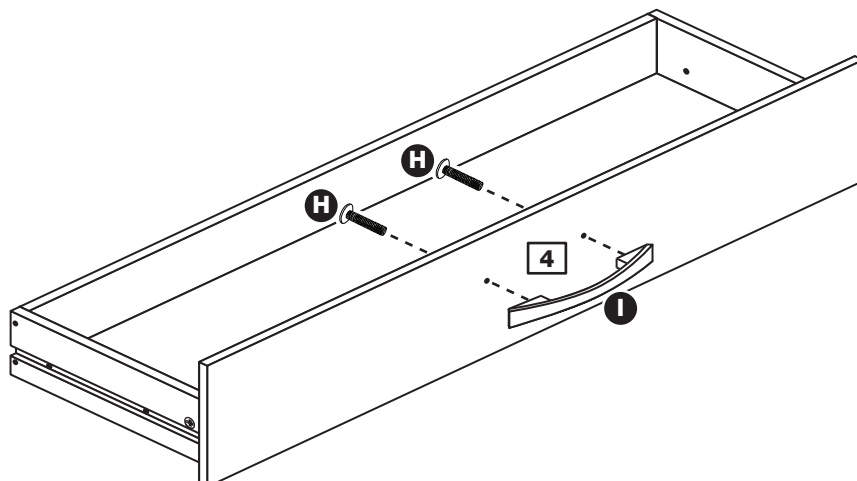

Assembly Instructions


Step 7

Fit the wedgexes

Turn the drawer assembly over.

Slide 3 wedgexes **N** into the small groove located on the back of the drawer front **4** and 3 into the small groove in the drawer back **5**.

Once in place, tighten up the screws in the wedgexes **N**.

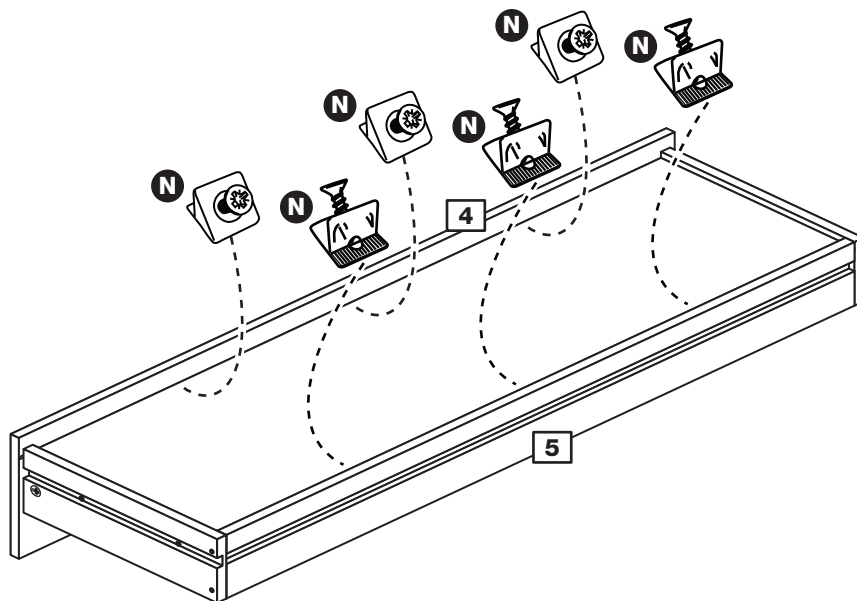


Step 8

Fit runners to the drawers

Fit the runner **M c** to the bottom edge of the left drawer side **6**, as shown, making sure that it is pushed up against the back of the drawer front **4**. Use a bradawl to mark the fixing positions, then secure with 2 screws **K**.

Fit the runner **M d** to the bottom edge of the right drawer side **7** using the same method.

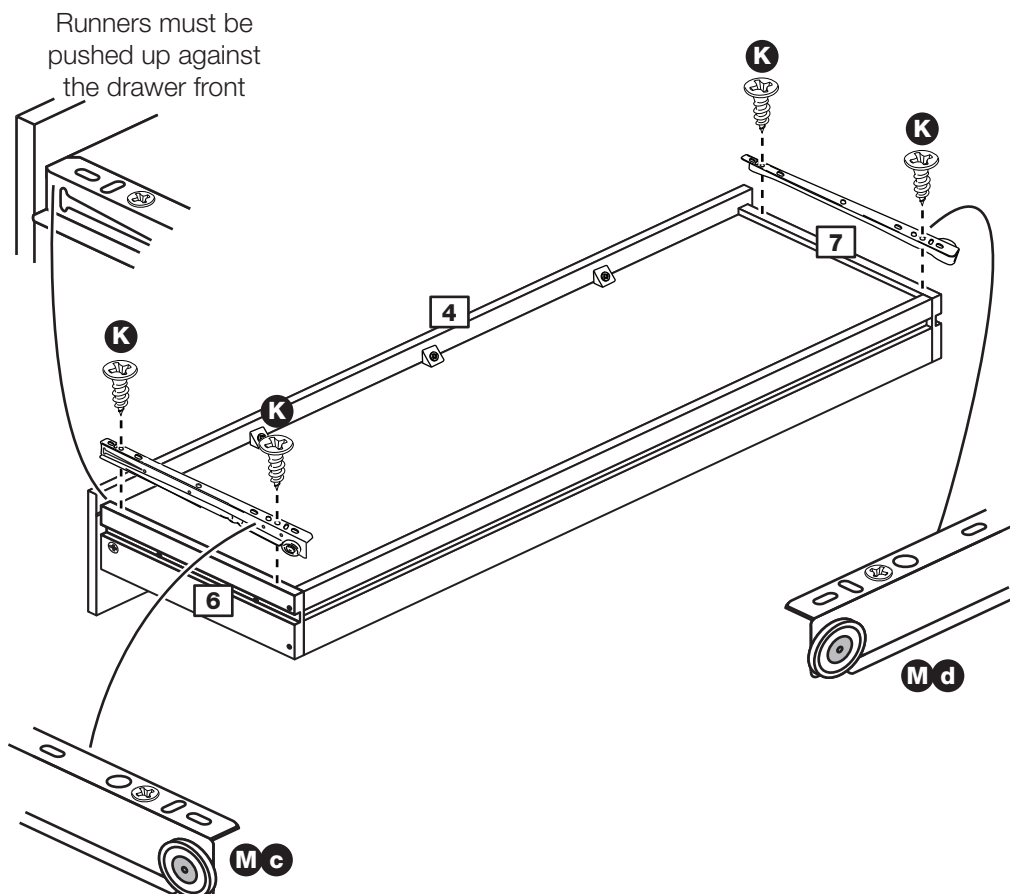



Step 9

Prepare the left side



a: Fit runner **Ma** to the left side **1**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd and 3rd screws **L** use the holes that line up with the other panel holes.

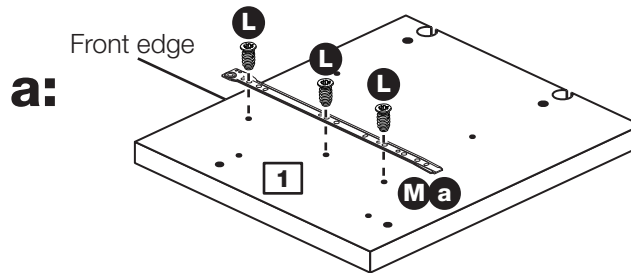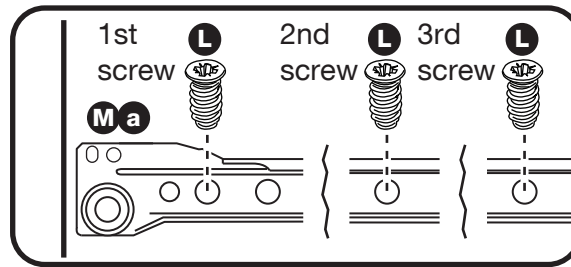

b: Fit a screw **K** into the 2nd hole in at the top of the runner **Ma**.


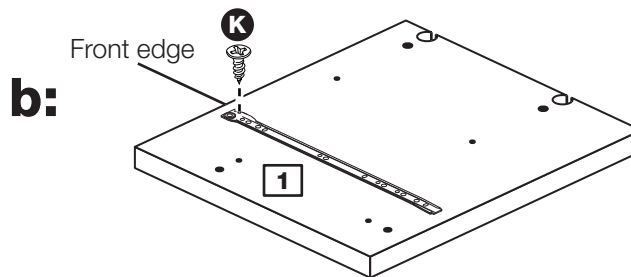


c: Push 2 hollow core locking nuts **C** into the left side **1**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **C**.

Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **C**.

Screw 4 large metal dowels **B** into the holes shown.

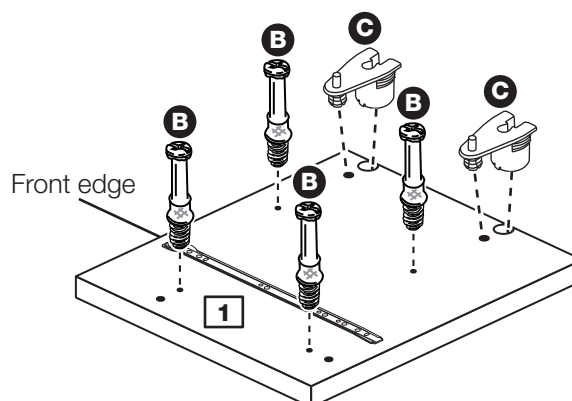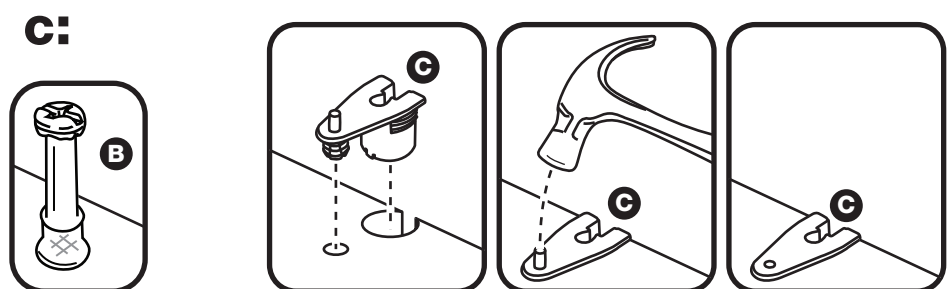

Assembly Instructions



Step 10

Prepare the right side



a: Fit runner **M b** to the right side **2**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd and 3rd screws **L** use the holes that line up with the other panel holes.

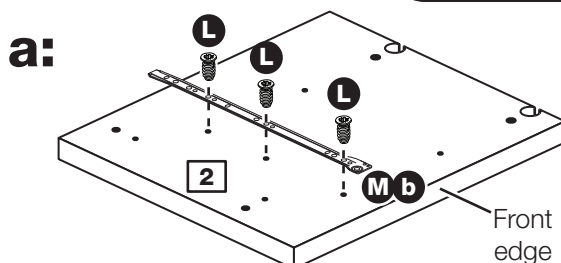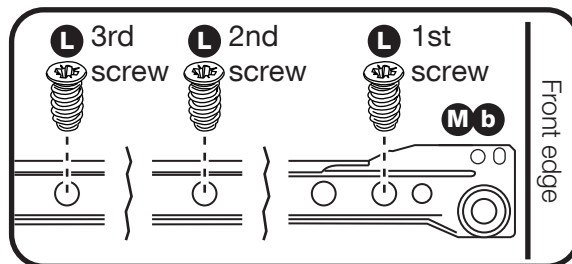

b: Fit a screw **K** into the 2nd hole in at the top of the runner **M b**.

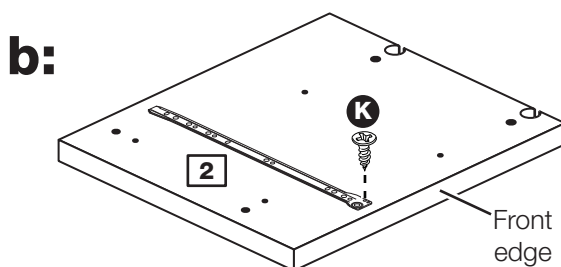



c: Push 2 hollow core locking nuts **C** into the right side **2**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **C**.

Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **C**.

Screw 4 large metal dowels **B** into the holes shown.

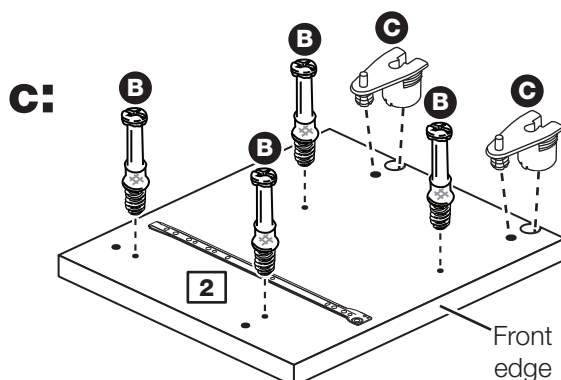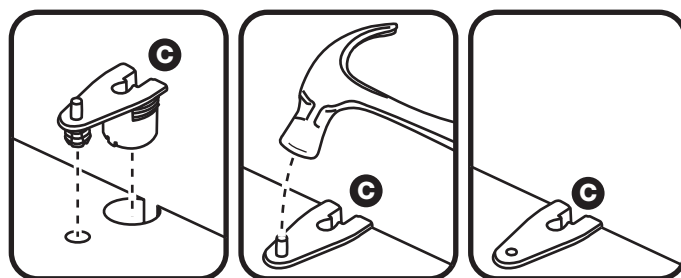


Assembly Instructions

Step 11

Prepare the upright

Gently tap the 2 mini blocks **P** into the holes on the upright **11**, orientated as shown.

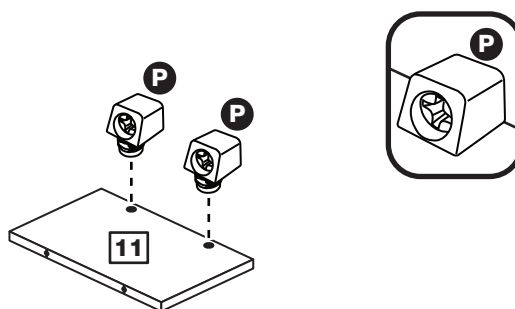

Step 12


Prepare the top

Screw 4 small metal dowels **G** into the holes in the top **3**.

Note: Tighten metal dowels up fully against the panels.

Position the upright **11** so that the screws from the mini blocks **P** are over the holes in the top **3**.

Tighten up the screws in the 2 mini blocks **P** into the holes in the top **3**.

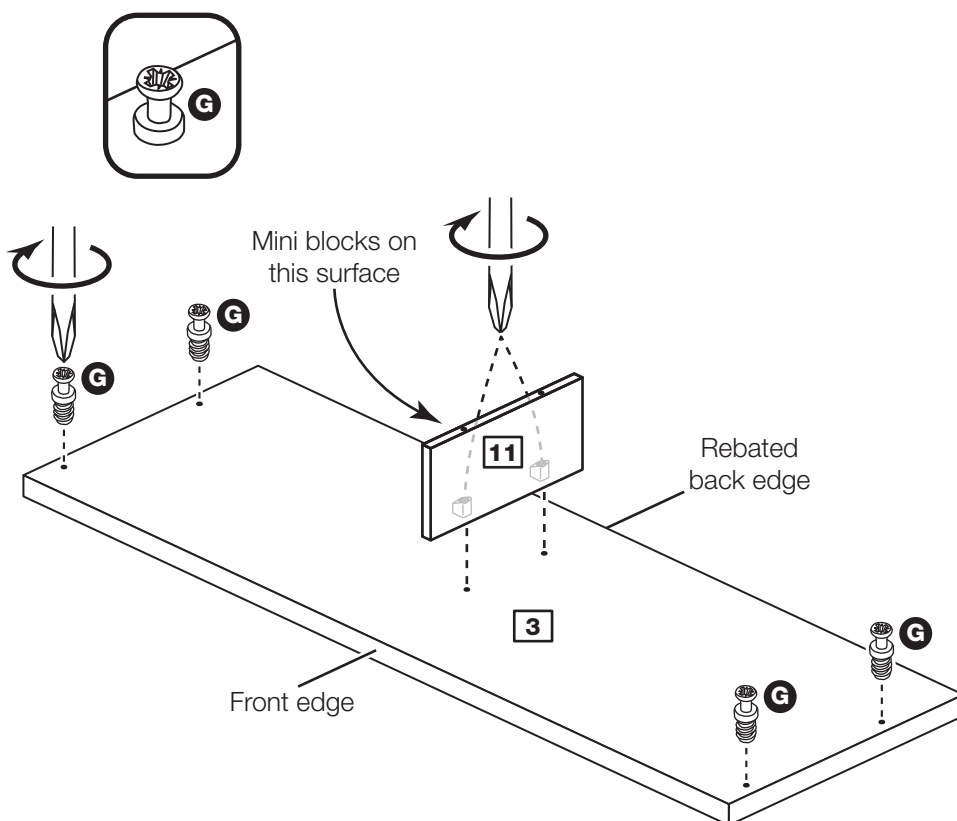

Assembly Instructions



Step 13

Join the top and right side

Push the right side **2** onto the top **3**.

The 2 small metal dowels **G** fitted to the top **3** must slide into the top of the 2 hollow core locking nuts **C** fitted to the right side **2**.

Insert a screwdriver into the 2 hollow core locking nuts **C** and turn the nuts inside as far as they will go.

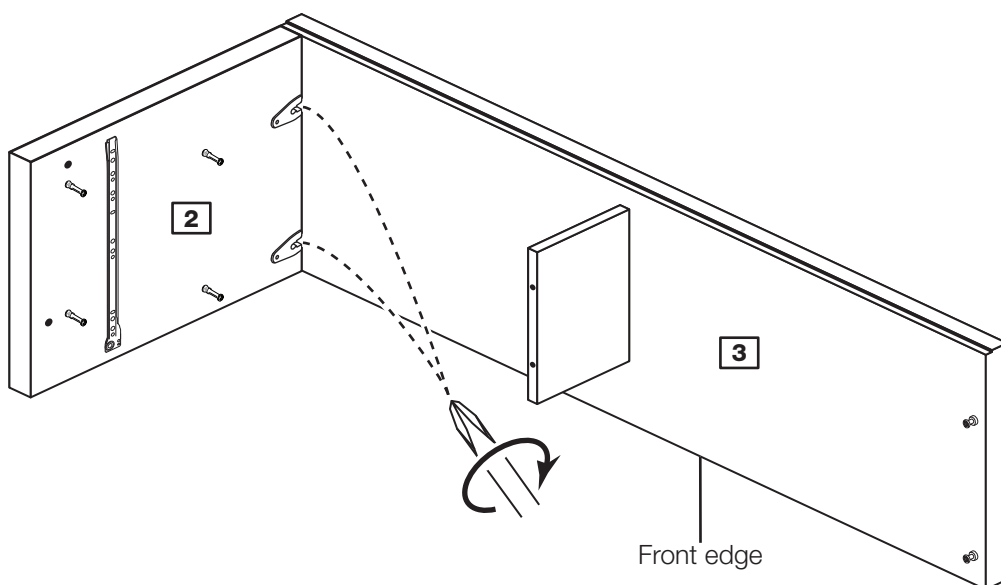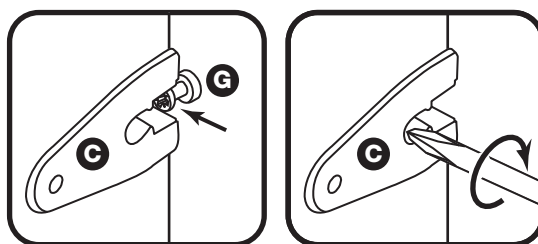


Step 14

Prepare the shelf

Insert 4 large locking nuts **E** into the shelf **9**.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

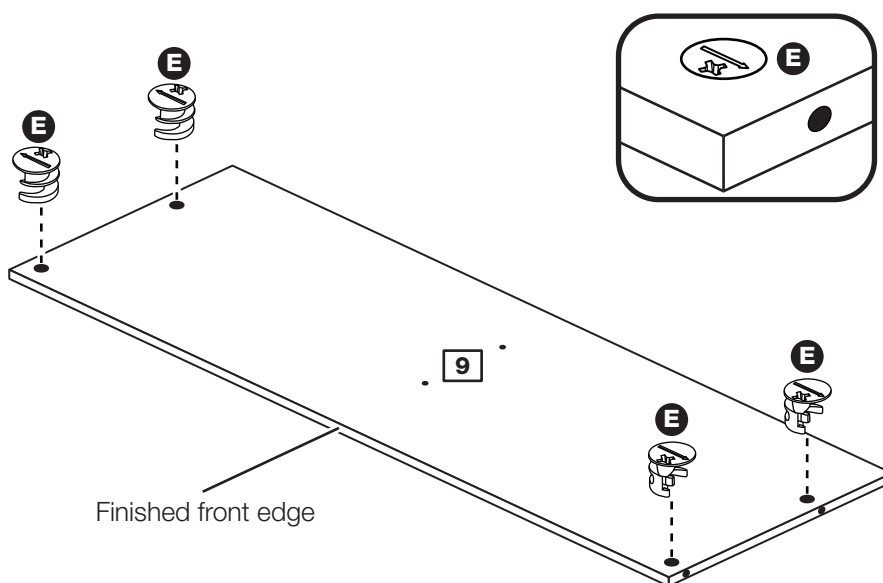

Assembly Instructions


Step 15

Fit the shelf

Push the shelf **9** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to the shelf **9**.

Note: Turn the large locking nuts **E** as far as they will go - more than 1/2 a turn.

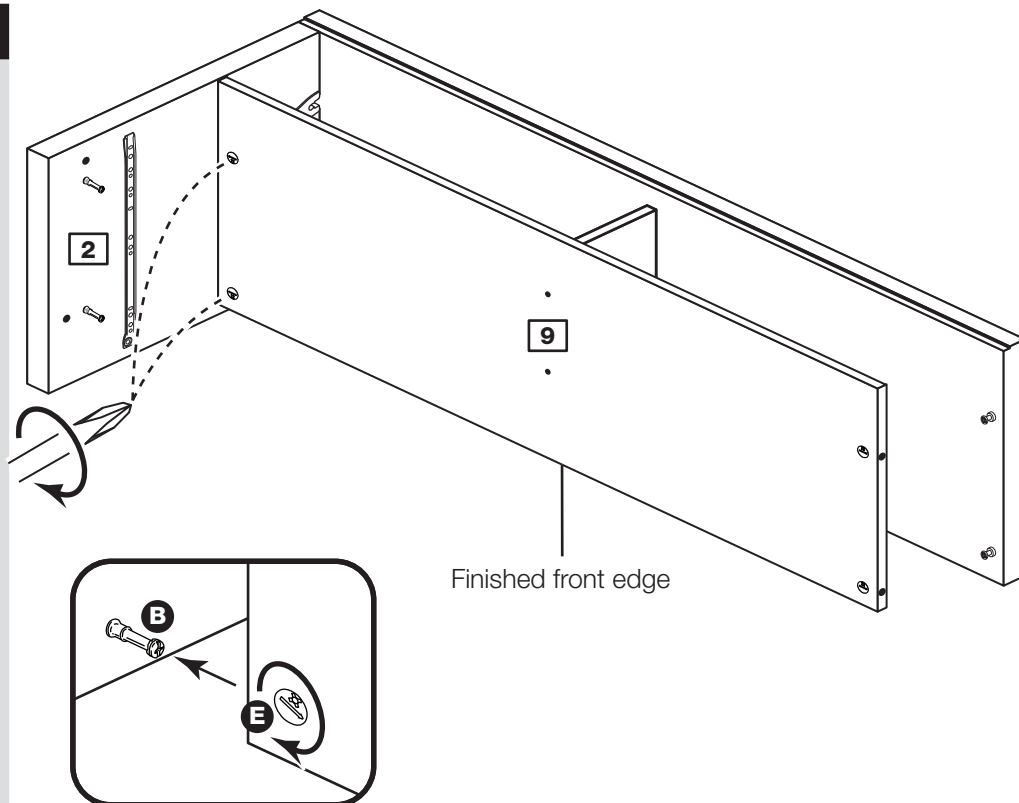

Step 16


Prepare the 2 plinths

Insert 2 large locking nuts **E** into each of the plinths **10**.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

Tap 2 wooden dowels **A** into each plinth **10**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

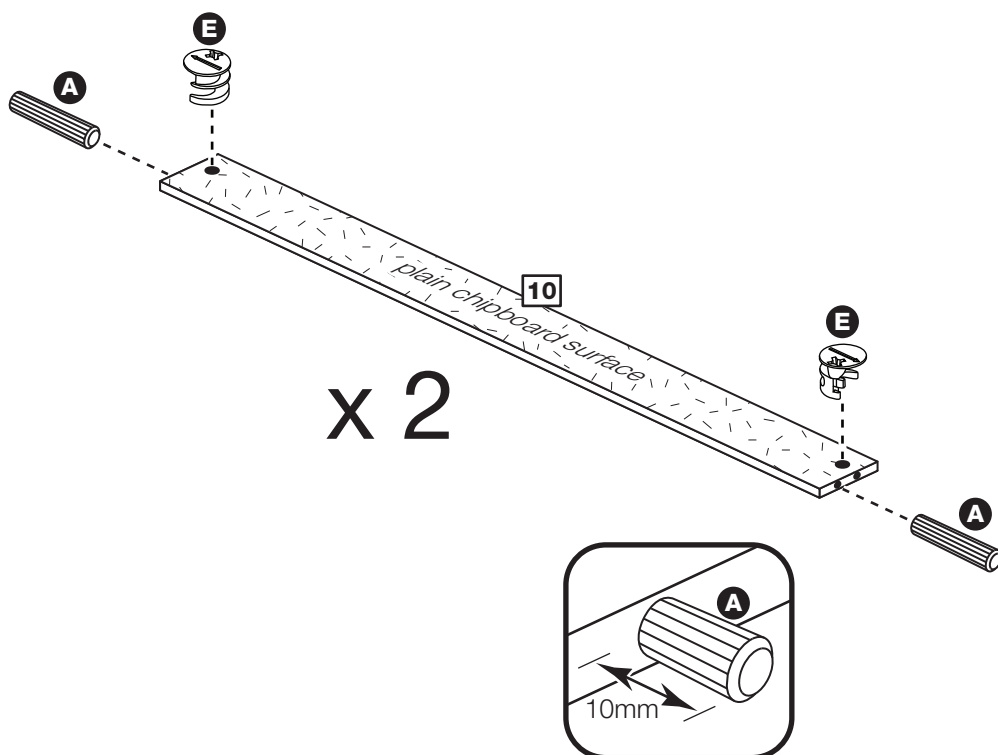

Assembly Instructions

Step 17


Fit the 2 plinths

Push the plinths **10** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **E** fitted to each plinth **10**.



Note: Turn the large locking nuts **E** as far as they will go - more than 1/2 a turn.

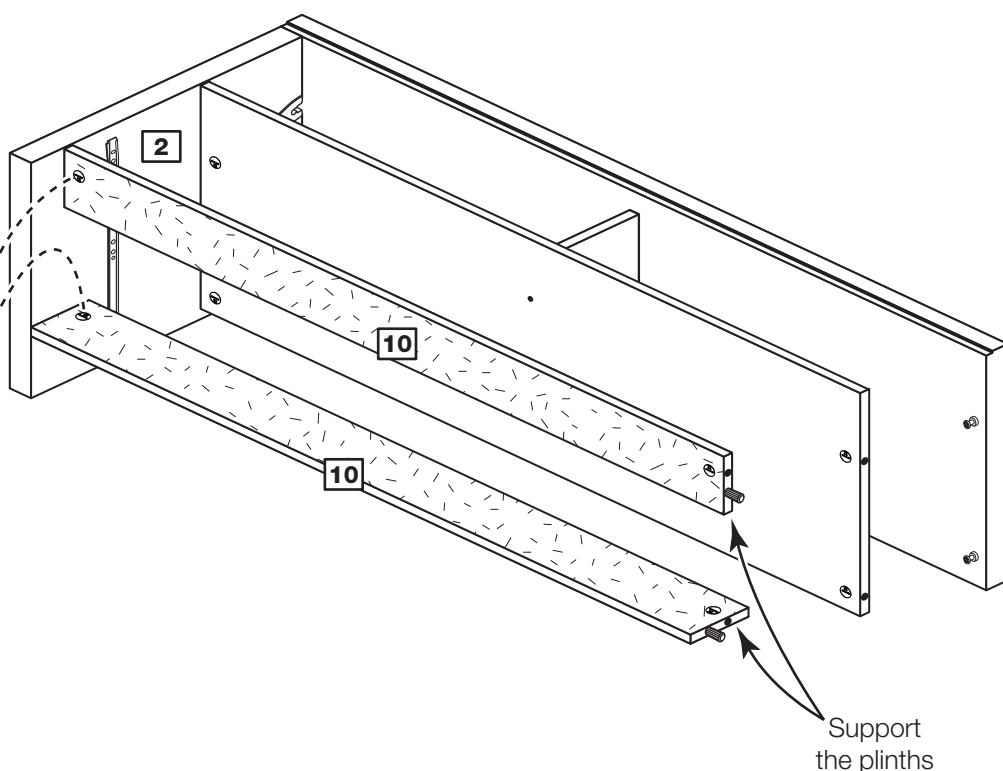

Step 18


Fit the left side

Push the left side **1** onto the assembly as shown.

Slide the 2 small metal dowels **G** fitted to the top **3** into the top of the 2 hollow core locking nuts **C** fitted to the left side **1**.

Insert a screwdriver into the 2 hollow core locking nuts **C** and turn the nuts inside as far as they will go.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to the shelf **9** and the one fitted to each plinth **10**.

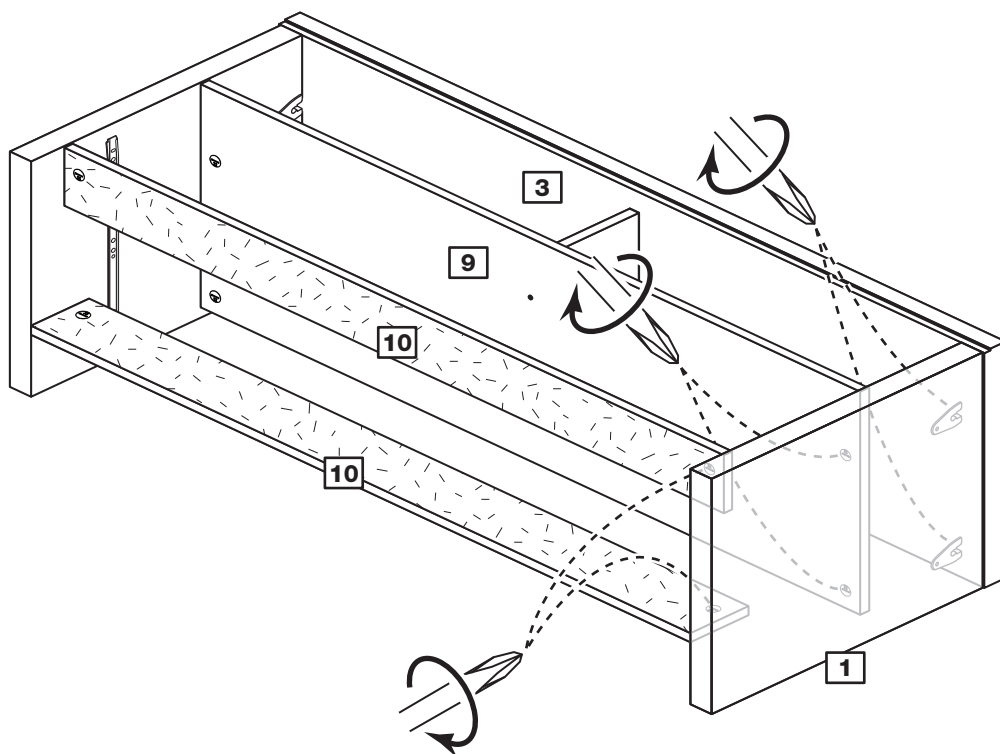


Assembly Instructions

Step 19

Fit the shelf to the upright

Attach the shelf **9** to the upright **11** using 2 screws **O**.

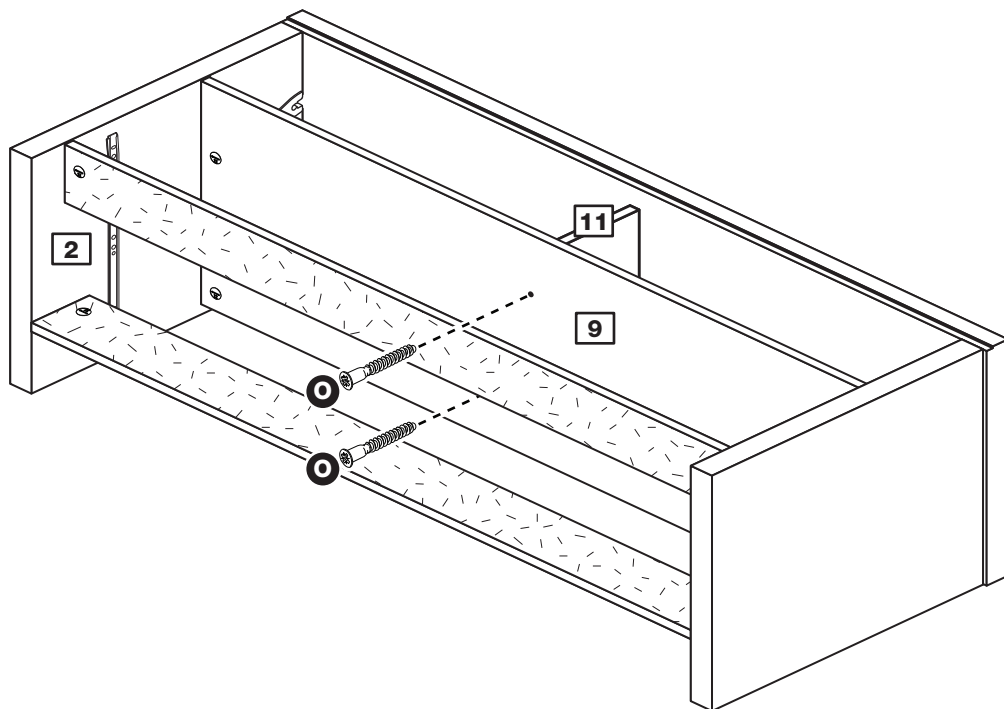

Step 20

Fit the foldy back


a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Place the 2 backs **12** down onto the unit and push them up against the sides. The gap left in the centre is for cable management.

Tap 4 nails **D** along the top and 4 nails **D** along the bottom of each of the 2 backs **12**.

Note: Nails should try to be spaced out evenly.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

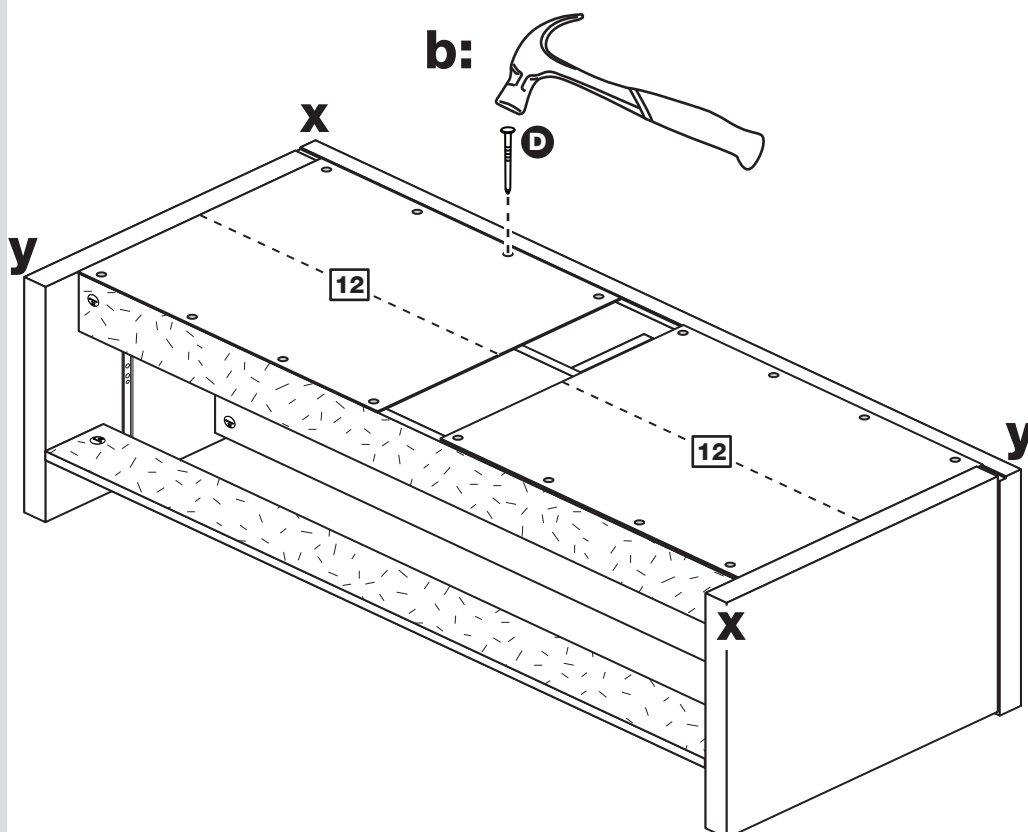

Assembly Instructions

Step 21

Secure the backs to the shelf


Carefully measure and mark the centre of the shelf's **9** back edge along the 2 back panels.

Nail **D** the 2 back panels **12** to the shelf **9** using the line you have drawn to avoid damaging the shelf.

Stand the unit up for the next step.



Warning: The unit is heavy. Lift with care.

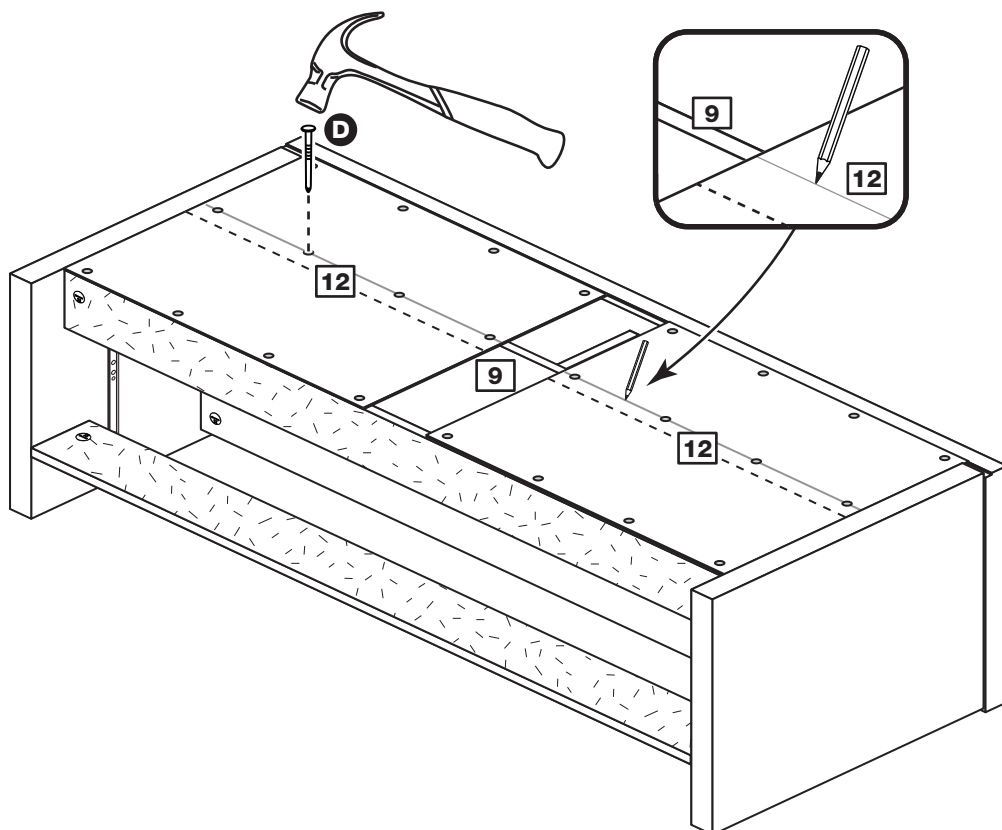

Step 22


Fit the drawer

Slide the wheels of the runners fitted to the drawer over the wheels of the runners fitted to the side panels and push the drawer into position.

Assembly is complete



Warning: The unit is heavy. Lift with care.

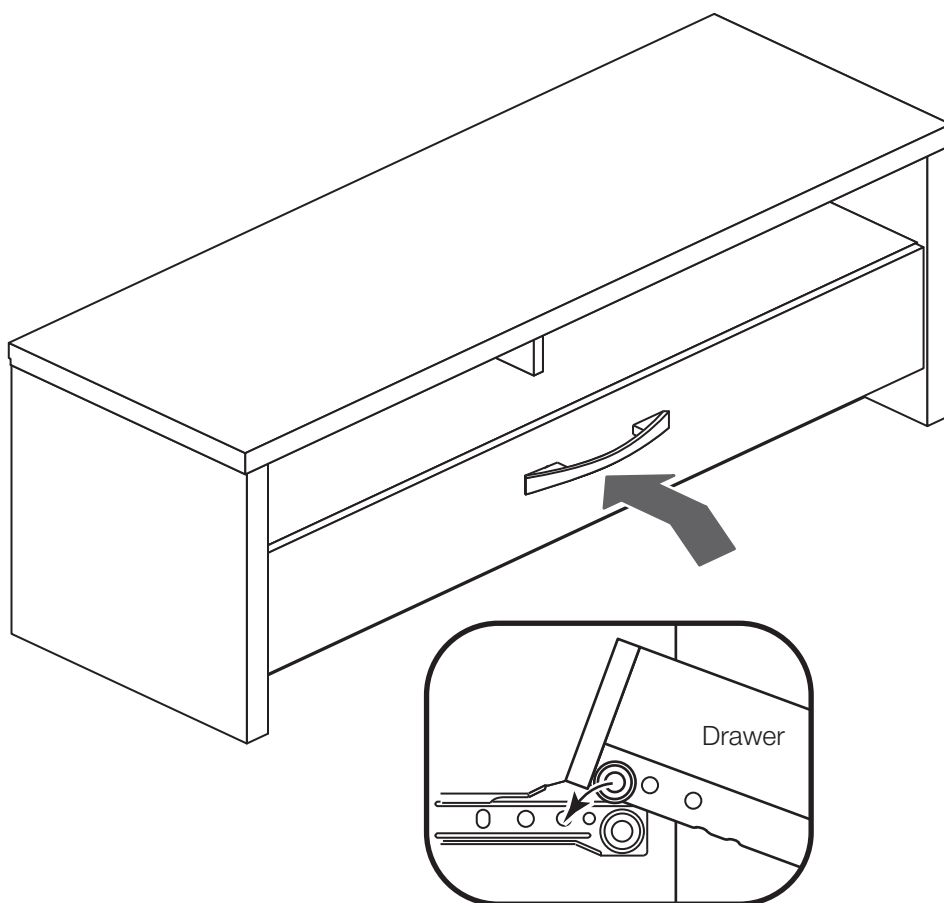

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

