

06LOG209SG-V1 & 06LOG209DG-V1 (5x5m)
06LOG209SG-V1: 5x5m (34mm) apex cabin with single (glass) glazing
06LOG209DG-V1: 5x5m (34mm) apex cabin with double (glass) glazing

BEFORE YOU START PLEASE READ INSTRUCTIONS CAREFULLY

- Check the pack and make sure you have all the parts listed.
- When you are ready to start, make sure you have the right tools at hand (not supplied) including a Phillips screwdriver, Stanley knife, wood saw, step ladder and drill with 2mm bit.
- Ensure there is plenty of space and a clean dry area for assembly.

TIMBER

As with all natural materials, timber can be affected during various weather conditions. For the duration of heavy or extended periods of rain, swelling of the wood panels may occur. Warping of the wood may also occur during excessive dry spells due to an interior moisture loss. Unfortunately, these processes cannot be avoided but can be helped. It is suggested that the outdoor building is sprayed with water during extended periods of warm sunshine and sheltered as much as possible during rain or snow.

Our buildings are pre treated with a water based treatment**; this only helps to protect the product during transit and for upto 3 months against mould. To validate your guarantee and ensure longevity of the product, it is ESSENTIAL the building is treated with a wood preserver within the first three months of assembly and thereafter in accordance with the manufactures recommendations. Care must be taken to ensure the product is placed on a suitable base.

BUILDING A BASE

When thinking about where the building and base is going to be constructed: Ensure that there will be access to all sides for maintenance work and annual treatment.


Ensure the base is level and is built on firm ground, to prevent distortion. Refer to diagrams for the base dimensions, The base should be slightly smaller than the external measurement of the building, i.e. The cladding should overlap the base, creating a run off for water. It is also recommended that the floor be at least 25mm above the surrounding ground level to avoid flooding.

TYPES OF BASE

- Concrete 75mm laid on top of 75mm hard-core.
- Slabs laid on 50mm of sharp sand.

Whilst all products manufactured are made to the highest standards of Safety and in the case of childrens products independently tested to EN71 level, we cannot accept responsibility for your safety whilst erecting or using this product.


Refer to the instructions pages for you specific product code



All building’s should be erected by two adults



Winter = High Moisture = Expansion
Summer = Low Moisture = Contraction



2mm Drill bit

For ease of assembly, you **MUST** pilot drill all screw holes and ensure all screw heads are countersunk.



CAUTION
Every effort has been made during the manufacturing process to eliminate the prospect of splinters on rough surfaces of the timber. You are strongly advised to wear gloves when working with or handling rough sawn timber.



For ease of assembly use a rubber mallet to fit the log boards. Do **NOT** use a heavy hammer.



Ensure to measure and check before cutting boards.



It is advisable to use a circular saw when cutting roof and floor boards.

For assistance please contact customer care on: 01636 880514



Mercia Garden Products Limited,
Sutton On Trent,
Newark,
Nottinghamshire,
NG23 6QN

www.merciagardenproducts.co.uk

06LOG209SG-V1 & 06LOG209DG-V1


Overall Dimensions:
Width = 5108mm
Depth = 5832mm
Height = 2869mm

Base Dimensions:
Width = 4818mm
Depth = 4818mm

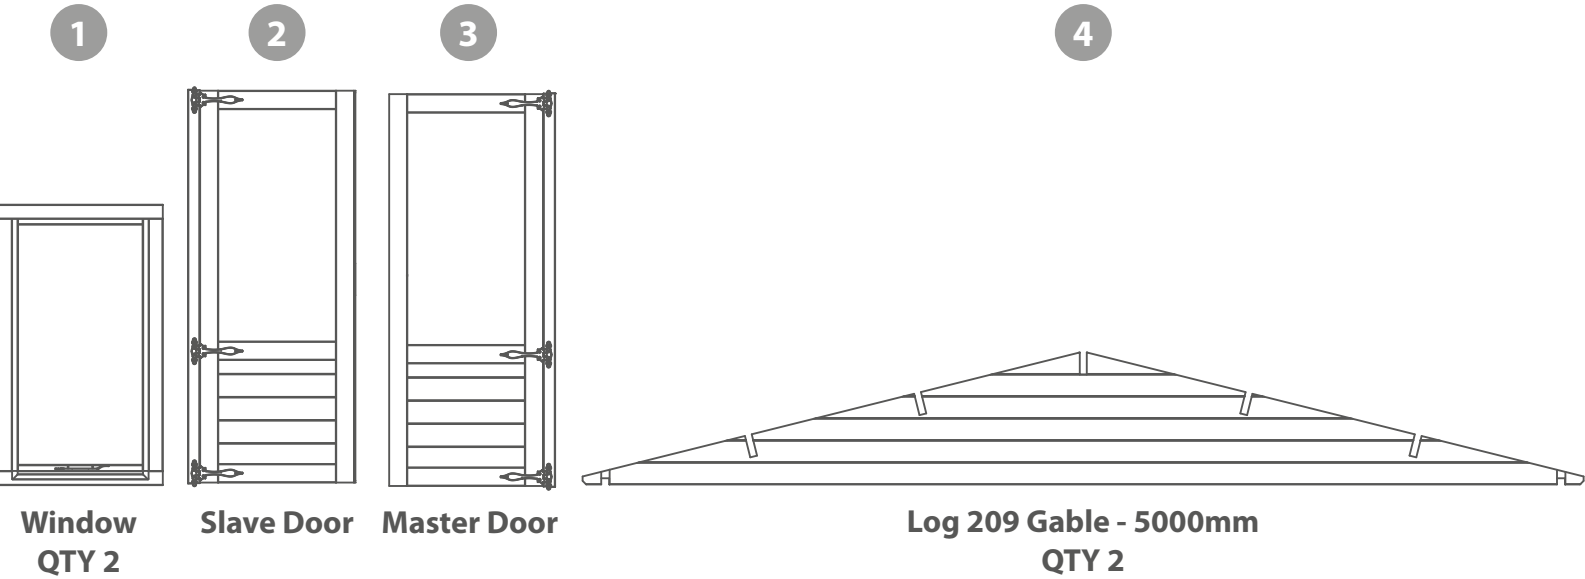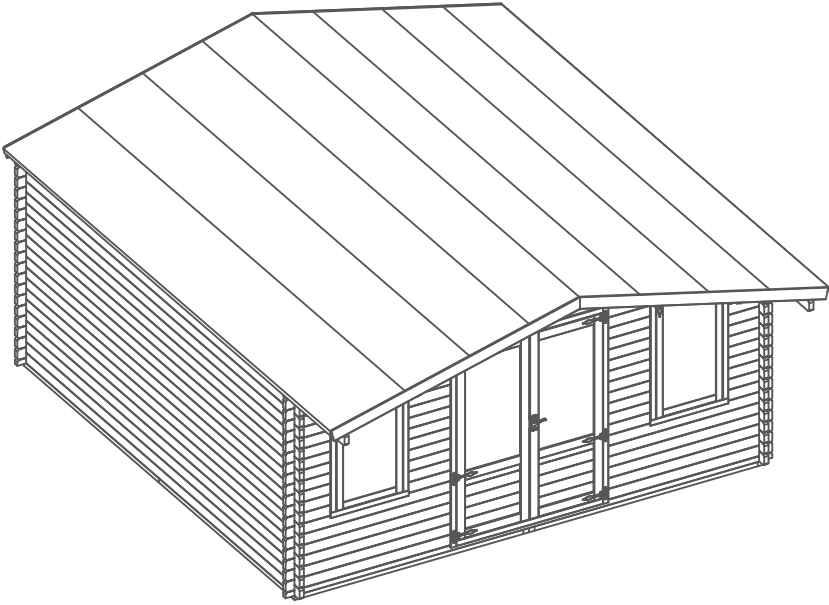


- 5 Starter Board (S1) - 66x34x5000mm QTY 2
LB34RT66-5000mm
- 6 Log Board (B) - 120x34x1715mm QTY 12
LB34-1715mm
- 7 Log Board (B) - 120x34x482mm QTY 24
LB34-482mm
- 8 Log Board (E) - 120x34x482mm QTY 24
LB34-482mm (No Notch)
- 9 Log Board (A) - 120x34x5000mm QTY 56
LB34-5000mm
- 10 Log Board (A) - 120x34x5500mm QTY 2
LB34-5500mm (Notch Offset)

- 11 Log Board (A) - 120x34x6000mm QTY 2
LB34-6000mm (Notch Offset)
- 12 Floor Board - 121x16x2369mm QTY 84
MB16-2369mm
- 13 Roof Board - 121x16x2629mm QTY 108
MB16-2629mm
- 14 Bearer - 44x58x2286mm QTY 36
F4458-2286mm (Pressure Treated)
- 15 Bearer - 44x58x2402mm QTY 8
F4458-2402mm (Pressure Treated)
- 16 Purlin - 45x120x6004mm QTY 5
F45120-6004mm (44mm)
- 17 Fascia - 16x120x2649mm QTY 4
S16120-2649mm
- 18 Fascia - 16x120x2001mm QTY 6
S16120-2001mm
- 19 Eaves Frame - 27x44x2001mm QTY 6
F2744-2001mm
- 20 Door Strip - 16x1660x1880mm
F1660-1880mm
- 21 Door Frame Top & Bottom - 69x69x1505mm QTY 2
WF6969-1505mm (44mm)
- 22 Storm Brace - 27x44x2100mm QTY 8
F2744-2100mm
- 23 Skirting - 28x28x2400mm QTY 12
FS2828-2400mm
- 24 Interior Roof Trim - 27x44x2400mm QTY 6
F2744-2400mm (Bevelled)
- 25 Mortice Lock
- 26 Key Plate

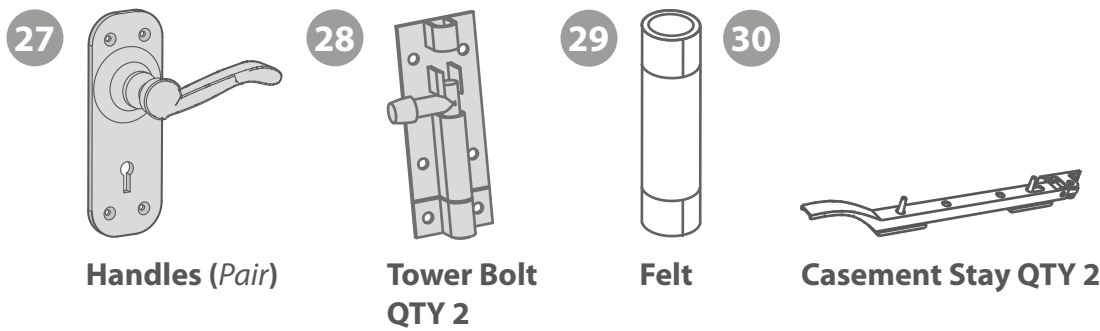

Nail Bag

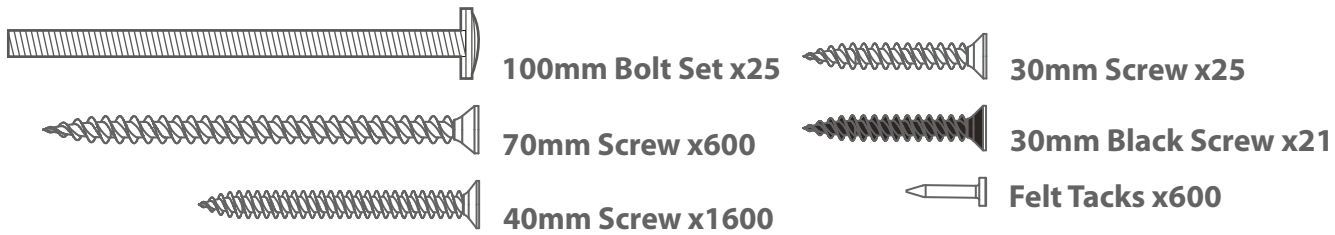


Pre-assembly

*Please note:

Each board interlocks at either end in a staggered pattern.

Before securing ensure that the boards are fitted properly in their respective tongue's and groove's.

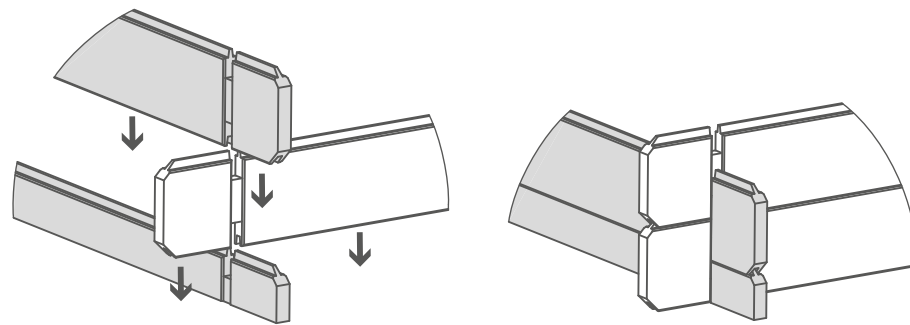


Step 1: Door Frame Fit

IMPORTANT: It is imperative that you pre-drill before fixing screws.

Arrange the door framing onto a firm and level surface. Secure the top and bottom frames (**No. ****) to the uprights (attached to each door). Fix into place using 1x70mm screw per corner, ensuring the screws do **NOT** protrude into the channel either side of the doors.

***Please note:** This image is for illustrative purposes and may differ from your choice in product (**regarding hinges**). Nevertheless the process of fixing the frames is the same.

8x70mm Screws

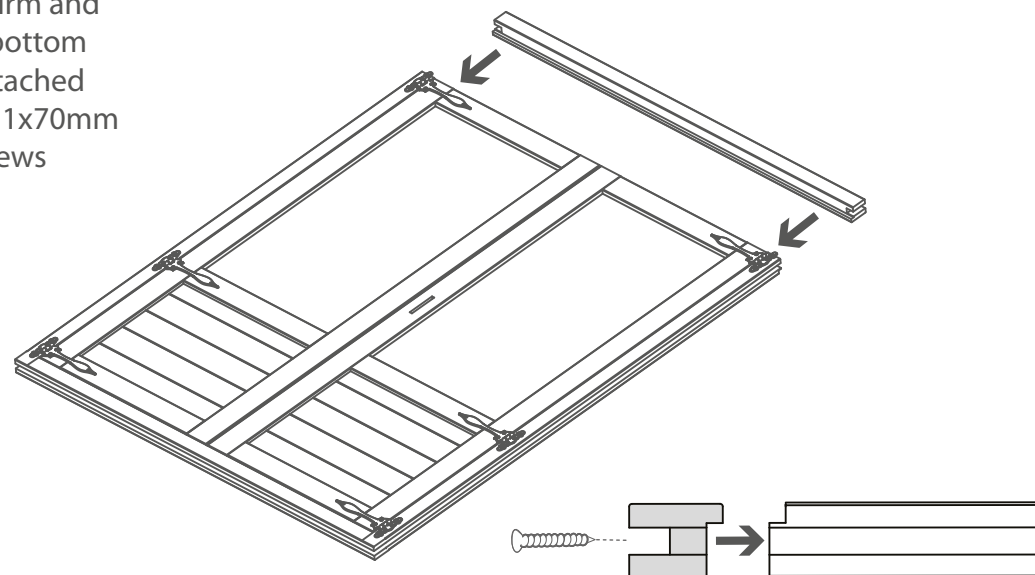

***Ensure the top & bottom rails sit inbetween the upright framing attached to the doors.**

Step 2

- Fit the mortice lock (**No. 24**) into the recess in the master door (**No. 3**) and secure using the screws provided. Attach the key plate (**No. 25**) to the slave door (**No. 2**) with the screws provided.
- Fit the door handles (**No. 26**) and connect with the metalbar to the mortice lock using 8x30mm screws. Ensure the lock mechanism closes correctly. If not, remove the lock and turn the catch around using the small grub screw.

***Please note:** This image is for illustrative purposes and may differ from your choice in product (**regarding ironmongery**). Nevertheless the process of fixing the frames is the same.

12x30mm Screws





Step 3

Attach the door strip (**No. 19**) to the back of slave door using 4x40mm screws as shown in the illustration.

Once fixed secure the tower bolts (**No. 27**) to the top and bottom of the strip using the screws provided.

***These tower bolts help to keep your doors straight during high and low levels of moisture content in the air.**

4x40mm Screws

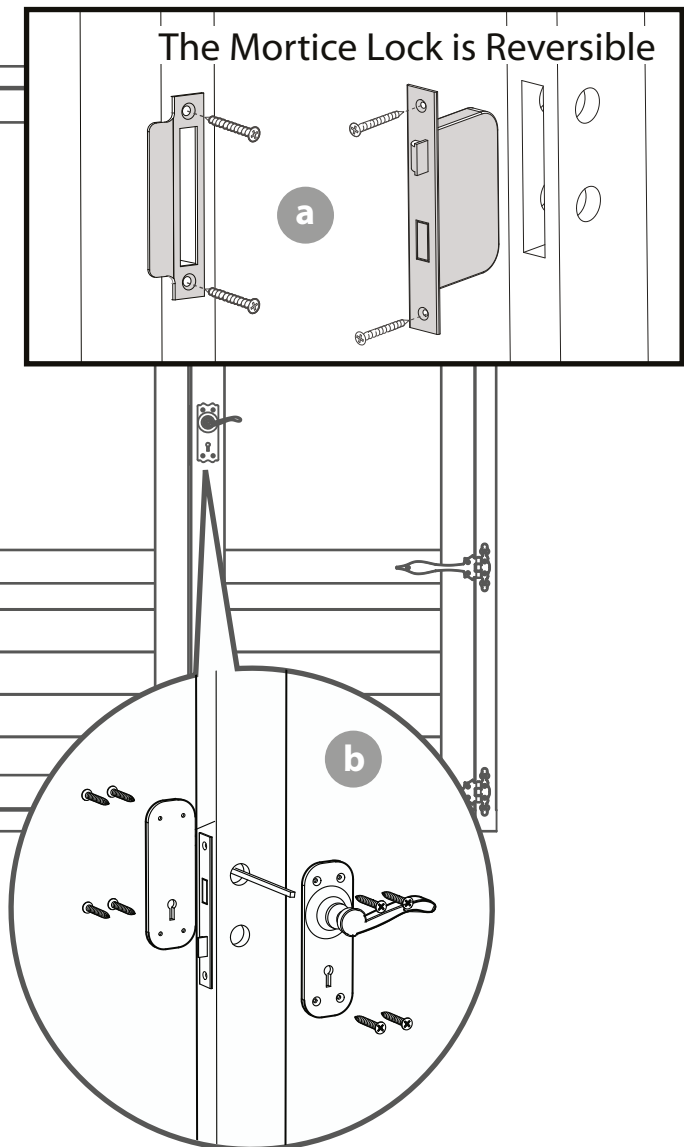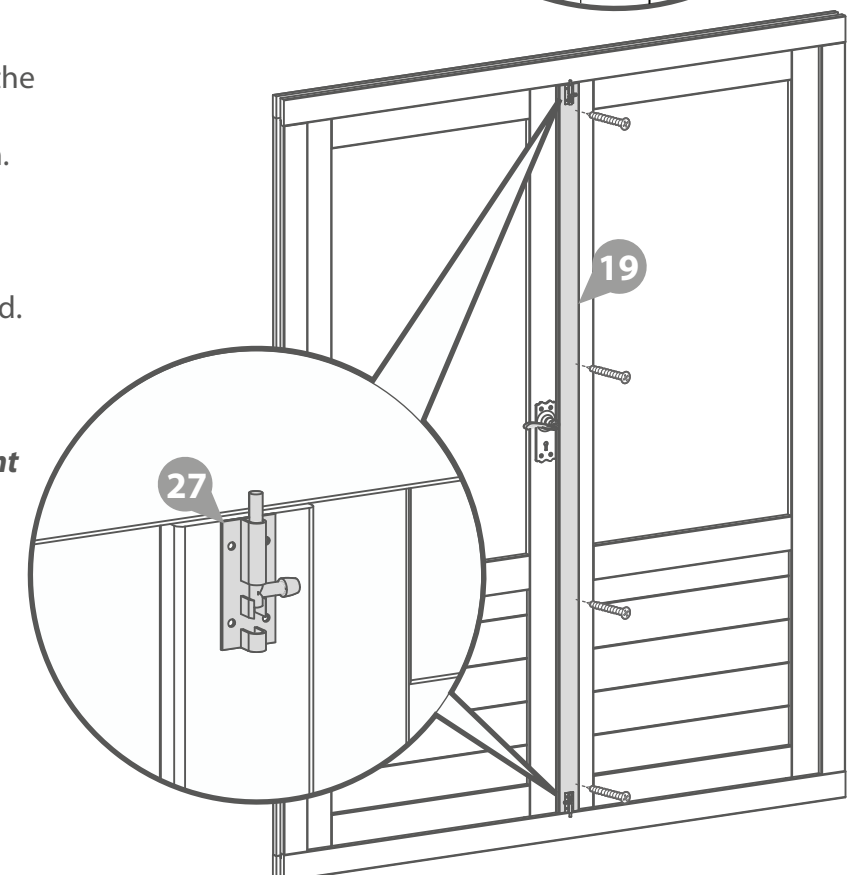


Step 4

Fix the casement stay (**No. 29**) onto the window (**No. 1**) and the casement stay pins to the window cill using 6x30mm (*black*) screws per casement stay.

****Ensure the casement stay is centralised on the window.***

12x30mm Screws

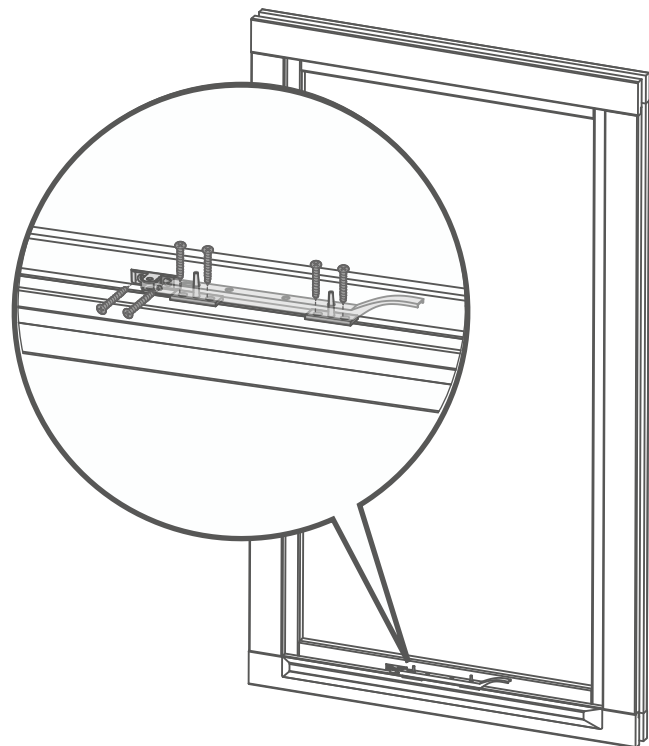


Step 5

Lay the starters (**No's. 14 & 15**) onto a firm and level surface (**free from areas where standing water can collect**) as shown in the illustration.

Fix the framing together at each corner using 8x70mm screws, ensuring the frame is flush.

8x70mm Screws

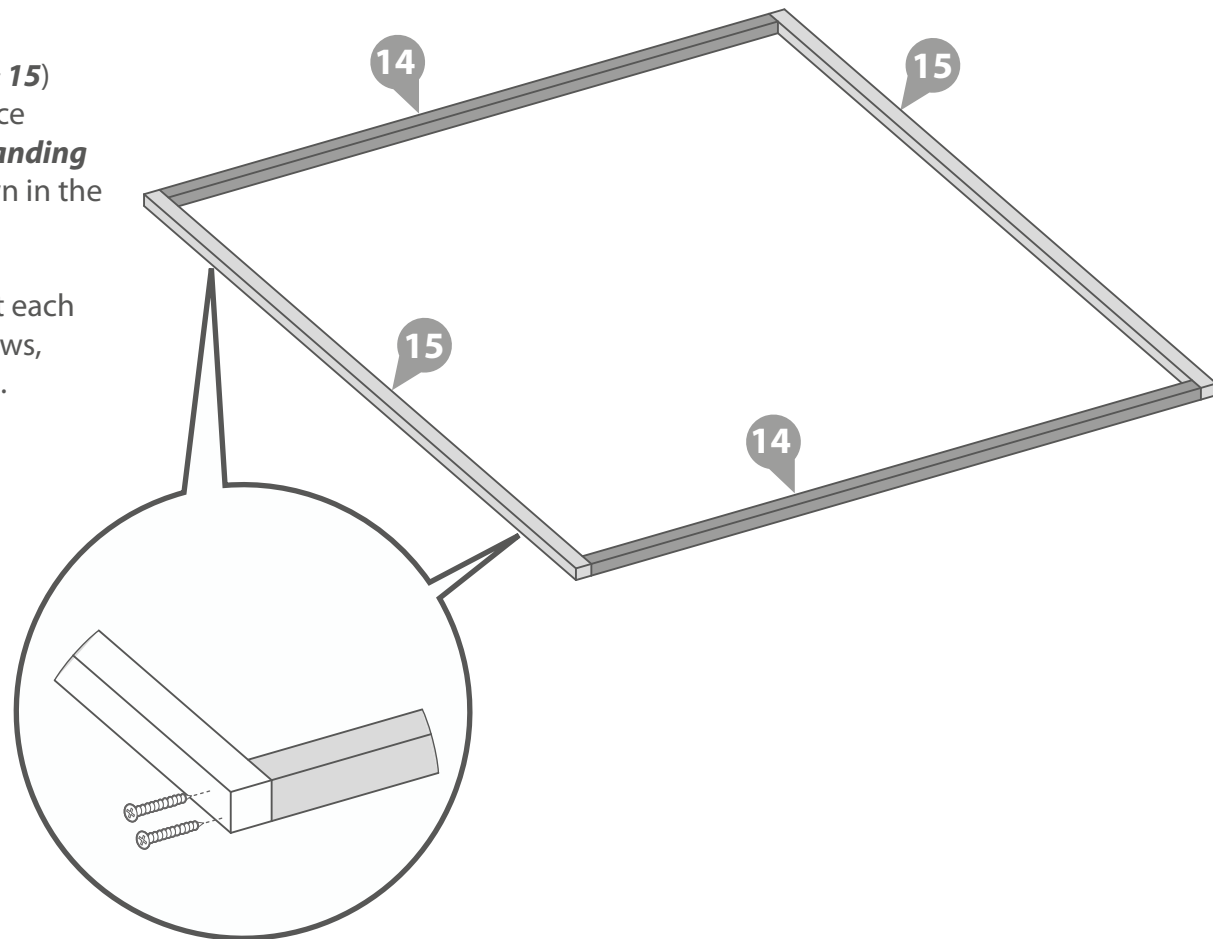



Step 6

Following the same method outlined in **Step 5**, arrange the next 7 peices of framing (**No. 14**) spaced equally as shown in the illustration.

****Ensure there is an equal amount of space between each frame.***

Secure each of the frames in place using 4x70mm screws per frame, ensuring the framing remains level.

32x70mm Screws

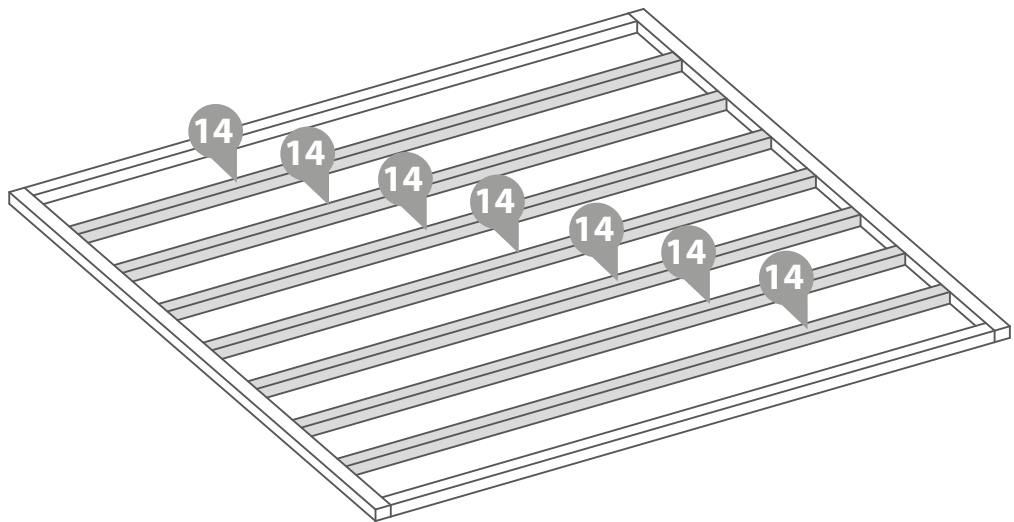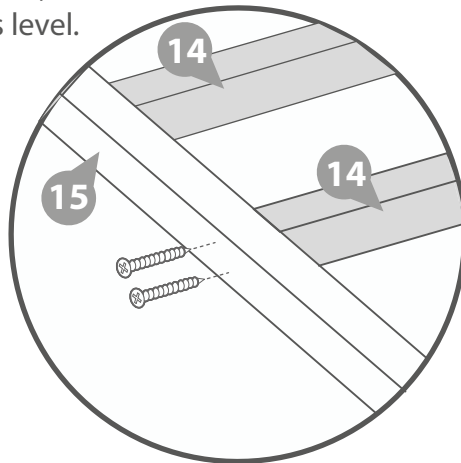


Step 7

Following the same method outlined in **Step's 5 & 7**, build the next 3 base sections.

****Ensure there is an equal amount of space between each frame.***

Secure each base section together using 32x70mm screws, ensuring to fix in an alternating pattern so as not to collide screws.

192x70mm Screws

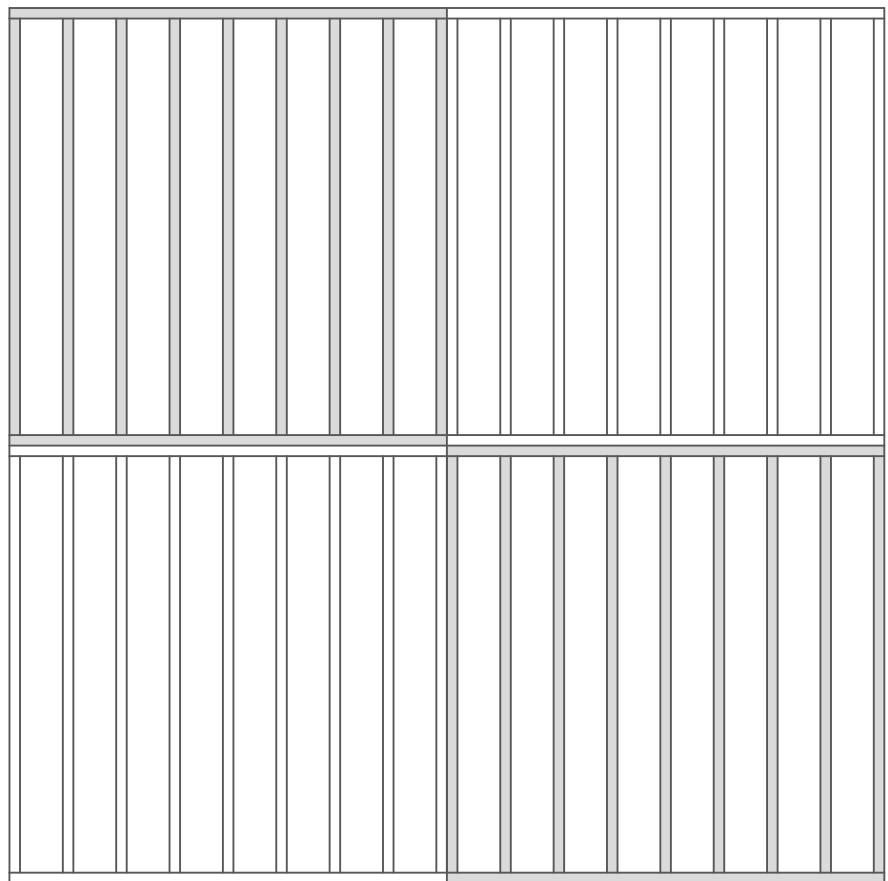

Step 8 (See Pre-Assembly)

Place the starter boards (**No. 5 & 9**) on to assembled base frame along the longest sides.


***Ensure the notches at either end of each board are flush and level with the ends of the frame.**

Fix each of the starter boards to the frame by screwing through the notch into the frame as shown in the illustration.

4x70mm Screws

70mm screw

IMPORTANT: It is imperative that you pre-drill before fixing screws.

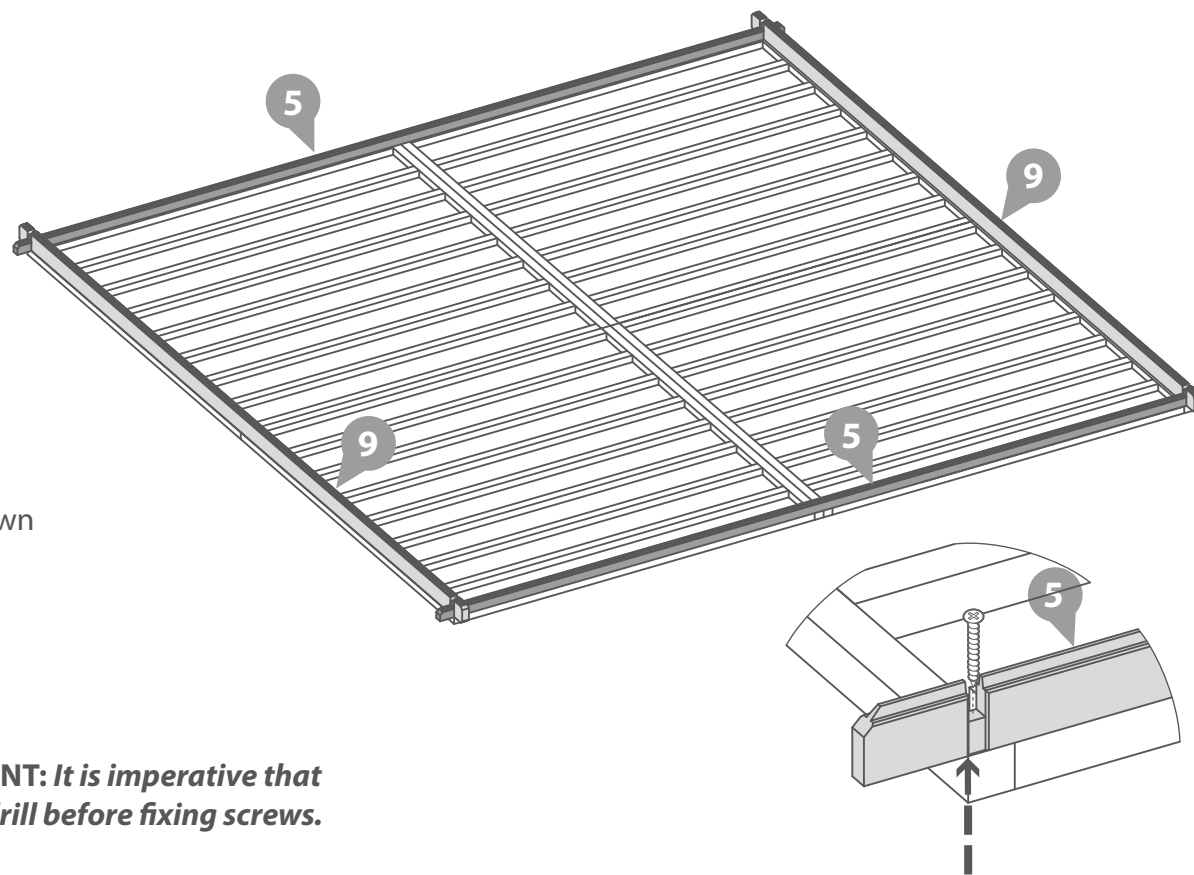**Step 9 (See Pre-Assembly)**

IMPORTANT: It is imperative that you pre-drill before fixing screws.

Following the same method outlined in *Pre-Assembly*, lay the first 6 boards (**No's. 6 & 9**) onto the starter boards to create your first level.


***Ensure that the boards are level and flush with each other as you lay each one.**

Fix every third board to the one below by screwing through the notch as shown in the illustration using 1x70mm screw per side.

****Ensure to stagger the screws so as not to collide with the previous screw.**

16x70mm Screws


70mm screw

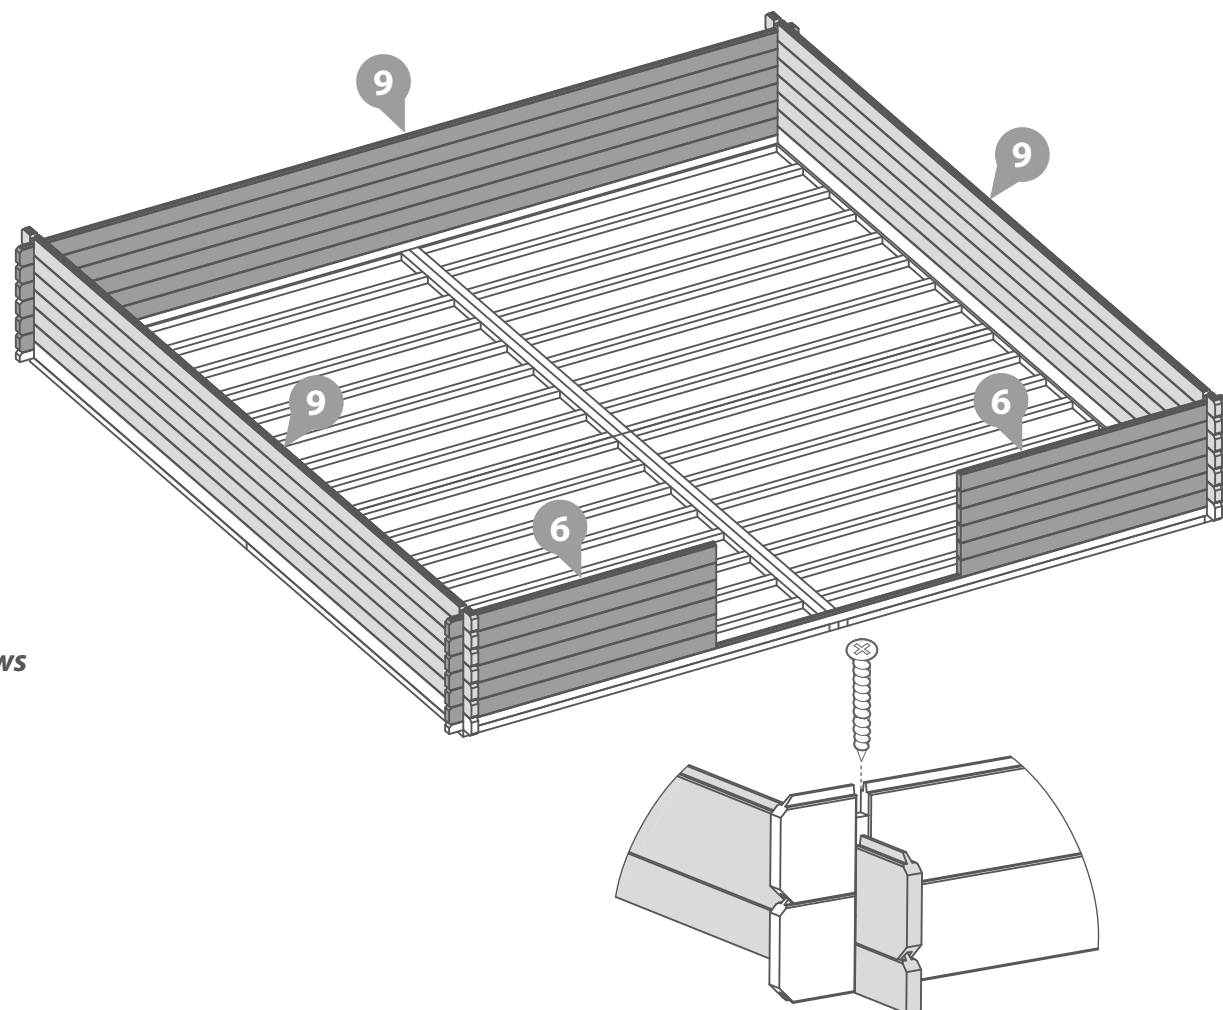**Step 10**

Once you have laid 6 log boards (off of the starter) up the door section, slide the assembled door frame assembly over the boards resting the frame on top of the starter board.

***Please note:** This image is for illustrative purposes and may differ from your choice in product (**regarding door position**). Nevertheless the process of fitting the door frame is the same.

****Please Note:** The short boards at the front of the building (either side of the door and window opening's) can be placed either side depending on your needs.

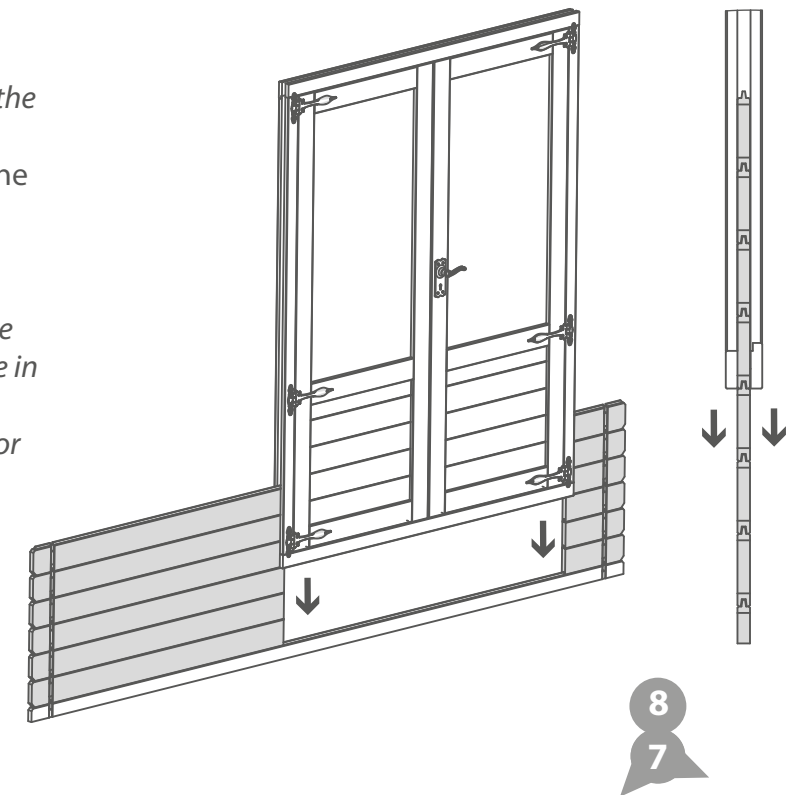**Step 11 (See Pre-Assembly)**

IMPORTANT: It is imperative that you pre-drill before fixing screws.

Following the same method outlined in *Pre-Assembly*, lay the next 6 boards (**No's. 7, 8, & 9**) onto the assembly to create your second level.


***Ensure that the boards are level and flush with each other as you lay each one.**

Fix every third board to the one below by screwing through the notch as shown in the illustration using 1x70mm screw per side (as outlined in Step 7).

****Ensure to stagger the screws so as not to collide with the previous screw.**

20x70mm Screws

70mm screw

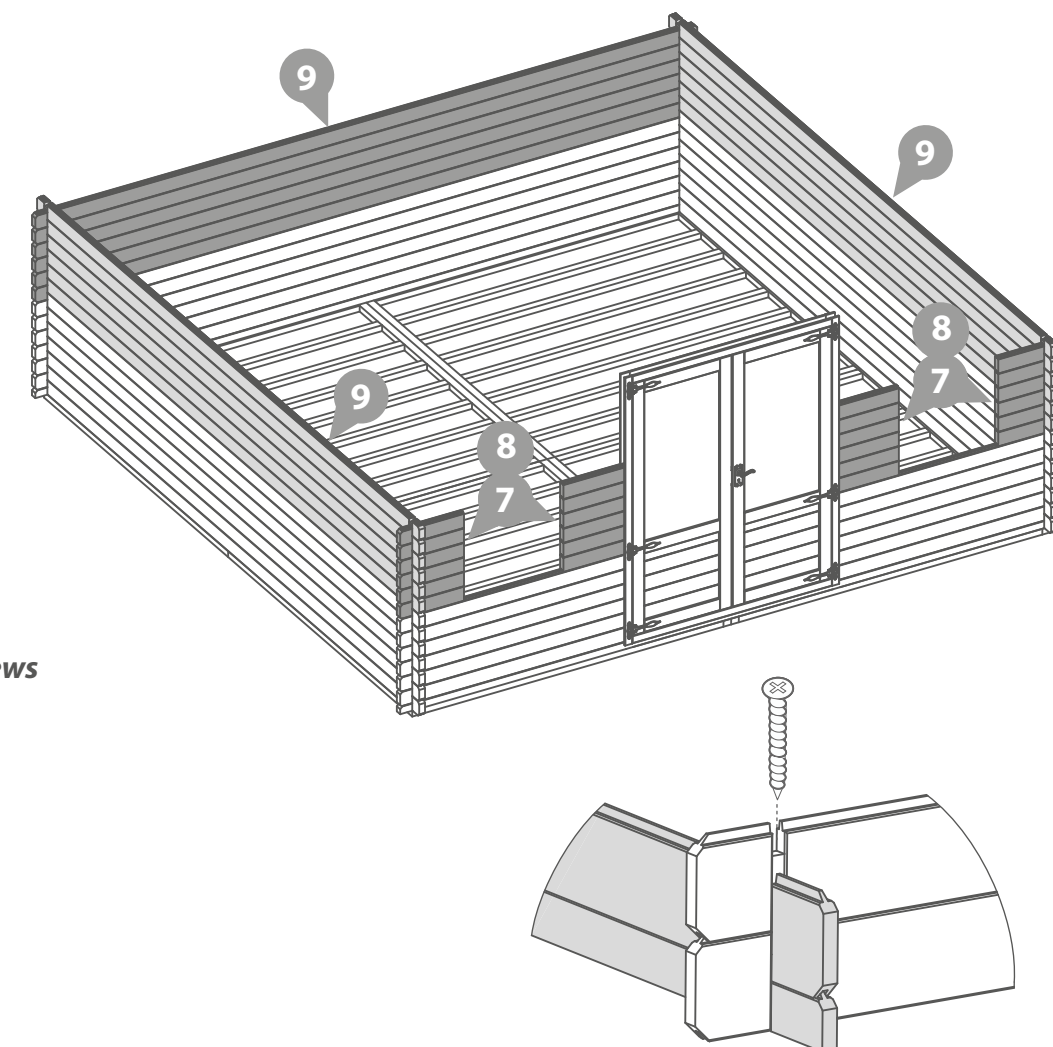


Step 12: Window Frame Fit

Once you have laid the second level of boards onto the assembly slide the window(s) between the smaller boards and rest on to the longer board.

***Ensure the boards are level with each end.**

***Please note:** This image is for illustrative purposes and may differ from your choice in product (regarding window position). Nevertheless the process of fitting the window is the same.

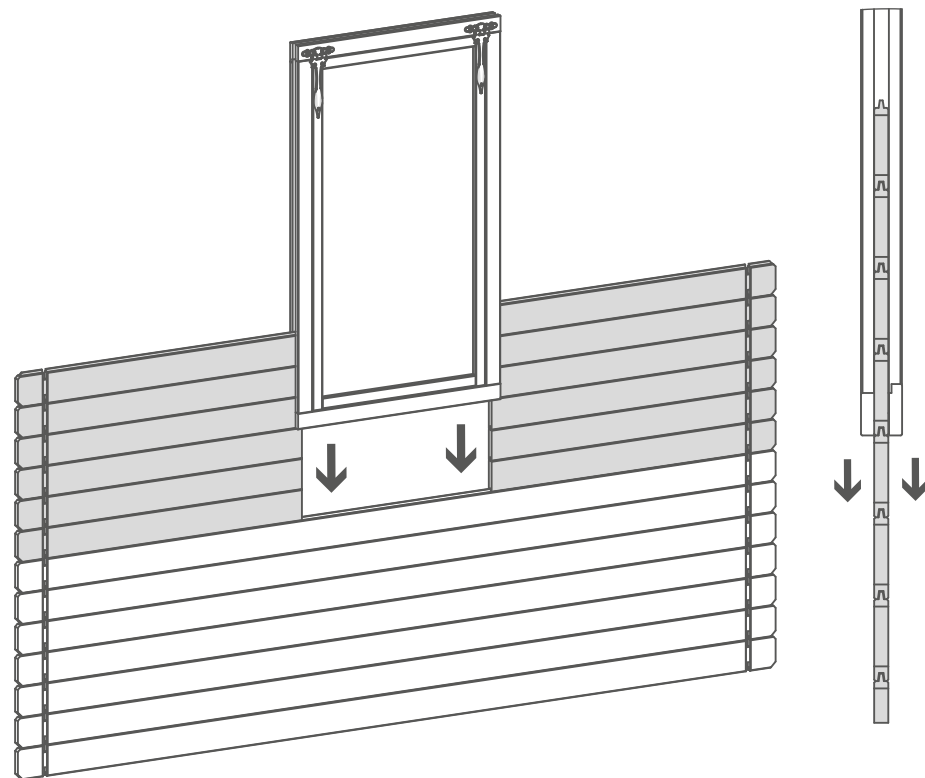

Step 13 (See Pre-Assembly)

Following the same method outlined in Pre-Assembly, lay the remaining boards (No's. 7, 8, 9 & 10) onto the assembly to bring the board level to the top of the window and door frames.

***Ensure that the boards are level and flush with each other as you lay each one.**


Fix every third board to the one below by screwing through the notch as shown in the illustration using 1x70mm screw per side (as outlined in Step 7).

****Ensure to stagger the screws so as not to collide with the previous screw.**

20x70mm Screws



IMPORTANT: It is imperative that you pre-drill before fixing screws.

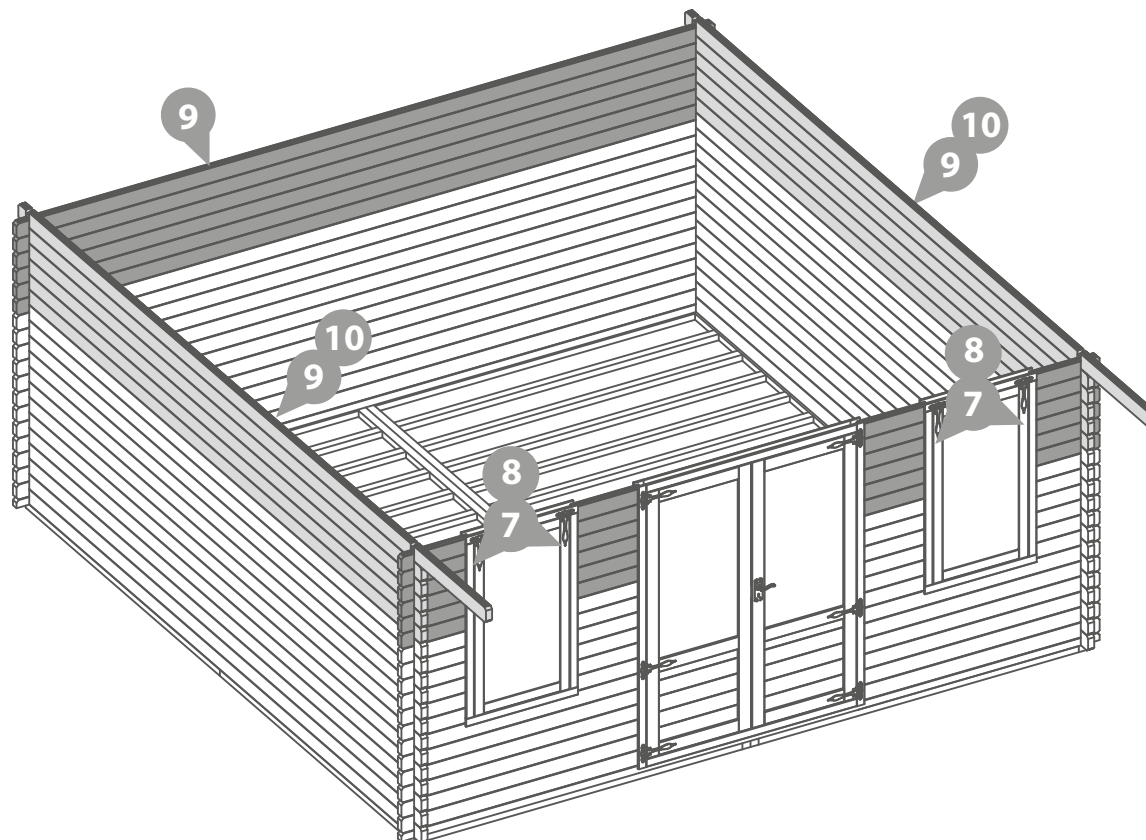

Step 14 (See Pre-Assembly)

Following the same method outlined in Pre-Assembly, lay the last two boards (No. 9) onto the front of the assembly. Once in position place the last 2 log board's (No. 10) onto the plain sides, fixing into position by screwing through the notches as shown in the illustration.

***Ensure that the boards are level and flush with each other as you lay each one.**

4x70mm Screws




IMPORTANT: It is imperative that you pre-drill before fixing screws.

Step 15 (See Pre-Assembly)


Place the gable tops onto the assembly. Fix into position by screwing through the notches as shown in the illustration.

***Ensure that the boards are level and flush with each other as you lay each one.**

4x70mm Screws

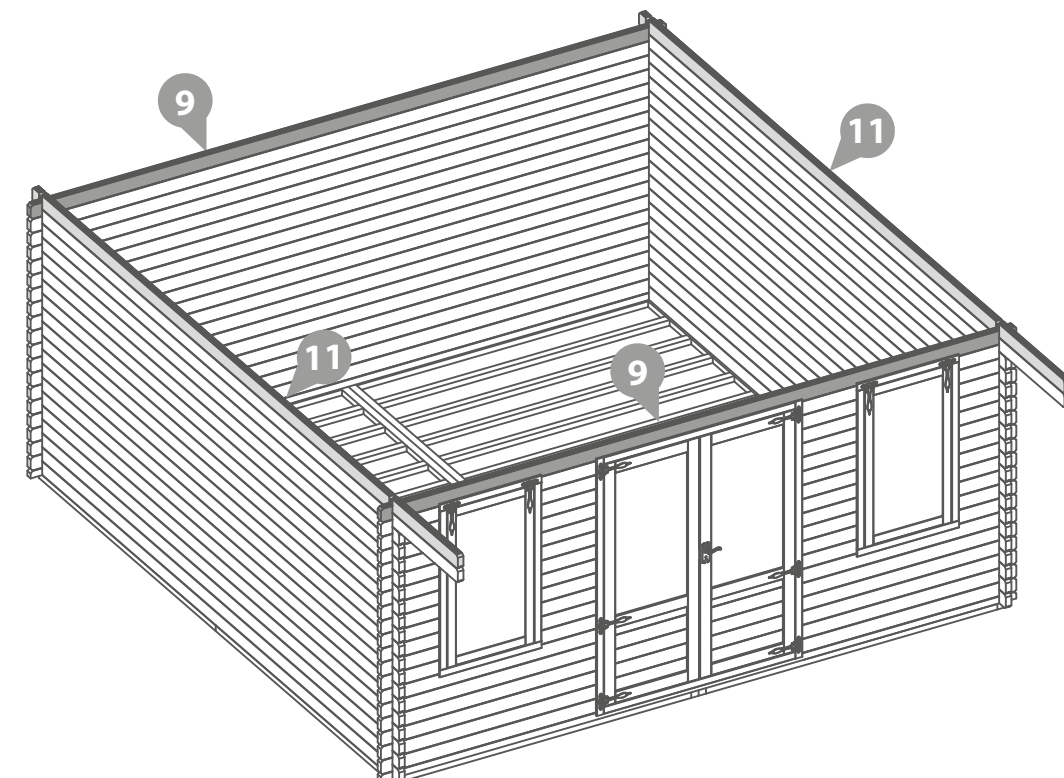

IMPORTANT: It is imperative that you pre-drill before fixing screws.


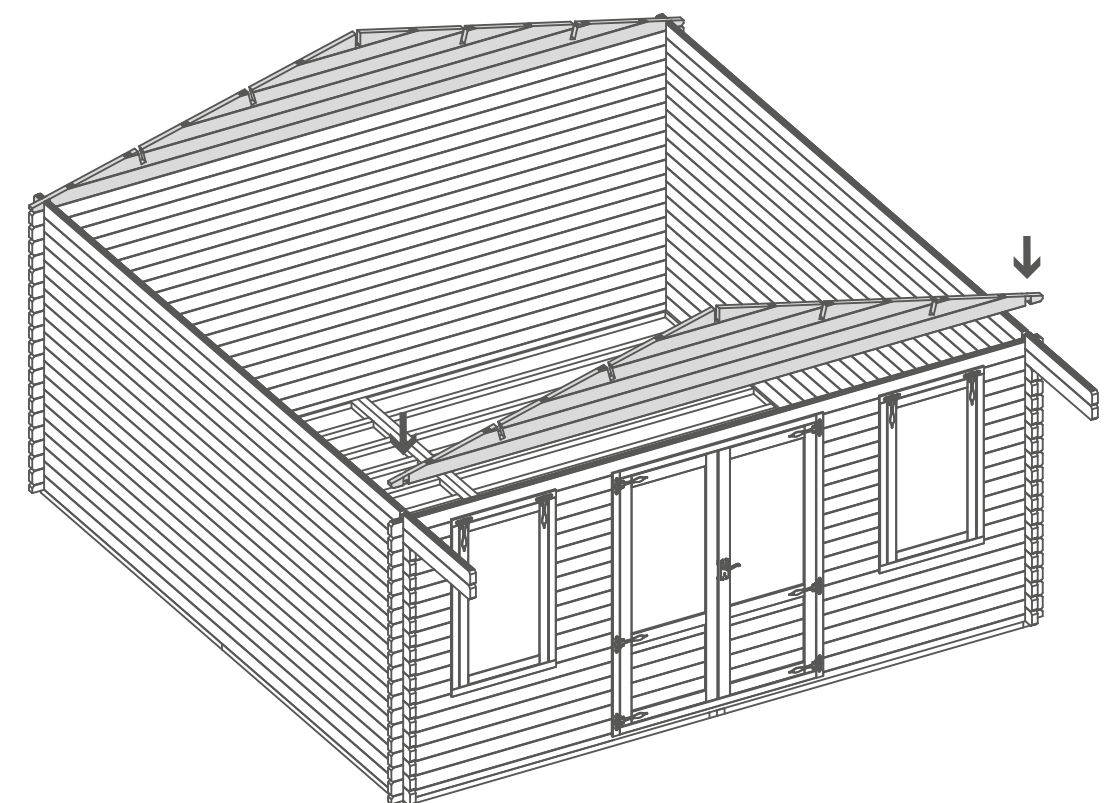


Step 16: Ridge Bar Fit**IMPORTANT:** *It is imperative that you pre-drill before fixing screws.*

Align the ridge bar(s) (**No. 16**) into the cut out slots on each gable top ensuring each ridge bar interlocks the boards.

Secure the ridge bars at each end by screwing through the bars into the boards (**ensure to pre-drill to avoid the boards splitting**) using 4x70mm screws per ridge bar.

***Please note:** The gable shown is for illustrative purposes and may differ in width from your choice in product. Nevertheless, despite any differences the process of fixing the ridge bars is the same.

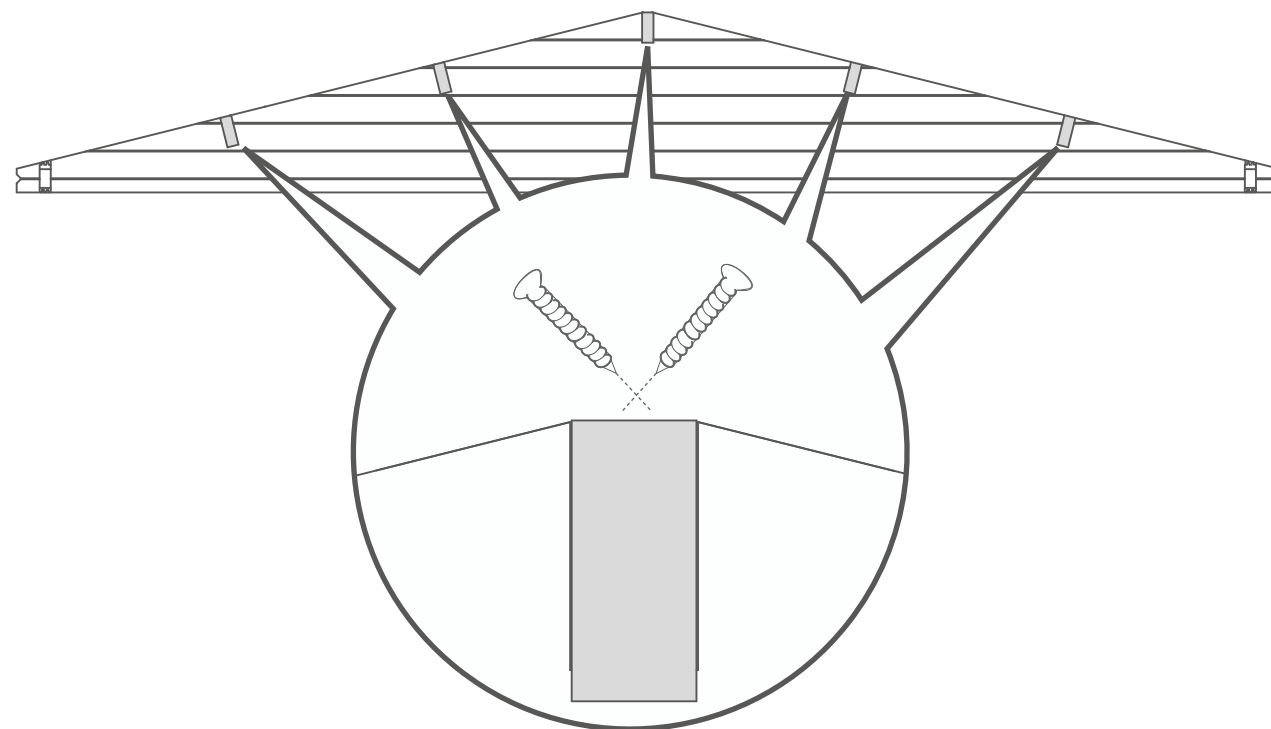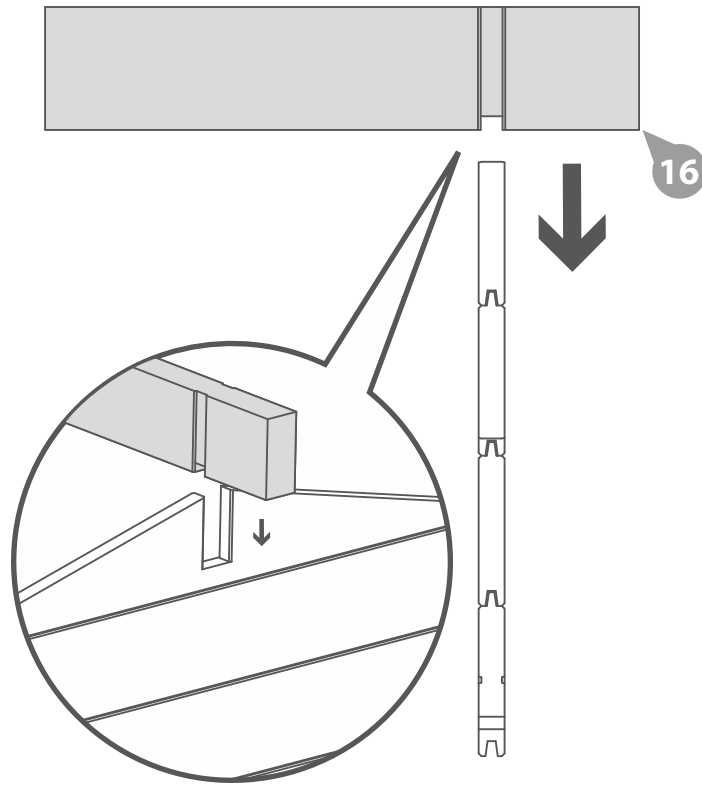20x70mm Screws**Step 17**

Place the first two roof board's (**No. 13**) onto the assembly on each side, making sure the boards are flush to the end of the roof purlin. Once in position fix to each purlin using 3x40mm screws.



***Ensure the roof boards meet at the top of the apex and leave an overhang at the bottom.**

Continue adding the roof boards along the roof, fixing each one into position using 4x40mm screws, making sure that each board is interlocked, flush at the bottom & meet at the top of the apex.

The last board on each side will overhang: Using a straight edge and a pencil mark out a line as a guide.

Cut along the pencil mark and remove the excess. Place the cut down board's back onto the roof and secure into place using 4x40mm screws per board.

***Please Note:** This image is for illustrative purposes and may differ from your choice in product. Nevertheless the process of cutting and fitting the last roof boards is the same.

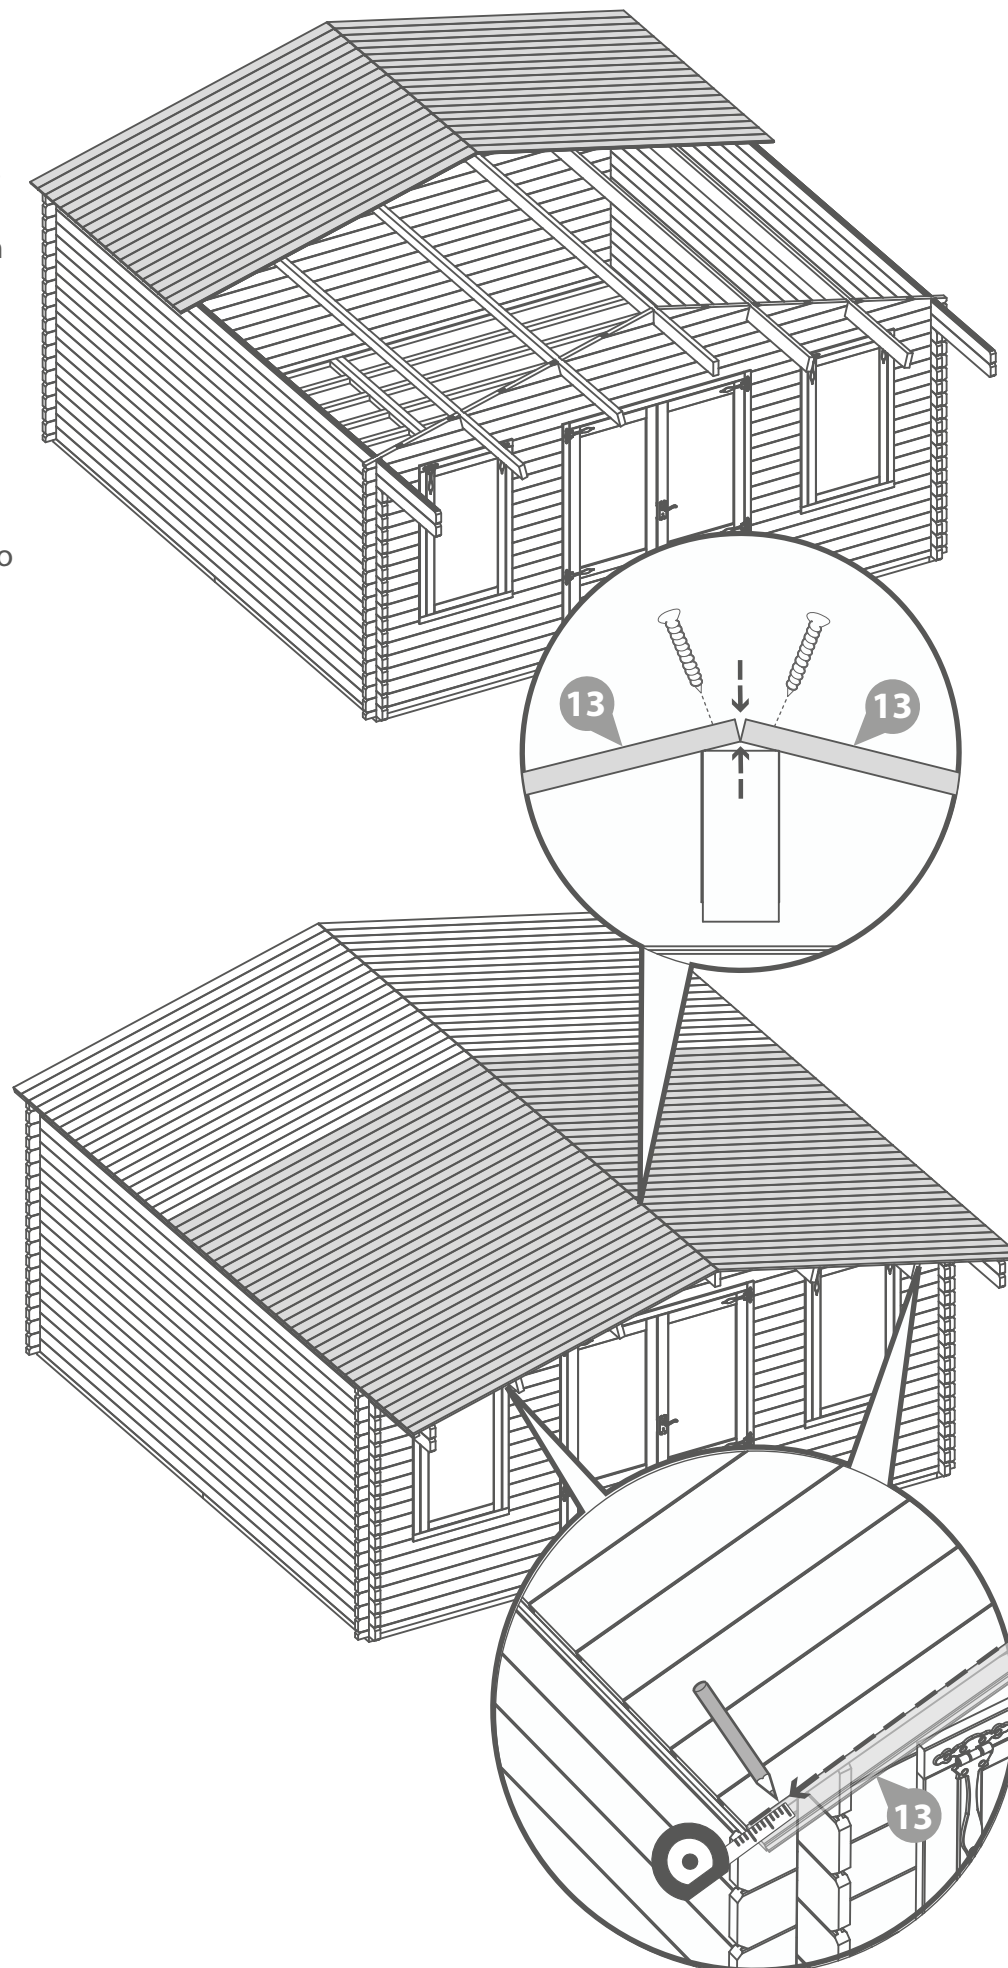

432x40mm Screws

Step 18

Ensuring the roof boards are flush at the overhanging side and meet at the apex, fix the eaves frames (**No. 18**) to the underside of the roof boards using 28x40mm screws as shown in the illustration

***Please Note:** This image is for illustrative purposes and may differ from your choice in product. Nevertheless the process of fixing the eaves frames is the same.

42x40mm Screws

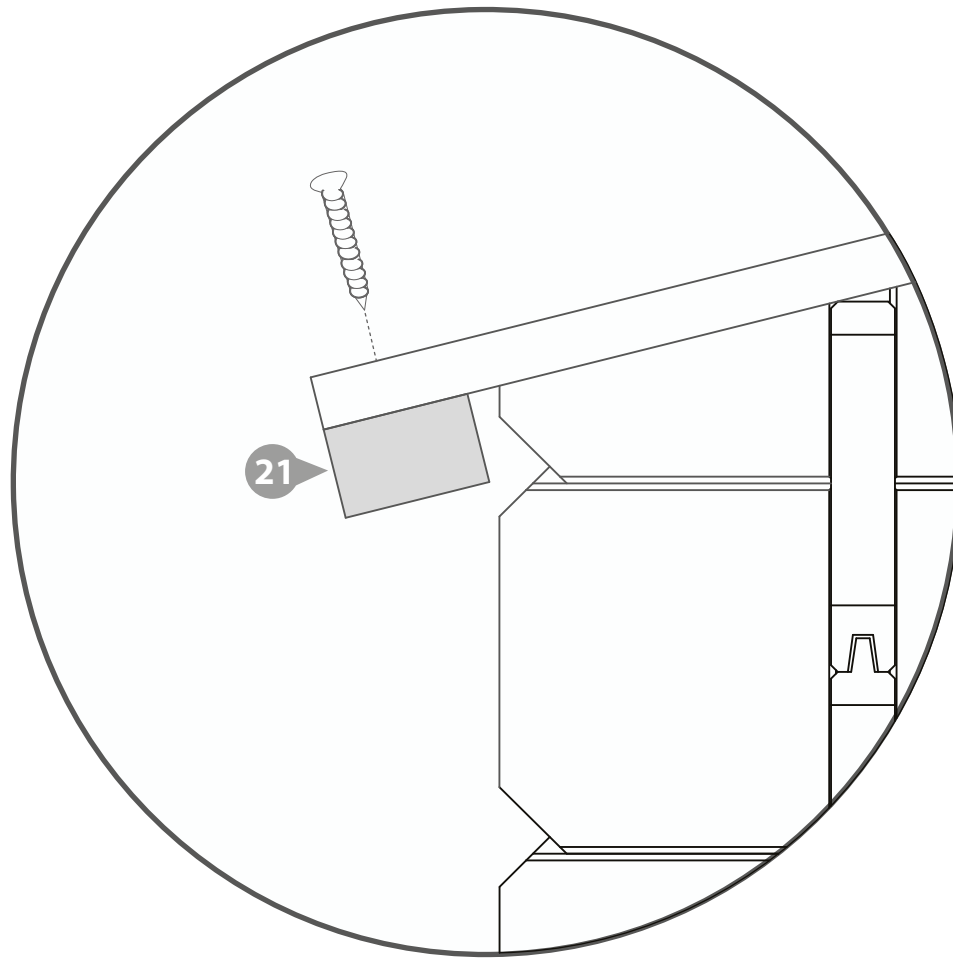

Step 19

Place the first floor board (**No. 12**) inside the building flush to the log board on one side. Continue adding the floor boards (*internally*) making sure to interlock each individual board.

***Do NOT secure the boards until the last board has been measured and cut.**

Following the same method outlined in **Step 17** measure the gap between the bottom of the tongue (**on the last board placed**) and the log board.





Using a straight edge mark out the measurement onto the last floor board (**No. 12**) and cut along the length removing the excess.

****Please note:** Mark the final board 2mm under the measurement; This will allow the timber to expand and contract correctly.

Once all the floor boards are in position secure each board into position using 10x40mm screws.

*****Please Note:** Ensure to screw through each of the floor boards into the floor bearers.

430x40mm Screws

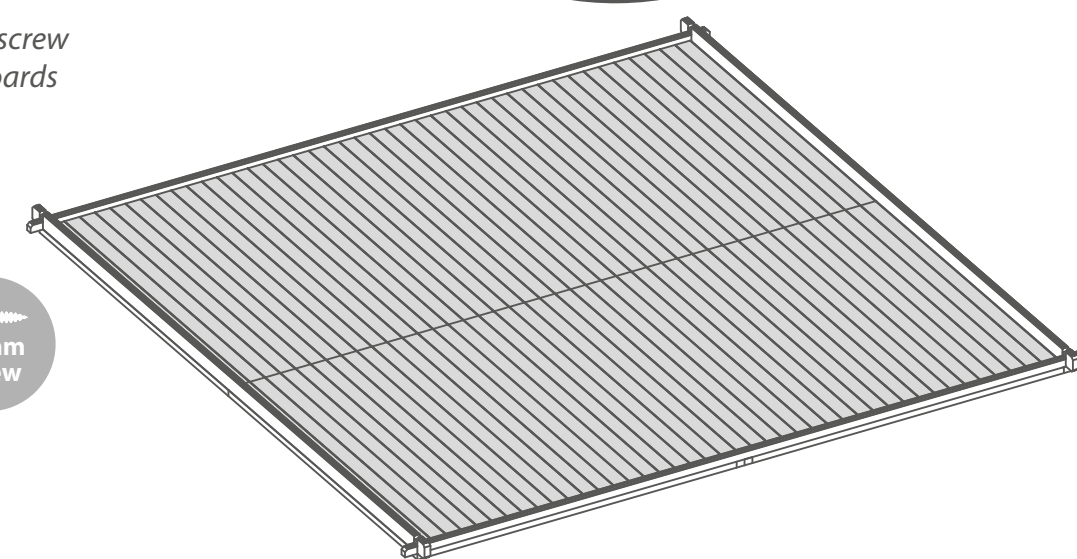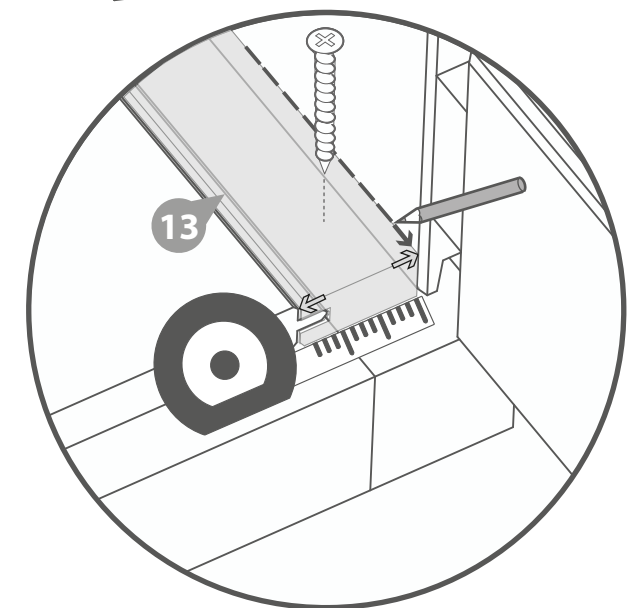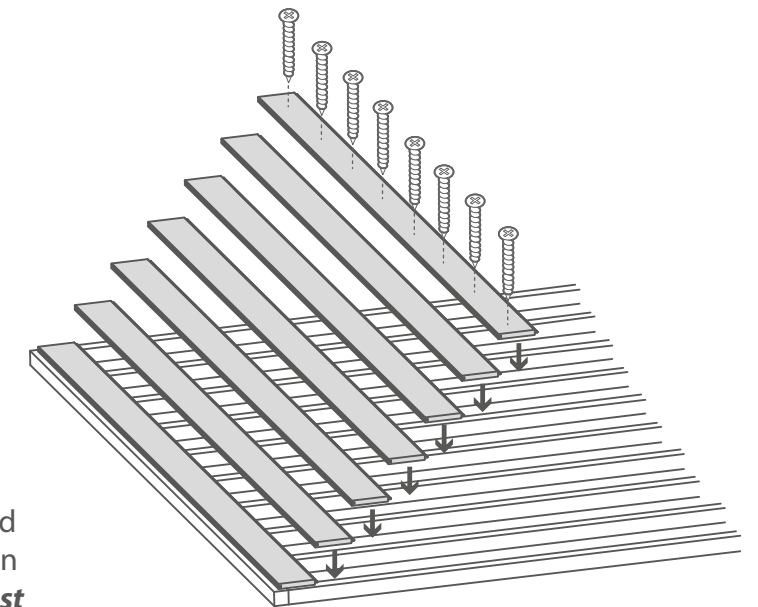


Step 20


Inside the building place an internal roof trim (**No. 23**) against the boarding and align with the roof as shown in the illustration, ensuring the angled face follows the roof line.

Once in position fix each roof trim into place using 40mm screws per roof trim, equally spaced along the face of the board.

20x40mm Screws

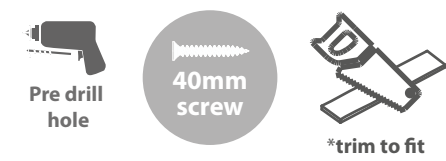

***Measure and cut the interior roof trims to fit the internal space.**

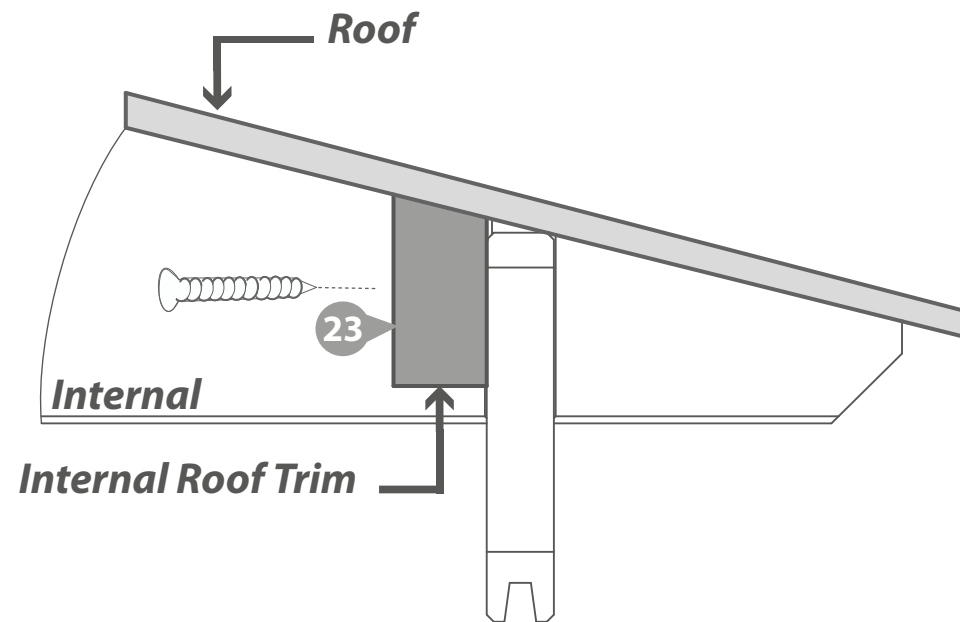



Step 21

Once the floor has been laid arrange the skirting (**No. 22**) around the outside edge of floor (**internally**), measure and cut down accordingly to best match the internal space.

Secure each skirting section into place using 30mm spaced equally along the board as shown in the illustration.

***Do NOT fix the skirting to the floor sheets/boards.**

54x40mm Screws

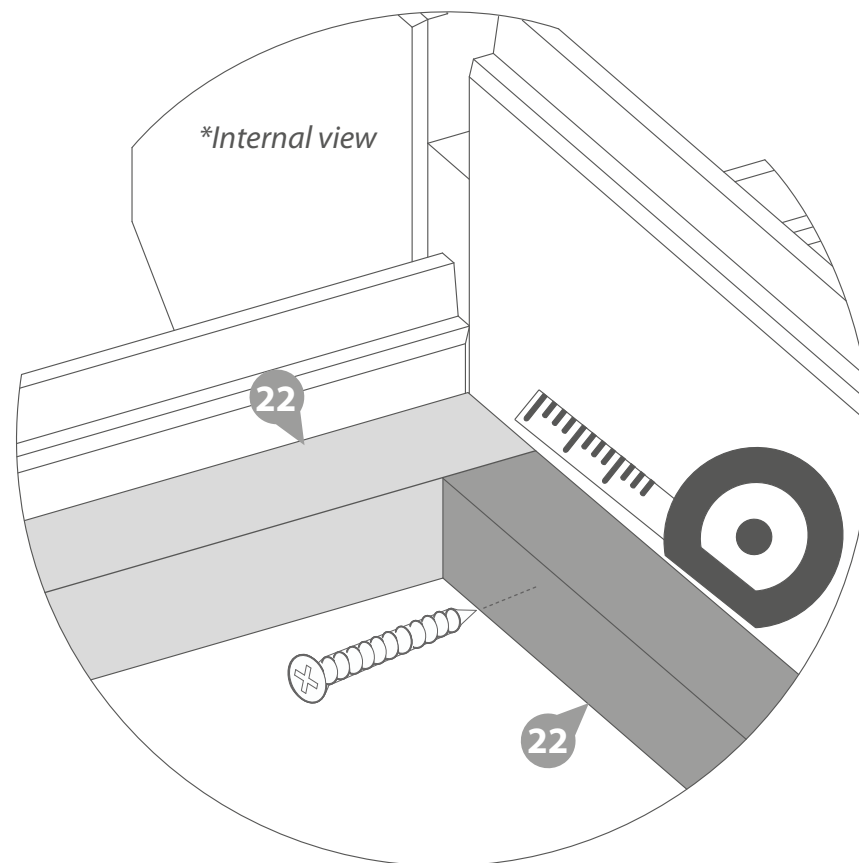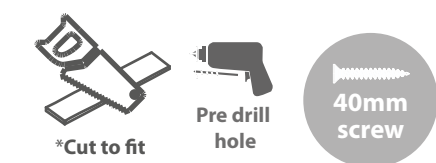

Step 22




Cut the felt into five & strips lay onto the roof in the order shown in the illustration.

***Ensure there is approximately 50mm of overhanging felt each side.**

Once the felt is laid out fix to the roof using felt tacks at 100mm intervals.

***Felt size: 6100mm**


488x Felt Tacks

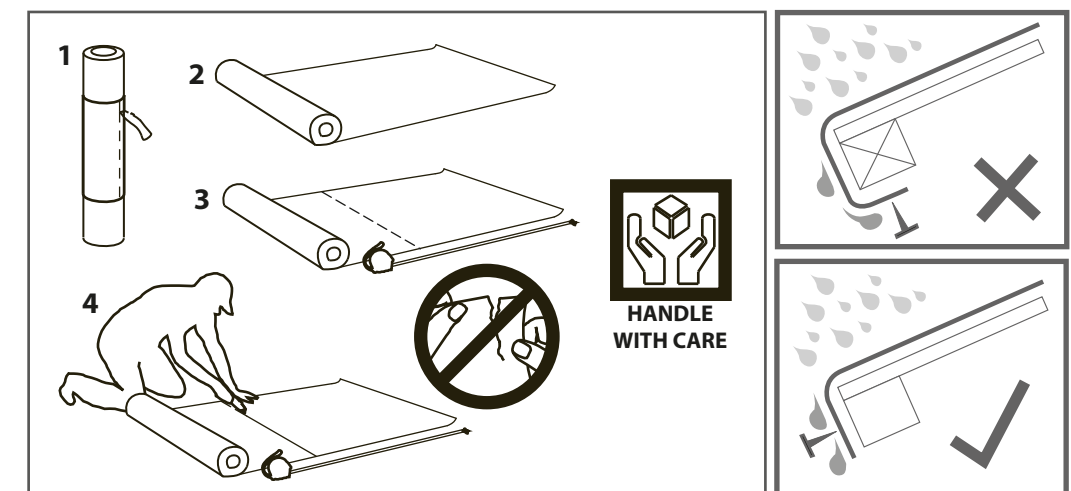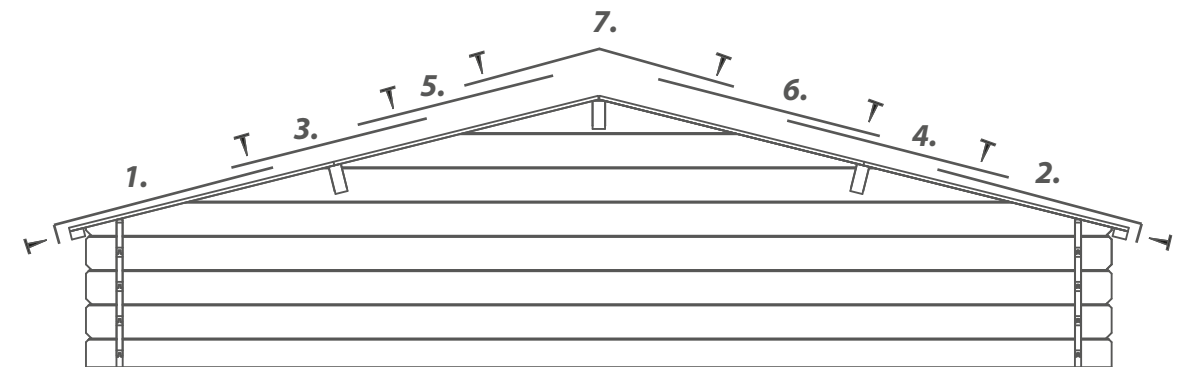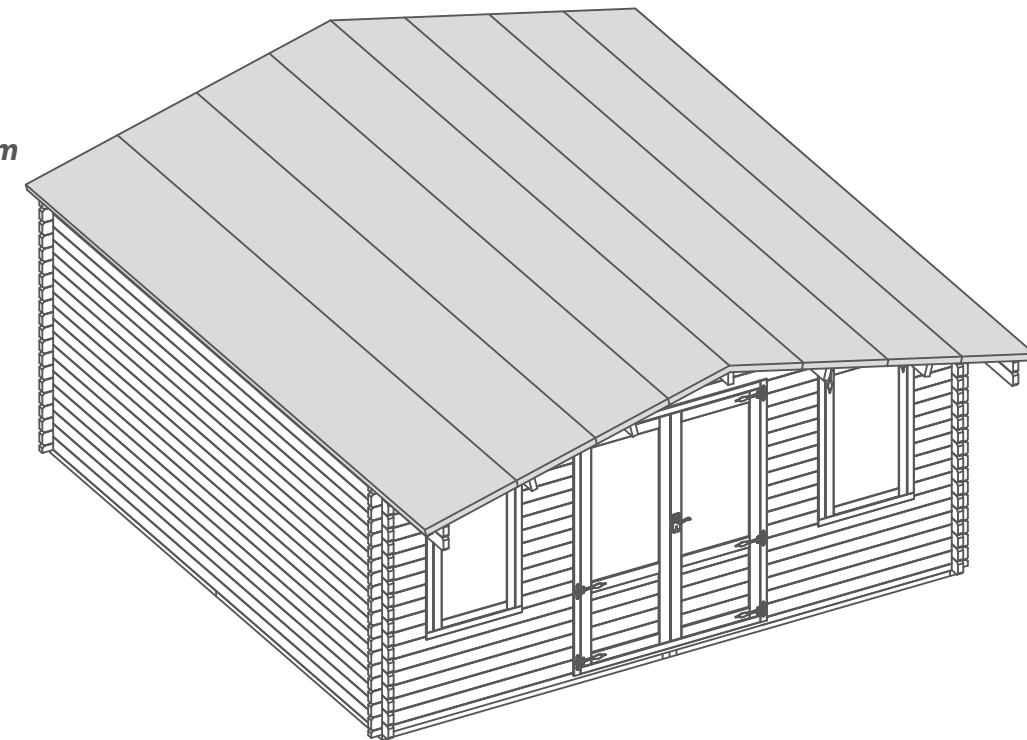

Step 22

Align the fascia's (**No's. 17 & 18**) with the roof and fix into place using 4x40mm screws per fascia, making sure to screw through the fascia into the roof purlins and eaves frames.

52x40mm Screws

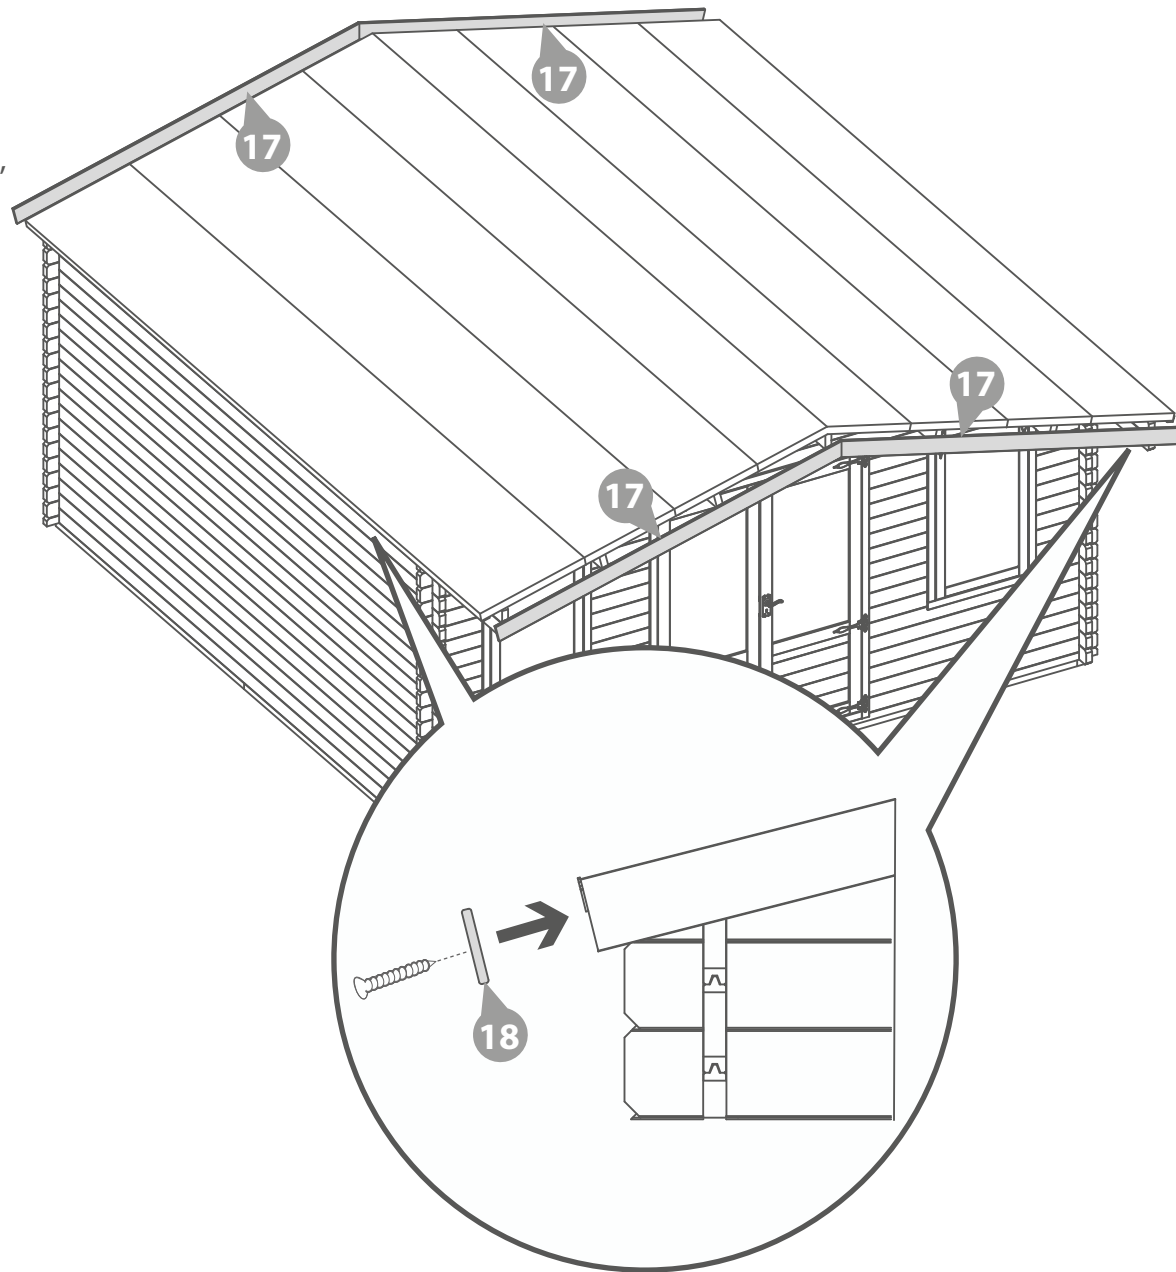

Step 23

Arrange the storm braces (**No. 21**) around the building (**internally**). Place 2x storm braces per side fixing into place using 2x 100mm bolts per brace making sure the washer & nut are tightened from the outside of the building.

***Ensure the storm braces are secured at the highest point possible on each side.**

****Storm braces will help your building expand and contract properly.**

*****It is imperative that each bolt is tightened using a washer so as not to damage the log boards.**

24x100mm Bolt Sets

