ASSEMBLY INSTRUCTIONS
432-4005 / 432-4012

WARNING

If in doubt, or difficulty is experienced contact a qualified electrician. Wire in accordance to current UK building regulations.

IMPORTANT!

Make sure that the power is switched off at the fuse box / consumer unit (electricity mains switch) before starting work.


BEFORE STARTING

Please read through these instructions and keep them for future reference. Carefully unpack the contents of the box.

FIXING INSTRUCTIONS

1. Place the fixing bracket onto the ceiling and mark holes in the required position .
2. Using a drill, drill the holes previously marked and secure the fixing bracket to the ceiling using the screws provided.
3. Screw the central column onto the HUB using the grub screws provided (A).
4. Fan the arms out into position and tighten using the screws provided.
5. Place a glass cup followed by a candle drip on each arm.
6. Screw the chain onto the central column.
7. Connect the mains supply wires to the fitting using the terminal block (C).
8. Hook the fitting to the fixing bracket.
9. Dress the fitting as illustrated (D).
10. Insert the bulbs.

(C)

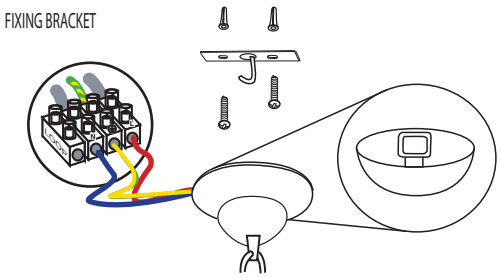

REPLACEMENT LAMP

Maximum wattage - See Lamp holder. Lightbulb shape - See Lamp holder.

CLEANING CARE

Clean with a soft dry cloth


SAFETY INFORMATION

Always switch off the electricity supply and allow to cool for10 minutes before changing the lamp.


Or any suitable low energy bulb.
example:


5watt	=	25watts
7watt	=	35watts
9watt	=	45watts
11 watt	=	60watts
15 watt	=	75watts
20watt	=	100watts
23watt	=	125watts

(A)

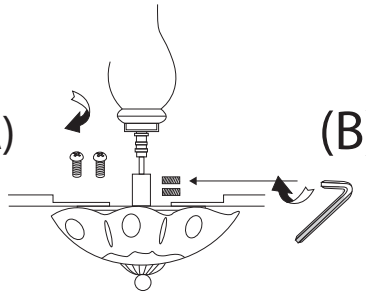

(B)



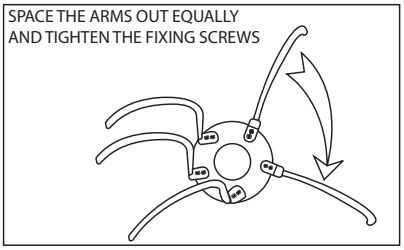

(D)



14 x D14mm 5 x Strings



12 x D14mm 5 x Strings

20 Strings



10 Strings



1 String

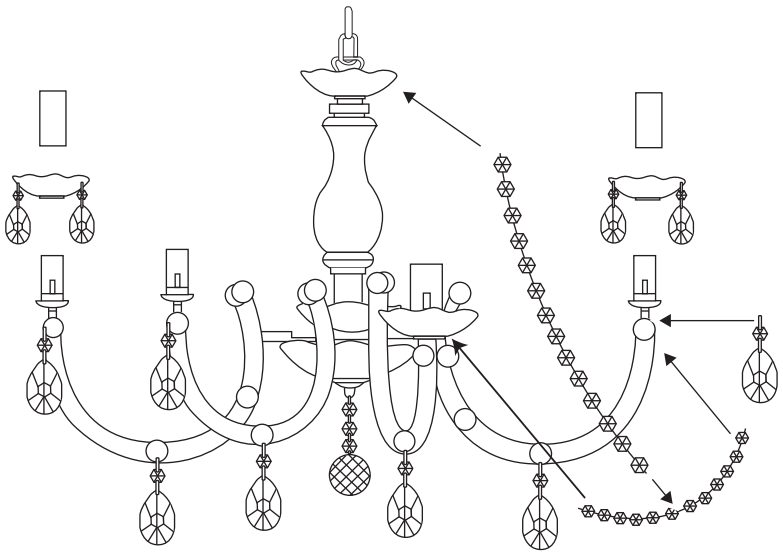


Fig1

Fitting wire colour		Household circuit
Blue	connect to	Blue or Black (Neutral)
Green/Yellow	connect to	Green/Yellow -sleeved Copper (Earth tag)
Brown	connect to	Red or Brown (Switched Live)

Q.C APPROVED 3/04/2008

CE

QA01529