
Hygena - Underbasin

Assembly Instructions - please keep for future reference

539/9974

527/9142

hygena

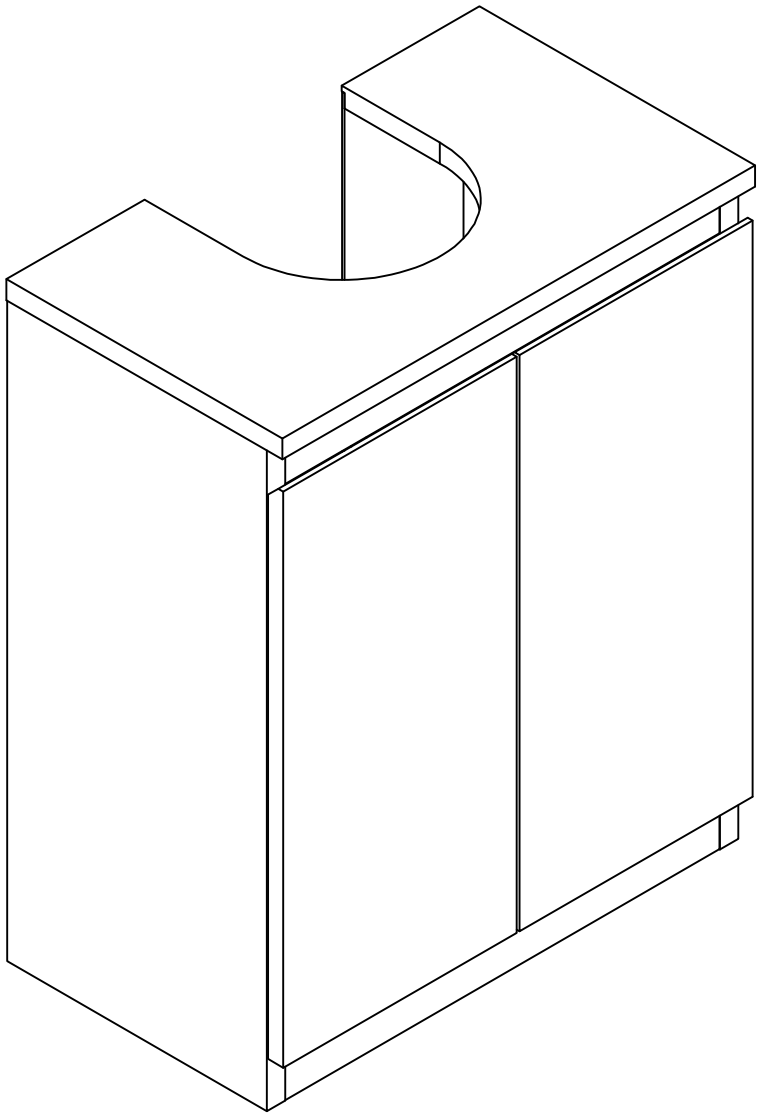

Dimensions

Width - 48cm
Depth - 28cm
Height - 60cm

Important– Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 0345 6400800**

Issue 1 - 21/03/15

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 1 and 2.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Glue safety - Take care when using glue, please follow the advice below

Skin contact: Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

Eye contact: Rinse immediately with clean water for 15 minutes and seek medical advice.

If swallowed: Seek medical advice immediately.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightend properly.

WARNING
In order to help prevent overturning – please follow these instructions


To help prevent product toppling over please follow the below steps:-
Use the anti tip strap or wall fixing method provided (if applicable)
Do not allow children to climb or hang on the furniture
Do not open more than one drawer at a time
Do not place heavy items in the top drawers
Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose

Please note that only the anti tip strap is provided.
You will need to provide wall plugs and screws applicable for your wall type


Components - Panels

If you have damaged or missing components, call the
Customer Helpline: 0345 6400800


Please check you have all the panels listed below

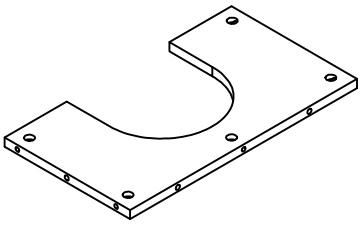


1 Bottom x1
(23cm x 44.1cm)




2 Left side panel x1
(5cm x 44.1cm)

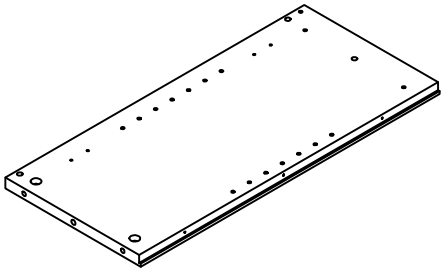


3 Right side panel x1
(26.3cm x 58.1cm)




4 Right side panel x1
(4cm x 44.1cm)

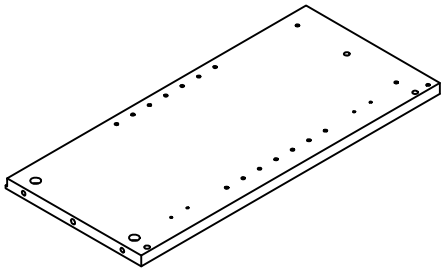


5 Left side panelx 1
(26.3cm x 58.1cm)

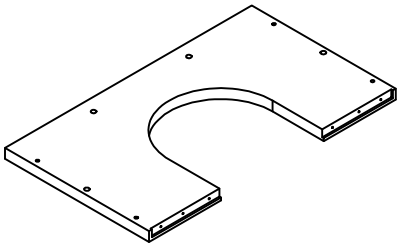


6 Top x 1
(28cm x 48cm)

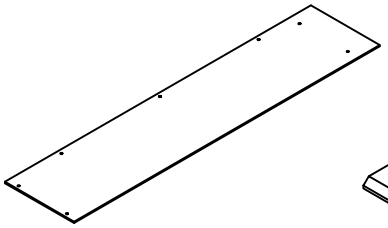


7 back x 2
(13.4cm x 59.4cm)

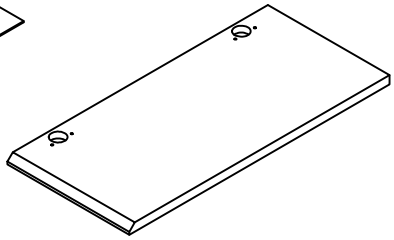

8 Left door x 1
(23.6cm x 50.6cm)

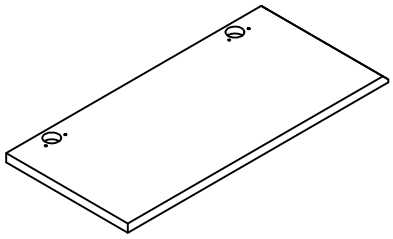

9 Right door x 1
(23.6cm x 50.6cm)

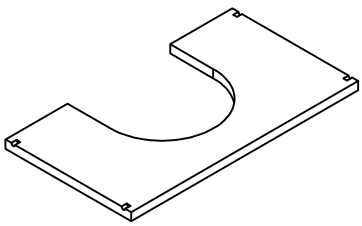





10 Adjustable shelf x 1
(24.3cm x 44cm)

Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 0345 6400800**


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly.In some cases more fittings may be supplied than are required.


A  Glue x 1	B  30mm Dowel x 12	c  Male comlock x 11	D  12mm Female comlock x 11
E  **Shelf holder x4**	F  15mm Screw x 16	G  Hinge x 4	H  25mm Sticker x 4
I  3x12mm Screw x 14	J  Wall strap x 2	K  Wall Plug x2	L  32mm Screw & washer x 2

Tools required



Phillips screwdriver
(medium & large)



Drill

7mm Suitable drill bit
(for use with wall plug)


Small
hammer

Ruler - Use this ruler to help correctly identify the screws





The screws length is measured from the head to the point (30mm screw shown).

Components - Fittings

If you have damaged or missing components, call the Customer Helpline: 0345 6400800


Ruler - Use this ruler to help correctly identify the screws



Using Camlocks

Step 1


Connect the male camlock as directed in the assembly instructions using a screwdriver.



Step 2


Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.



Step 3

Push the male camlock into the entry hole.




Step 4

Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.


The joint is now secure.



Assembly Instructions

Step 1


Fitting male camlocks
1.Insert 11 x male camlocks C into Panel 2 , 3 , 5 , 6 , and tighten using a suitable screwdriver .

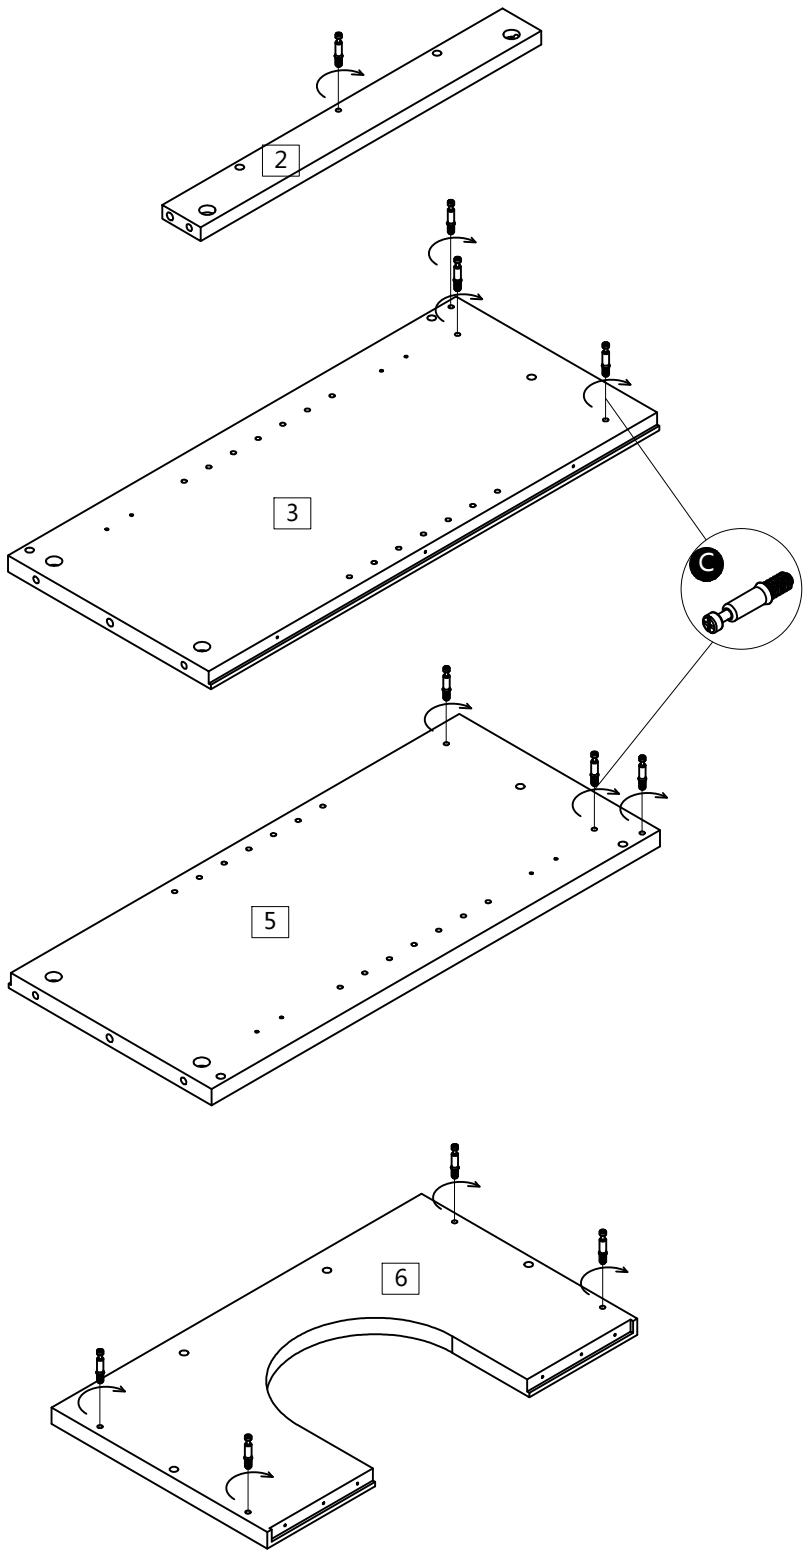

Assembly Instructions

Step 2

1. Glue and insert 12 x dowels (B) into panel [1], [2], [3], [4], [5], as shown.

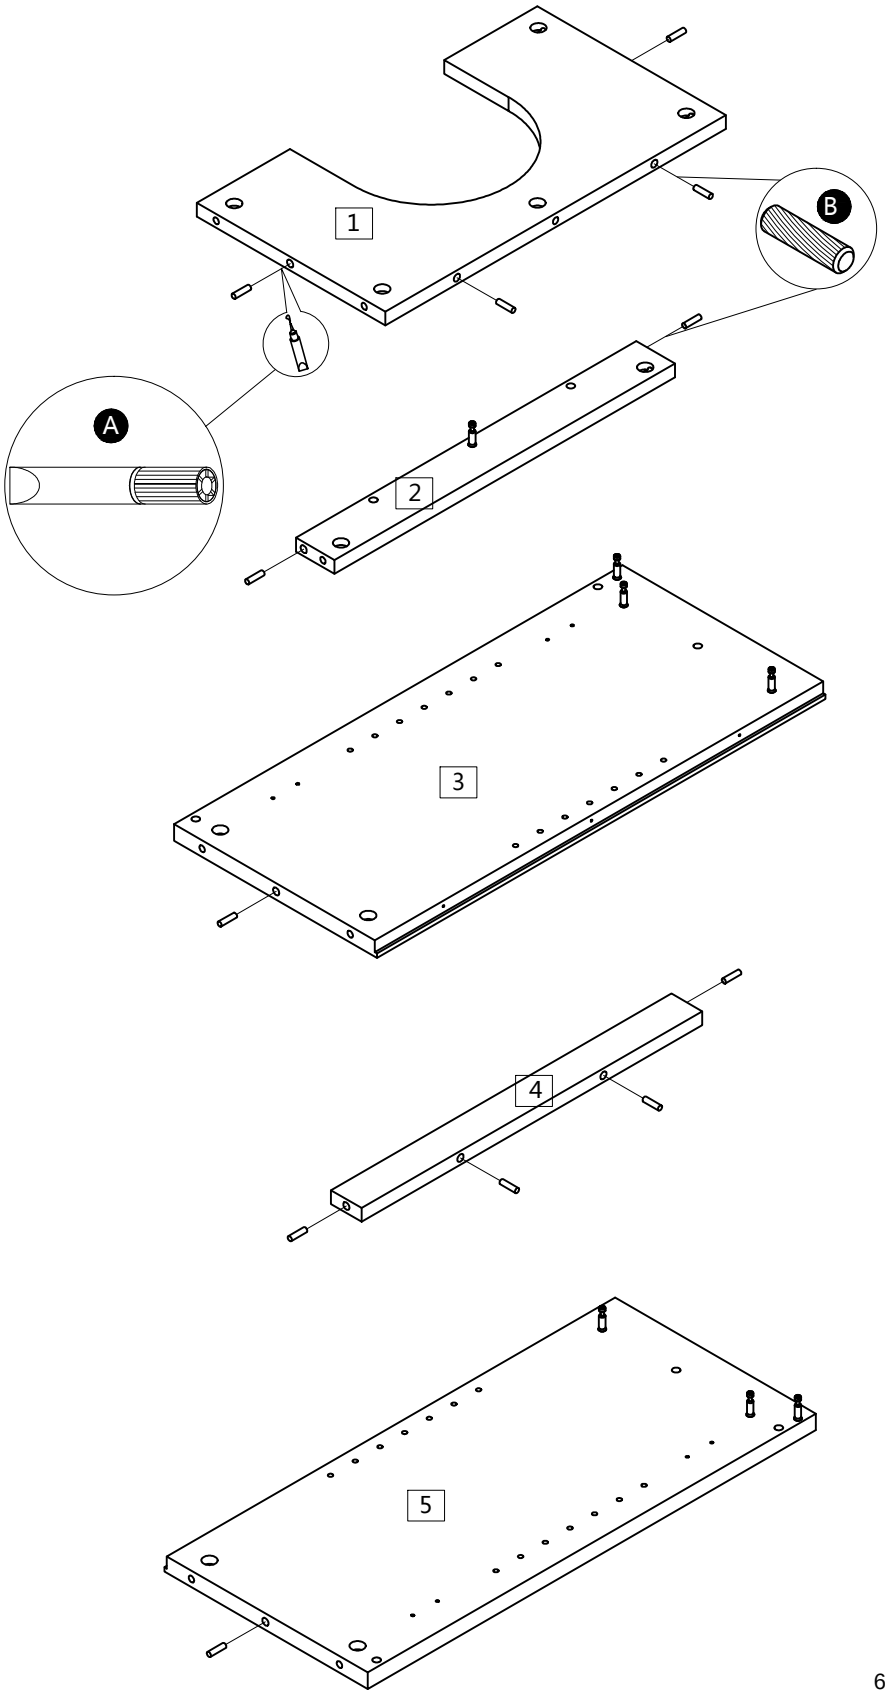


Assembly Instructions

Step 3

Attaching side panel
1. Glue holes in left side panel 1 , connect back panel 2 to left side panel 1 as shown.
2. Insert 1 x female camlocks D to attach left side panel 1 to front panel 2


Use a Screwdriver to turn the 1 x female camlock D clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

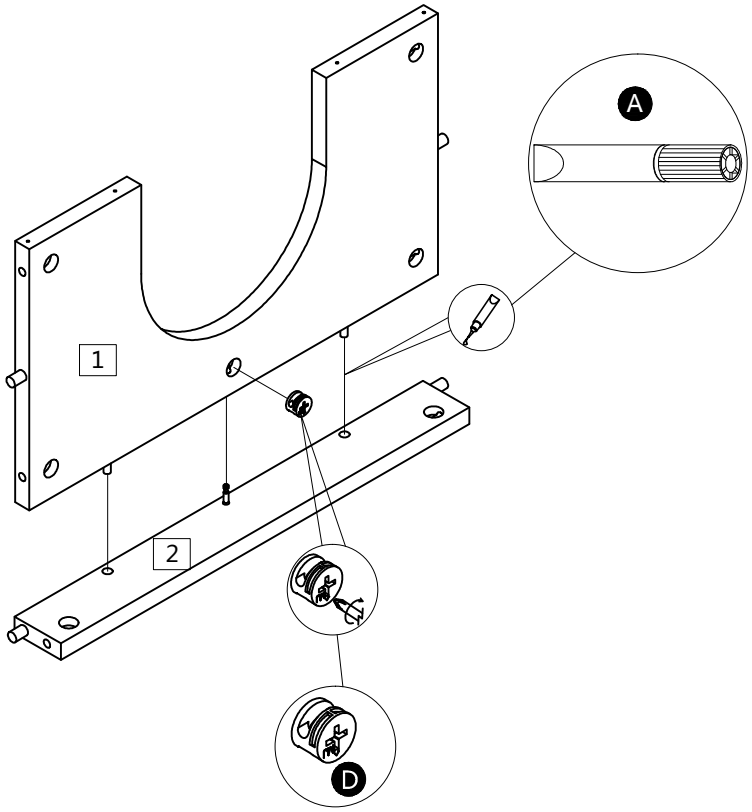

Step 4

1. Glue holes in right side panel 3 connect back panel 1 2 and front panel 4 to right side panel 5 .
2.Insert 6 x female camlocks D to attach back panel 1 2 4 and front panel 3 5 .

Use a Screwdriver to turn the 6 x female camlock D clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

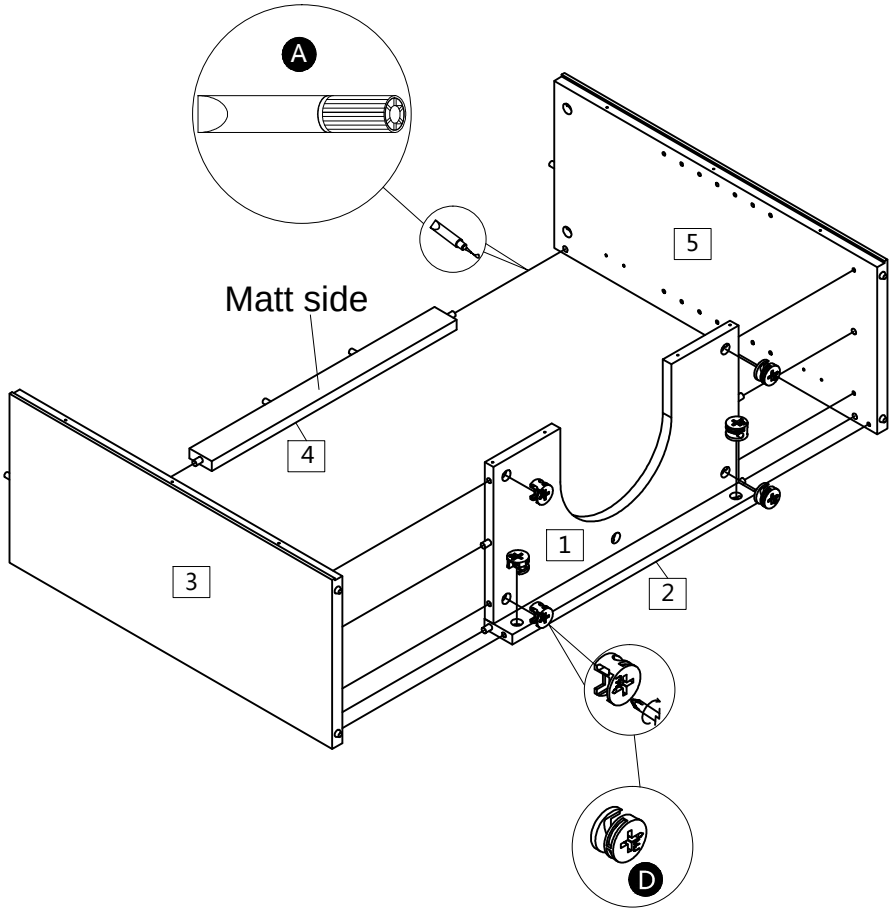


Assembly Instructions

Step 5

1. Glue holes in right side panel 6 connect back panel 5 and front panel 3 to right side panel 6.
2.Insert 4 x female camlocks D to attach back panel 5 and front panel 3.


Use a Screwdriver to turn the 4 x female camlock D clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

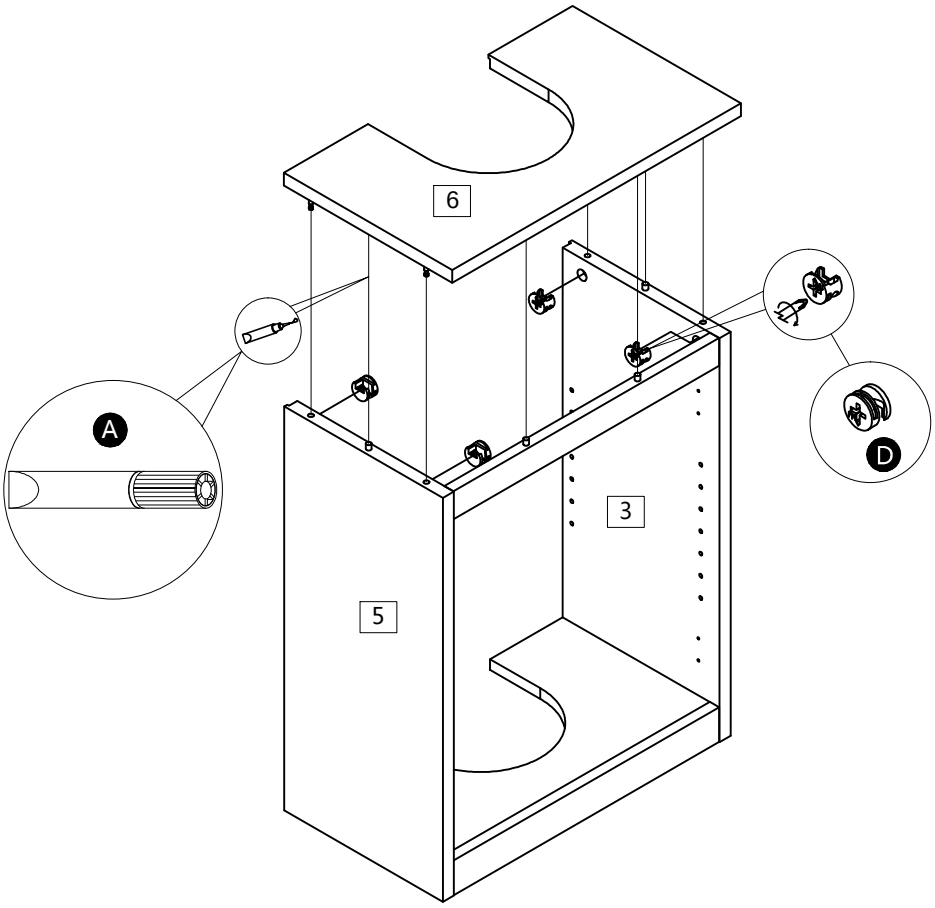

Step 6

1. Glue holes in right side panel 7 X2 connect back panel 1 3 and front panel 5 6 to right side panel 7 X2 .
2.Insert 14 x Screw I to attach back panel 1 2 4 and front panel 3 5.

Use a Screwdriver to turn the 14 x Screw I clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

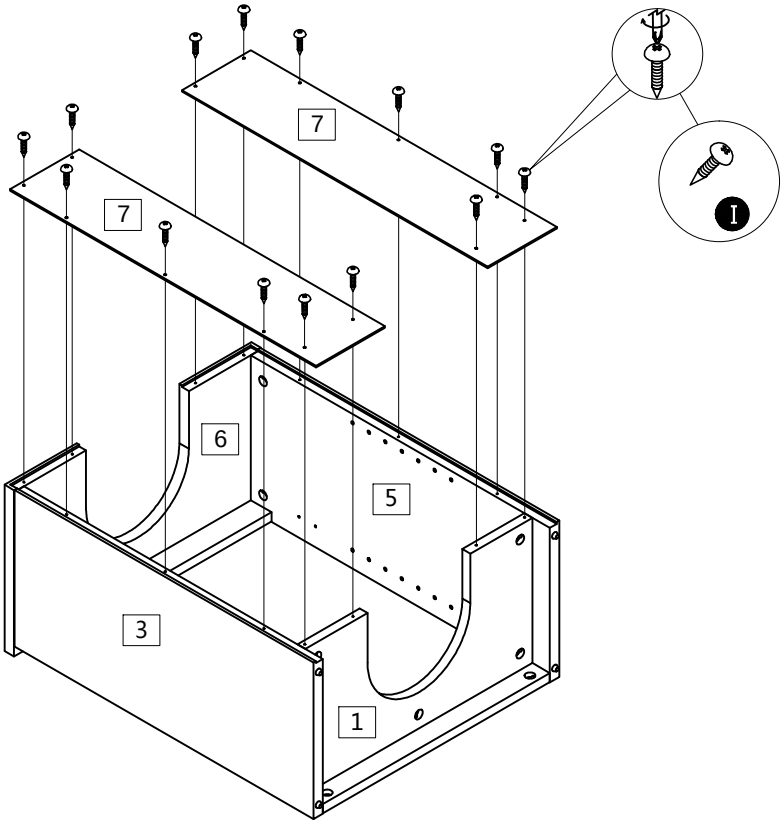


Assembly Instructions


Step 7

Attach hinge
1.Connect 4 x hinge G to the top panel 8 9 with 8 x screws F as show.

Use a Screwdriver to turn the female camlock clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

Very Important:
The friction stays must be attached the correct way up.
Please pay attention to diagram. Failure to do so may result in damaging the unit

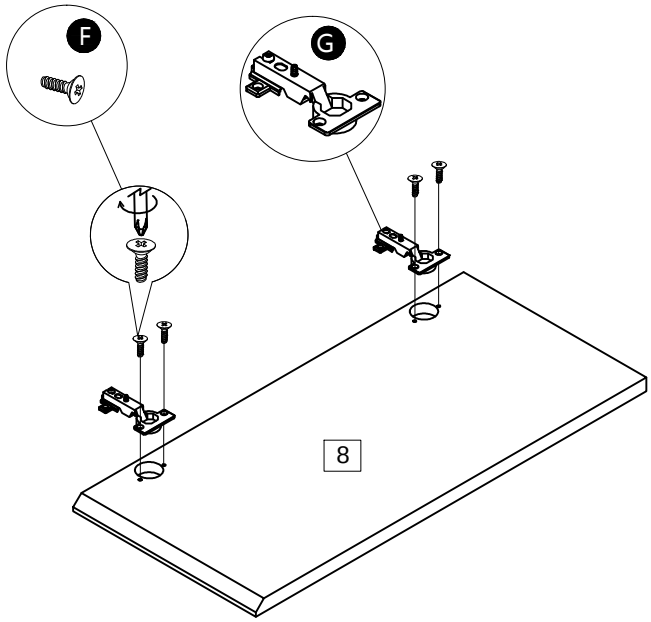

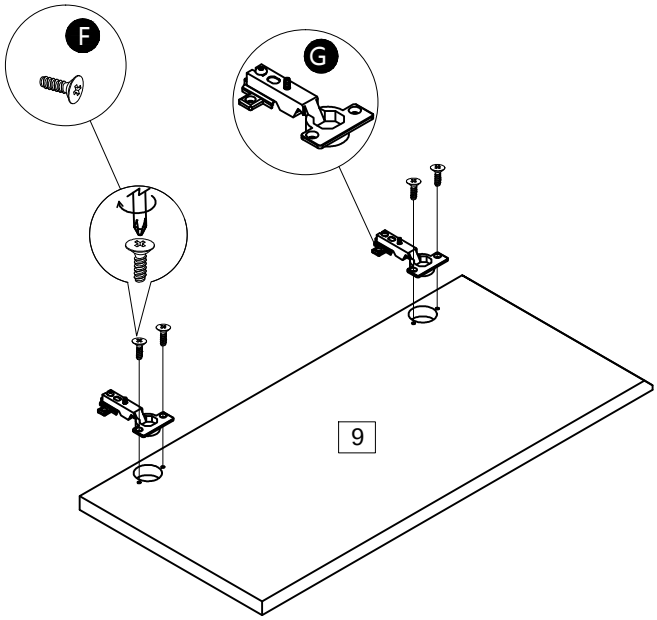


Assembly Instructions

Step 8

Attach top panel

1. Connect top panel 8 , 9 to the unit with 8 x screw E F as shown. F

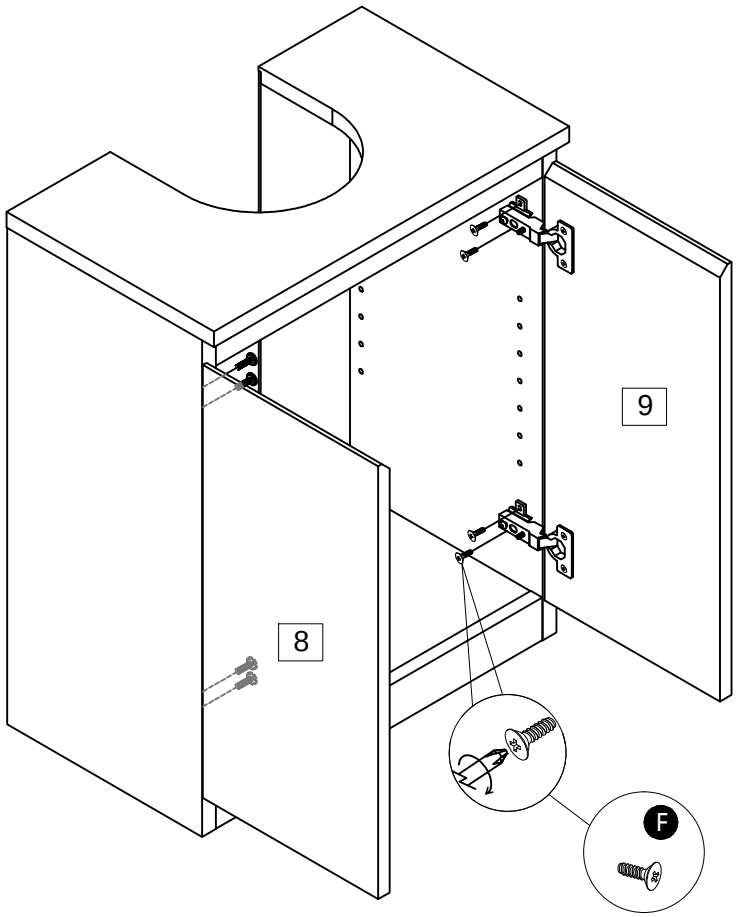

Hinge adjustment:


a: To move the top panel up or down, loosen screws shown and move top panel to suit

b.To move the top panel in or out, loosen screws shown and move top panel to suit.


Retighten screws

C:To move the top panel left or right, adjust screws shown.


a:

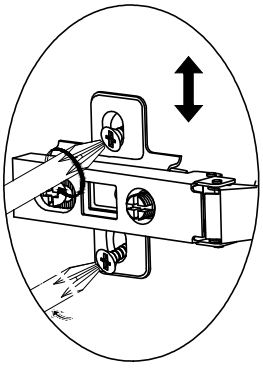

b:

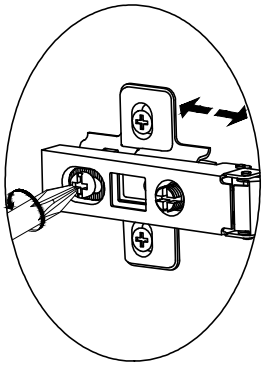


c:

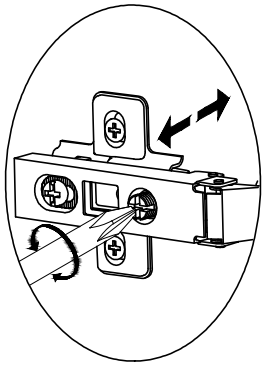

Assembly Instructions

Step 9


1.Use 4 x stickers (H) to cover camlocks on 2x side panel [3] and left upright [5] as shown.

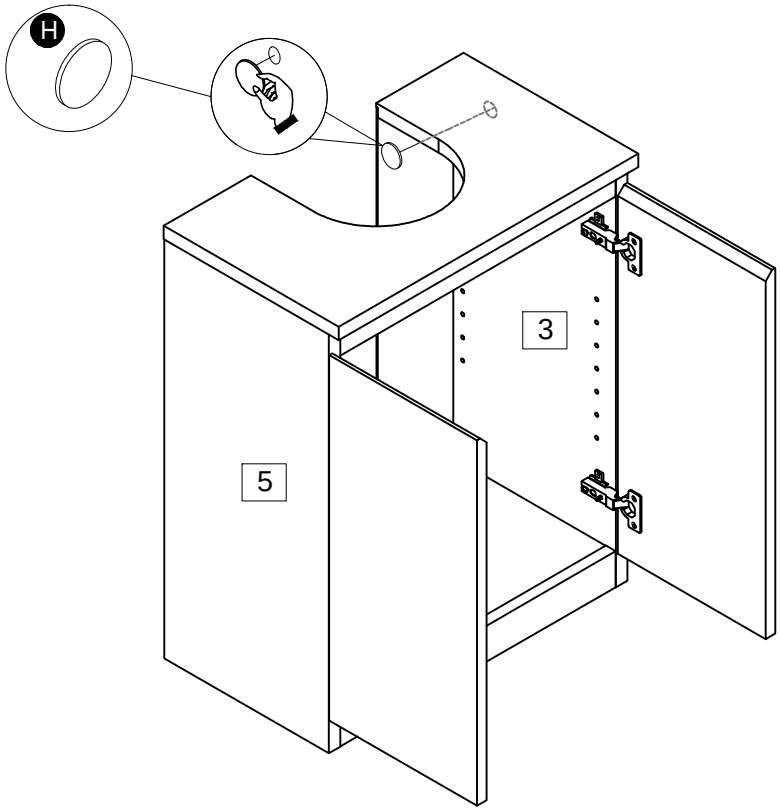

Step 10

1.Insert 4 x shelf holders (E) to 2 x side panel [3] and left upright [5] and right .


2.Attach 4x panel [10] and onto shelf holder as shown.

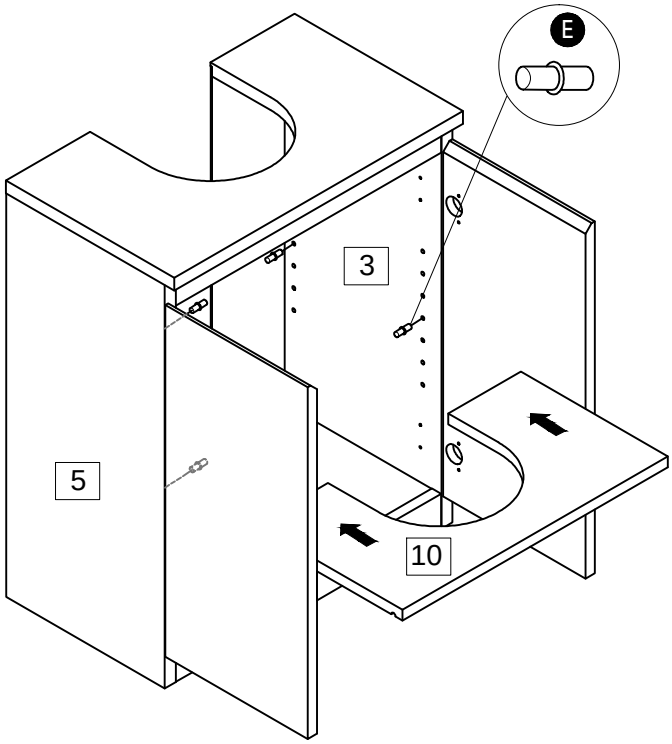

Assembly Instructions

Step 11

1.Using 2 x nylon straps J to the back of left back 7 & right back 6 .

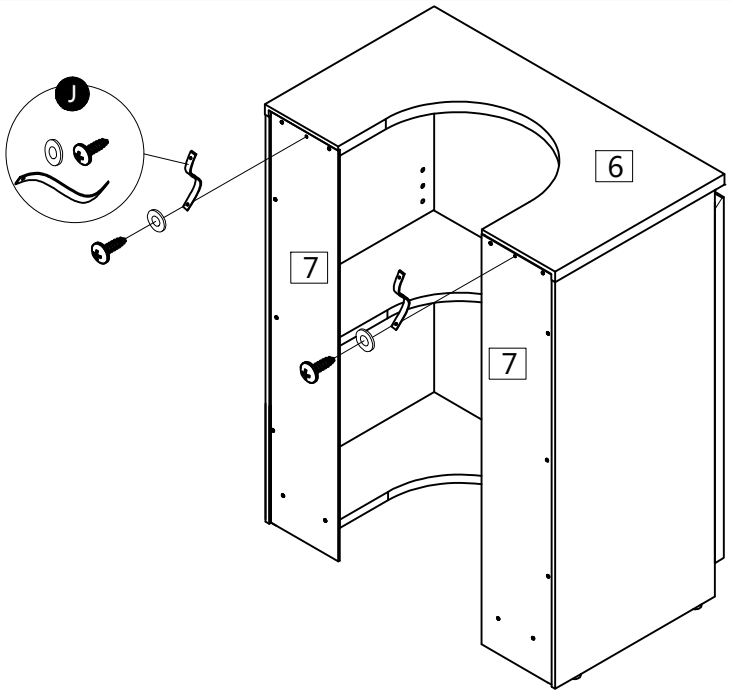

Step 12

It is recommended that the unit is fixed to a wall.
1.Move the unit into desired position.

Warning:
The unit is heavy.
Lift with care.


2. Mark the wall with a suitable scribe the position of the fixing hole.

Warning:
Before driling,check wall for hidden pipes and cables.

3. Drill hole and insert 2 x wall plug K.

4.Secure the other end of the 2 x strap J to the wall with 2 x washer & screw L

Note: To hide the strap behind the unit ,drill the hole lower than the top of unit.

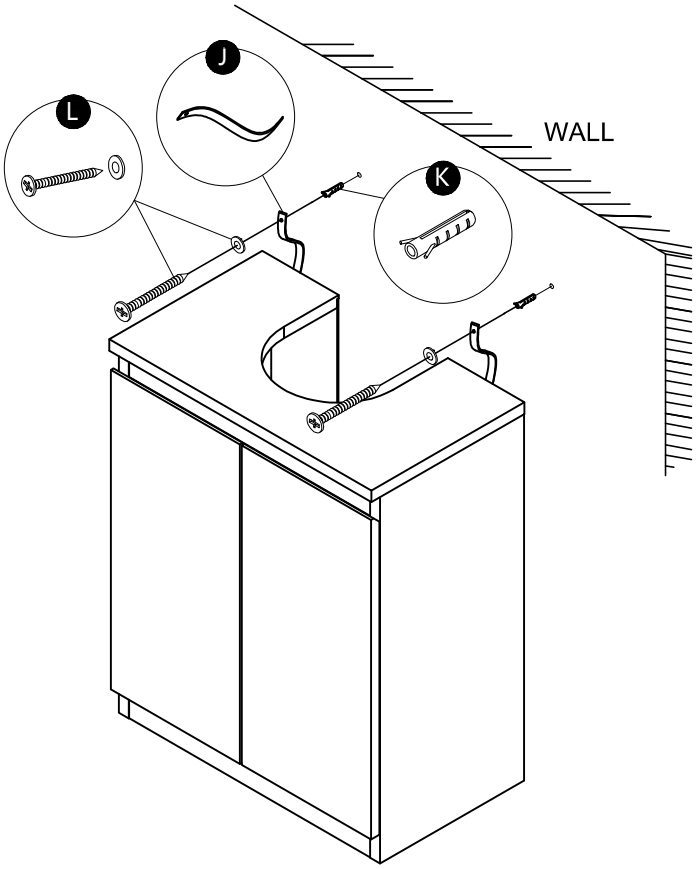


If you need help or have damaged or missing parts, call the Customer Helpline: 0345 6400800
Argos LTD. 489-499 Avebury boulevard, Central Milton Keynes, MK9 2NW

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs(rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using the incorrect fixings is the responsibility of the installer.

Important: when drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for **supporting your unit.Consult a qualified tradesperson if you** are unsure.

Hints:

1: General rule: always use a larger screw and wall plug if you are not sure.

2: Ensure you use the recommended drill bit to match the wall plug and hole size.

3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.


4: Take extra care when drilling high walls,ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.

5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the folllowing types of wall plug if your walls are made of brick, breeze block, concrete,stone or wood.

No.1"General Purpose" wall plug

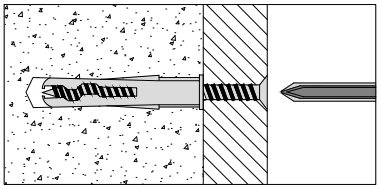


Generally aerated blocks should not be used to support heavy loads,use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.3"Cavity Fixing" wall plug

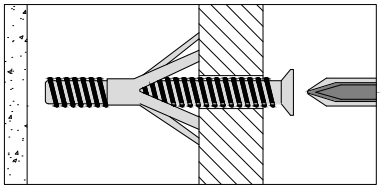


For use with plasterboard partitions or hollow wooden doors.

No.5"Hammer Fixing" wall plug

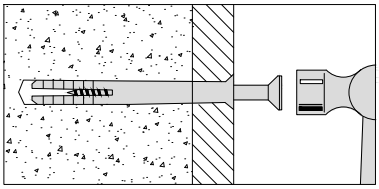


For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.2" Plasterboard" wall plug

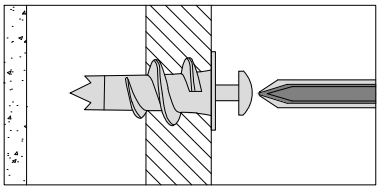


For use when attaching light loads onto plasterboard partitions.

No.4" Cavity Fixing - Heavy Duty" wall plug

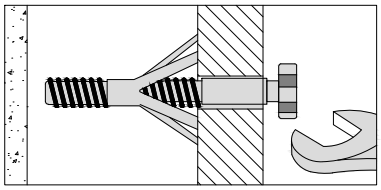

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.4" Shield Anchor" wall plug - heavy loads

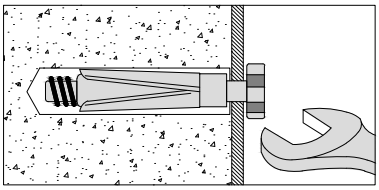

For use with heavier loads such as TV and HiFi speakers and satelite dishes etc.

Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting: to ensure the wall plugs or screws do not become loose.

If you need help or have damaged or missing parts, call the Customer Helpline: 0345 6400800