M004002 12" Batman Bike with Bat Fin

PLEASE READ BEFORE ASSEMBLY


12" Bicycle

Important owner's information

Please read this before allowing your child to ride the bicycle.

CORRECT BICYCLE SIZE

Make sure the bicycle you have bought is the correct size for the child. The rider's crotch should be higher than top tube of the bicycle or equivalent for at least 1 inch.



BICYCLE SET-UP

It is essential that, before moving off, the rider is comfortably seated on the bicycle and not stretching forward to reach the handlebars. Recheck the instructions given for the installation of the saddle.

FOR YOUR CHILD'S SAFETY

Recheck that all screws, nuts and bolts are firmly tightened.
Make sure that your child is capable of riding this bicycle.
Do not allow your child to ride without supervision.

BASIC MAINTENANCE

Chain should have approximately 10mm of vertical movement when checked in the centre between the front and rear sprocket. To adjust the chain tension, loosen two rear wheel retaining nuts and move the rear axle either forwards or backwards to adjust the tension. Retighten nuts once correct tension is achieved.

Brake blocks must be checked by an adult at regular intervals. It is recommended that the brake blocks are replaced if they become less than 3mm.

Lubricate moving parts with light machine oil at regular intervals or when necessary.

Any wear and tear on tyres, tubes and brake friction components must be checked by an adult.
Please note helpline number for replacement parts.
Only use genuine replacement parts for safety critical components.

RECOMMENDED TORQUE TOLERANCES (Nm - Newton Meter)

Handlebar clamp	15 Nm
Seat Post	15 Nm
Wheels	20 Nm

Design and spec may vary

Please retain this leaf let for reference to the manufacturer.
Made in the Phillippines to European Safety Standards.

Conforms to ISO 8098

CUSTOMER SERVICES

We make every e ort to ensure that this product reaches you in satisfactory condition. However if you have any queries, need assistance, or find this product defective, please contact our Customer Services: customer.services@mvsports.com. Alternatively, you can call on 0121 748 8017

DISTRIBUTED BY

MV SPORTS & LEISURE LTD
35 Tameside Drive • Castle Bromwich • Birmingham • B35 7AG • UK
www.mvsports.com

This bicycle is to be assembled by an adult

Check the contents and only remove the protective packaging from each item as and when it is to be fitted.

Please keep the packaging until you have completely assembled the bicycle.

Permissible total weight of the rider plus luggage should be 35kg and the maximum total weight should be 43kg.

TRANSIT PROTECTORS
Remove frame protectors and dispose of safely.

TOOLS REQUIRED
NOT SUPPLIED

Spannersizes:
10mm for brakes
13mm for saddle
14mm for stabilisers
15mm for pedals


Screwdriver

Pliers



CONTENTS:

1. Frame assembly
2. Front wheel
3. Front forks
4. Handlebars
5. Stabilizer arm andwheel(x2)
6. Saddle
7. Pedals (x2)
8. Plaque
9. Handlebar clamp cover
10. Bat Fin

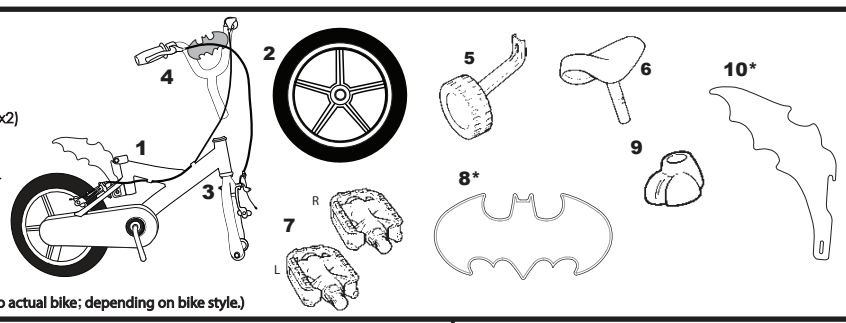


(NOTE: illustrations may differ to actual bike; depending on bike style.)

FITTING THE PEDALS

NOTE: The pedals are identified as right hand or left hand by an 'R' or 'L' on the spindle end.


1. Screw the pedal marked 'R' clockwise into the right hand chain wheel crank (side with chainguard) and tighten securely.
2. Screw the pedal marked 'L' anticlockwise into left hand crank and tighten securely.

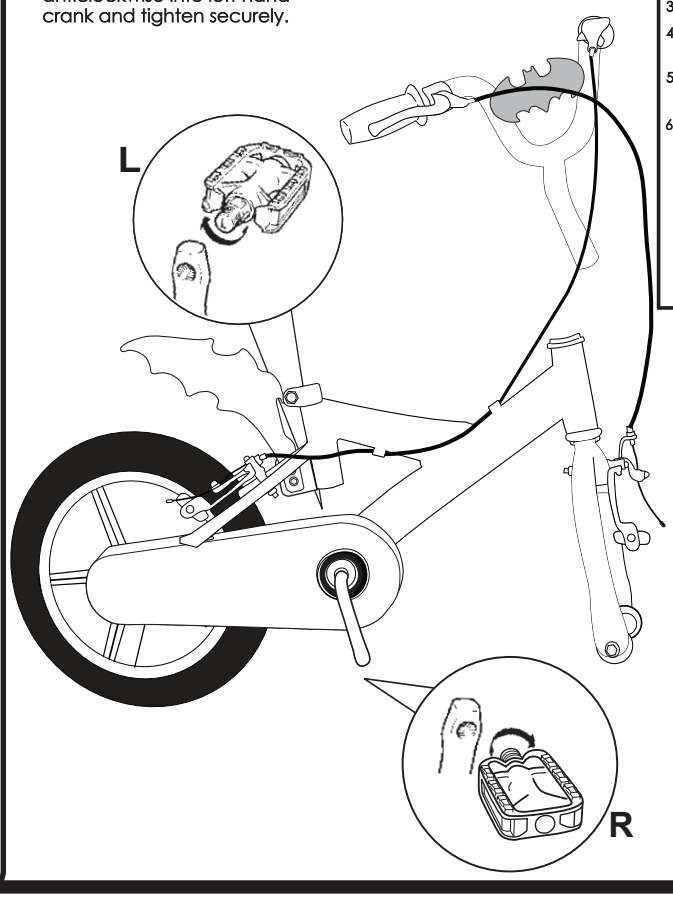

NOTE: Please ensure the brake levers does not swivel on the handlebar tube. Position levers once handlebar is fixed and tighten.


FITTING THE HANDLEBARS

1. Loosen clamp nut.
2. Ensure the nut is completely undone and being careful not to pinch your hand between the clamp and tube, push the clamp all the way down the steerer tube to remove any play in the forks.
3. Slide the clamp cover onto the handlebar stem.
4. Slide the handlebar stem into frame head as far as the minimum insertion marks.
5. Align the handlebars with the front forks and tighten the clamp bolt.
6. Push the clamp all the way down.

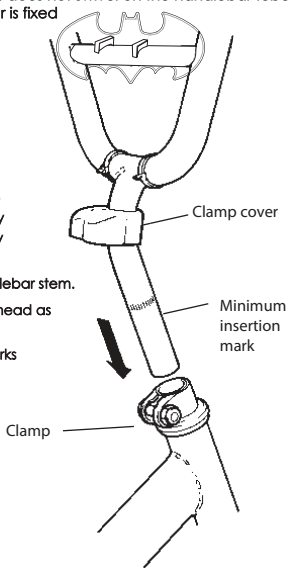


FRONT WHEEL

1. Loosen the front wheel nuts sufficiently to allow the tabbed locating washers to fit outside the fork end.
2. Insert the front wheel into the front forks, sliding the wheel spindle into the slots in the fork end.
3. Ensure that the locating washer tabs are inserted into the holes in the fork end.
4. Check that the wheel rim is central between the forks and tighten the wheel nuts.

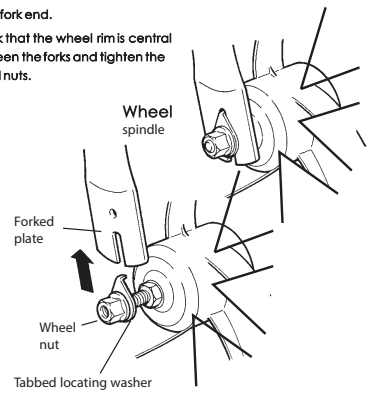

ADJUSTING THE BRAKE

1. Ensure the brake callipers are secure to the frame.
2. On the brake arm, loosen the anchor nut and bolt.
3. Squeeze the brake shoes together and using a pair of pliers, pull the inner brake cable tight.
4. Retighten the cable anchor nut and bolt.
5. Using the cable adjuster, adjust the brakes to give 1/16"clearance between the brake blocks and the wheel rim
6. Tighten the cable adjuster lock nut.
7. Check the brake blocks make contact with the wheel rim and not the tyre.

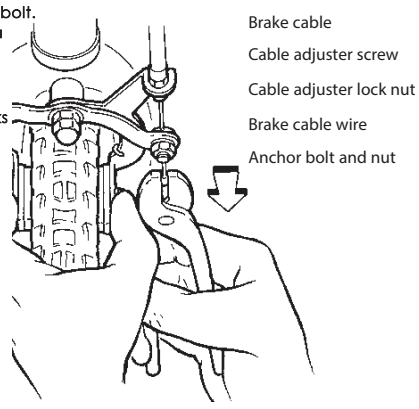


NOTE: The left hand brake lever operates the rear brake and the right hand brake lever operates the front brake.

03.2015 ISSU E 1


FITTING THE SADDLE

1. Push the saddle pillar into the down tube atleast as far as the Minimum insertion mark.
2. Align the saddle with the bike frame and tighten the clamp.

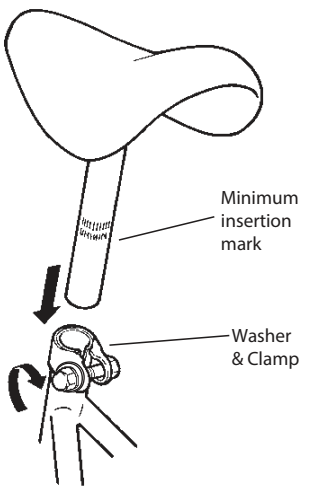

* Under no circumstances should the seat post project from the frame beyond its Minimum Insertion mark. If your seat post projects from the frame beyond these markings, the seat post or frame may break, which could cause you to lose control and fall.


PROPER SEAT HEIGHT

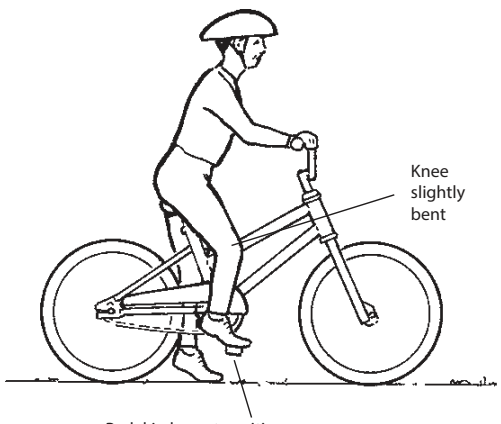

FITTING THE STABILISERS


1. Remove the nut from the rear axle frame assembly leaving the stabiliser frame bracket in position.
2. Slide the stabiliser over the threaded axle spindle end.
3. Replace nut and tighten.
4. To adjust the stabiliser wheel height, loosen the nut, slide the stabiliser up or down to adjust the wheel height and retighten the nut.


* It is very important to check the stabiliser connection to the bicycle. Failure to properly tighten may cause the stabilser to dislodge. Pay attention for risk when using stabiliser. When the stabilisers are removed please be sure to replace the bracket and nut to cover the end of the axle.

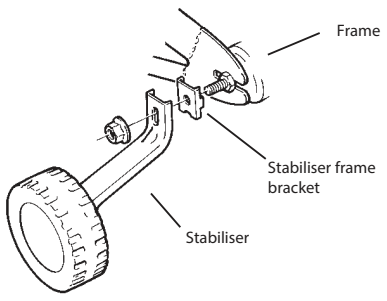


FITTING THE BAT FIN

STEP 1. Hook bat fin over seat clamp.




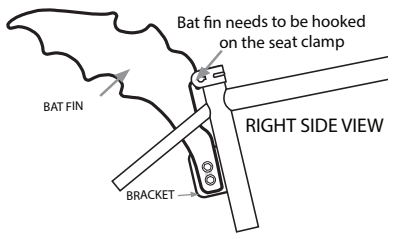

STEP 2. Line up bat fin alongside bracket and insert bolt and washer.

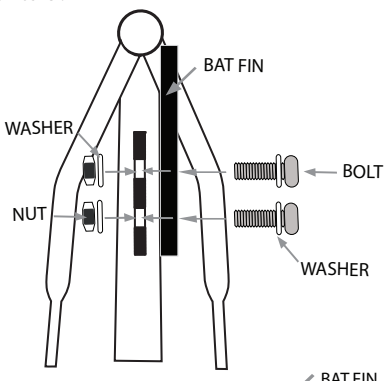

STEP 3. Attach washer & nut on left side of bracket, then tighen the nut.

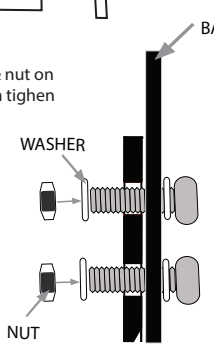


ASSEMBLED BIKE

Please check all screws and fittings are secure before giving to your child.

MV recommends the use of protective pads bicycle and helmet when using this product.


DO NOT LEAVE OUTSIDE

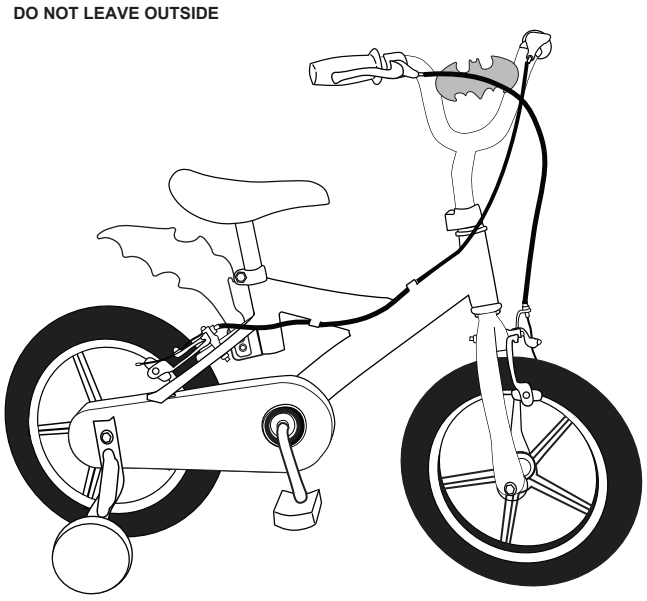

(NOTE: Illustration may differ to actual bike)

FITTING THE BAT PLAQUE

Clip the front plaque onto the handlebar.

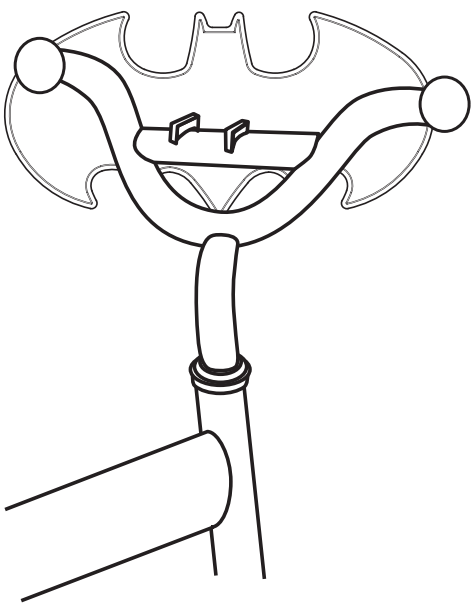

A GUIDE TO SAFE CYCLING

1. We recommend this bike is for pavement use only.
2. Do not ride at night. Visibility is often limited at dawn and dusk. It is dangerous to ride on other type of terrain such as highway.
3. Always give pedestrians right-of-way, and don't ride to close to them. Never park your bike where it can cause a nuisance.
4. Avoid hazards that may cause you to lose control of your bike such as pot holes, uneven pavements and manhole covers.
5. Leave plenty of room when passing parked vehicles and watch out for doors being opened in your path.
6. Remember that braking distance should be increased in wet weather, and regular checks of brakes, steering and lighting should be made.
7. Never carry passengers on your bike. Never carry packages in your hands while riding, or fix anything to your bike that could obstruct your visibility or control.
8. Don't wear anything that restricts your hearing.
9. Always ride with both hands on the handlebars.
10. Don't wear very loose clothing, which could hang down and become caught in the wheels of your bike. Wear cuff bands or trouser clips to keep your trousers from getting caught in the chainwheel.
11. We recommend that light coloured or fluorescent clothing be worn which helps others to see you in daylight and poor light.
12. Always wear proper safety equipment. We recommend a bicycle helmet, long sleeve shirt, long trousers, shoes and elbow and knee pads. Gloves and eye protection also make good sense. Cover your handlebars, stem and top tube with safety pads for extra protection.
13. Don't ride your bike if the chain cover is not attached.
14. The adult has the responsibility to teach the child how to use the brake and how to cycle safely.
15. Please be careful of sharp points or edges as this may cause injury when you assemble or maintenance the bike.
16. This bike is not to be used on public roads and not to be used after dark.

PLEASE REFER TO THE HIGHWAY CODE REGARDING RULES FOR CYCLISTS.