



Spare Part Service Manual

Tall Retro Fridge

ME61153RETROBLK ME61153RETROWHT

BC-330RD



General method to replace gasket

Step 1

Pull gasket out from the fridge one corner.



Step 2

Install a new gasket, starting from the fridge one corner.






General method to replace gasket

Step 3
Make sure base of gasket is pressed into trough completely.

Step 4
Make sure gasket is properly aligned with edges of trough.

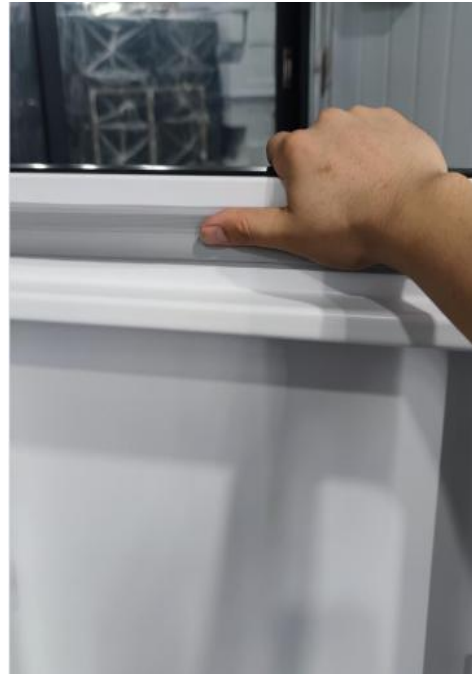

Step 5
After closing the door, make sure gasket is well attached to door.





General method to replace small drawer gasket

Step 1

Pull gasket out from the drawer door one corner.



Step 2

Replace new gasket, take care that the flanging side of gasket needs to be placed on outside, otherwise there is leaking cold.





General method to replace shelves

Step 1
Pull out and take the
damaged shelves out.



Step 2
Install the new shelves
along the slots.





General method to replace door hinge

Step 1

Unscrew the screws on the door hinges.



Step 2

Replace with new hinges, re-fix the screws.





General method to replace handle

Step 1

Unscrew the two screws on the handle, remove the damage handle.





General method to replace handle

Step 2
Replace a new handle, re-fix the
two screws.

