

DOOR GASKET

BUSH



PROCEDURE

GENERAL METHOD TO REPLACE GASKET

Step 1

Pull gasket out from the corner.



Step 2

Install a new gasket, starting from the corner.




Step 3

Make sure base of gasket is pressed into trough completely.



Step 4

Make sure gasket is properly aligned with edges of trough.

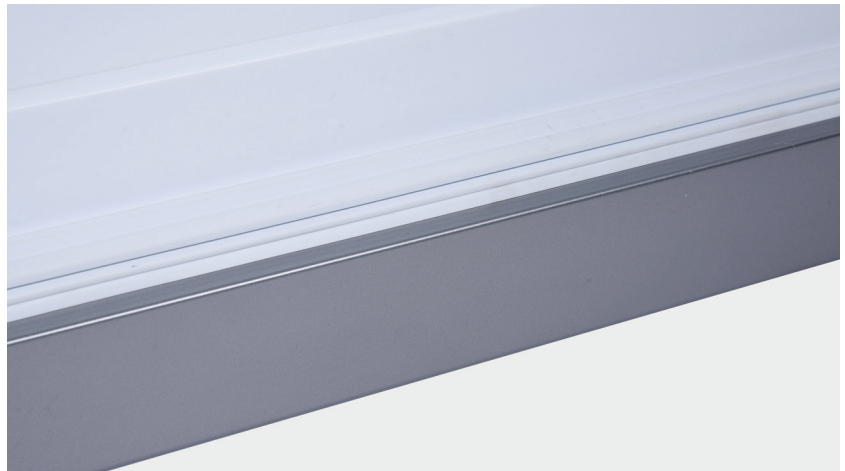

Step 5

After closing the door, make sure gasket is well attached to door.



Note

HINGE REPLACING



BUSH

DOOR BOUNCES AFTER CLOSING THE DOOR

WHY?

DOOR HINGE

WHY?

Priority: Door hinge is deformed or broken.

Check to see if the hinge is deformed or cracked, and whether screws are loose.

Follow technical sheet below to start to check



TOOLS




8mm Inner Hexagon Spanner



10mm Inner Hexagon Spanner



6x300 Slotted Screw Driver

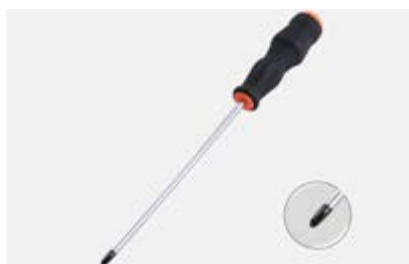


6x300 Cross-head Screw driver



2x100 Slotted Screw Driver

**DIAGNOSIS 1**

**CHECK TO SEE IF
THE HINGE IS DEFORMED OR CRACKED,
AND WHETHER SCREWS ARE LOOSE.
IF SO, FOLLOW PROCEDURES BELOW TO REPLACE
THE HINGE AND DRIVE THE SCREW IN.**

**PROCEDURE 1**

**GENERAL DISASSEMBLY PROCEDURES
FOR DOOR HINGE**

Step 1

Unscrew hinge cover.

**Step 2**

Remove the cover.

Step 3

Unscrew 3 bolts and
remove the top hinge.





Step 4

Remove upper door.



Step 5

Unscrew 2 bolts and
remove the middle hinge



Step 6

Remove bottom door.



Step 7

Tilt cabinet by 10
degrees.





Step 8

Unscrew the adjustable foot.



Step 9

Unscrew 2 bolts and remove bottom hinge.



CHECK AND TEST 1

Step 1

Check to see whether hinge is deformed or cracked and whether screws are loose.



DIAGNOSIS 2

**IF THE HINGE IS DEFORMED OR CRACKED,
AND WHETHER SCREWS ARE LOOSE.**

**IF SO, REPLACE THE HINGE
AND DRIVE THE SCREW IN.**



PROCEDURE 2

REVERSE PROCEDURES ABOVE TO REINSTALL OR REPLACE HINGES AND DOORS, HOWEVER, PLEASE PAY ATTENTION TO POINTS BELOW.

Tip 1

Don't forget to add washer onto hinge pin.



Tip 2

When installing door onto hinge, please check the alignment of doorstopper and hinge.





Tip 3

Make sure gasket is properly attached.



Tip 4

Make sure gaps between doors are even.



DIAGNOSIS 2

**AFTER REWORK,
CHECK TO SEE WHETHER DOOR
CLOSES SMOOTHLY.**

If door closes smoothly,
**WELL DONE!!!
REWORK WAS SUCCESSFUL!**



If door doesn't close smoothly,
please go back to check if you
have missed to find something
wrong.



9.4 APPEARANCE FAULTS: INTERNAL ACCESSORIES ARE DAMAGED



APPEARANCE / INTERNAL ACCESSORIES ARE DAMAGED

BUSH



DIAGNOSIS.

IF YOU FIND THAT DOOR BALCONIES, GLASS
SHELVES, DRAWERS ARE DAMAGED,
PLEASE REPLACE WITH NEW ONES,
BUT PAY ATTENTION TO BELOW POINTS.

Step 1

Remove shelves.



Step 2

Remove crispers.



GO BACK TO **FAULT LIST APPEARANCE** - Page 657

• 667

Step 3

Repeatedly alternate pushing left and right ends to remove balconies.



Tip

When install the new balconies, make sure the balconies are pushed into proper final position.



NOTE

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.