

DOOR GASKET

BUSH



PROCEDURE

GENERAL METHOD TO REPLACE GASKET

Step 1

Pull gasket out from the corner.



Step 2

Install a new gasket, starting from the corner.




Step 3

Make sure base of gasket is pressed into trough completely.



Step 4

Make sure gasket is properly aligned with edges of trough.

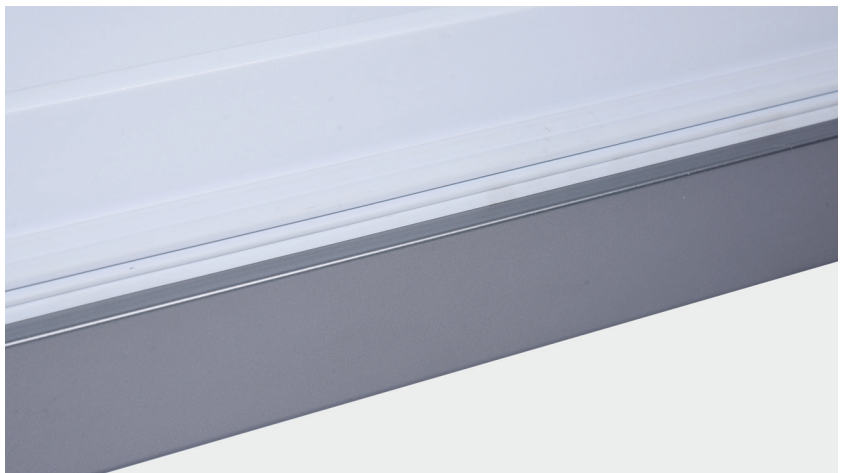

Step 5

After closing the door, make sure gasket is well attached to door.



Note

8.5 RELIABILITY FAULTS: HINGE IS DAMAGED



TOOLS



6x300 Slotted Screwdriver.



6x300 Cross-head Screwdriver.




8mm Inner Hexagon Spanner



DIAGNOSIS 1

CHECK IF IT IS DIFFICULT TO
OPEN OR CLOSE THE DOOR,
OR WHETHER IT IS FALLING DOWN
OR MISALIGNED
WITH OTHER DOORS AND CABINET.

IF SO, THERE MIGHT BE A PROBLEM WITH
THE HINGE.



PROCEDURE 1

GENERAL DISASSEMBLY AND INSTALLATION
PROCEDURES FOR HINGES AND DOORS.

Step 1

Unscrew hinge cover.





Step 2

Remove the cover.



Step 3

Disconnect the terminals.



Step 4

Unscrew bolts and remove the top hinge.



Step 5

Remove upper door.



Step 6

Unscrew 3 bolts and remove the middle hinge.



Step 7

Remove lower door.



Step 8

Tilt cabinet.



Step 9

Unscrew the adjustable foot.



Step 10

Unscrew the adjustable foot.



CHECK AND TEST 2

Step 1

Check if the hinges are deformed or cracked, or whether screws are loose.





DIAGNOSIS 2

IF HINGES ARE DEFORMED OR CRACKED, REPLACE IT WITH A NEW ONE.
REVERSE PROCEDURES ABOVE TO REINSTALL IT,
AND PAY ATTENTION TO THE KEY POINTS BELOW.

Tip 1

Don't forget to add washer onto hinge pin.




Tip 2

When install door onto hinge, please check the match between door-stopper and hinge.



Tip 3

Make sure gasket is attached well.

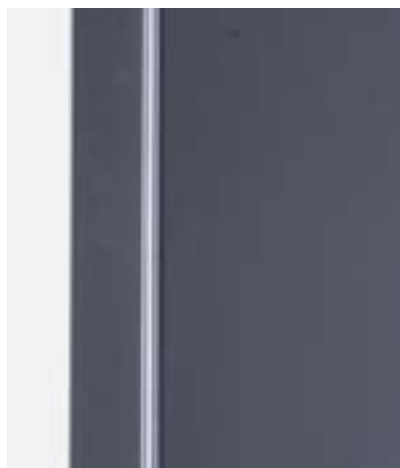

Tip 4

Make sure gaps between doors are even.

A large rectangular area with a thin orange border, containing 25 horizontal dashed lines for writing.

9.4 APPEARANCE FAULTS: INTERNAL ACCESSORIES ARE DAMAGED



DIAGNOSIS.

IF YOU FIND THAT DOOR BALCONIES, GLASS
SHELVES, DRAWERS ARE DAMAGED,
PLEASE REPLACE WITH NEW ONES,
BUT PAY ATTENTION TO BELOW POINTS.

Step 1

Remove shelves.



Step 2

Remove crispers.



