Spare Part Service Manual
Tall Retro Fridge

ME61153RETROBLK ME61153RETROWHT

BC-330RD

Version 2021/07/01

General method to replace gasket

Step 1
Pull gasket out from the fridge one corner.




Step 2
Install a new gasket, starting from the fridge one corner.



General method to replace gasket

Step 3
Make sure base of gasket is pressed into trough completely.

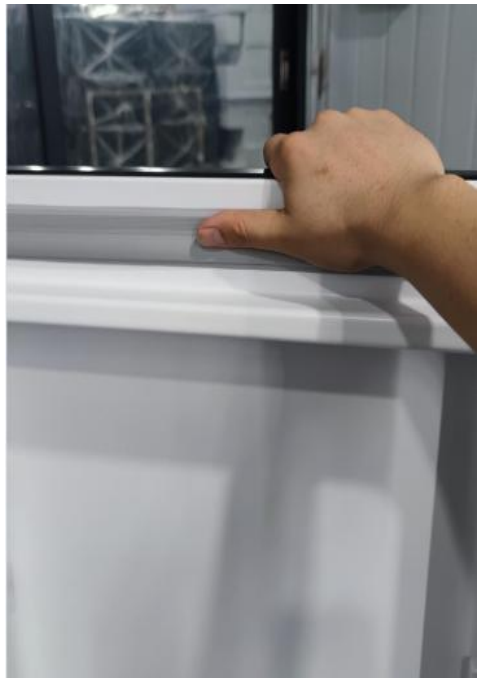


Step 4
Make sure gasket is properly aligned with edges of trough.

Step 5
After closing the door, make sure gasket is well attached to door.



General method to replace small drawer gasket

Step 1
Pull gasket out from the drawer door one corner.

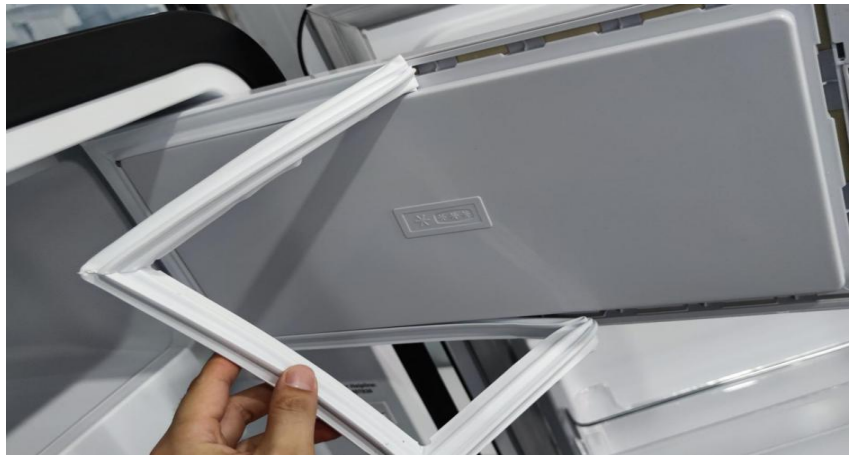

Step 2
Replace new gasket,take care that the flanging side of gasket needs to be placed on outside,otherwise there is leaking cold.






General method to replace shelves


Step 1
Pull out and take the damaged shelves out.



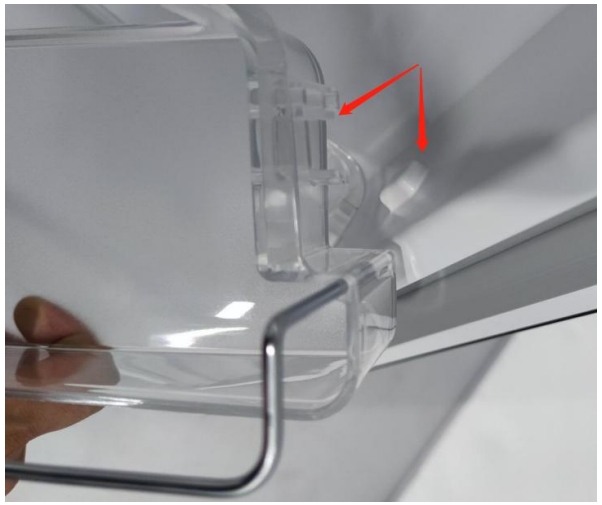

Step 2
Install the new shelves along the slots.



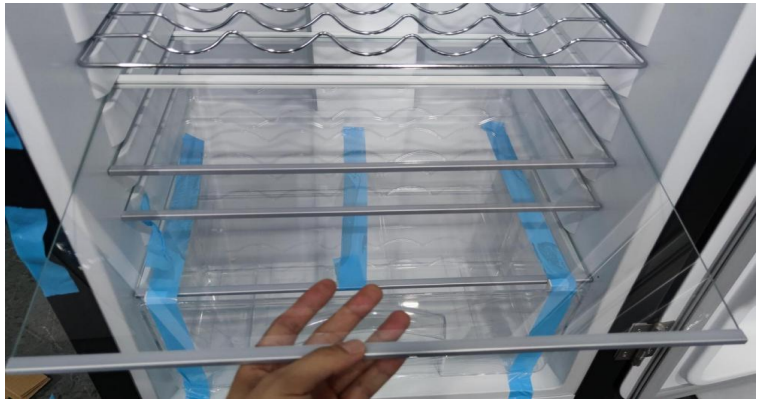

General method to replace door hinge

Step 1
Unscrew the screws on the door hinges.




Step 2
Replace with new hinges,re-fix the screws.



General method to replace handle

Step 1
Unscrew the two screws on the handle,remove the damage handle.

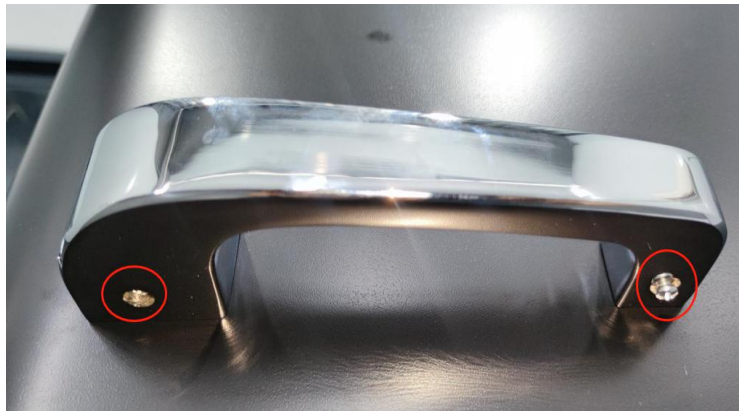



General method to replace handle

Step 2
Replace a new handle,re-fix the two screws.



