



# EXPANDING LIGHTWEIGHT **XHOSE** THAT NEVER KINKS

**YOUR XHOSE IS LIGHTWEIGHT AND COMPACT WITH A LOWER CARBON FOOTPRINT THAN OTHER COMPARABLE HOSES. YOU DON'T NEED TO PURCHASE A REEL TO STORE IT ON: SIMPLY STORE IT IN A PLANT POT OR HANG ON THE XHOSE HOOK WHICH IS DESIGNED TO FIT OVER YOUR OUTSIDE TAP**

**FINALIST**  
RHS CHELSEA  
FLOWER SHOW  
GARDEN PRODUCT  
OF THE YEAR 2013  
SHORTLISTED



# INSTRUCTIONS FOR USE

## BEFORE USING YOUR XHOSE

PLEASE BE AWARE THAT WHEN YOU FIRST USE YOUR XHOSE BLUE DYE FROM THE OUTER WEBBING MAY TRANSFER WHEN IN CONTACT WITH WATER. WE ADVISE YOU TO SOAK THE XHOSE IN WATER (TWICE FOR 10 MINUTES EACH TIME) BEFORE USE. THIS SHOULD REDUCE THE AMOUNT OF BLUE DYE TRANSFERRED.



YOUR XHOSE WILL FIT ANY STANDARD  $\frac{3}{4}$ " TAP

**NOTE:** AN ADAPTOR IS AVAILABLE TO BUY FOR  $\frac{1}{2}$ " TAPS (SEE ACCESSORIES ON THE REVERSE OF THIS BOOKLET)

YOUR XHOSE MUST BE CONNECTED TO AN EXTERNAL TAP OR PUMP

THE XHOSE END CONNECTOR IS EU STANDARD SIZING SO WILL CONNECT TO ALMOST ANY GARDEN HOSE ACCESSORIES



## IMPORTANT INFORMATION

YOUR XHOSE IS FITTED WITH A PRESSURE VALVE TO CONTROL THE FLOW OF WATER TURNING THE ARM ON THE PRESSURE VALVE WILL CONTROL THE WATER PRESSURE TO START USING YOUR XHOSE: SCREW HOSE CAP TO TAP (SEE DIAGRAMS ON FOLLOWING PAGE)

**WARNING:** MAKE SURE CAP AND CONNECTORS ARE CLOSED TIGHT


THE XHOSE HAS BEEN TESTED AT STANDARD 3 BAR PRESSURE (EQUIVALENT TO 100 LITRES PER MINUTE). \*WATER PRESSURE VARIES GREATLY ACROSS THE UK DEPENDENT ON LOCATION, INTERNAL PLUMBING SYSTEMS, HOW MUCH DEMAND THERE IS AT THE TIME AND HOW FULL THE RESERVOIRS ARE. UK WATER PRESSURE CAN VARY BETWEEN 1 AND 6 BWAR. YOUR WATER COMPANY WILL BE ABLE TO ADVISE YOU FURTHER.

FOR MORE DETAILS VISIT [WWW.OFFICIALXHOSE.CO.UK](http://WWW.OFFICIALXHOSE.CO.UK)

# INSTRUCTIONS FOR USE

## 1 TO START USING YOUR XHOSE WITH ACCESSORIES:

- INSERT ACCESSORY INTO CONNECTOR
- TURN VALVE TO CLOSED POSITION AND TURN WATER ON - XHOSE WILL EXPAND UP TO 3X ITS ORIGINAL LENGTH
- SLOWLY TURN THE ARM ON THE PRESSURE VALVE TO OPEN TO REQUIRED WATER PRESSURE
- ENSURE ALL CONNECTIONS ARE TIGHTENED PRIOR TO USE

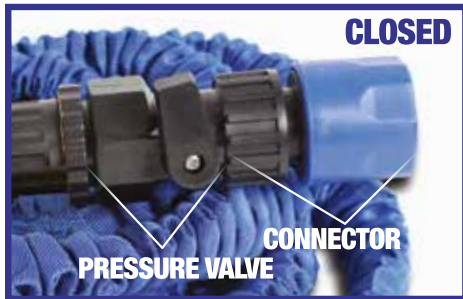

## 2 TO START USING YOUR XHOSE WITHOUT ACCESSORIES:

- REMOVE THE END CONNECTOR
- TURN VALVE TO CLOSED POSITION AND TURN WATER ON - XHOSE WILL EXPAND UP TO 3X ITS ORIGINAL LENGTH
- SLOWLY TURN THE ARM ON THE PRESSURE VALVE TO OPEN TO REQUIRED WATER PRESSURE
- **WARNING!** YOUR XHOSE WILL EXPAND BUT THEN REDUCE IN LENGTH DUE TO LACK OF BACK PRESSURE IF YOU DO NOT USE ANY ATTACHMENTS OR ACCESSORIES.



## HOW DO I LOOK AFTER MY XHOSE?

TO PROLONG THE LIFE OF YOUR XHOSE STORE INDOORS - IF LEFT IN DIRECT SUNLIGHT THE FABRIC WILL FADE. IN FREEZING CONDITIONS, IF WATER IS LEFT INSIDE YOUR XHOSE, IT MAY CAUSE SPLITTING. AFTER EACH USE, TURN THE WATER OFF AND OPEN THE VALVE TO RELEASE THE WATER FROM INSIDE THE XHOSE SO IT WILL CONTRACT TO A SMALL SIZE.

# XHOSE ACCESSORIES ARE AVAILABLE

## POWERFUL WATER JET



## 8 SPRAY NOZZLE



## 8 SPRAY SPRINKLER



## 1/2" TAP ADAPTOR



## HOSE HOOK



**VISIT [WWW.OFFICIALXHOSE.CO.UK](http://WWW.OFFICIALXHOSE.CO.UK)**