
Kentucky Chair

Assembly Instructions - Please keep for future reference

151/5989
161/5920
157/9884
152/9827

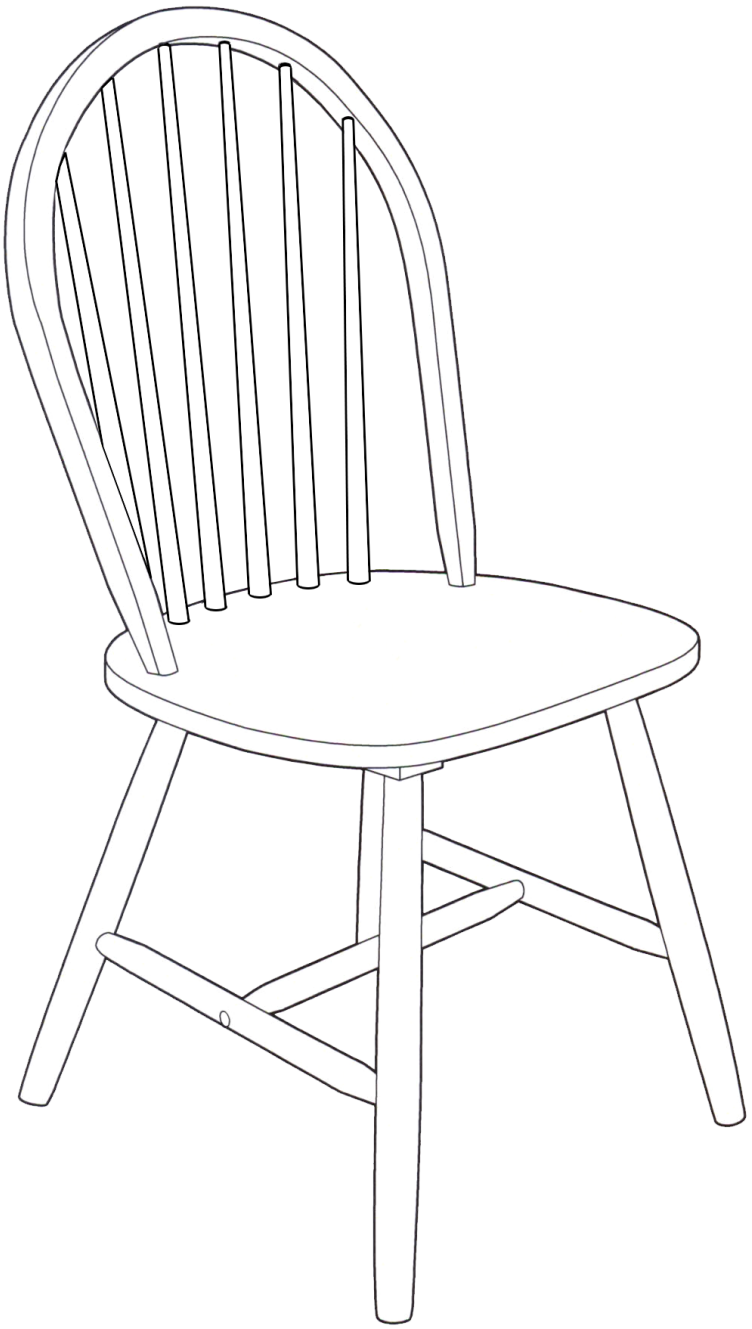

Dimensions

Width - 46cm
Depth - 53.5cm
Height - 93cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Issue1 - 22/04/13

⚠ Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put excessive weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Parts of the assembly will be easier with 2 people.
- Dispose of all packaging carefully and responsibly.
- Place the product on flat and steady surface during use.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Keep these instructions for further use.
- To ensure an easier assembly, we strongly advise that all fittings are only finger tightened during initial assembly. Only upon completion of the assembly should all fixing points be fully tightened.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Components - Parts


If you have damaged or missing components, call the **Customer Helpline: 08456 400800**

Please check you have all the parts listed below

Note: Component parts listed below are required for one chair only.

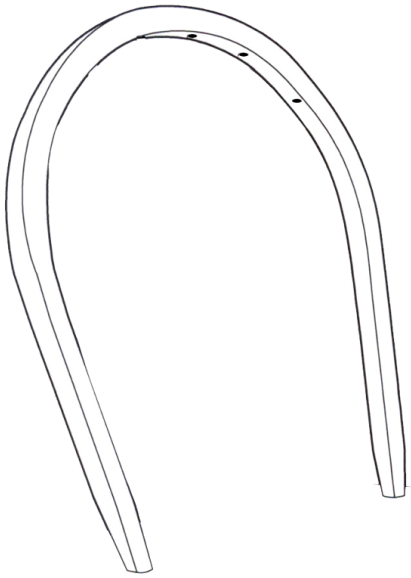


1 Chair Back (45.5 x 53 x 2.5cm)

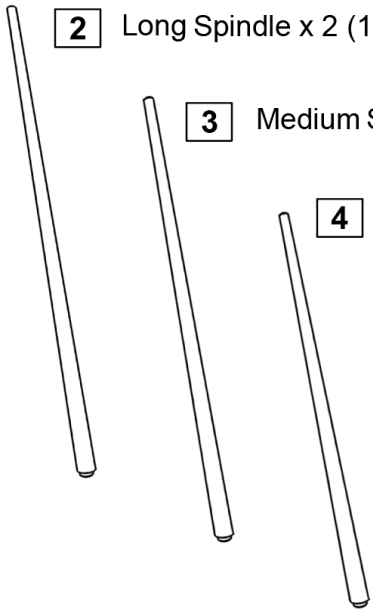

2 Long Spindle x 2 (1.7 x 50.3cm)

3 Medium Spindle x 2 (1.7 x 48.5cm)


4 Short Spindle x 2 (1.7 x 44cm)

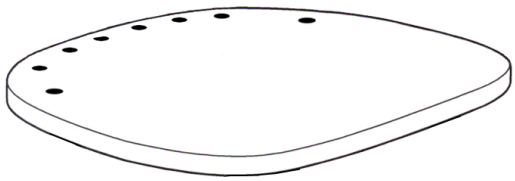


5 Seat Pad (44 x 43 x 2cm)



6 Cross bar(2.8 x 36cm)

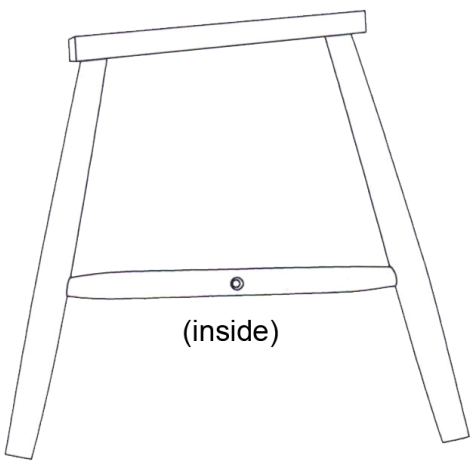

7 Right leg frame (44 x 42cm)

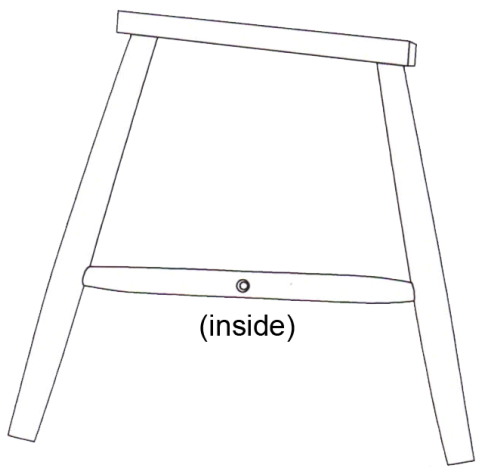







8 Left leg frame (44 x 42cm)

Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  50mm Allen screw x 2	**B**  70mm Allen screw x 2	**C**  35mm Allen Screw x 6
D  Barrel Nut x 4	**E**  Wood plugs x 4	**F**  Metal Washer x 2
G  Glue x 1	**H**  Allen key x 1	**I**  Spring Washer x 2


Tools required


Ruler/tape measure


Phillips screwdriver (medium & large)


Flatblade screwdriver (medium)

Ruler - Use this ruler to help correctly identify the screws

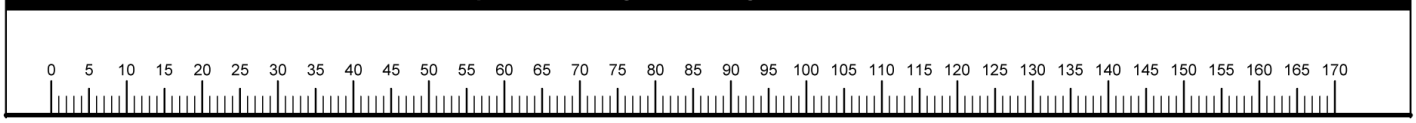

Assembly Instructions

Step 1

Preparing the legs


a: Insert cross bar 6 into the large hole on the inside of the right leg frame 7.

Insert barrel nut D into the hole in the underside of cross bar 6.

Secure cross bar 6 using screw A.

Note: Ensure the barrel nut holes in the cross bar 6 are facing down.


a:

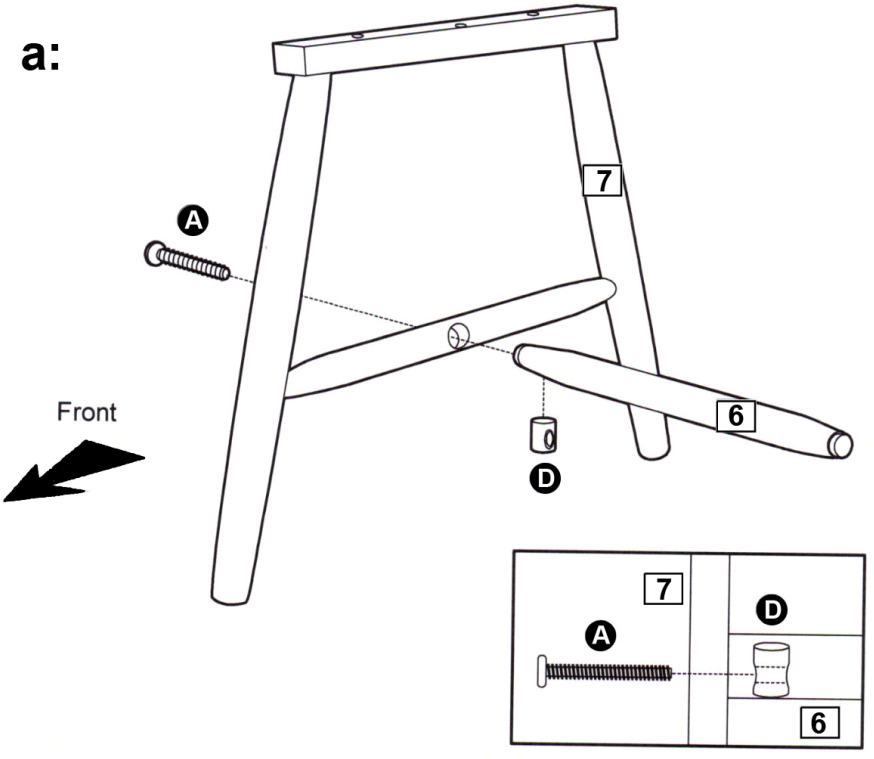

b: Align left leg frame 8 onto cross bar 6.

Secure using fixings A and D as shown.

b:

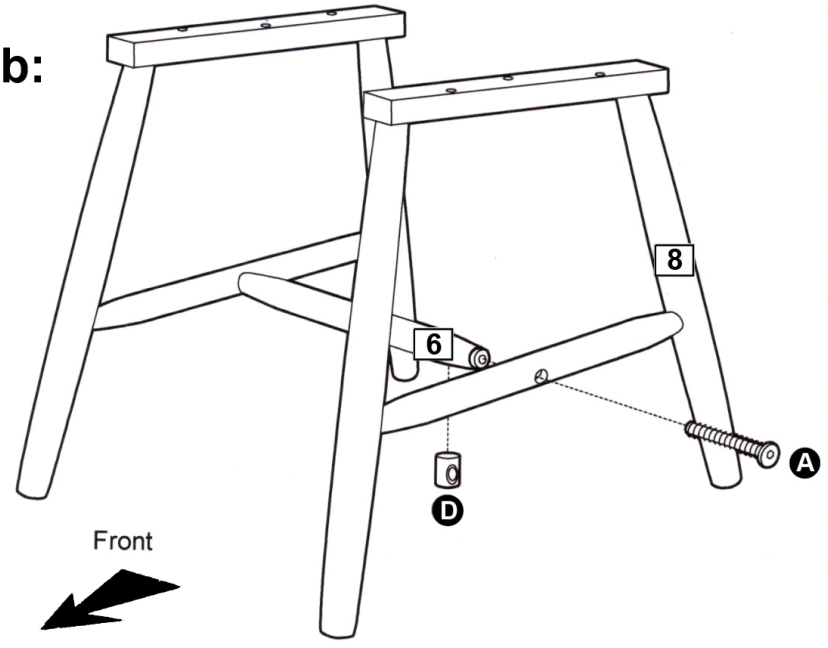

Assembly Instructions

Step 2

Assembling the chair seat

a: Liberally apply glue Ⓖ into spindle holes in seatpad [5].
Locate spindles [2], [3] and [4] into the correct spindle holes in seatpad [5] as shown.

Note: ensure the widest end of the spindles are located in the holes in seatpad [5].

Note: wipe away excess surface glue before it dries.

b: Liberally apply glue to holes in the underside of chair back [1] and in seatpad [5].

Carefully locate chair back [1] onto the spindles and into the holes in seatpad [5] as shown.

Note: wipe away excess surface glue before it dries.


c: With help to hold everything in place, carefully turn the seat assembly upside down onto a clean flat surface.

Insert barrel nuts Ⓓ into the holes in the back of chair back [1].


Secure using fixings Ⓑ, Ⓕ and Ⓘ as shown.

Note: fully tighten screws and wipe away excess glue before it dries.


a:

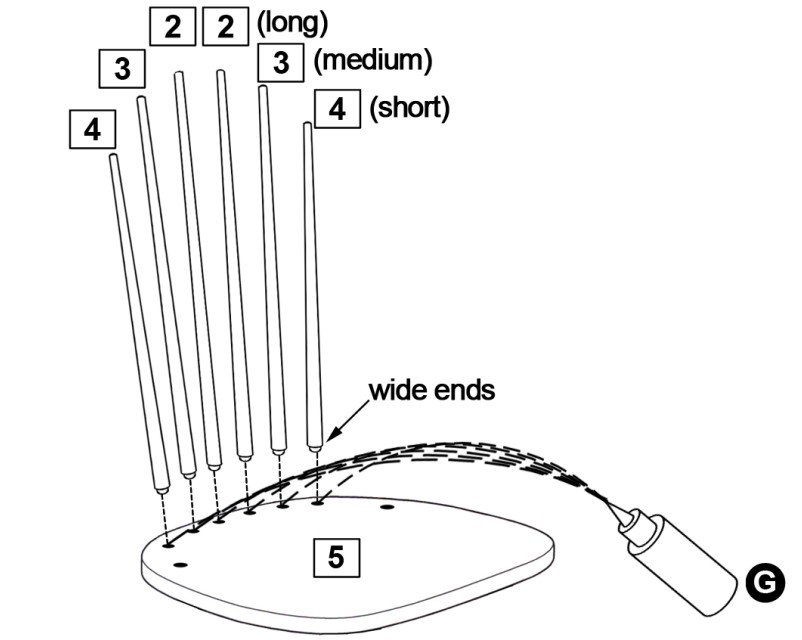

b:

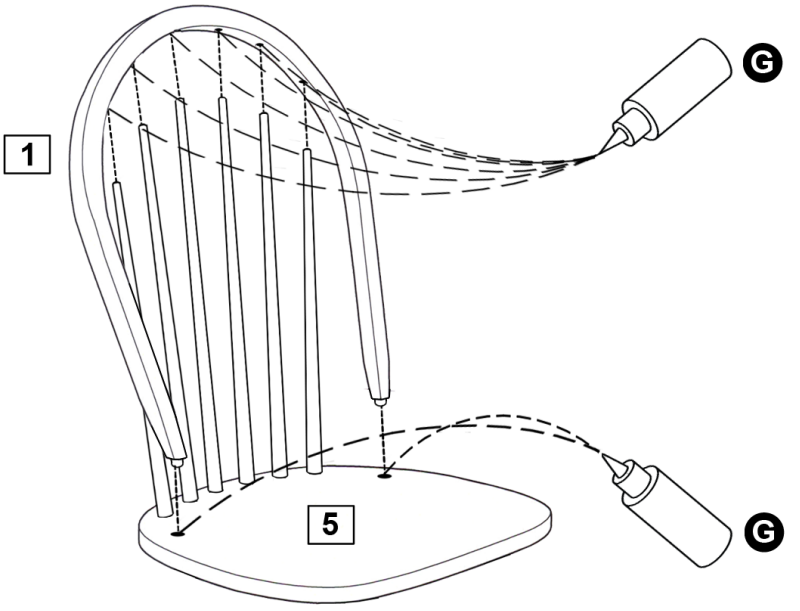

c:

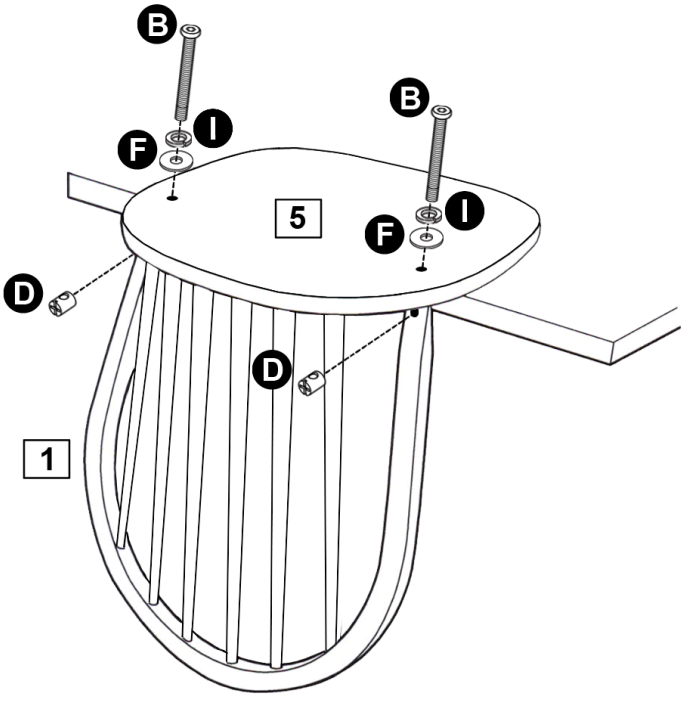

Assembly Instructions

Step 3


Attaching the leg frame.

a: Carefully align the leg frame onto the underside of seat pad 5.

Note: Ensure the arrows on the underside of leg frames 7 and 8 are towards the front edge of chair seat 5.


Secure using screws C as shown.

Fully tighten all screws.

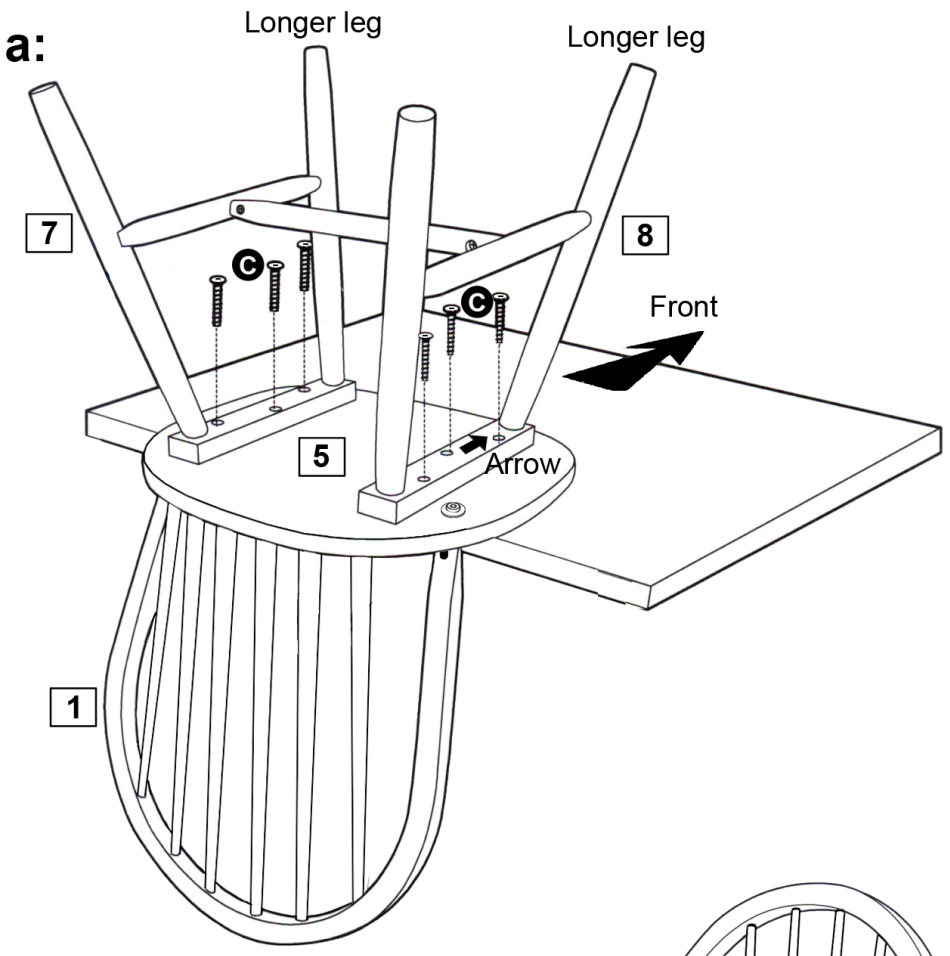

b: Use wood plugs E to cover the fixing holes, as shown.

Note: Once assembly is complete, please allow 12 hours for glue to dry before using chairs.

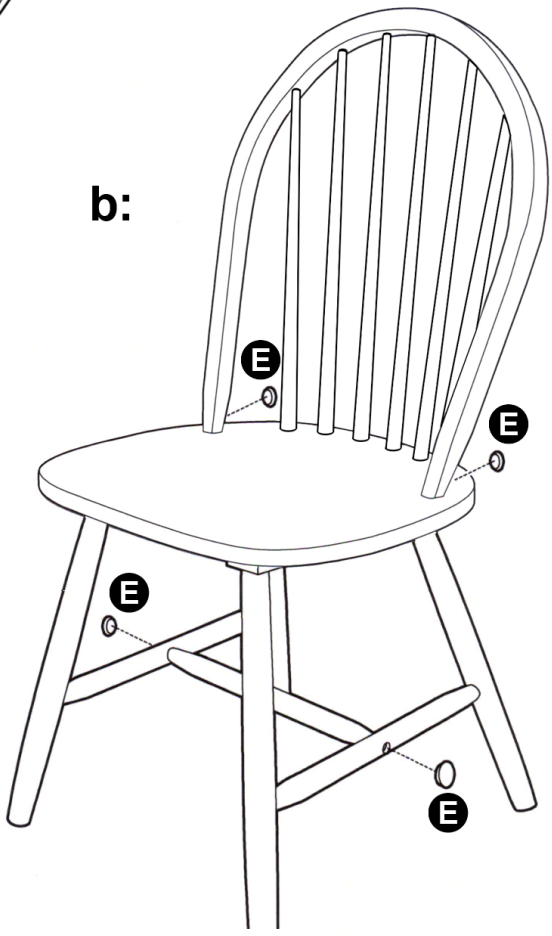

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**
Home Retail Group. 489-499 Avebury Boulevard. Saxon Gate West. Central Milton Keynes. MK9 2NW