
Victoriana - 2 Drawer 3 Door Mirrored Robe

Assembly Instructions - Please keep for future reference

227/2207 239/8071

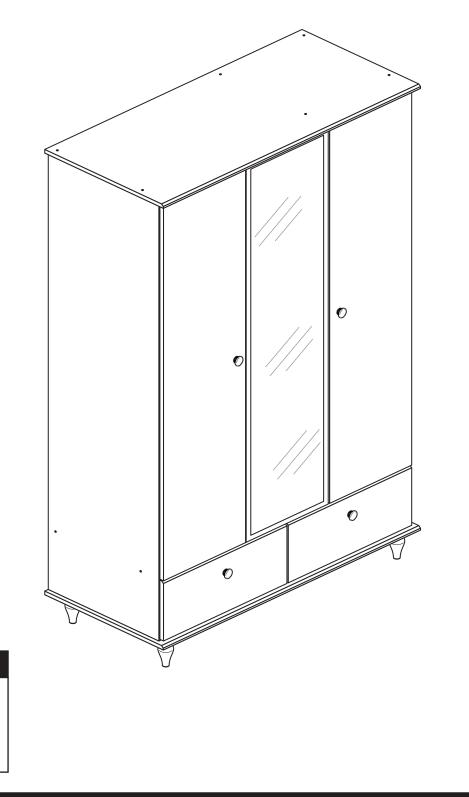

Important - Please read these instructions fully before starting assembly

Dimensions

Width - 106.5cm

Depth - 49cm

Height - 195cm

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800

MADE IN

BRITAIN

A Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 74kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Parts of the assembly will be easier with 2 people.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).

• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the bracket supplied.
- Dispose of all packaging carefully and responsibly.

• From time to time check that there are no loose screws on this unit.


• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Tools required							
Rule	Spirit level	Bradawl	Cross-head screwdriver	Eye protection (when using a	Electric drill (do not use for		
Square	Scissors	Hammer	Step ladder	hammer or drill)	fitting screws)		

Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below














5 Drawer Base (*T468-367*) (468 x 367mm) x 2




3 Right Drawer Side (W370-195RH) (370 x 195mm) x 2



Components - Panels

If you have damaged or missing components, call the Customer Helpline: 08456 400800 quoting the reference numbers below

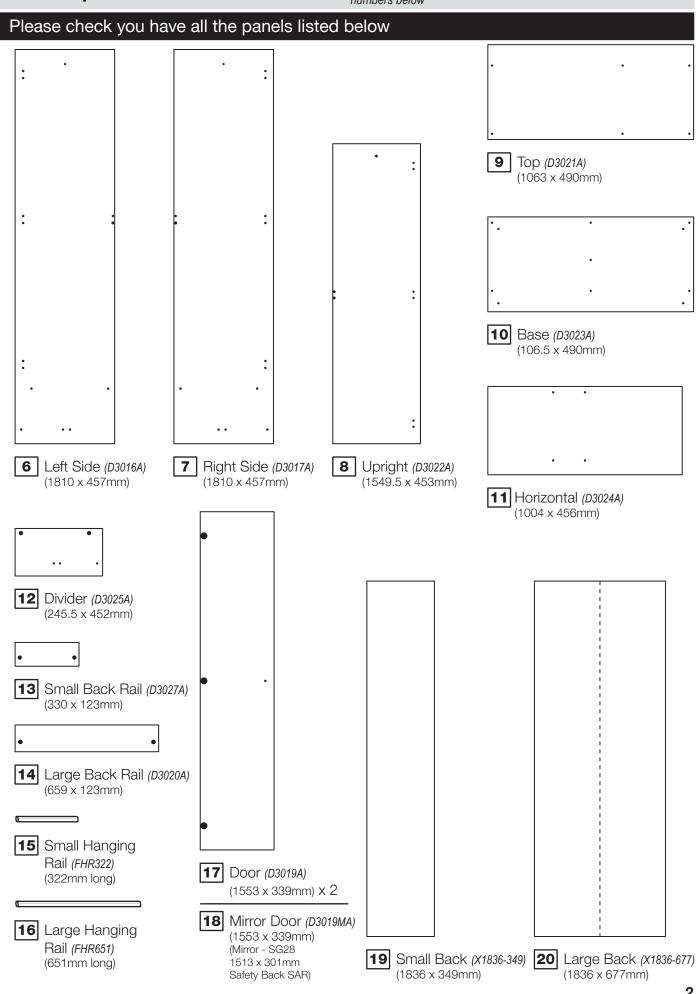

If you have damaged or missing components, call the Components - Fittings Customer Helpline: 08456 400800 quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Wooden dowel (F22) x 2	B () (F901) x 8	C Small locking nut (F3) x 4
Large wooden dowel (F40) x 1	40mm Screw (F910) x 18	Large locking nut (F900) x 6
G () () () () () () () ()	13mm Screw (F63) x 22	D D D T 13mm Screw (F79) × 1
9mm Screw (<i>F73</i>) x 8	9mm Screw (F74) x 4	b b b b b b b b c b c c c c c c c c c c
Bracket (F327) x 1	Hinge plate (<i>F523</i>) x 9	O Hinge (<i>F518</i>) x 9
Drawer runner (F1004) x 4	Wedgefix (F639) x 4	
B D D D D D D D D D D D D D D D D D D D	S (mail screw (F277) x 5	Back holder (F276) x 5 *These can also be round
Rail holder (F1014) x 4	Handle (F463) x 4	© • Foot (F872) × 5
Nail x <i>(F51)</i> x 38	50mm Screw (F49) x 5	2 Allen Key <i>(F36)</i> x 1

If you have damaged or missing components, call the numbers below

Step 1

Prepare the 2 drawer fronts

Screw 2 metal dowels B into each of the drawer fronts 1.

Note: Tighten the metal dowels up fully against the panels.

Step 2

Prepare the drawer sides

Insert a small locking nut C into the hole shown on the left drawer side **2** and the right drawer side 3.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

Step 3


Attach the drawer sides to the drawer fronts


Push the left drawer side **2** and right drawer side **3** onto the back of the drawer front 1.


Turn the small locking nuts **C** on the left drawer side **2** and right drawer side **3**.


Note: Turn the locking nuts C clockwise to secure panels - more than 1/2 a turn.





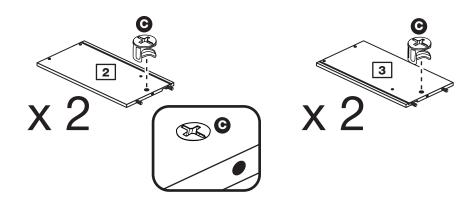

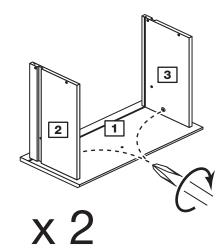



Step 4

Fit the drawer bases

Slide the drawer base **5** down the grooves in the drawer sides **2** and **3** and down into the groove in the drawer front **1**.

Step 5

Fit the drawer back

Fit the drawer back **4** between the drawer sides **2** and **3**. Make sure that the drawer base **5** fits into the groove in the drawer back **4**.

Hold the drawer back 4 in position and tap the knock-in pegs () through the holes in the drawer sides 2 and 3.

Step 6


Attach the handles


Attach a handle **V** to each drawer front **1** using screw **G**.


Step 7


Fit the wedgefixes

Turn the 2 drawer assemblies over and slide 2 wedgefixes into the front and back grooves, as shown, and tighten up the screws.

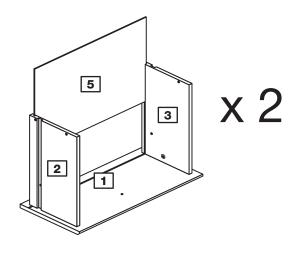

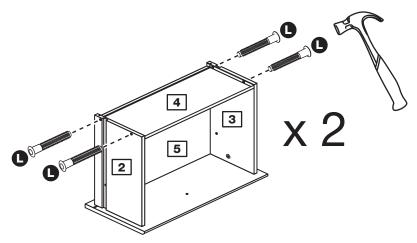

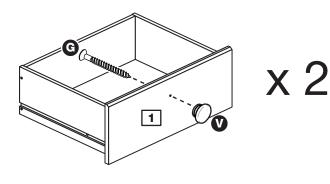

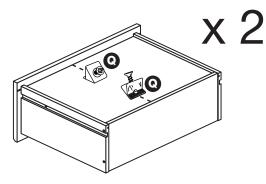



Step 8

Prepare the left side


a: Fit 3 hinge plates **N** to the left side **6** making sure that the slot is facing towards the finished front edge.

Push a rail holder **U** into the left side **6**. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **H**.

Place a runner **P** onto the left side **6**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

Screw a metal dowel **b** into the left side **6**.

b: Slide the runner **P** back the other way and fit the 2nd screw **1** into the corresponding hole in the left side **6**.

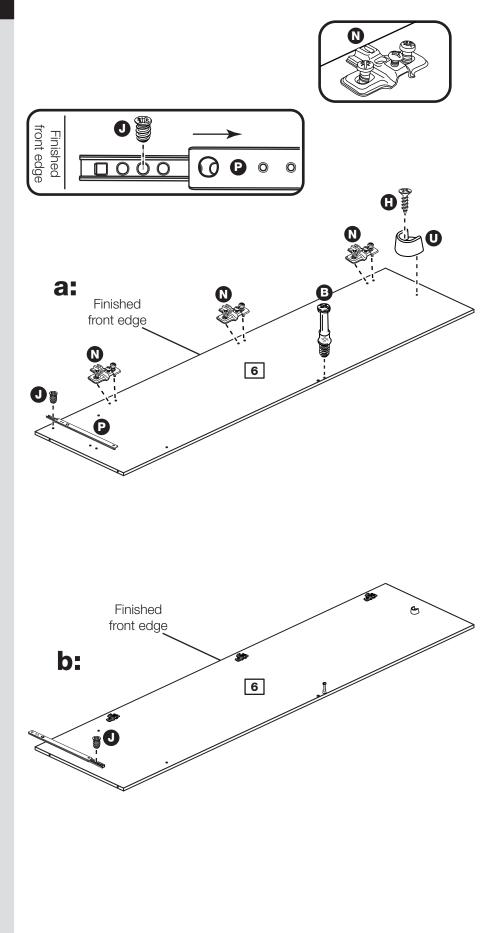

Step 9

Prepare the right side


a: Fit 3 hinge plates **N** to the right side **7** making sure that the slot is facing towards the finished front edge.


Push a rail holder **U** into the right side **7**. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **H**.

Place a runner P onto the right side 7. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

Screw a metal dowel **B** into the right side **7**.

b: Slide the runner P back the other way and fit the 2nd screw **1** into the corresponding hole in the right side **7**.

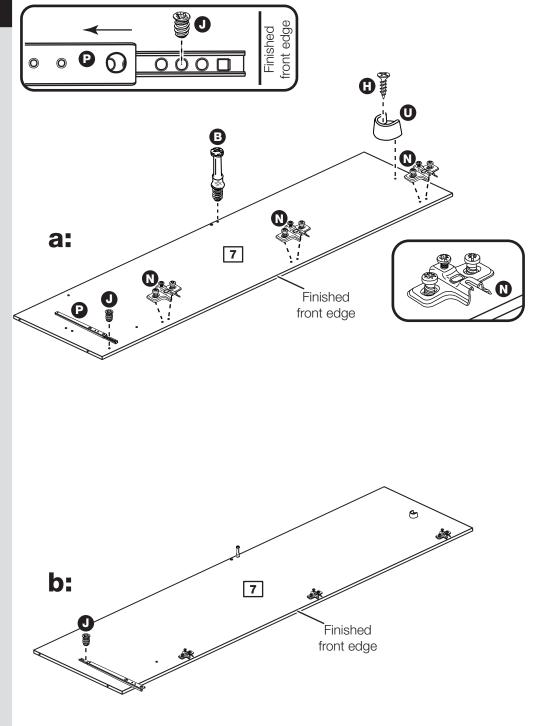

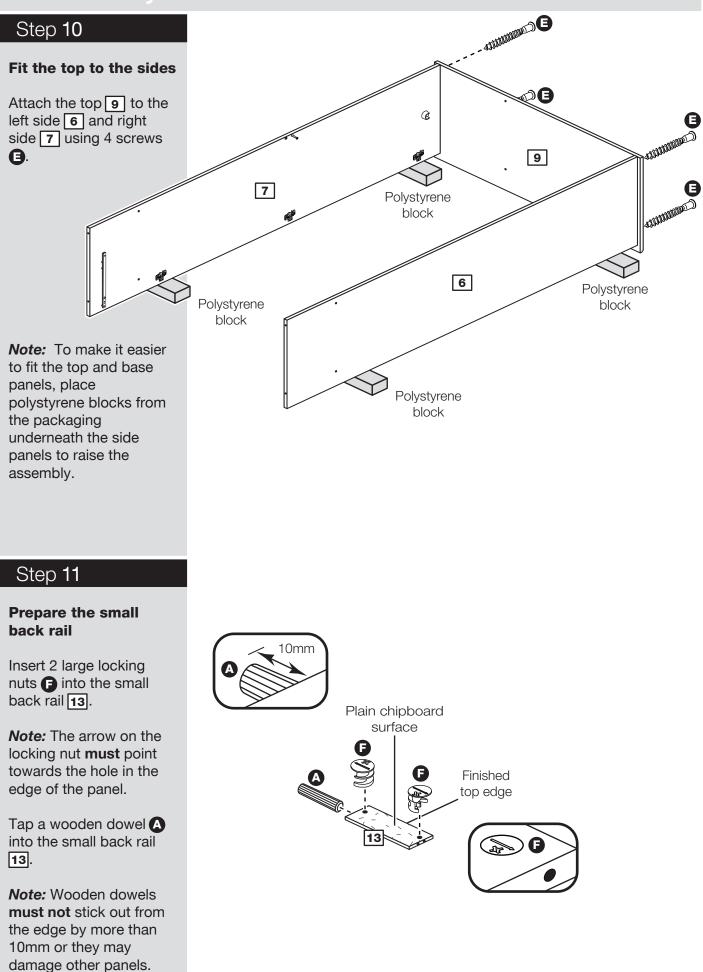

Step 12


Prepare the upright


a: Fit 3 hinge plates **N** to the upright **B** making sure that the slot is facing towards the finished front edge.

Push a rail holder **U** into the upright **B**. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **H**.

Turn the upright over

b: Push a rail holder **U** into the upright **8**. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **H**.

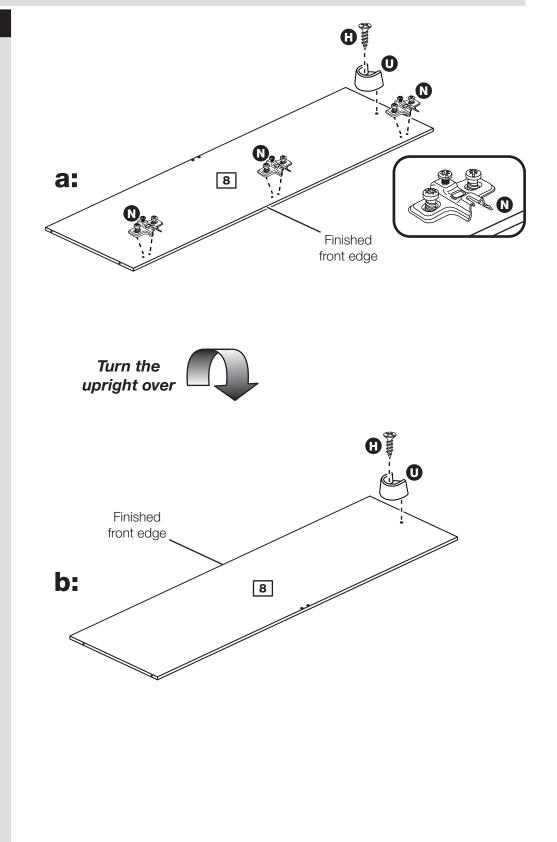

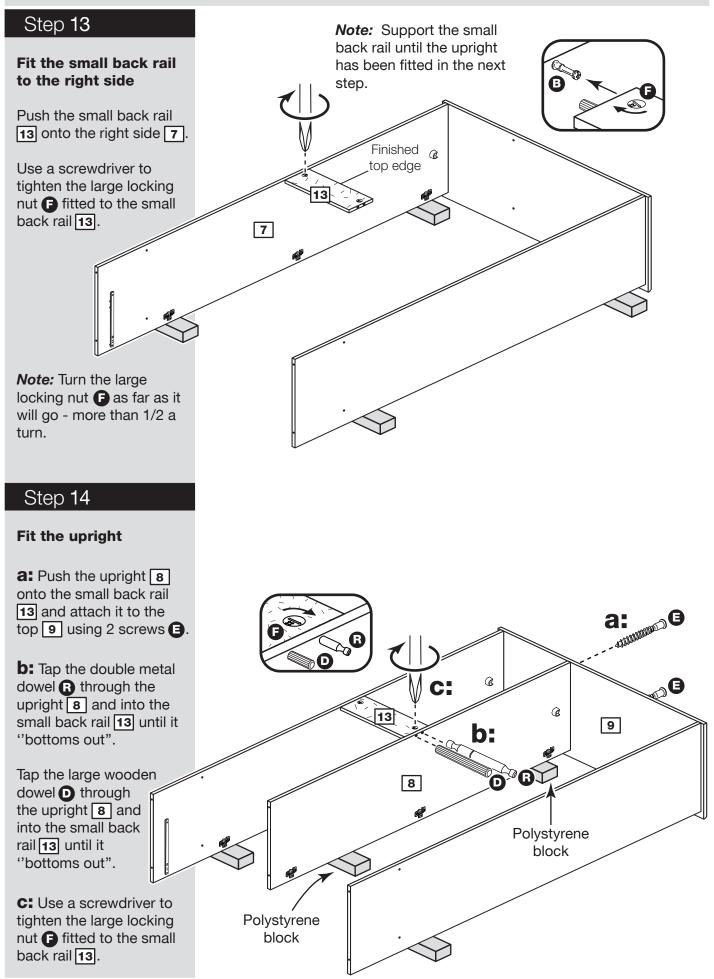


Step 15

Prepare the large back rail

Insert 2 large locking nuts into the large back rail 14.

Tap a wooden dowel A into the large back rail 14.

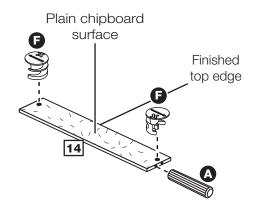


Step 16

Fit the large back rail

Push the large back rail **14** onto the left side **6** and upright **8**.

Use a screwdriver to tighten the 2 large locking nuts **F** fitted to the large back rail **14**.

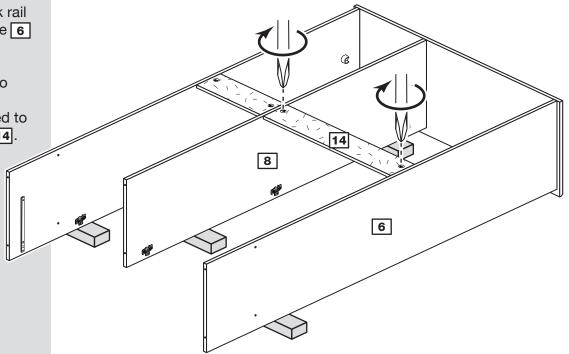


Step 17

Prepare the horizontal


Screw 2 metal dowels **B** into the horizontal **11**.

Note: Tighten the metal dowels up fully against the panels.

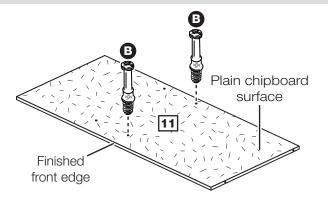

Step **18**

Fit the horizontal

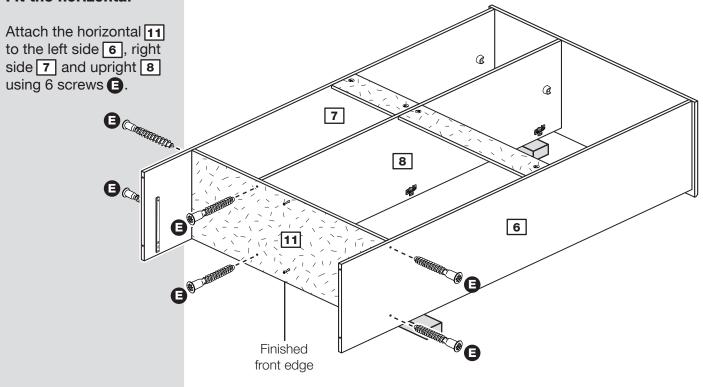

Step 19

Prepare the divider

a: Insert 2 large locking nuts **b** into the divider **12**.


Place a runner P onto the divider 12. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

b: Slide the runner **P** back the other way and fit the 2nd screw **J** into the corresponding hole in the divider **12**.

Turn the divider over

C: Place a runner **P** onto the divider **12**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **J**.

b: Slide the runner **P** back the other way and fit the 2nd screw **1** into the corresponding hole in the divider **12**.

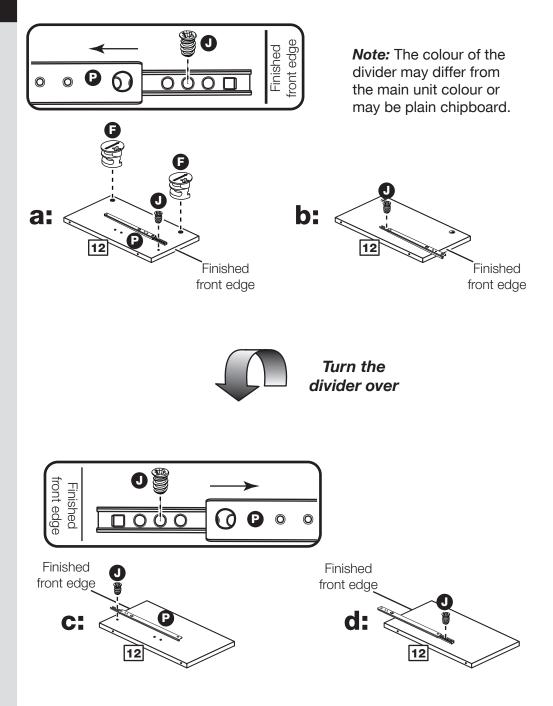


Step 20

Fit the divider

Push the divider **12** onto the horizontal **11**.

Use a screwdriver to tighten the large locking nut **(F)** fitted to the small divider **12**.

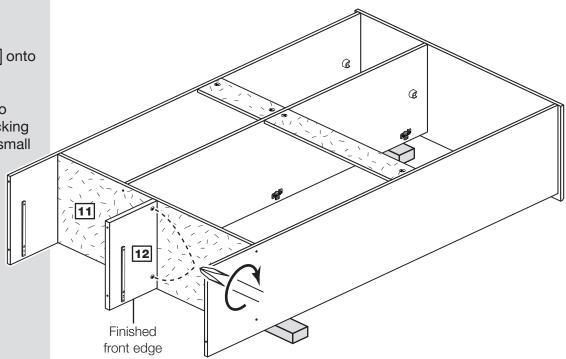


Step 21

Prepare the base

Note: Do not use the holes nearest the edge of the panel to fit the feet.


Fit the 5 feet W to the base 10 using 5 screws Y and tighten them using the allen key 2.

Note: You may find it easier to turn the foot as the screw is held with the allen key.

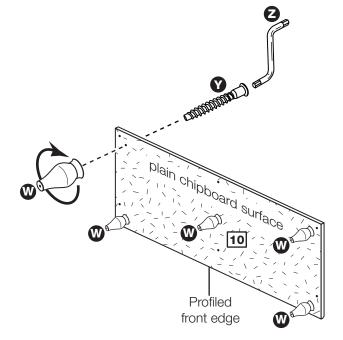

Step 22

Fit the base

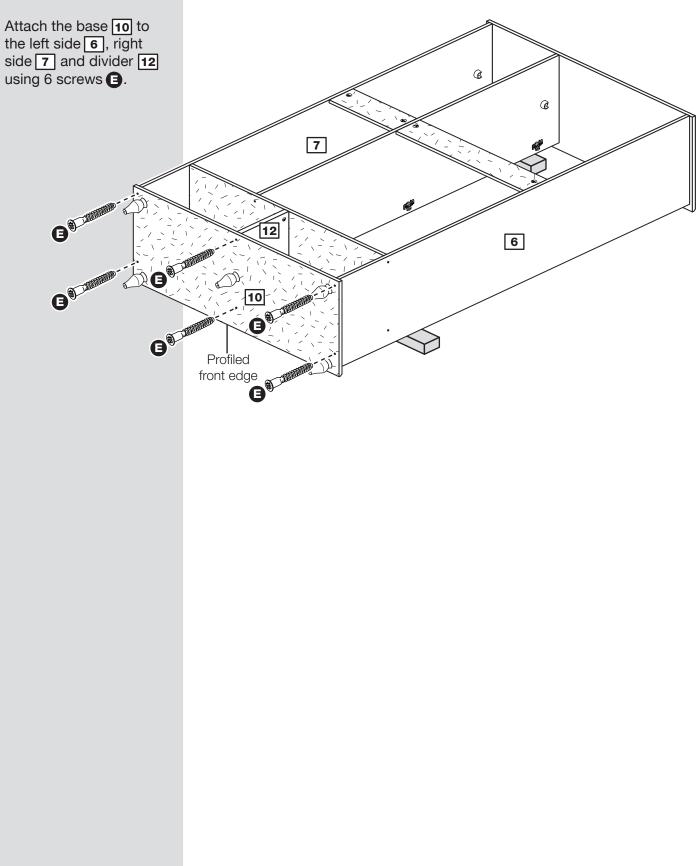

Step 23


Fit the back panels

a: Square up the unit by making sure that measurement x:x equals y:y.

Place the small back **19** and large back 20 down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the upright's back edge.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

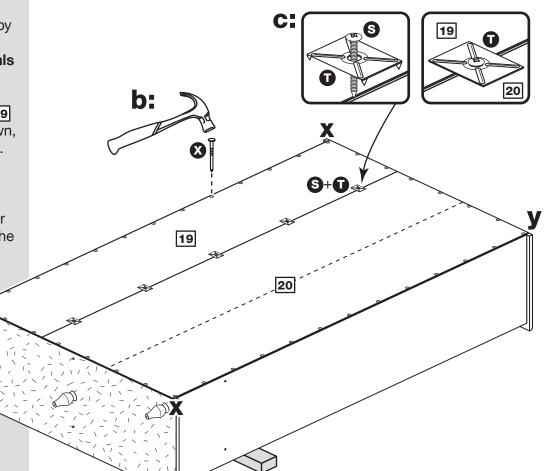

b: Nail 🗙 around the outside edges of the 2 backs.


Note: Do not nail where the 2 backs meet and nails should be spaced about 150mm apart.

C: Push the 5 nail screws **S** through the 5 back holders
and tap them down between the small back **19** and large back 20 and into the back edge of the upright 8.

Keep tapping the nail screws S in until the back holders **D** dig into the small and large back.

Carefully stand the unit up for the next step.

Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.





Warning: The unit is heavy. Lift with care.

Step 24


Fit the hanging rails and drawers


Push small hanging rail **15** and large hanging rail **16** into the rail holders **U**.


Slide both the runners P forward and locate the drawer sides 2 and 3 between them, lining up the holes in the drawer sides with the 2nd 'threaded' holes in the runners P.

Working from the inside of the drawer, insert 2 screws () through the drawer sides and out into the 2nd threaded hole in the runner.

Note: Do not overtighten the screws **(**). If they catch on the runner you may need to loosen them slightly.

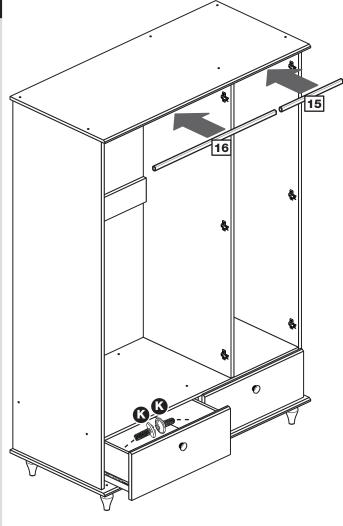






Step 25

Prepare the 3 doors

Push fit 3 hinges (1) into each of the 3 doors [17] and [18].

Secure each hinge with 2 screws **O**.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

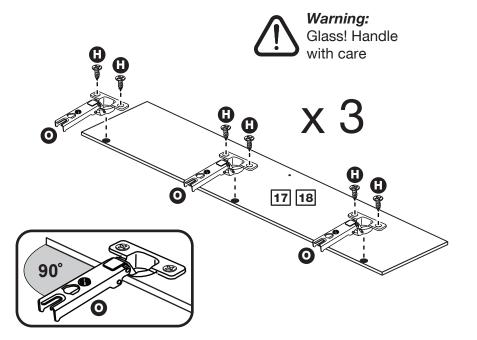

Step 26

Fit doors and handles

Note: The easiest way to attach each door **17** and **18** is to fit the top hinge first, then align and fit the other hinges.


a: Push the hinge **O** onto the front part of the hinge plate **N**. The recess at the bottom of screw B goes into the slot in the hinge plate.

b: Keep the hinge **O** FLAT against the hinge plate **O** as you slide it across as far as it will go. Tighten screw A.

C: The hinge **O** must be flat against the hinge plate **N** prior to any adjustment.

d: The hinge **O** must NOT be AT AN ANGLE to the hinge plate **N** when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

e: Attach a handle **V** to each plain door **17** using screw **G**.

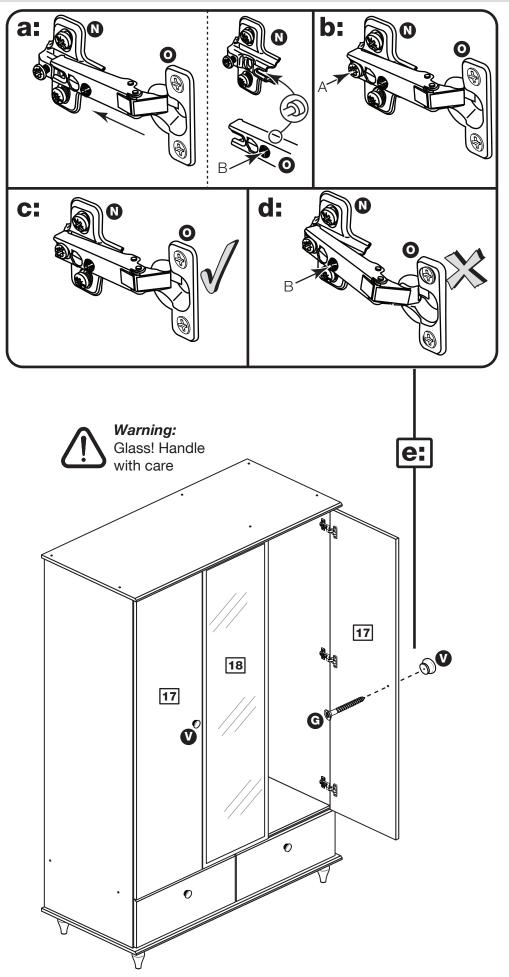

Step 27

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

C: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

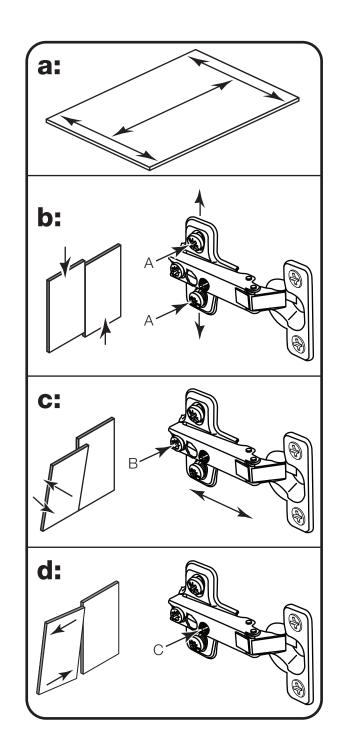

Step 28

Attach bracket to top

To prevent possible overbalancing, we recommend that this unit is secured to a suitable wall by use of the bracket fitted to the top of the unit.

Fixings are not supplied, as they will need to suit the wall type and the length of screw will depend on the distance from the back of the unit to the wall.

Fix the bracket M loosely onto the top of the unit using screw and mark the wall for the wall fixing.


Swivel the bracket **M** away from the wall and drill a hole in the wall using a suitable drill bit and fit your wall fixing.

Swivel the bracket back and fix the bracket to the wall, then tighten screw **1**.


Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.



Warning: The unit is heavy. Lift with care.

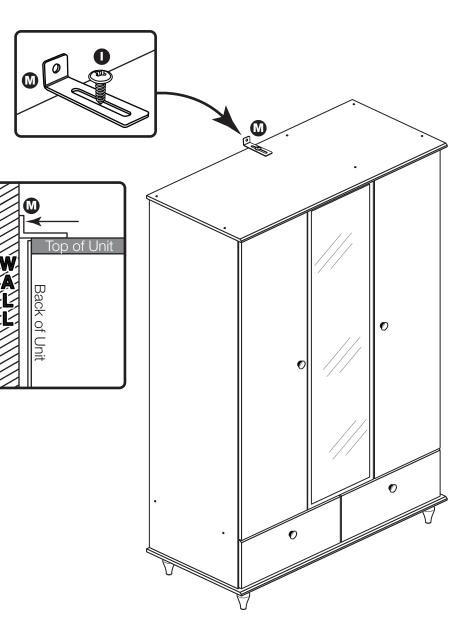

Step 29

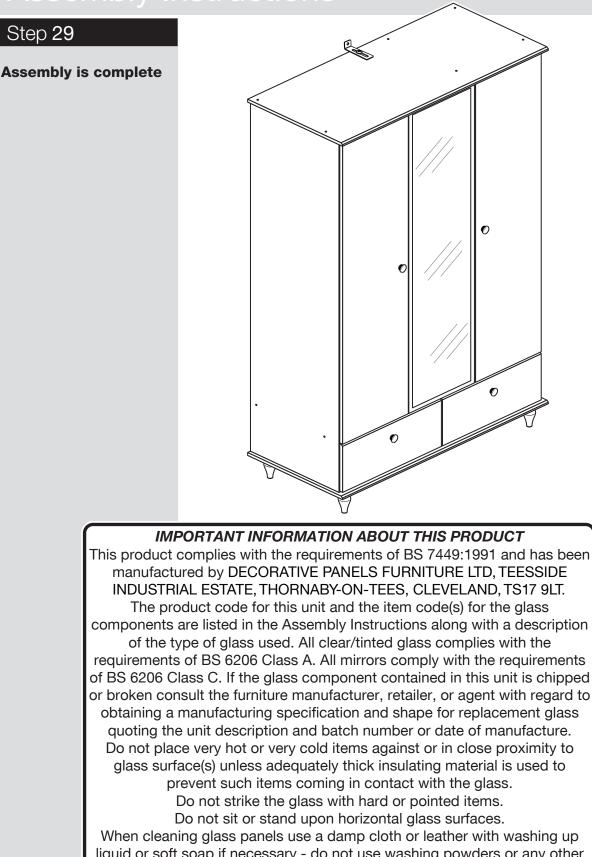

liquid or soft soap if necessary - do not use washing powders or any other substance containing abrasives since these substances scratch glass. If stated in the instruction leaflet, it is essential that this unit is fixed to a wall. **KEEP THESE INSTRUCTIONS FOR FUTURE USE**

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages. Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW