


Hygena Floor cabinet

Assembly Instructions - please keep for future reference

322/6290

hygena

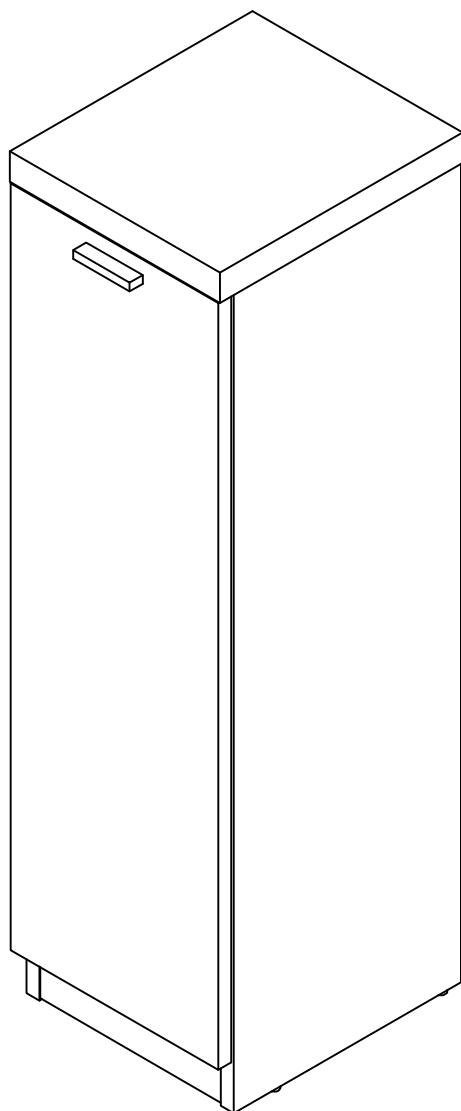

Dimensions

Width - 24.3cm

Depth - 28cm

Height - 85.6cm

Important - please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 1 and 2.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Glue safety - Take care when using glue, please follow the advice below

- Skin contact: Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

- Eye contact: Rinse immediately with clean water for 15 minutes and seek medical advice.

- If swallowed: Seek medical advice immediately.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints


- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts

- Regularly check and ensure that all bolts and fittings are tightened properly.


Components - Panels

If you have damaged or missing components,
call the Customer Helpline: 0845 6400800


Please check you have all the panels listed below

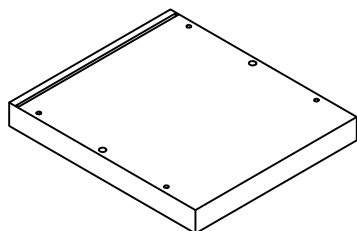


1 Top x1
(27.9cm x 24.3cm)

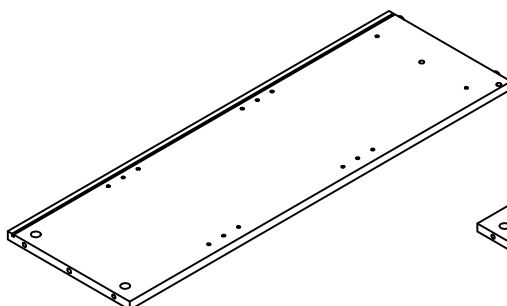


2 Left side x1
(82cm x 26.2cm)

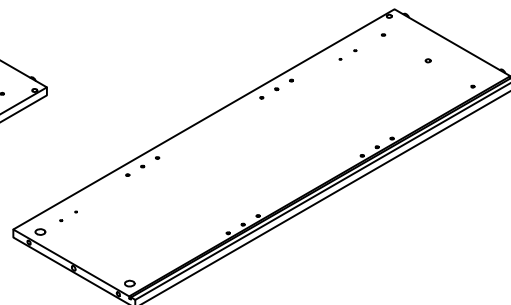


3 Right side x1
(82cm x 26.2cm)

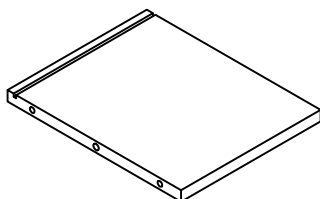


4 Bottom x1
(26.2cm x 21cm)

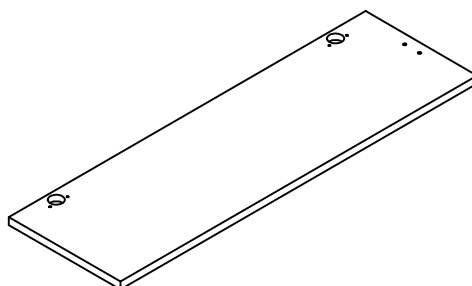


5 Door x1
(76.7cm x 23.9cm)

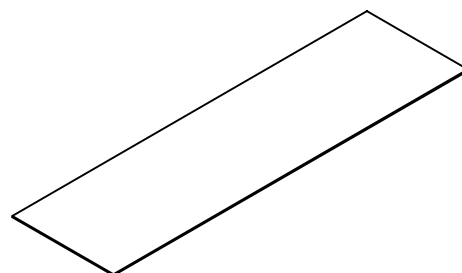

6 Back x1
(76.2cm x 21.7cm)



7 Adjustable shelf x2
(24.4cm x 20.8cm)

















8 Front bar x1
(21cm x 5cm)

Components - Fittings


If you have damaged or missing components, call the Customer Helpline: 0845 6400800

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  30mm Wooden dowel x 7	B  Male camlock x 8	C  Female camlock x 8	D  Glue x 1
E  Handle x 1	F  21mm Handle screw x 2	G  Wall strap x 1	H  32mm Screw & washer x 2
I  Hinge x 2	J  14mm Screw x 8	K  Wall Plug x 1	L  Panel Stiffeners x 6
M  Shelf Support x 8	N  25mm Sticker x 4		

Tools required



Phillips screwdriver
(medium & large)



Drill




7mm Suitable drill bit
(for use with wall plug)



Small
hammer

Ruler - Use this ruler to help correctly identify the screws



The screws length is measured from the head to the point (30mm screw shown).

Components - Fittings


Ruler - Use this ruler to help correctly identify the screws



Using Camlocks

Step 1


Connect the male camlock as directed in the assembly instructions using a screwdriver.



Step 2


Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.



Step 3

Push the male camlock into the entry hole.




Step 4

Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.

The joint is now secure.




Assembly Instructions

Step 1

Fitting Male camlock


1. Insert 8 x male camlocks **B** to the top **1**, left side **2**, right side **3**

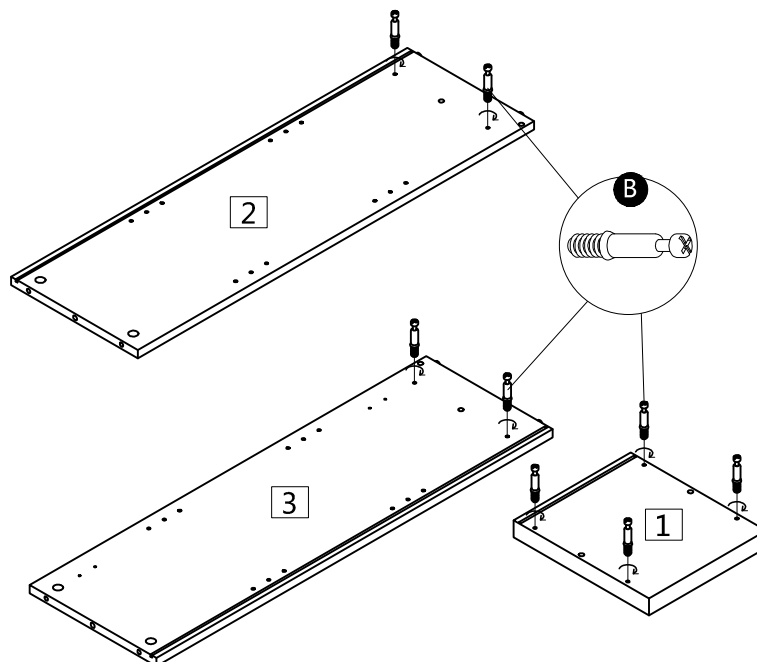

Step 2

Fitting dowels

1. Glue and insert 7 x wooden dowels **A** to left side **2**, right side **3**, bottom **4** & front bar **8**

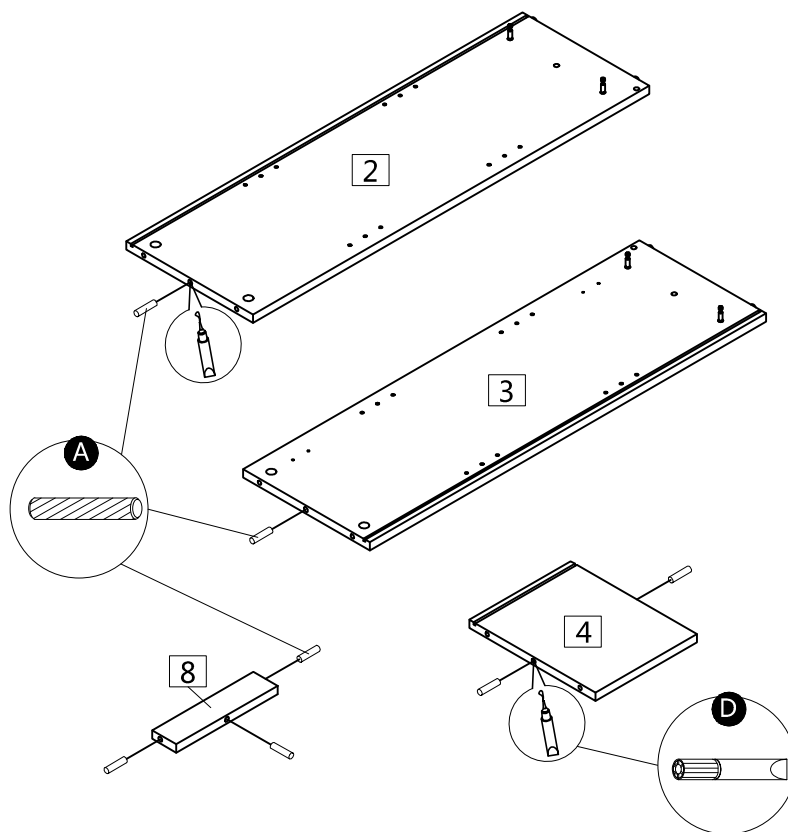


Assembly Instructions

Step 3

Attaching panels


1. Attach front bar **8** to bottom **4**.

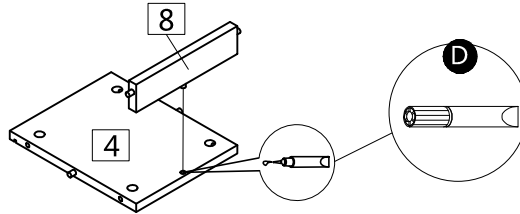

Step 4

1. Attach bottom **4** & front bar **8** to left side **2**.
2. Insert 2 x female camlocks **C** to bottom **4**.


Use a screwdriver to turn the female camlock clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

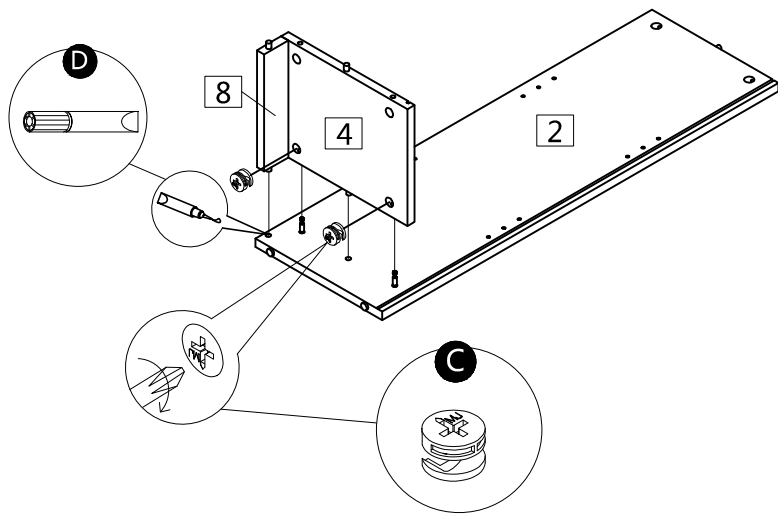

Step 5

1. Attach right side **3** to bottom **4** & front bar **8**.
2. Insert 2 x female camlocks **C** to bottom **4**.


Use a screwdriver to turn the female camlock clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

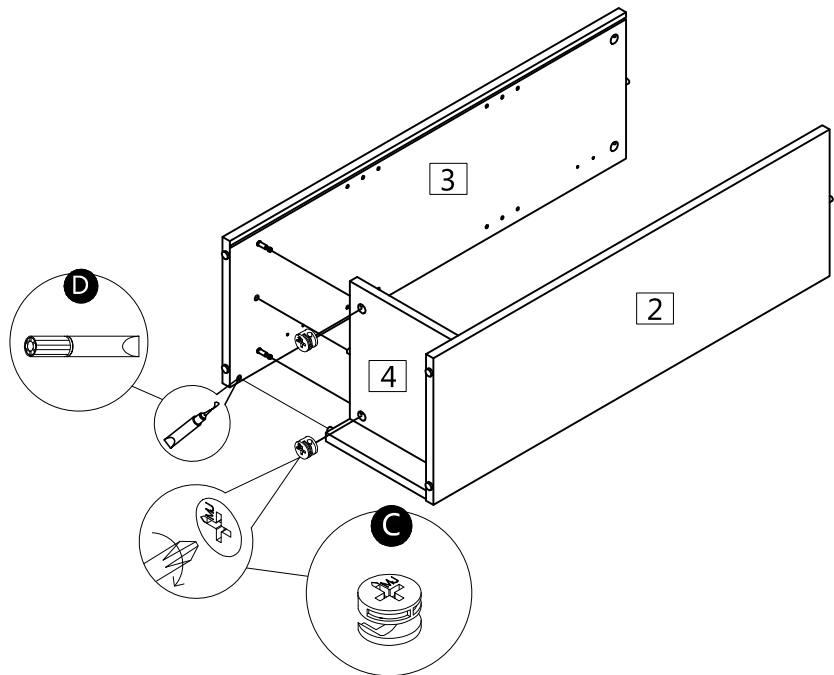

Assembly Instructions

Step 6


1. Slide back **6** along grooves of the unit as shown in diagram

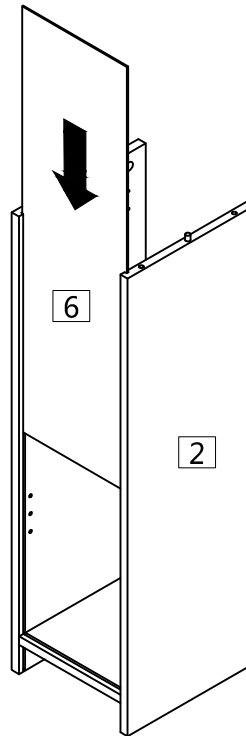

Step 7

1. Attach top **1** to left side **2** & right side **3** .
2. Insert 4 x female camlocks **C** to left side **2** & right side **3** .


Use a screwdriver to turn the female camlock clockwise to lock. Please refer to the "Using Camlocks" section at the front of this instruction for further assistance.

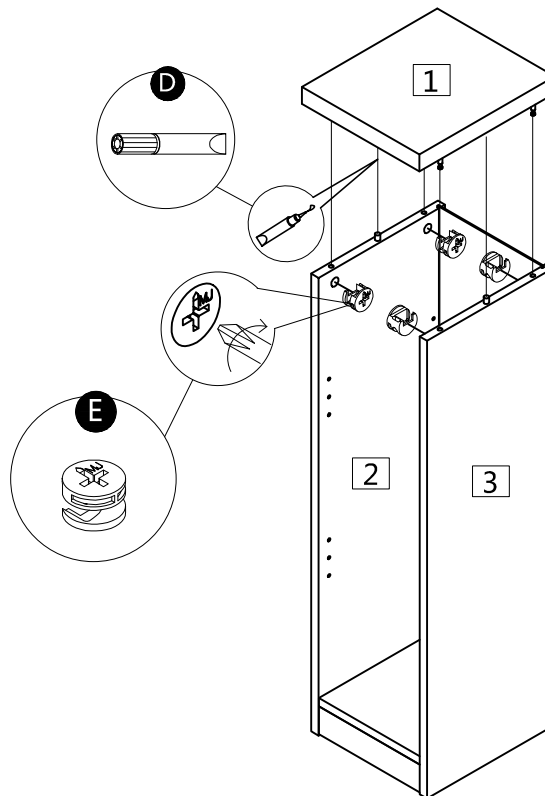

Assembly Instructions


Step 8

1. Attach 2 x hinges **I** to the door **7** with 4 x screws **J** as shown.
2. Attach 1 x handle **E** with 2 x screw **F** to door **5** as shown.

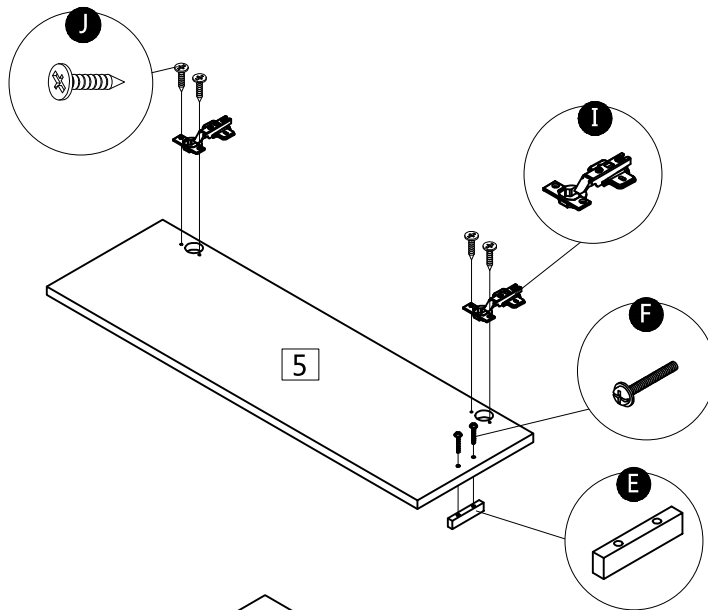

Step 9

1. Attach door **5** to the unit with 4 x screw **J** as shown.
3. Use 4 x stickers **N** to cover camlock hole on left side **2** and right side **3**

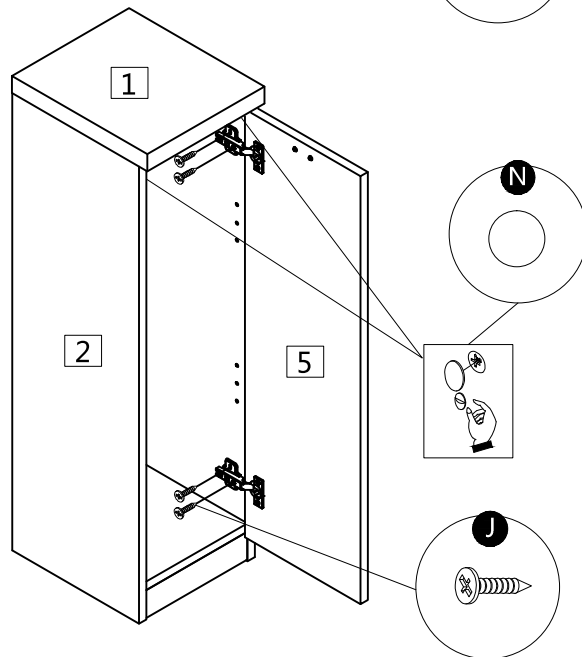


Hinge adjustment:

a: To move the doors up or down, loosen screws shown and move doors to suit

b: To move the doors in or out, loosen screws shown and move doors to suit.

Retighten screws


c: To move the doors left or right, adjust screws shown.

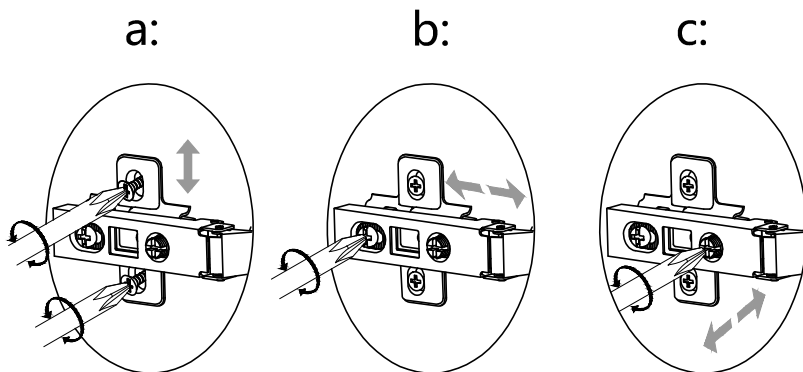

Assembly Instructions


Step 10

1. Insert shelf supports **M** into the holes inside the unit in the desired position
2. Place adjustable shelves **7** on the shelf supports.

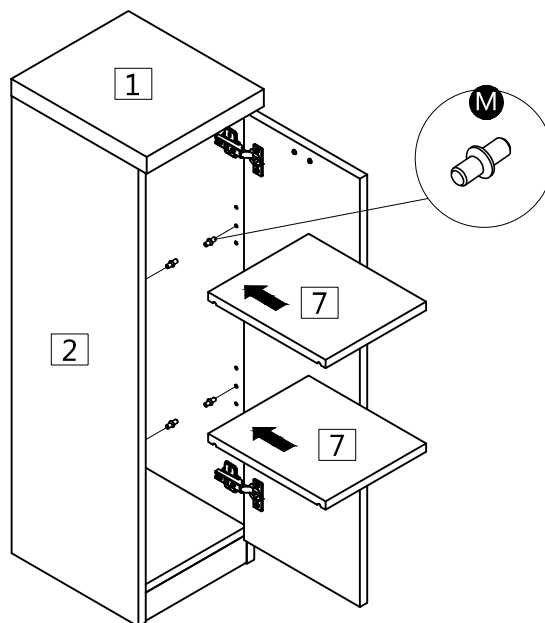

Step 11

1. Insert 6 x panel stiffeners **L** into the back panel grooves as shown. These add support and give the unit rigidity.
2. Using screw & washer **H** secure the 1 x wall strap **G** to the back of top **1**.

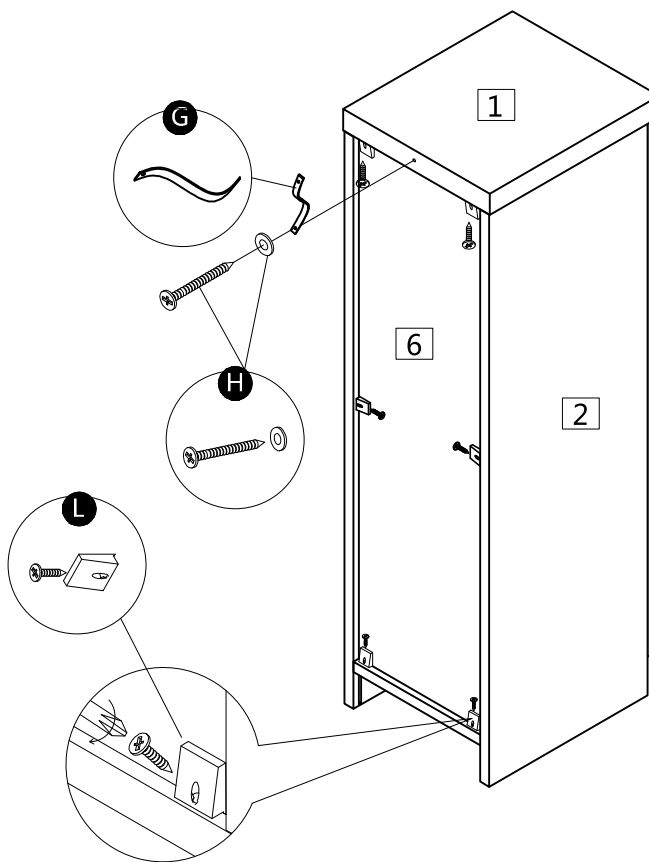

Assembly Instructions

Step 12

It is recommended that the unit is fixed to a wall.

1. Move the unit into desired position.



Warning:

The unit is heavy.

Lift with care.

2. Mark the wall with a suitable scribe the position of the fixing hole.




Warning:

Before drilling, check wall for hidden pipes and cables.

3. Drill 7mm hole and insert wall plug **K**.

4. Secure the other end of the strap **G** to the wall with washer & screw **H**.

Note: To hide the strap behind the unit, drill the hole lower than the top of unit.

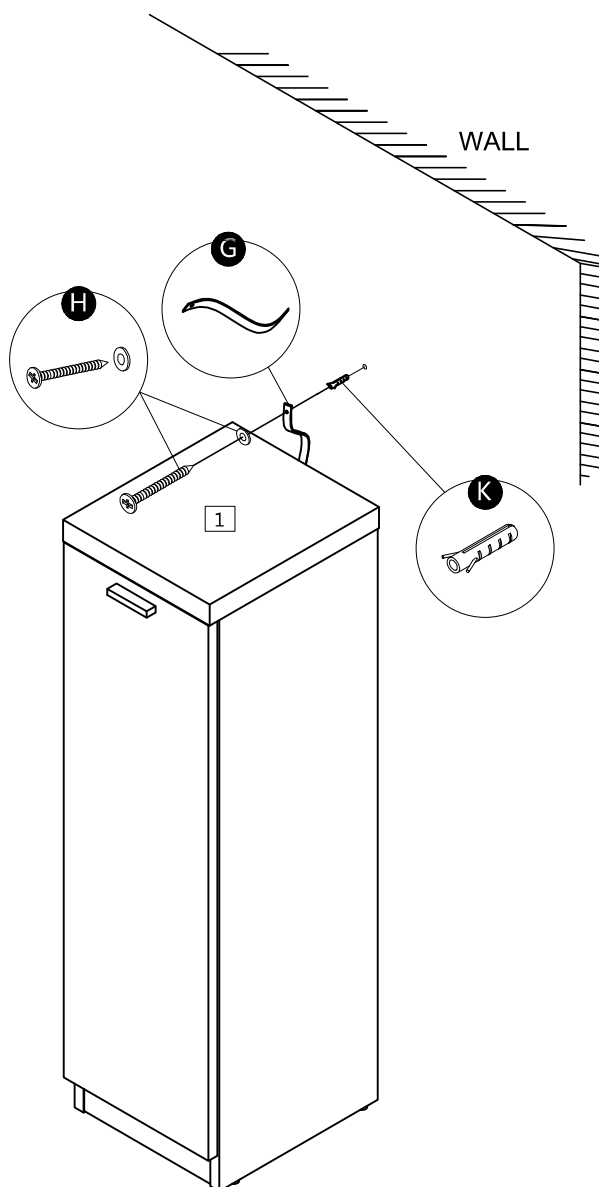


Assembly Complete

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.


Failure of the product due to using the incorrect fixings is the responsibility of the installer.



Important: when drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:  always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

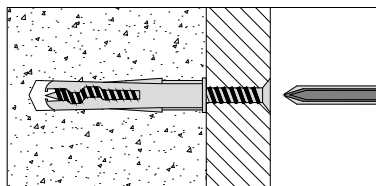


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.3 "Cavity Fixing" wall plug

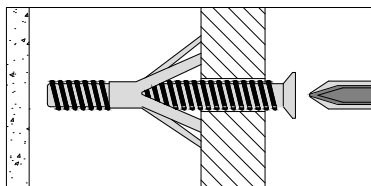


For use with plasterboard partitions or hollow wooden doors.

No.5 "Hammer Fixing" wall plug

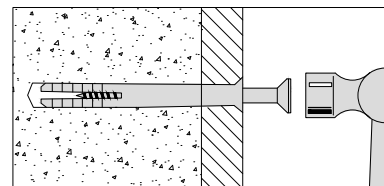


For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.2 "Plasterboard" wall plug

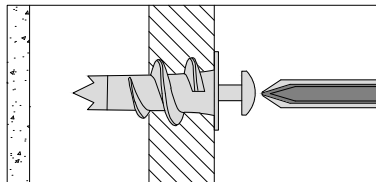


For use when attaching light loads onto plasterboard partitions.

No.4 "Cavity Fixing - Heavy Duty" wall plug

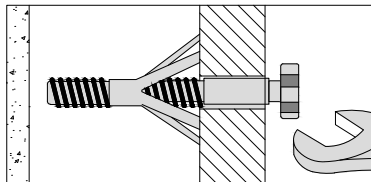

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.4 "Shield Anchor" wall plug - heavy loads

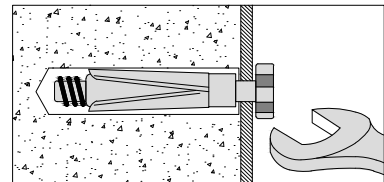

For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting: to ensure the wall plugs or screws do not become loose.

If you need help or have damaged or missing parts, call the Customer Helpline: 0845 6400800