
Sandford Wall Mirror Cabinet

Assembly Instructions – Please keep for future reference

356/1371



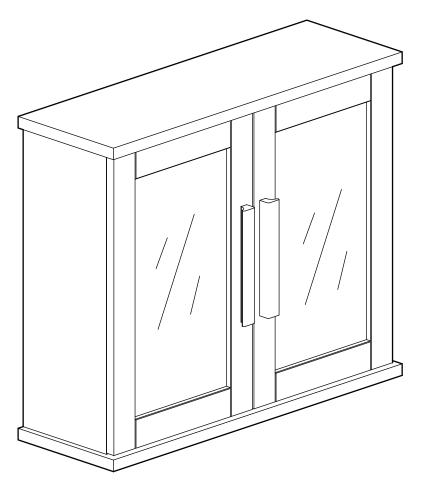

Dimensions

Width - 60cm

Depth - 19.8cm

Height - 50.5cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and care advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the panels, this could cause damage.
- Assemble the unit as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.
- **Note:** Only apply the glue once you are sure of the assembly.
- The wall plugs supplied are suitable for solid walls only. It is important that the correct type of fixing is used for your wall, seek professional advice if in doubt.
- Parts of the assembly will be easier with 2 people.
- If using power tools, please follow the safety instructions supplied with the tools.



• We do not recommend the use of power drill/ drivers for inserting screws, as this could damage

the unit. Only use hand screwdrivers.

- *Warning:* Before drilling, check the wall for hidden pipes and cables.
- Dispose of all packaging carefully and responsibly.

Glue safety - Take care when using glue, please follow the advice below

Skin contact: Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

Eye contact: Rinse immediately with clean water for 15 minutes and seek medical advice.


If swallowed: Seek medical advice immediately. If possible show product information or label to the medical advisor.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as a reference throughout the assembly. Keep this page with these instructions for future reference.

Please check you have all the panels listed below

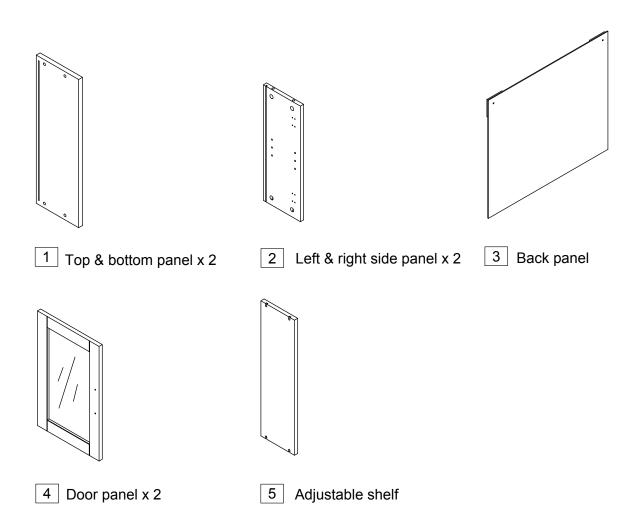

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly . In some cases more fittings may be supplied than are required.

	B	C Significant
Locking Pin x 8	Locking Nut x 8	Straight hinge x 4
Ф4 x 12mm Screw x 24	Ф4 x 45mm Screw x 2	Metal Support x 4
6 0	8	
Wall plug(for solid walls only) x 2	Wooden handle x 2	Φ4 x 25mm Screw x 4
Cam cap x 8	Screw cap x 4	

Tools required



Ruler - Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170

Assembly Instructions

Step 1

Assembling side and bottom panel

a:

Screw locking pin (A) into top and bottom panel [1].

b:

Attach left side panel and right side panel 2 to bottom panle 1.

Insert locking nut **(B)** into left side panel and right side panel.

Tighten the locking nut to secure the unit.

Step 2


Assembling back and top panel

Carefully slide the back panel 3 into side and bottom panels of the groove.


Carefully place the top panel 1 onto the unit.Insert locking nut **B** into left side panel and right side panel.


Tighten the locking nut to secure the unit.


a:



b:







Assembly Instructions

Step 3

Assembling door panel

NOTE:It would be useful to ask someone to help you at this stage.

a:

Use 12mm screws **()** to fix straight hinge **()** onto door panels **(4)**.


Use 25mm screws **()** to fix handles **(h)** onto doors .

b:

Carefully attach door panels 4 to the unit by fixing straight hinge onto the side panels with 12mm screws **D**.

Adjust the door up or down, left or right, in or out if needed as shown:

- 1. Loosen two screws **D**and adjust the door up or down, then fix screws **D** again.
- 2. Loosen screw and adjust the door left or right, then fix screw again.
- 3. Loosen screw 2 and adjust the door in or out, then fix screw 2 again.

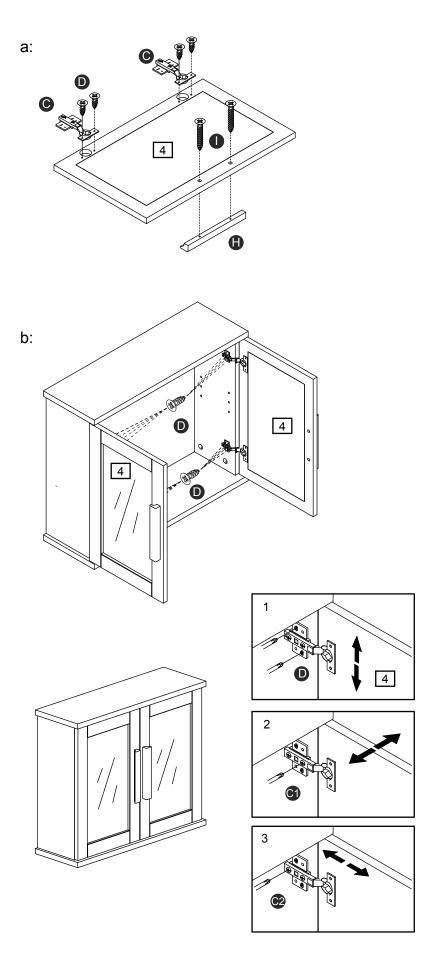

Assembly Instructions

Step 4

Fixing to the wall

NOTE:It would be useful to ask someone to help you at this stage.

Warning!

Please make sure the unit is secured to the wall before use.

Please refer to next page the Guide for Wall Mounting & Fixings.

a:


Use 45mm screws and wall plug to fix the unit on the wall.


Use cam caps ① to cover the visible cams

Use screw caps **(**S to cover the visible screws



After above assembly, please double check and make sure all screws are firmly fixed before use.

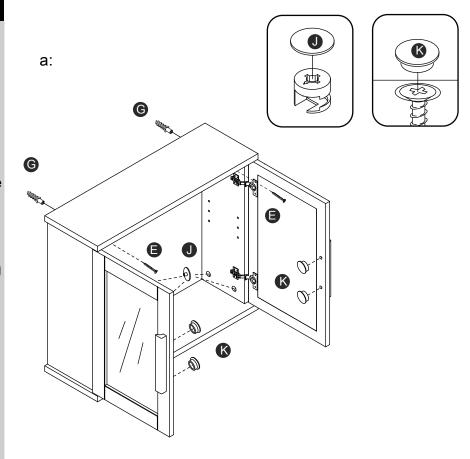

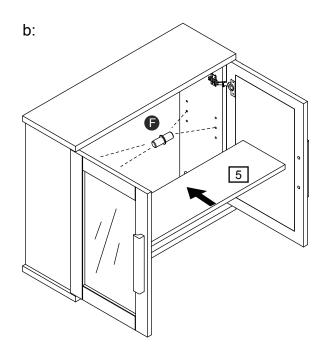

NOTE:If you have damaged or missing components, call the Customer Helpline:08456 400800 Argos LTD,489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule: Always use a larger screw and wall plug if you are not sure.
- **2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- **3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- **4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- **5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug




Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug




For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug




For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug




For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug



For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads



For use with heavier loads such as TV & HiFi speakers and satelite dishes etc.



Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.