



x1



<15m

MRCS_0337_0813_V1

© Mamas & Papas Ltd. 2013

Mercury G0+ & 1

IMPORTANT Note:

Read these instructions carefully before fitting your car seat. Remember, an incorrect installation could be dangerous.



Keep these instructions in a safe place, preferably in the recess under the car seat or in the vehicle so that you can find them for future use.

This car seat has been tested and approved to comply with the latest European Standards for Group 0+ & 1. For use rearward facing Group 0+ new born – 13kg (approximately birth – 12 months) Forward facing Group 1, 9 – 18kg (approximately 9 months – 4 years).

The car seat should NOT be fitted in a passenger seat of a vehicle that has an air bag fitted. (SRS)

NEVER leave your child unattended in the car seat.

Do not make any alterations or additions to the car seat.

Do not use the car seat without the cover.

The seat cover should be replaced with one recommended by Mamas & Papas, because the cover constitutes an integral part of the car seat's performance.

Ensure that once the car seat is fitted that no parts of the seat or the vehicle's seat belt can become trapped by a folding seat or the vehicle's door.

Check every time you use the car seat that the vehicle's safety belt is tight and the car seat is held firmly in place.

Check every time you use the car seat that the vehicle's safety belt has not become twisted.

Car interiors can become very hot when standing in direct sunlight – it is therefore recommended that the car seat is covered by a towel when not in use. This prevents the car seat and its metal parts becoming hot and burning the child.

Check that luggage or other heavy or sharp objects are secured in the car. Loose objects are liable to cause injury in the event of an accident or sudden braking.


Do not allow the seat to be in contact with corrosive substances.


When travelling with other passengers using both the front and the rear seats, the lighter occupant should travel in the rear of the vehicle and the heavier occupant in the front passenger seat.

When the car seat is left in the vehicle without the child in it, always ensure it is correctly fitted using the vehicle's safety belt to prevent it from being thrown about in an accident.

The car seat should be replaced after an impact or accident.

Features

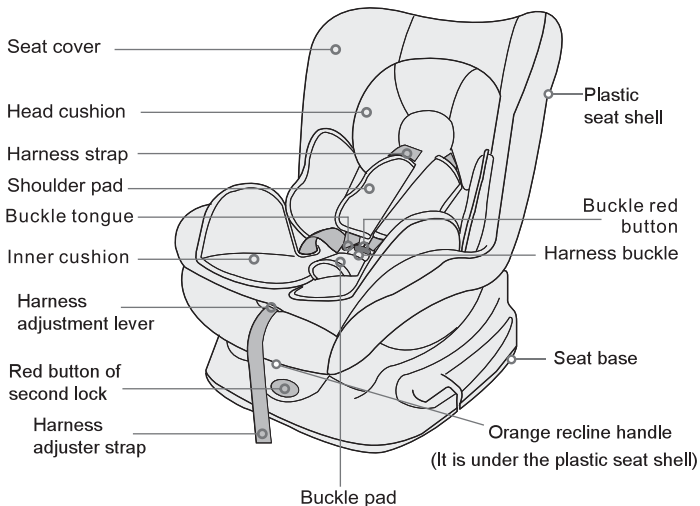

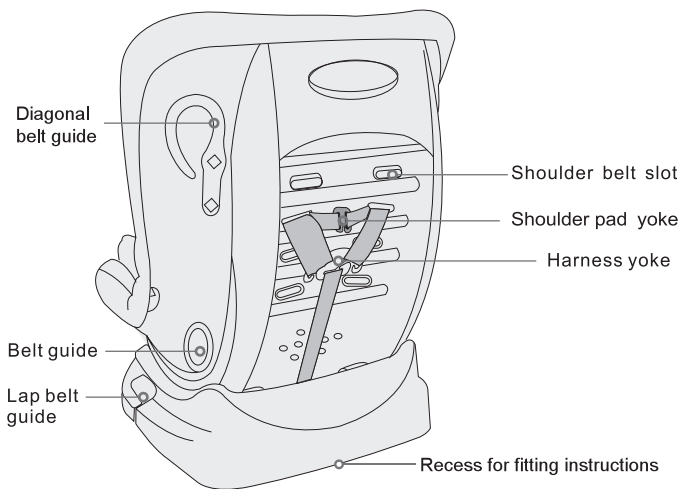


Vehicle Application



Correct fitting/Suitable



Incorrect fitting/ Not suitable

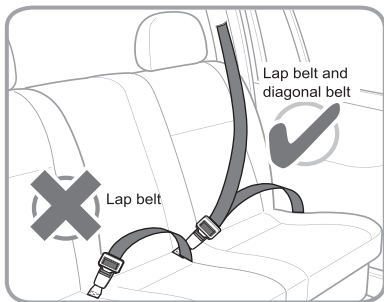


Your child seat can only be installed using a three-point lap and diagonal seat belt in the front or rear passenger seat of the vehicle.



Warning:
NB DO NOT fit in a passenger seat of a vehicle that has an air bag fitted. (SRS).


Adjusting the harness to suit your child




Release the buckle by sliding the red button downwards, at the same time pull out the buckle tongues.




Place your child on the car seat and check the height of the shoulder straps are correct.



The shoulder straps must be threaded through the slots in the cover and the corresponding shoulder belt slots in the seat shell that are closest to the top of your child's shoulders.



To adjust the height of the shoulder straps, press the harness adjustment lever down - at the same time pull both harness straps forward to create slack.



From the back of the seat slide the strap off the shoulder pad yoke and pull the straps through to the front of the seat.



Thread the harness shoulder straps back through the cover and the harness shoulder belt slots in the seat shell - ensure both harness shoulder straps are at the same height.



Attach the harness shoulder straps securely to the harness yoke.

Feed the shoulder pad straps through the same slots ensuring the straps are under the harness shoulder straps and attach the shoulder pad straps to the shoulder pad securely.




Installing your child seat – Rearward Facing

For use with group 0+ – less than 13kg




Warning:

NB DO NOT fit in a passenger seat of a vehicle that has an air bag fitted. (SRS)



Put the foam into the bag of the inner cushion, then install the inner cushion on the car seat.




Press the red button of the second lock and at the same time lift upwards the orange handle, slide the seat shell forward until the red triangle at the side of the seat shell is in line with the blue triangle on the side of the base of the seat. The seat should now be in its fullest recline.




Before installing the child seat in the vehicle - always ensure that the seat is in its fullest recline.





Fasten the child seat into the vehicle by threading the lap belt through the lap belt guides on either side of the seat - this is indicated by a white label with a blue arrow and the words **BELT HERE** printed on it.



Thread the diagonal belt through both of the belt guides at the back of the plastic seat shell - these are indicated with a white label with a blue arrow (and a red arrow for use later) and the words **BELT HERE**.

Insert the vehicle's seat belt into the seat belt buckle - you will hear a click when it is engaged.

Now adjust the tightness of the vehicle's seat belt.

Installation Checkpoints - Rearward Facing



Check:
The vehicle's seat belt has been pulled tightly and is not twisted.

Check:
The car seat must be in its fullest reclined position.

Check:
Ensure the vehicle's seat belt buckle is engaged. (clicks when locked).


Check:
The lap section of the vehicle's seat belt is under the seat and through the lap belt guides on both sides of the seat.

Check:
The car seat is tight against the vehicle seat backrest.


Installing your child seat – Forward Facing

Only for use with group 1 – from 9 to 18 kg

Important : Do not use the child seat forward facing until your child reaches a weight of 9kg, we recommend you continue to use the seat rearward facing until your child reaches 13kg.





Remove the foam from the bag underneath the inner cushion, then replace the inner cushion in the car seat.



Place the child seat firmly against the backrest of the vehicle seat.

The diagonal portion of the vehicle's seat belt goes through the belt guide - indicated by a white label with a red arrow (and a blue arrow for earlier use) and the words **BELT HERE** located on the back of the seat furthest away from the seat belt buckle A.

The lap and diagonal belt go through the belt guide located at the side of the plastic seat shell B. This is indicated by a white label with a red arrow and the words **BELT HERE**. Now guide the belts over the car seat and out through the belt guide on the other side of the seat shell C.



Insert the lap and diagonal belts into the vehicle's buckle - you will hear a click when it has engaged.

Installing Checkpoints - Forward Facing




Check:

The vehicle's seat belt has been pulled tightly and is not twisted.



Check:

The vehicle's seat belt is correctly routed through the slots in the plastic seat shell of the car seat.

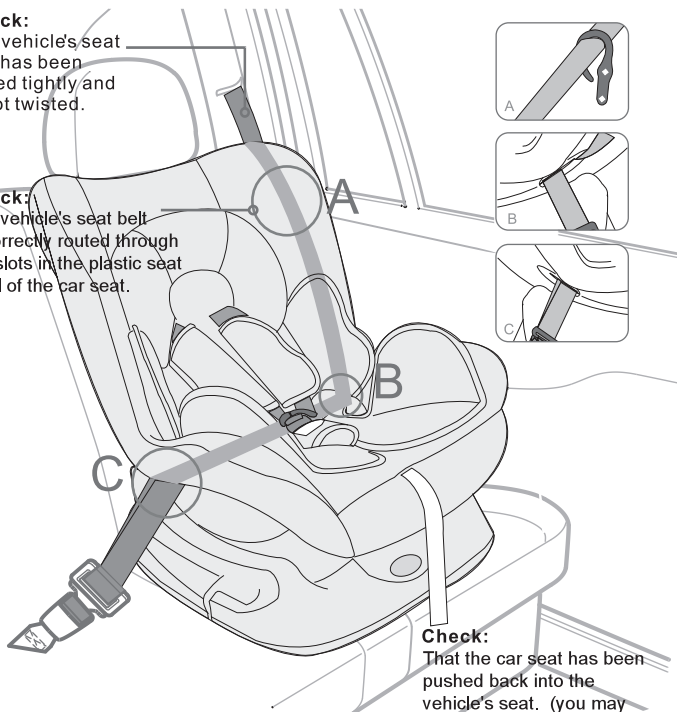

Check:

That the car seat has been pushed back into the vehicle's seat. (you may wish to push down into the vehicle's seat using your knee)




PLEASE NOTE:

There is a label on the child seat showing the correct belt routing.


How to fasten your child into the car seat



Release the safety belts and place your child on the child seat ensuring the harness shoulder straps are at the correct height, place the shoulder straps over your child's shoulders and the lap straps over your child's hips.

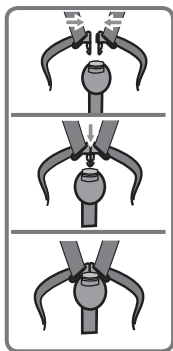

Fasten the buckle by bringing together the two buckle tongues and push them into the harness buckle until you hear a click.



Adjust the shoulder pads so that they sit correctly on your child's shoulders. Tighten the shoulder straps by pulling the harness adjuster strap, your child must be comfortable and securely fastened in .

Check points



Check:
That the shoulder pads are covering the shoulders .

Check:
That the shoulder straps are not lower than your child's shoulders, if they are move the shoulder straps to the next slot shoulder belt slots.

Check:
The harness lies over the hips and not over the stomach and is pulled tightly.


Check:
The buckle pad is in place and that the buckle is fully engaged.

Check:
That the harness adjuster strap has been pulled tight.



Cleaning & Maintenance

To remove the cover for cleaning, you must release the shoulder straps from the yoke.




Remove the inner cushion and the head cushion from the car seat.



Gently pull down the cover from the top of the shell. Unhook the plastic hooks from the shell - these are attached to the cover.



Pull the harness and shoulder pad straps through the shoulder belt slots to the front of the seat. Pull the harness through both of the buckle tongues and feed the buckle through the buckle pad.



The cover can now be removed for washing.

NB Keep the harness and buckle with the seat until you replace the cover and cushions.

Washing instruction:

The cover is removable and washable at 30°C, line dry only.



Machine
wash, cold



Do not bleach



Dryclean, any
solvent except
Trichloroethylene



Do not tumble dry



Do not iron

If you are in any doubt about the use or fitting of this product or you require any replacement parts, please contact our customer hotline.

Notice:

1. This is a "Universal" child restraint; it is approved to ECE Regulation 44.04 for general use in vehicles and will fit most, but not all vehicle seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint of this group.
3. This child restraint has been declared "Universal" under more stringent conditions than those applied to earlier designs which do not carry this notice.
4. If in any doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the vehicle is fitted with 3-point static, 3-point retractor safety belts, approved to UN/ECE Regulation no.16 or other equivalent standards.

EXTREME HAZARD

Do not use in passenger
Seats equipped with air
Bags (SRS)







mamas & papas®

HD5 0RH, UK



mamasandpapas.com
mamasandpapas.ca
mamaspapas.kr



UK T: +44 (0)345 268 2000

USA T: 1-800-490-0331

CAN T: 1-800-667-4111

AU T: 1300-663-034



/mamasandpapasuk
/mamasandpapasusa
/mamasandpapasaltaregion
/mamasandpapasmagyarorszag



@mamasandpapas



/user/mamasandpapasglobal



mamasandpapasblog.com



/mamasandpapas



/mamasandpapasuk
/mamasandpapasus



/+mamasandpapas

