Malibu - 3+1+1 Mirror Effect Robe

Assembly Instructions - Please keep for future reference


391/1691

402/2895

402/8583

404/3094

381/6624

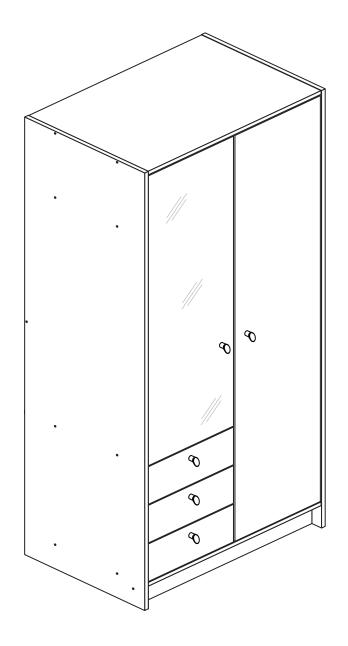

Dimensions

Width - 75cm

Depth - 49.5cm

Height - 181cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 54kgs. Please lift with care.
- Check you have all the components and tools listed on pages 1, 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
- Dispose of all packaging carefully and responsibly.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the panels listed below

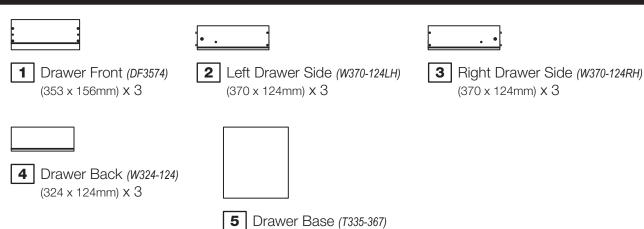


(335 x 367mm) x 3



Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below

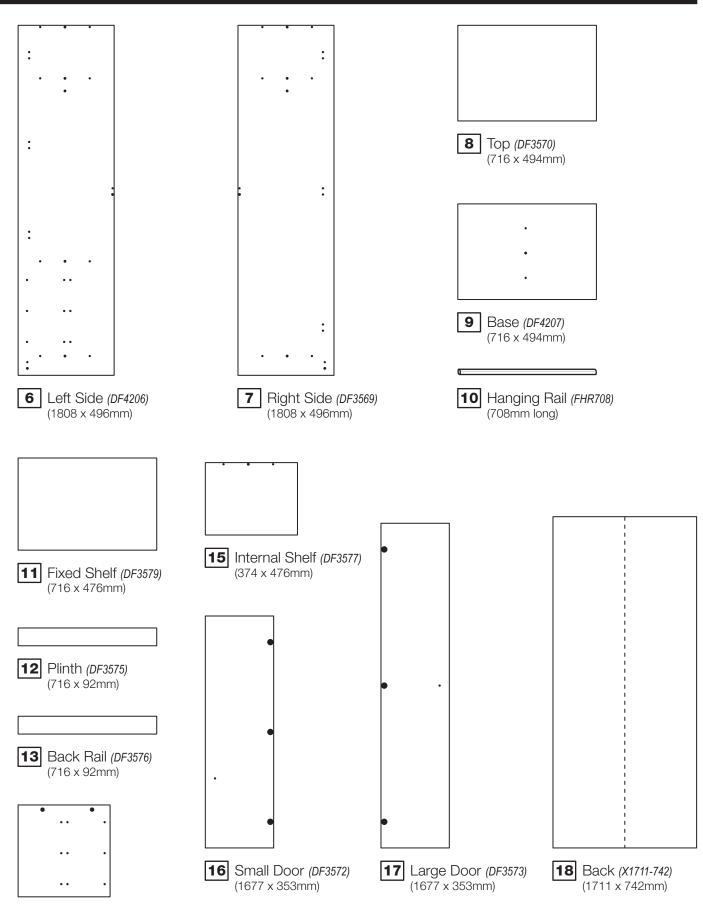


Components - Fittings

If you have damaged or missing components, call the Customer Helpline: 03456 400800 quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

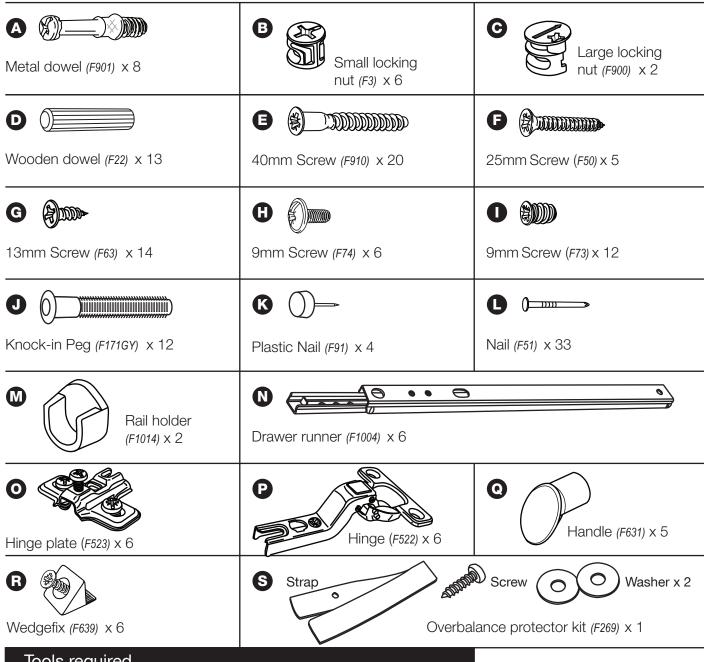

Tools required

Rule Hammer Cross-head screwdriver Square Bradawl Eye protection (when using a hammer or drill) Scissors Electric drill Spirit level Step ladder

Ruler - Use this ruler to help correctly identify the screws 20 40 60 80 90 100 110 120 130 140 150 160 mm 10 30 50 70


If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 03456 400800 quoting the reference numbers below

Step 1

Prepare the 3 drawer fronts

Screw 2 metal dowels A into each of the drawer fronts 1.

Note: Tighten the metal dowels up fully against the panels.

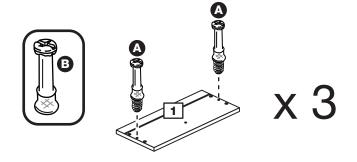



Step 2


Prepare the drawer sides

Insert a small locking nut **B** into the hole shown on the left drawer side 2 and the right drawer side 3.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.








Step 3


Attach the drawer sides to the drawer fronts

Push the left drawer sides 2 and right drawer sides 3 onto the back of the drawer fronts 1.

Turn the small locking nuts **B** on the left drawer side 2 and right drawer side 3.

Note: Turn the locking nuts B clockwise to secure panels - more than 1/2 a turn.






Step 4

Fit the drawer base

Slide the drawer base 5 down the grooves in the drawer sides 2 and 3 and down into the groove in the drawer front 1.

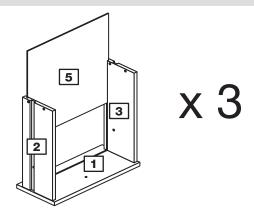


Step 5

Fit the drawer back

Fit the drawer back 4 between the drawer sides 2 and 3. Make sure that the drawer base 5 fits into the groove in the drawer back 4.

Hold the drawer back 4 in position and tap the knock-in pegs **1** through the holes in the drawer sides **2** and **3**.

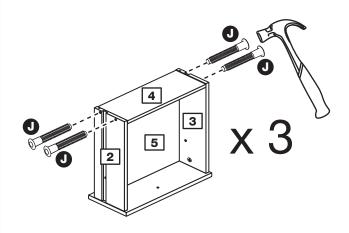


Step 6

Attach the handles

Attach a handle **Q** to each of the drawer fronts **1** using screw **F**.


Note: Do not overtighten the screw.

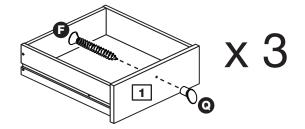

Step 7

Fit the wedgefixes

Turn the drawer assemblies over and slide 2 wedgefixes (a) into the front and back grooves, as shown, and tighten up the screws.





Step 8


Prepare the left side

a: Place 3 runners **N** on the left side **6** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **1**.

b: Slide the runner N back the other way and fit the 2nd screw into the corresponding hole in the left side 6.

onto the left side 6 making sure that the slot is facing towards the finished front edge.

Push a rail holder M into the left side 6. Make sure that it is fitted straight, in line with the panel edges and then secure with screw 6.

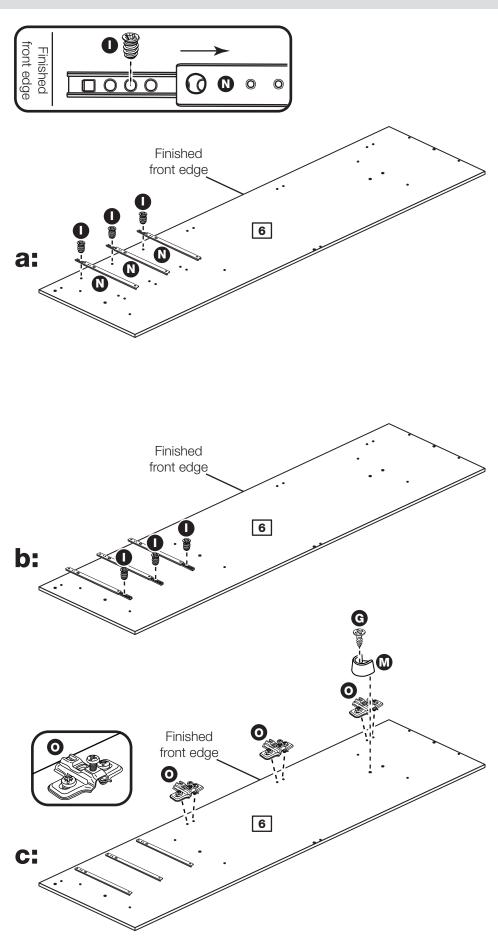


Step 9

Prepare the right end

Push a rail holder M into the right end 7. Make sure that it is fitted straight, in line with the panel edges and then secure with screw G.

Fit 3 hinge plates • onto the right end 7, making sure that the slot is facing towards the finished front edge.

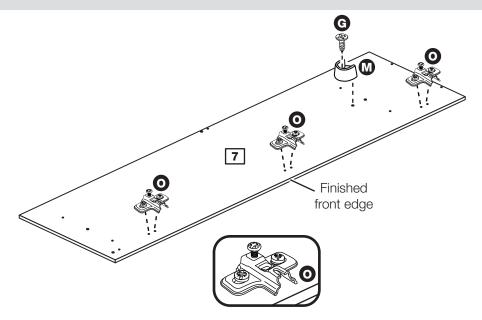


Step 10

Prepare the top

Tap 2 wooden dowels **D** into the top **8**.


Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

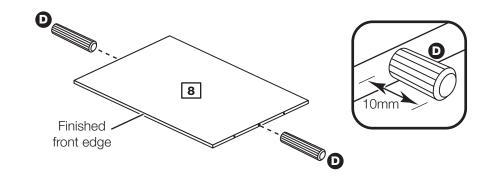

Step 11

Fit the top to the right side


Push the top 8 onto the right side 7 and secure it with 2 screws 1.

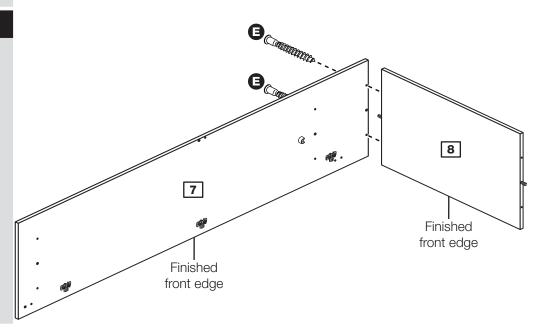

Step 12

Prepare the base

Tap 2 wooden dowels **D** into the base **9**.

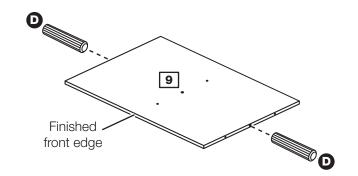


Step 13

Fit the base

Push the base 9 onto the right side 7 and secure it with 2 screws



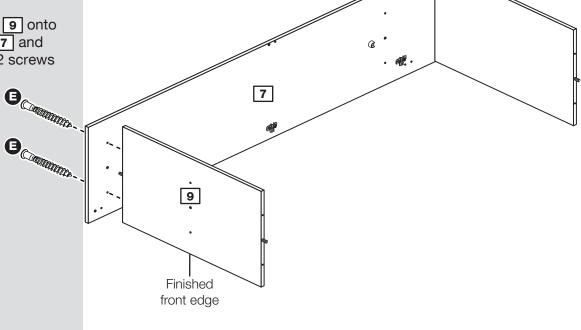


Step 14

Prepare the fixed shelf

Tap 2 wooden dowels **D** into the fixed shelf **11**.


Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

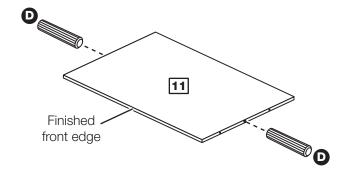

Step 15

Fit the fixed shelf

Push the fixed shelf 11 onto the right side 7 and secure it with 2 screws 2.

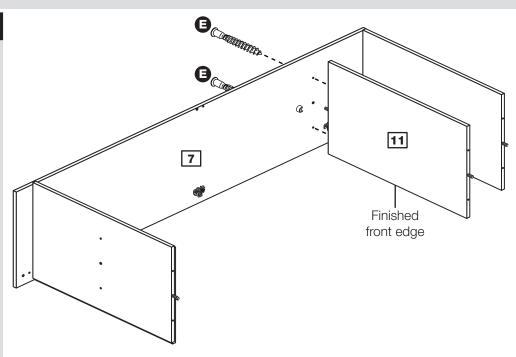


Step 16

Prepare the plinth and back rail

Tap 2 wooden dowels **(D)** into the plinth **(12)**.

Tap 2 wooden dowels **D** into the back rail **13**.

Note: The back rail has a finished top edge.

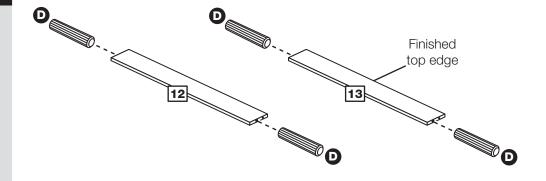


Step 17

Fit the plinth and back rail

Push the plinth 12 onto the right side 7 and secure it with screw 3.


Push the back rail 13 onto the right side 7 and secure it with screw **E**.

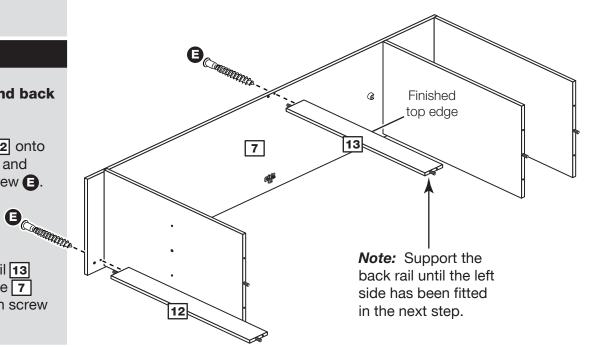

Step 18

Fit the left end

Push the left side 6 onto the top 8, the base 9, the fixed shelf 11, the plinth 12 and the back rail 13 and secure with 8 screws **E**.

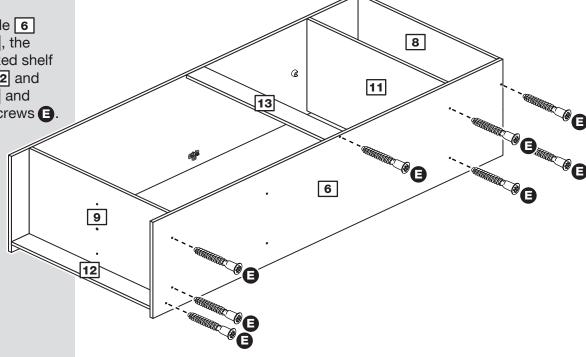

Step 19


Prepare the upright


a: Place 3 runners N on the upright 14. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw 1.

b: Slide the runner N back the other way and fit the 2nd screw into the corresponding hole in the upright 14.

Tap 2 wooden dowels **D** into the upright **14**.

Insert 2 large locking nuts **©** into the upright **14**].

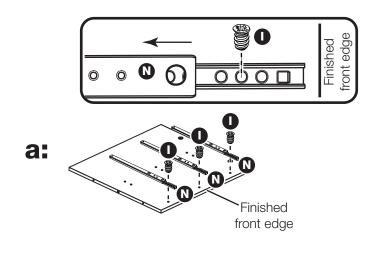

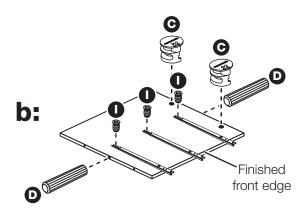


Step 20

Prepare the internal shelf

Screw 2 metal dowels (A) into the internal shelf [15].

Tap a wooden dowel **D** into the internal shelf **15**.

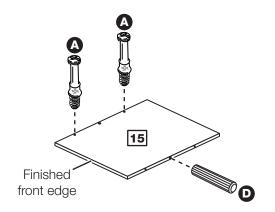


Step 21


Fit the top

Push the internal shelf **15** onto the upright **14**.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the upright **14**.

Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.






Step 22

Fit the upright and internal shelf

Push the upright 14 and internal shelf 15 onto the assembly and secure them with 4 screws 2.

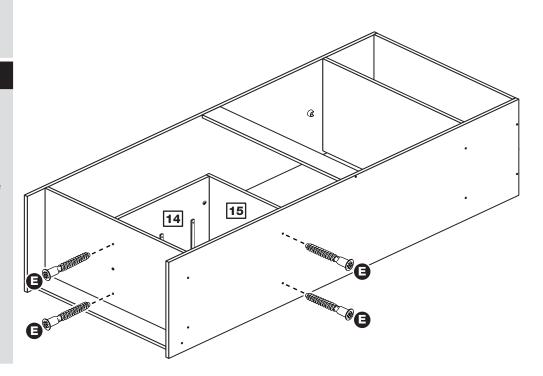

Step 23

Fit the back


a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Place the back 18 onto the unit.

Nail **()** around the outside edges of the back **18**.

Note: Nails should be spaced about 150mm apart.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

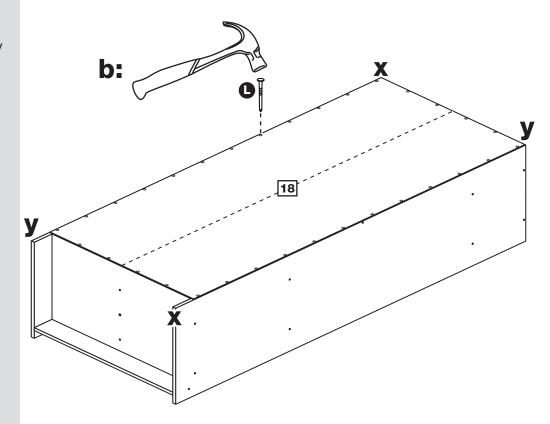

Step 24

Fit the plastic nails

Tap 2 plastic nails (s) into the bottom edge of each of the sides [6] and


7.



Carefully stand the unit up for the next step.



Warning: The unit is heavy. Lift with care.

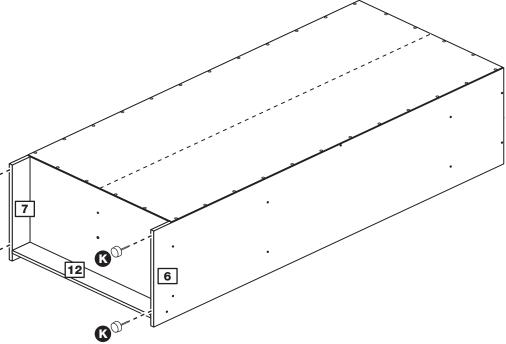

Step 25


Fit the hanging rails and drawers

Push the hanging rail 10 into the rail holders M.

Starting with the bottom drawer, slide both the runners N forward and locate the drawer sides 2 and 3 between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners N.

Working from the inside of the drawer, insert 2 screws the through the drawer sides and out into the 2nd threaded hole in the runner.

Note: Do not overtighten the screws **1**. If they catch on the runner you may need to loosen them slightly.

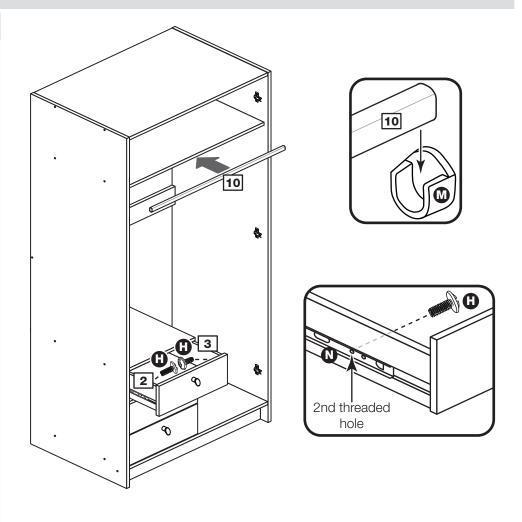


Step 26

Prepare the 2 doors

Push fit 3 hinges **P** into each of the 2 doors **16** and **17**.

Secure each hinge with 2 screws **G**.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

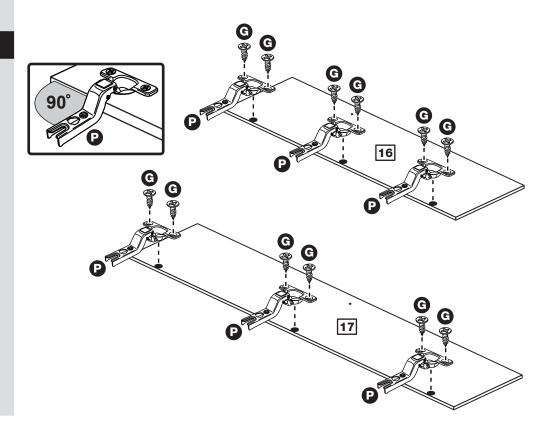

Step 27

Fit doors and handles

Note: The easiest way to attach each door 16 and 17 is to fit the top hinge first, then align and fit the other hinges.

onto the front part of the hinge plate ①.


The recess at the bottom of screw B goes into the slot in the hinge plate.

b: Keep the hinge P FLAT against the hinge plate O as you slide it across as far as it will go. Tighten screw A.

C: The hinge P must be flat against the hinge plate O prior to any adjustment.

d: The hinge P must NOT be AT AN ANGLE to the hinge plate when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

e: Attach a handle **@** to each door **16** and **17** using screws **F**.

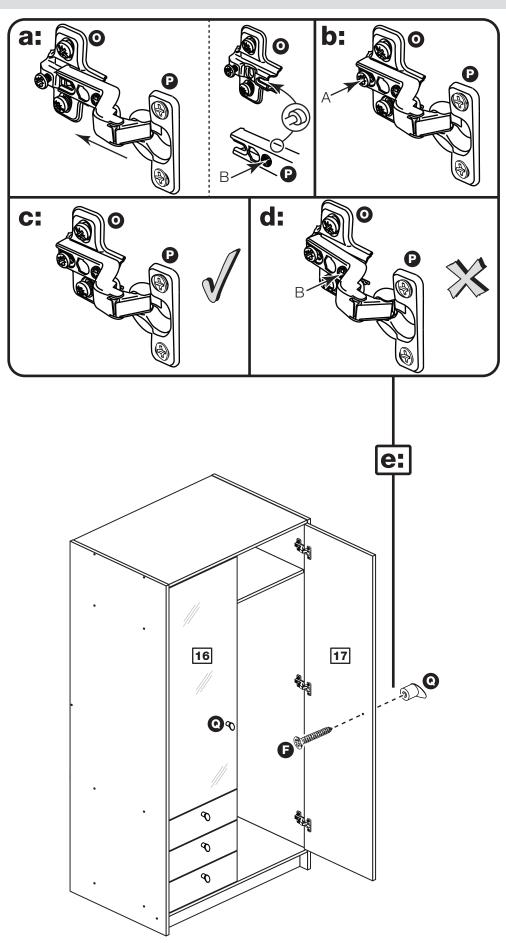

Step 28

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown.

Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

C: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C.
To move door 'in' tighten screw C.

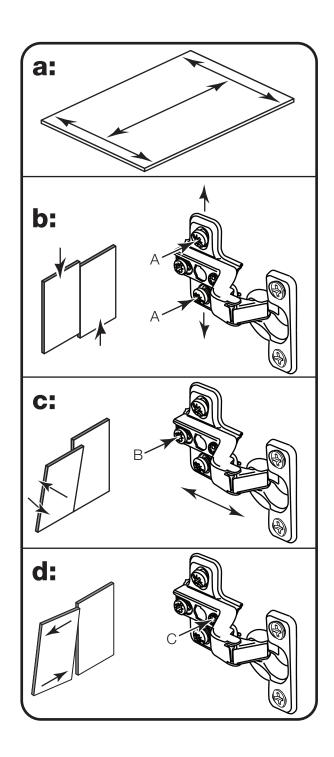

Step 12


Fit the overbalance protector

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete

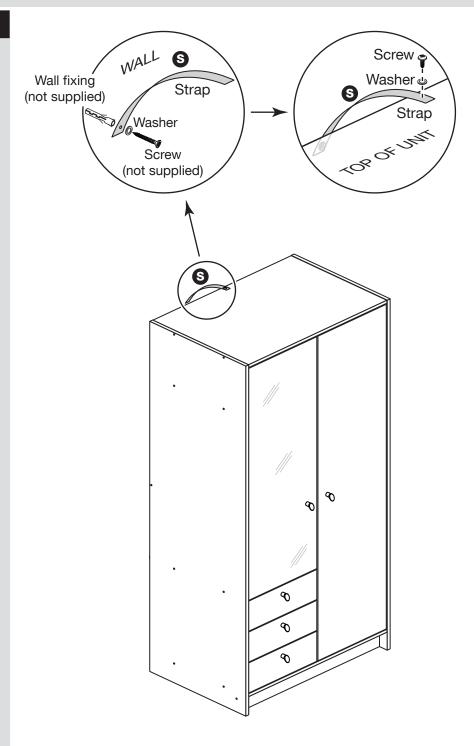

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW