
Somersham Oak Bathroom Wall Cabinet

Assembly Instructions - Please keep for future reference

404/6895



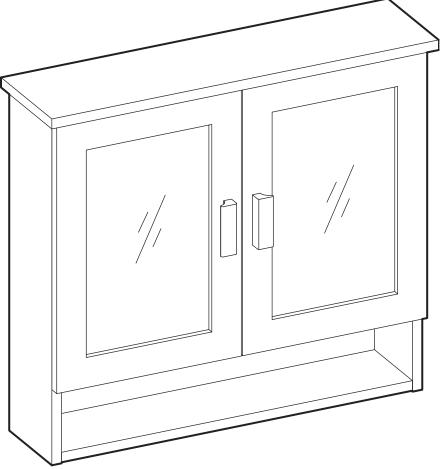

Dimensions

Width - 59cm

Depth - 15.5cm

Height - 53cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800



Safety and care advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the panels, this could cause damage.
- Assemble the unit as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.
- **Note:** Only apply the glue once you are sure of the assembly.
- The wall plugs supplied are suitable for solid walls only. It is important that the correct type of fixing is used for your wall, seek professional advice if in doubt.
- Parts of the assembly will be easier with 2 people.
- If using power tools, please follow the safety instructions supplied with the tools.



 We do not recommend the use of power drill/ drivers for inserting screws, as this could damage

the unit. Only use hand screwdrivers.

- *Warning:* Before drilling, check the wall for hidden pipes and cables.
- Dispose of all packaging carefully and responsibly.

Glue safety - Take care when using glue, please follow the advice below

Skin contact: Remove contamination by washing with soap and water. This procedure should also be followed prior to eating and drinking.

Eye contact: Rinse immediately with clean water for 15 minutes and seek medical advice.


If swallowed: Seek medical advice immediately. If possible show product information or label to the medical advisor.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as a reference throughout the assembly. Keep this page with these instructions for future reference.

Please check you have all the panels listed below



1 Left side panel



2 Right side panel



3 Bottom panel




4 Shelf



5 Top panel




6 Adjustable shelf



7 Back panel



8 Back rail



9 Door panel x 2


Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly . In some cases more fittings may be supplied than are required.

	B	©
Locking Pin x 4	Locking Nut x 4	Hinge x 4
Ф4 x 12mm Screw x 16	Wooden handle x 2	Metal Support x 4
Ф4 x 30mm Screw x 4	Wooden dowel x 16	Ф4 x 45mm Screw x 2
J Derever	K 9	
Wall plug(for solid wall only) x 2	Cam cap x 4	Screw cap x 4
M		
Screw cover x 16		

Tools required



Phillips screwdriver (medium & large)



Flatblade screwdriver (medium)




6mm Suitable drill bit (for use with wall plug)



Hammer Drill (Only for dril hole on the wall)



Small hammer



Ruler/tape measure



Eye protection (when using a hammer or glue)

Ruler - Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170

Step 1

Fitting locking pin

Screw 4 x locking pin into top panel , left side panel and right side panel .

Step 2

Assembling side panel


NOTE:It would be useful to ask someone to help you at this stage.

Insert wooden dowel ① to bottom panel ③ ,shelf ② and back rail ⑧ as shown.

Attach lelf side panel 1 and right side panel 2 to bottom panel, shelf and back rail as shown.

Insert locking nut **(B)** into bottom panel .

Use a screwdriver to turn the locking nut clockwise to lock.

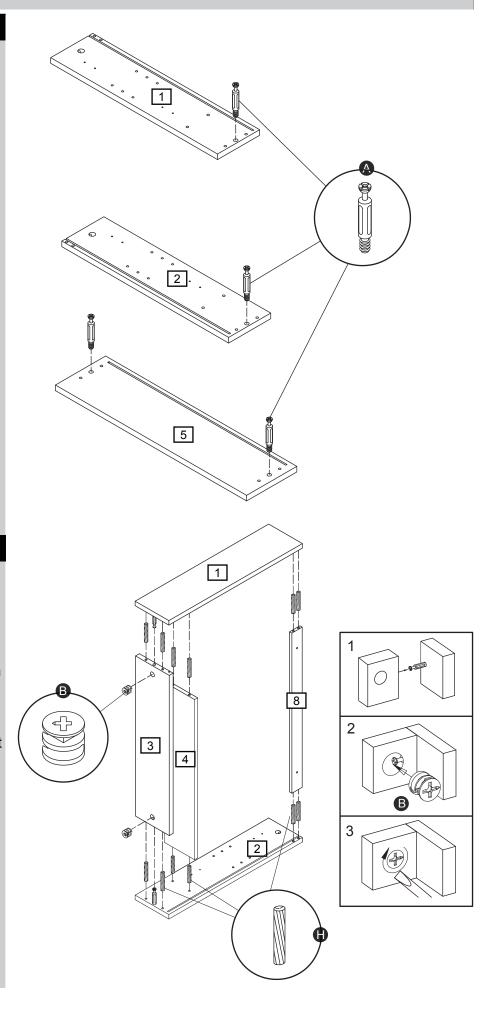

Step 3

Assembling back panel and top panel

NOTE:It would be useful to ask someone to help you at this stage.

Insert wooden dowels ① to lelf side panel ① and right side panel ② .

Slide down back panel 7 along grooves in lelf side panel and right side panel .

Carefully place the top panel 5 onto the unit. Insert locking nut 3 into left side panel and right side panel.


Tighten the locking nut to secure the unit.

7 7 2.

Step 4

Assembling adjustable panel

Insert metal supports into left side panel and right side panel. Carefully put the adjustable shelf on it.

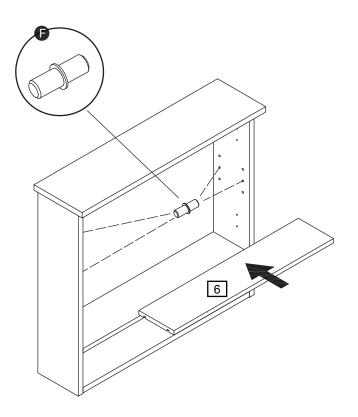

Step 5

Assembling door panel

NOTE:It would be useful to ask someone to help you at this stage.

a:


Use 12mm screws **①** to fix hinges **②** onto door panel **⑤** .


Use 30mm screws **6** to fix handle **a** onto door.


b:
Carefully attach door panel 9
to the unit by fixing hinge onto side panel with 12mm screws **b**.


Adjust the door up or down, left or right, in or out if needed as shown:


- 1. Loosen two screws **D**and adjust the door up or down, then fix screws **D** again.
- 2. Loosen screw and adjust the door in or out, then fix screw again(loose screw clockwise first help to adjust door in or out if needed).
- 3. Loosen screw and adjust the door left or right, then fix screw again.

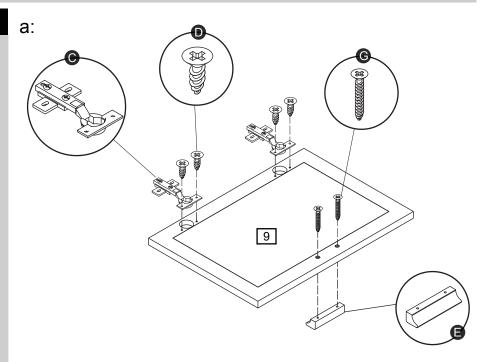

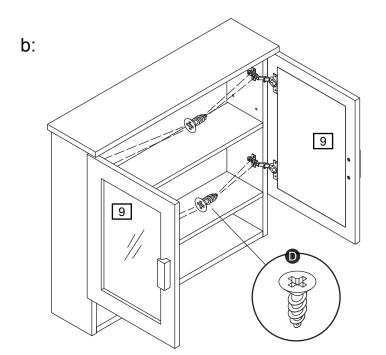







Step 6

Finishing the unit


NOTE:It would be useful to ask someone to help you at this stage.

a:

Use cam caps **(**S to cover the visible cams as shown.

Use screw caps to cover the visible screws as shown.

Use screw covers **M** to cover the visible screws of door panel as shown.

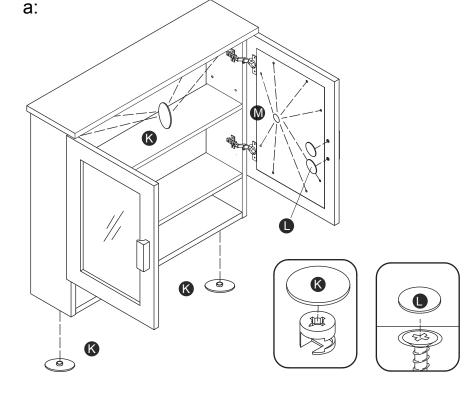

b:

After above assembly, please double check and make sure all screws are firmly fixed before use.

Use 45mm screw and wall plug

to fix the unit on the wall as

NOTE:If you have damaged or missing components, call the Customer Helpline:03456 400800 Argos LTD,489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

b:

shown.

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule: Always use a larger screw and wall plug if you are not sure.
- **2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- **3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- **4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- **5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug




Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug




For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug




For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug




For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug



For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads



For use with heavier loads such as TV & HiFi speakers and satelite dishes etc.



Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.

SAFETY WARNING INFORMATION

Keep these instructions for future use:

WARNINGS

*Do not place very hot or very cold items against or in close proximity to glass surface unless an adequately thick insulating material is used to prevent such items from coming into contact with the glass.

*Do not strike the glass with hard or pointed items.

- * Do not sit or stand upon horizontal glass surfaces.
- *When cleaning glass panels or mirrors use a damp or leather with washing up liquid or soft soap if necessary; do not use washing powders or any other substance containing abrasive since these substances scratch glass.

*It is essential that this unit is fixed to a wall with the fixings provided.

BS7449: 1991

Catalogue Number:		404/6895 (D)	
Manufacture date:	Apr.	23th,	2015
Retailer:	Argos	1	
Retailer address:	489-49	99 Avebi	ury Boulevard
	Saxon	Gate W	est

This unit contains <u>film backed</u> mirror of nominal thickness of <u>3</u> mm

Central Milton Keynes

Bucks, MK9 2NW

This unit contains <u>safety film backed mirror</u> of a nominal thickness of 3 mm, which is not required to be classified to BS6206 Class C.

If a glass is chipped or broken replace with glass of the type described on this label. Consult the manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the model number, and batch number or date of manufacture.