Exec Midback Leather Chair - Black

Assembly Instructions - Please keep for future reference | **408/7081**



Dimensions

Width - **60.5 cm**
Depth - **58.5 cm**
Height - **90-99.5 cm**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts,call the **customer helpline: 03456 400800**

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and fittings.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area,small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product during assembly, this could cause damage.
- Assemble the item as close to its final position(in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 pepole.



- We do not recommend the use of power drill/drivers ***for inserting screws***, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- To avoid any risk of suffocation to animals or children dispose of the plastic bags immediately.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components

Please check you have all the components listed below


1 5 x Castor



2 1 x Base




3 1 x Gas lift




4 1 x Seat support



5 1 x Seat cushion



6 1 x Backrest



7 2 x Armrest



Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 03456 400800**

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A 4 x Screw



1/4 x 20mm

B 2 x Screw



1/4 x 16mm

C 4 x Washer




Φ6 x 16 x 1mm

Tools required



Allen key 1 X M5 70mm/70mm

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1

Fitting the Base


a: Push all the five Castors 1 into the underside of the Base 2 .

***NOTE*: Ensure the Casters are fully inserted.**


b: Insert the Gas lift 3 into the base.


***NOTE*: Ensure the Gas lift is fully inserted and well fitted.**

a:

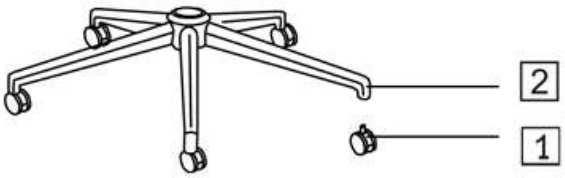

b:

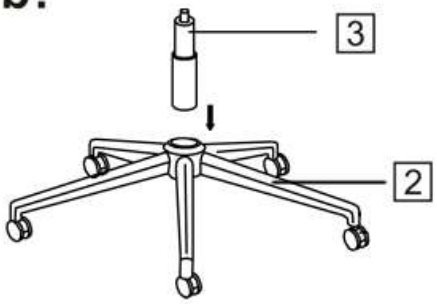

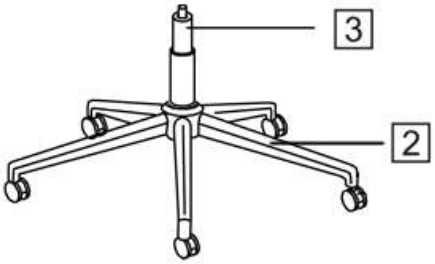


Step 2

Fitting the Seat support

Use screws Ⓐ + Ⓒ to fix the Seat support 4 onto the Seat cushion 5 . Ensure the seat support is firmly fitted onto the seat cushion.

The front on the seat plate should be same as the front on the seat

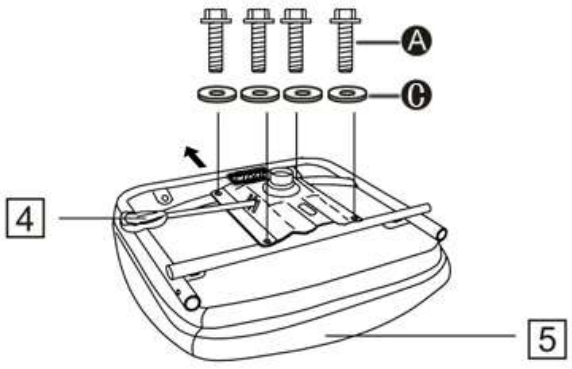

Assembly Instructions

Step 3


Fitting the backrest and armrest

***NOTE*: It would be useful to ask someone to help you at this stage.**

a: Insert the back's steel pipe into the seat's pipe

b: Use screw Ⓑ to fit the armrest 7 on each side.

a:

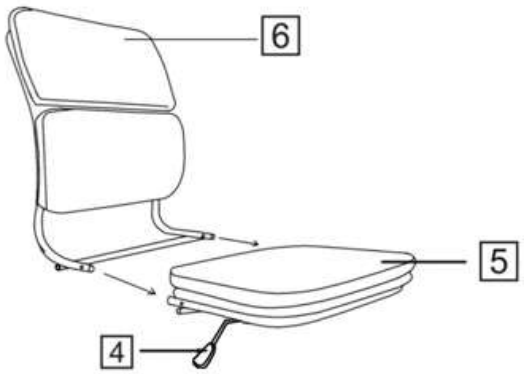


b:



Step 4

Finishing the Unit

Carefully locate 4 onto the base unit and tighten seat and gas lift after assemblying.

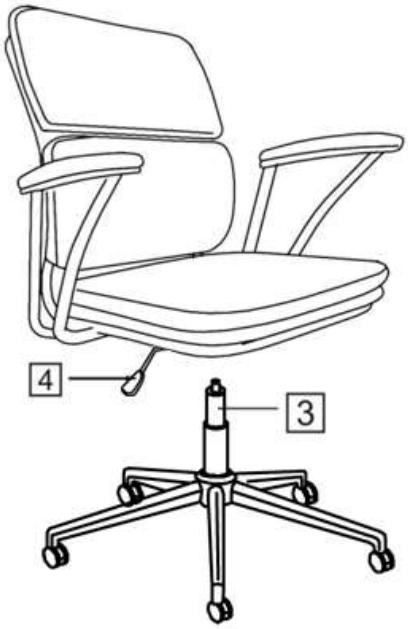

NOTE: If you have damaged or missing components, call the **Customer Helpline: 03456 400800**
Argos Limited Group, 489-499 Avebury Boulevard, Central Milton keynes, MK9 2NW