
DR8250790

Bergen 180 Mirror doors

Assembly Instructions Please keep for future reference

249/6265 Mirror doors



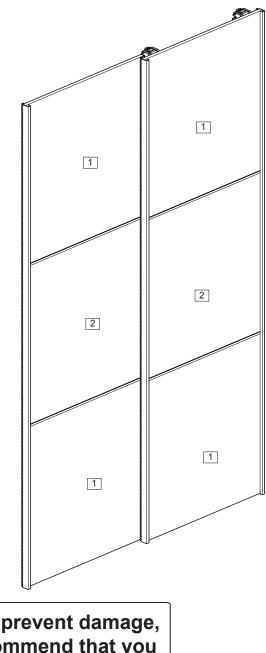

Dimensions

Width - 180cm Depth - 6.7cm Height - 195.2cm Tip : To prevent damage, we recommend that you build your unit on the carton(s) it was packed in.

249/6265 MIRROR

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit: **www.argos-support.co.uk** or email: **Help@ClickSpares.co.uk** (quoting your original order number) Alternatively, call the Spares Helpline on: **0370 112 1928** For any other queries please contact the Customer Helpline on: **0345 640 2020**

Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.



•To reduce the likelihood of damaging your product please ensure that your

power drill is set on a low torque setting.

• Dispose of all packaging carefully and responsibly.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

• Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts • Regularly check and ensure that all bolts and fittings are tightend properly.

Instruction video



• This manual is provided with an additional instruction video. If the icon on the right is displayed at a particular step in the manual, Follow the link: http://nlink.nu/vid02 Or scan the QR code on the left with your phone.




See page 2 for link to instruction video!


Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels For damaged or missing parts, please visit: www.argos-support.co.uk or email: Help@ClickSpares.co.uk

Please check you have all the panels listed below

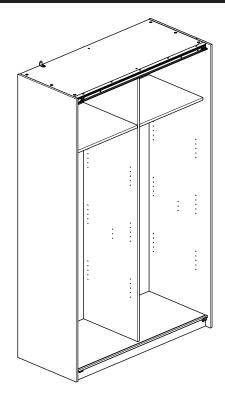



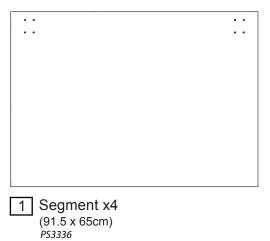

2 Segment middle x2





Components - Fittings

For damaged or missing parts, please visit: www.argos-support.co.uk or email: Help@ClickSpares.co.uk

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

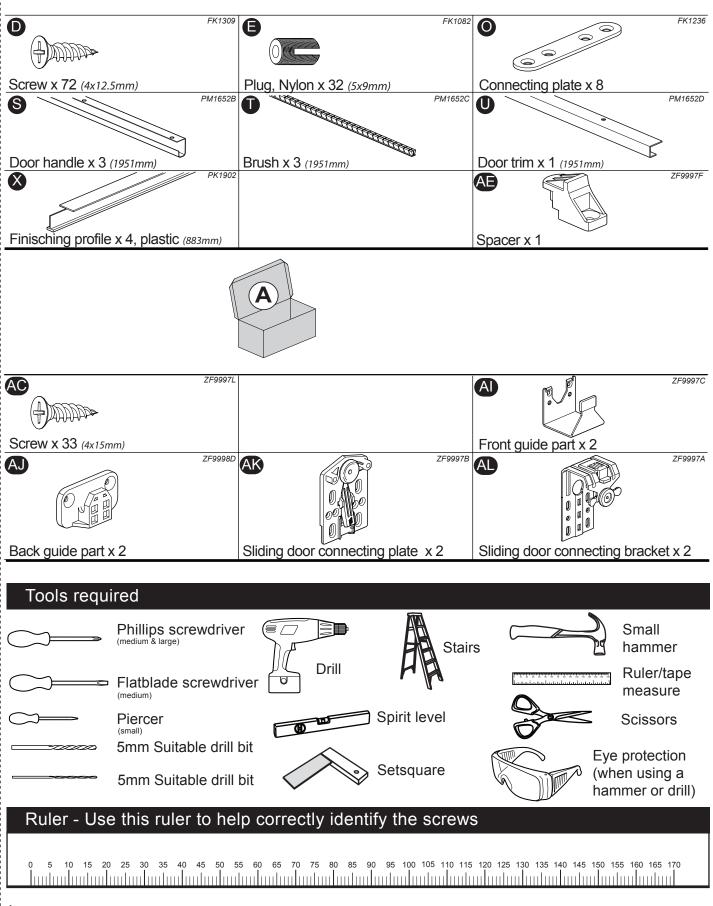

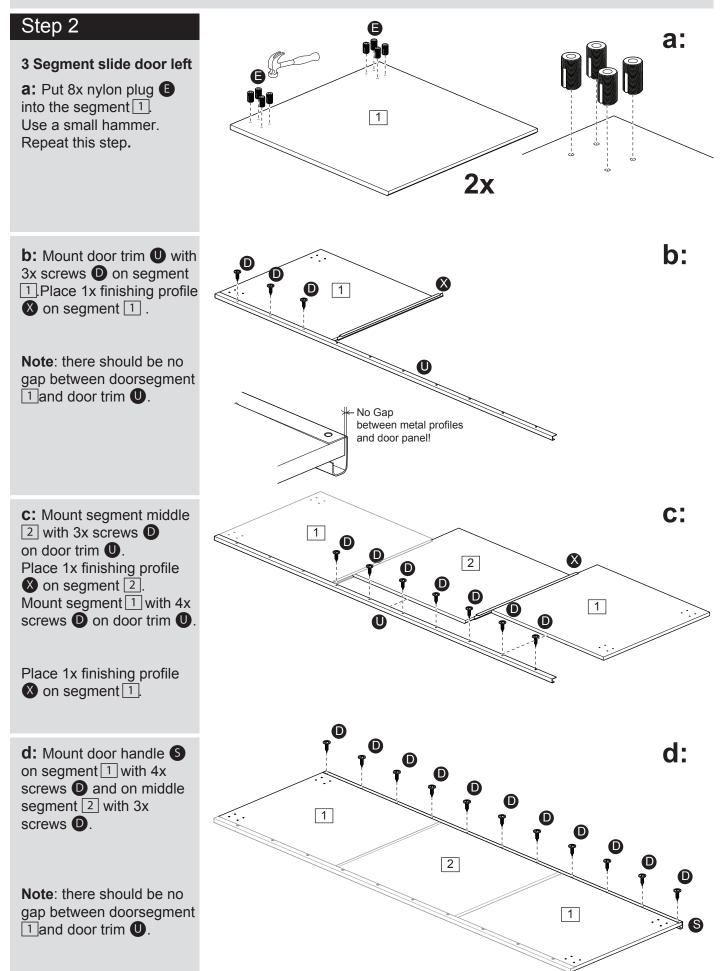


Step 2


3 Segment slide door left

e: Mount 4x connecting plate •, each with 2x screws • on segment 1 and 2x screws • on middle segment 2.


Remove protective film from door handle **S**. Stick 1x brush **1** onto door handle **S** by partially removing the cover from adhease as brush is applied.

f: Upside. Mount 2x Sliding door connecting plate AK squarely by using the guidemarks in the plate AK, each with 6x screws AC on segment 1. Attach 1x spacer AE with 1x screw AC on the brush side sliding door connecting plate AK.

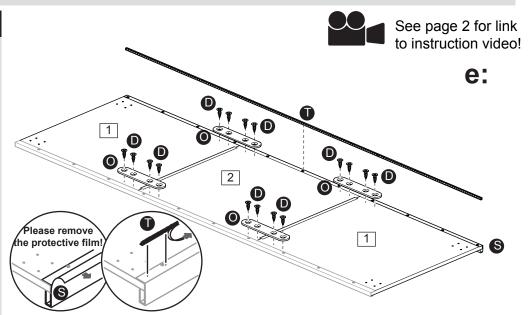


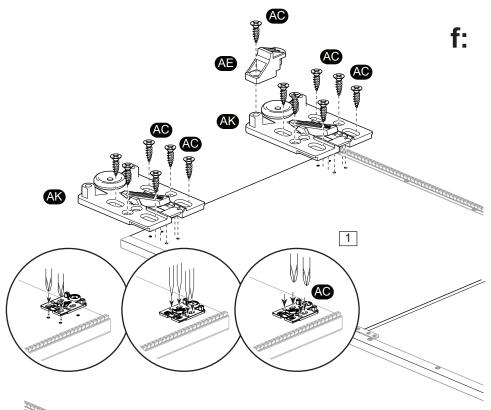

g: Underside. Mount 2x back guide part AJ, each with 2x screws AC on segment 1.

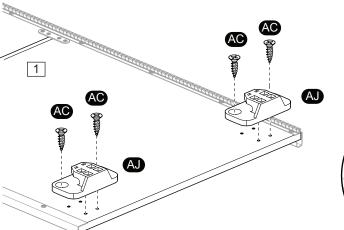

g:



Step 3

Place left slide door

2 people are required for step 3a and 3b.


a: Hook the 2x back guide part (A) into the plastic guide rail (B).


See page 2 for link to instruction video!

a:

a: Detail.

The hook of the back guide part (AJ) should be in the front guide of the plastic guide rail (R)




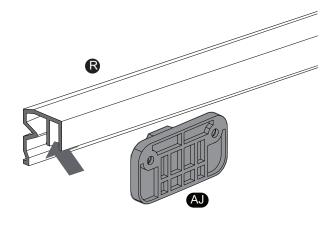

Step 3

Place left slide door

b: Hook Sliding door connecting plate **AK** on metal guide rail **Q**.

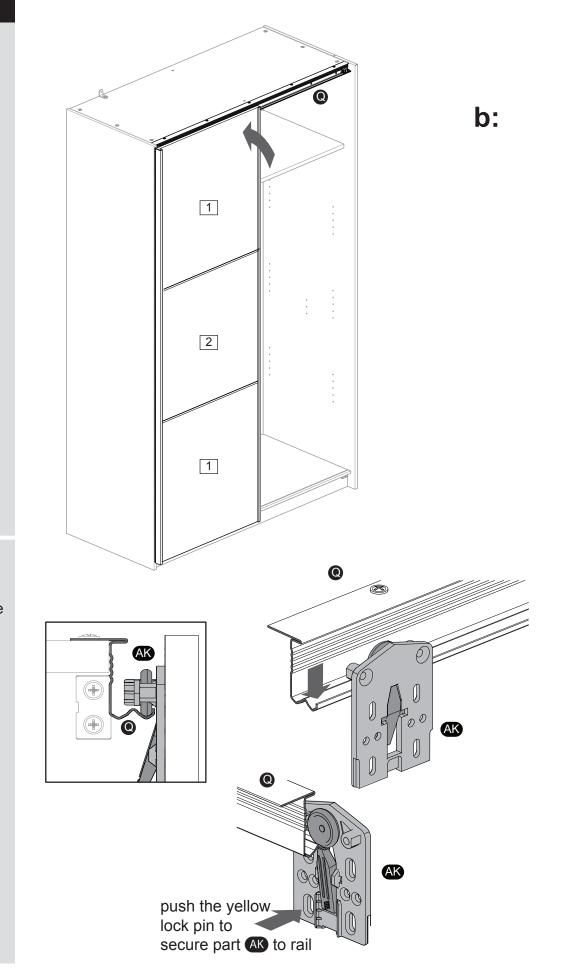

b: Detail. The wheel of the slidingdoorconnecting plate **AK** should be in the front guide of the metal guide rail **Q**.

To lock the door, lock the Sliding door connecting plate AK on the guide rail Q with the locking pawl.

Step 4 8 a: 6 ٩Ļ 3 Segment slide door right a: Put 8x nylon plug into the segment $\boxed{1}$. Use a small hammer. 1 Repeat this step. **2**x b: Mount door handle S b: with 4x screws **D** on D segment 1. **D** 1 Place 1x finishing profile S on segment 1. Note: there should be no S gap between doorsegment 1 and door handle S. No Gap between metal profiles and door panel! c: Mount segment middle C: **1 D** 2 with 3x screws **D** on door handle **S**. D X 2 D Place 1x finishing profile \bigotimes on segment 2. D D Mount segment 1 with 1 D 4x screws **D** on door D handle**S**. s s D d: d: Mount door handle S on segment 1 with 4xD screws **D** and on middle D D segment 2 with 3x 1 D screws **D**. Note: there should be no D 2 gap between doorsegment D 1 and door handle S. 1

Step 4

3 Segment slide door right


e: Mount 4x connecting plate •, each with 2x screws • on segment 1 and 2x screws • on middle segment 2.

Remove protective film from door handle S. Stick 2x brush T onto 2x door handle S by partially remove the cover from adhease as brush is applied.

f: Upside.

Mount 2x sliding door connecting bracket AL squarely by using the guidemarks in the plate AL, each with 6x screws AC on segment 1.


g: Underside. Mount 2x front guide part (A), each with 2x screws (AC) on segment [1].

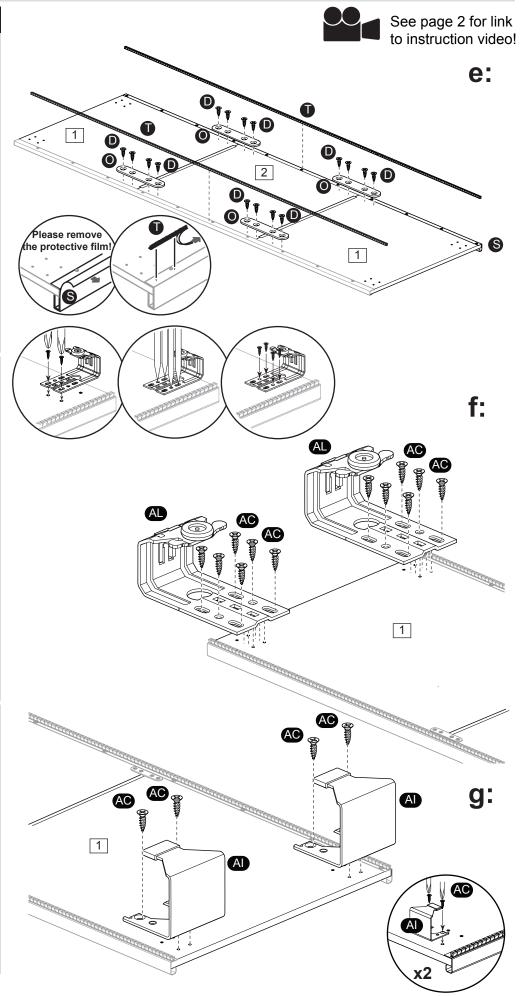

Step 5


Place right slide door


a: Hook the 2x front guide part (A) into the plastic guide rail (B).

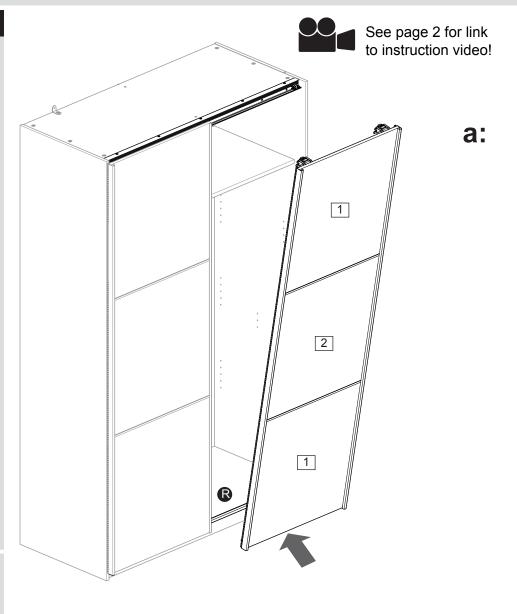

a: Detail.

The hook of the rear guide part A should be in the front guide of the plastic guide rail **R**




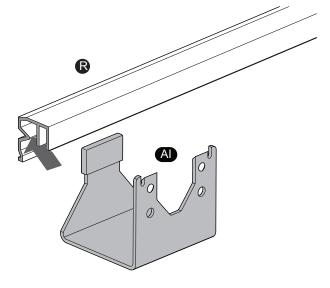

Step 5

Place right slide door

b: Hook the sliding door connecting bracket (AL) on metal guide rail **Q**.

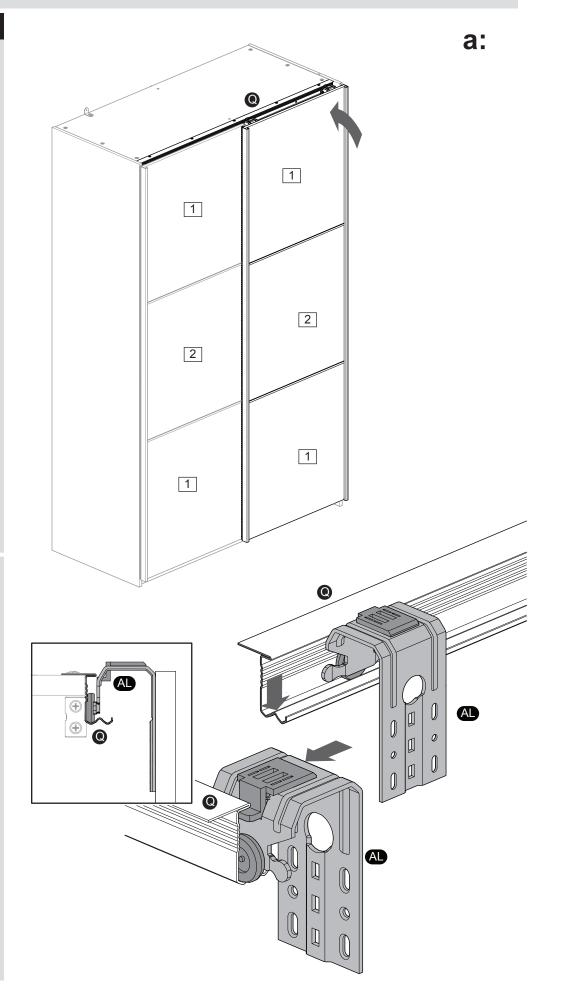

b: Detail.

The wheel of the sliding door connecting bracket (AL) should be in the rear guide of the metal guide rail (Q).

To lock the door, lock the sliding door connecting bracket (AD on the guide rail (Q) with the locking pawl.