
2 SEATER SWING HAMMOCK

Assembly Instructions - Please keep for future referenc e

450/4272

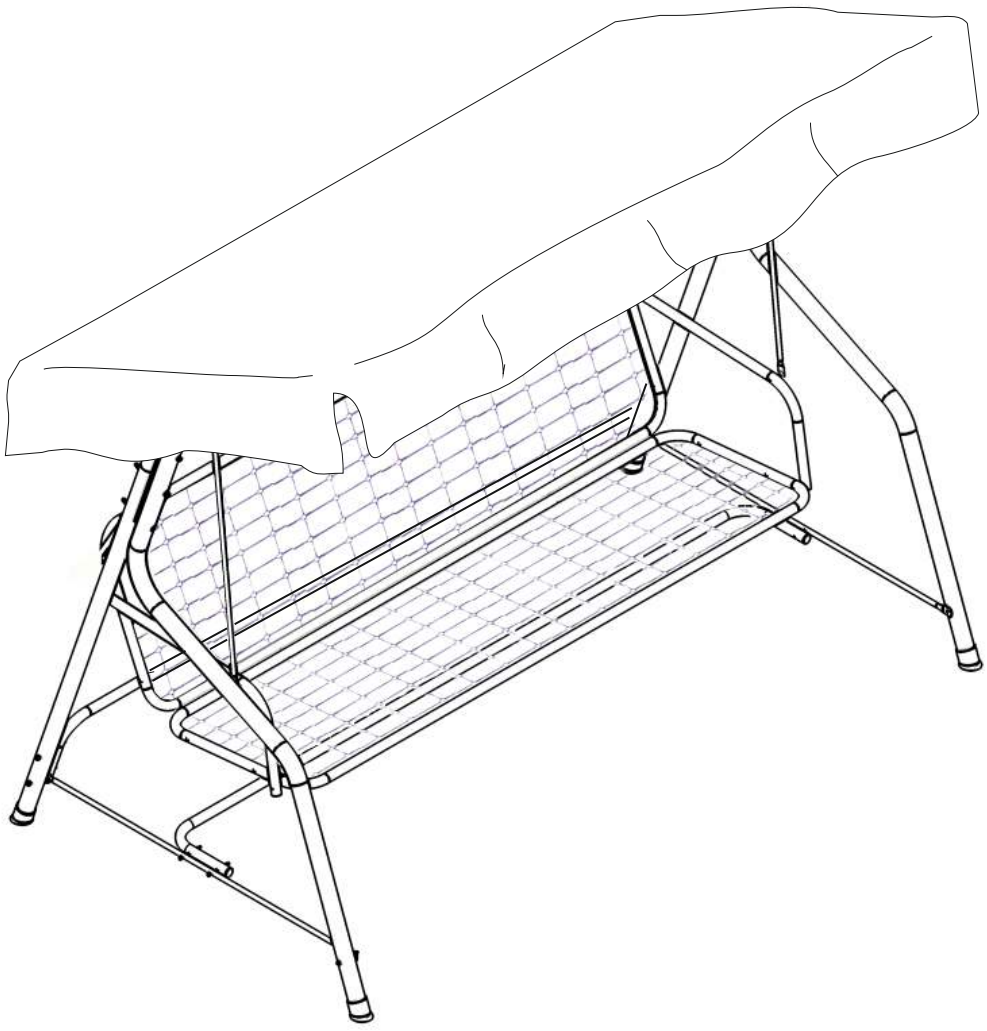

Dimensions

Width - 151 cm
Depth - 113 cm
Height - 154 cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**
Argos = 0345 6400800

Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on the following pages.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• During assembly do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.



• To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

• Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts


• Regularly check and ensure that all bolts and fittings are tightend properly.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

Customer Helpline: Argos = 0345 6400800


Please check you have all the components listed below

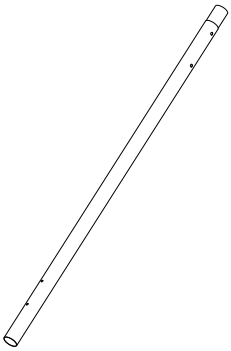


1 Back leg x 2 (137.5x4.5 cm)

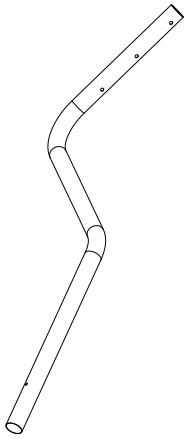


2 Front leg x 2 (150x34 cm)

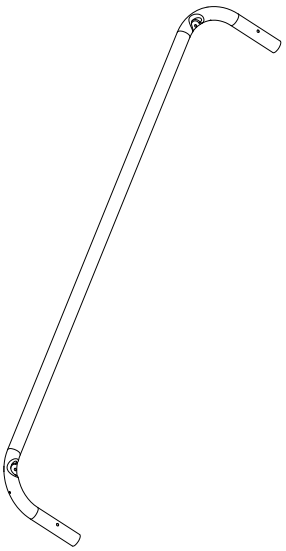


3 Top x 1 (178 x 35 cm)




4 Roof bar x 2 (118 x 17 cm)




5 Roof pole x 2 (169 x 1.5 cm)

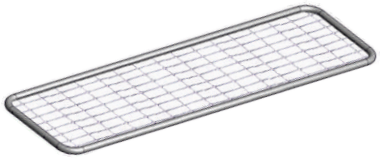


6 Seat support x 2 (150 x 48 cm)




7 Amrest x 2 (66 x 21 cm)




8 Seat support bar x 6
(79 x 1.6cm)

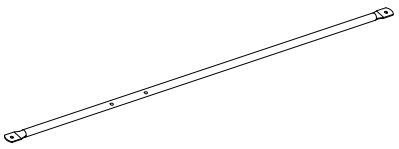

9 Side bar x 2 (104 x 2.5 cm)

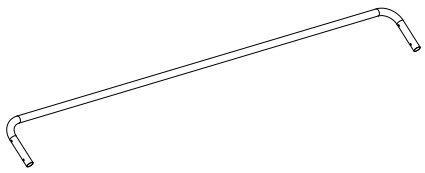

10 Cross bar x 2 (178 x 21 cm)




11 Canopy x 1 (178 x 60.5 cm)

Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A




M8 x 10cm Screw x 6

B




M6 x 8cm Screw x 4

D




M6 x 6cm Screw x 8

E




M6 x 5,5cm Screw x 4

F



M6 x 4cm Screw x 4

G

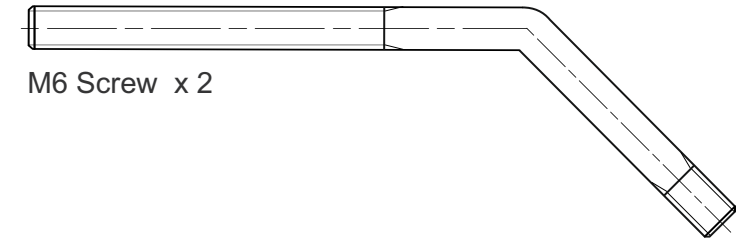


M6 Screw x 2


Tools required



(Supplied)

Ruler - Use this ruler to help correctly identify the screws


















The screws length is measured from the head to the point (30mm screw shown) .

Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

H  M8 Nut x 6	**I**  M6 Nut x 22	**J**  M6 Nut x 2
K  Ø8 x 12	**L**  Ø6 x 36	**M**  Ø6 x 2
N  Spring x 2	**O**  28 x 2.5 cm x 2	**P**  Ø45 x 2
Q  Ø45 x 4	**R**  x 2	**S**  x 4
T  x 8	**U**  x 2	**V**  Ø28 x 8

Assembly Instructions

Step 1

Insert the plastic foot Q onto the end of the back legs 1

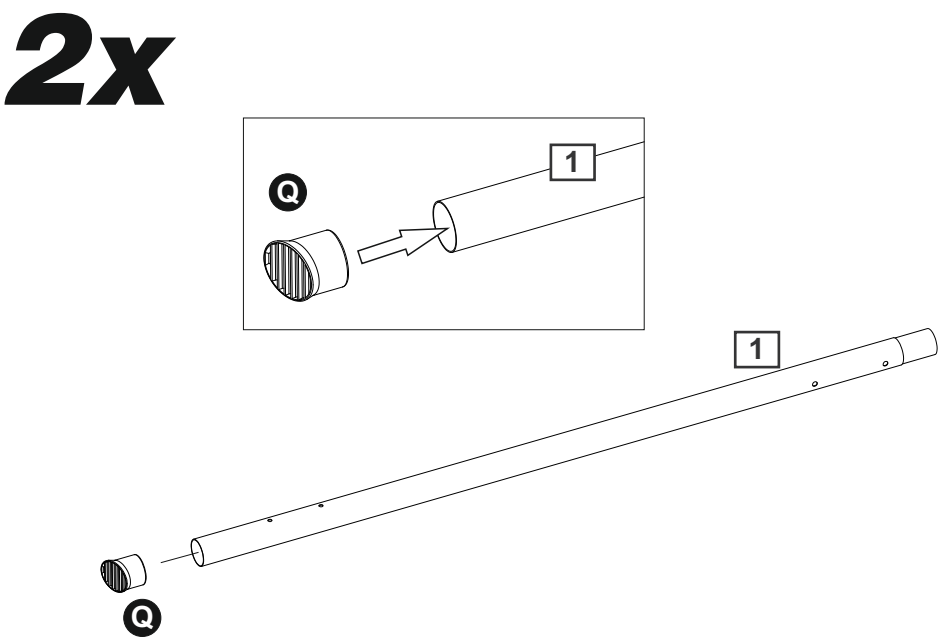


Step 2

a: Insert the plastic cap P into the end of front legs 2

Note:
Pay attention to the position of the holes

b: Insert the plastic foot Q onto the other end of the front legs 2

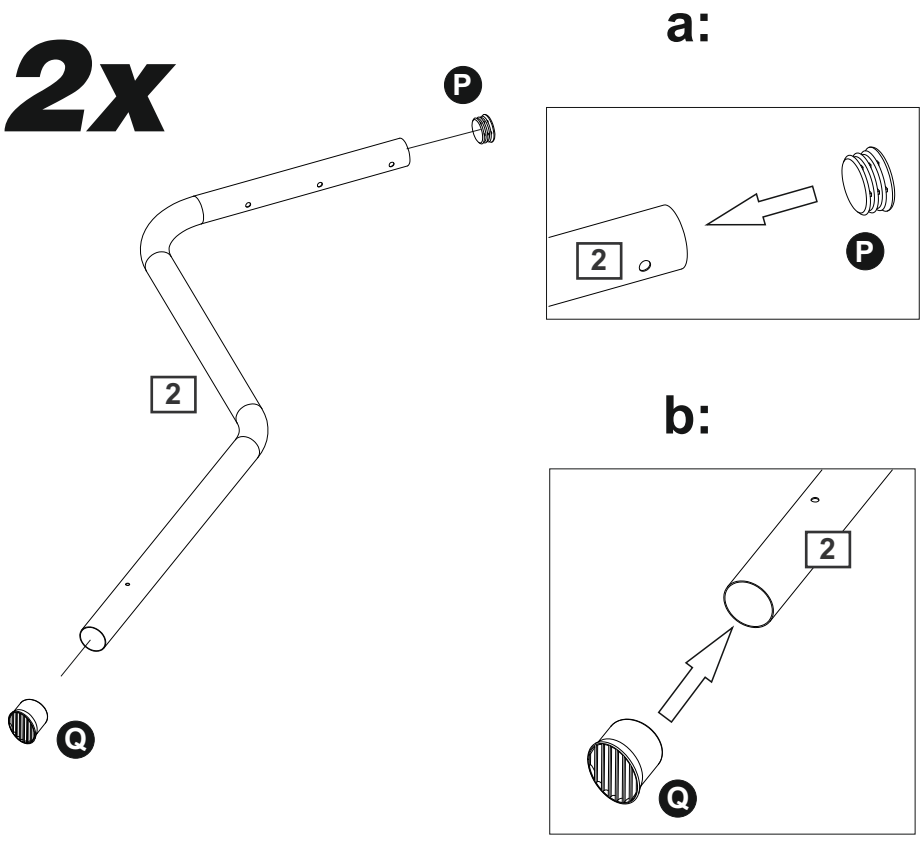


Assembly Instructions


Step 3

Assemble back leg 1 and front leg 2 together with plastic spacer O using screws A , washers K and nuts H .

Note:
Do not fully tighten bolts.
Repeat with the remaining legs.


2x

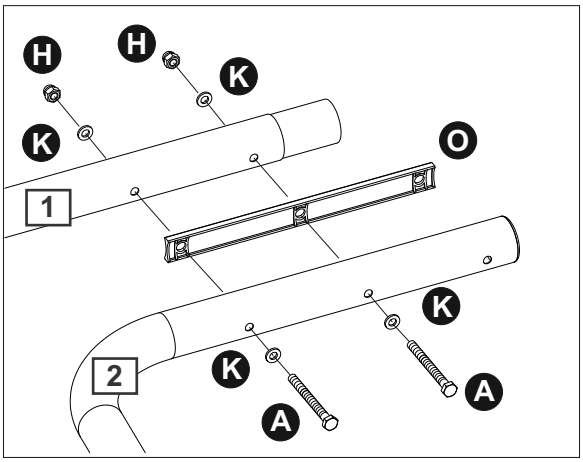


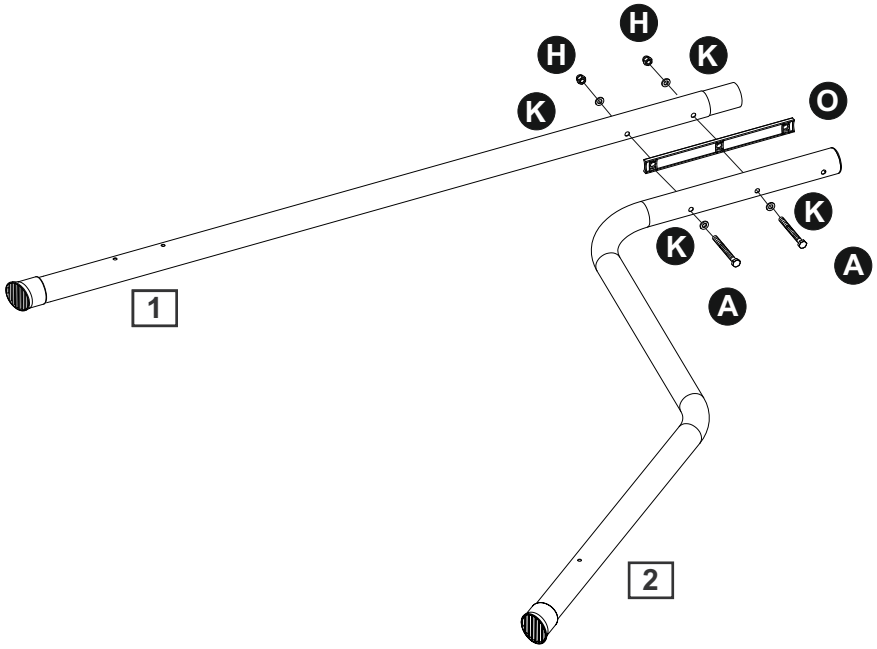

Step 4

Assemble the top 3 with the legs using screws A , washers K and nuts H .

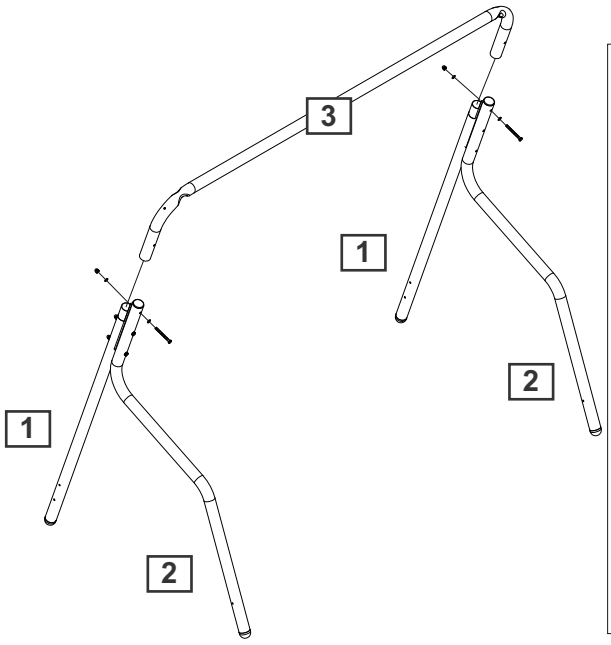


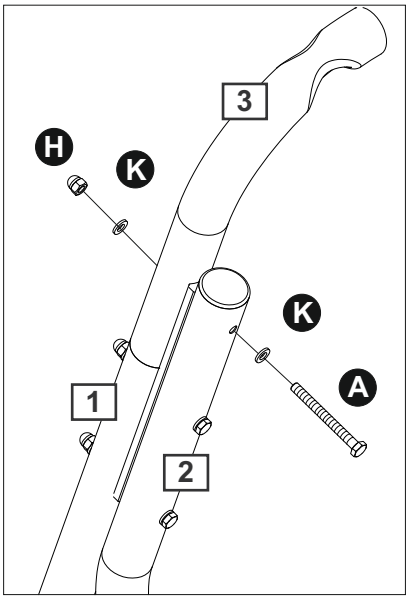

Assembly Instructions

Step 5


fix the plastic caps (S) onto the side bar [9]

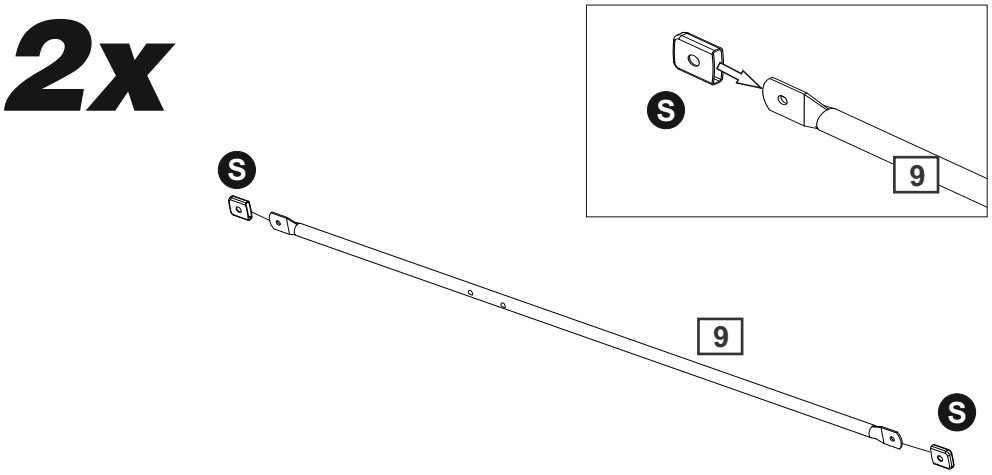



Step 6


Assemble the side bar [9] with the legs using screws (D), washers (L) and nuts (I)

Note:
Pay attention to the position of the holes

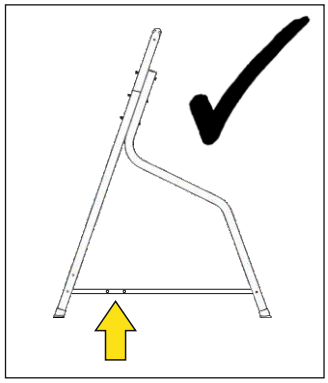

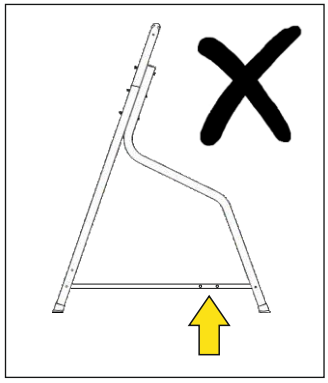


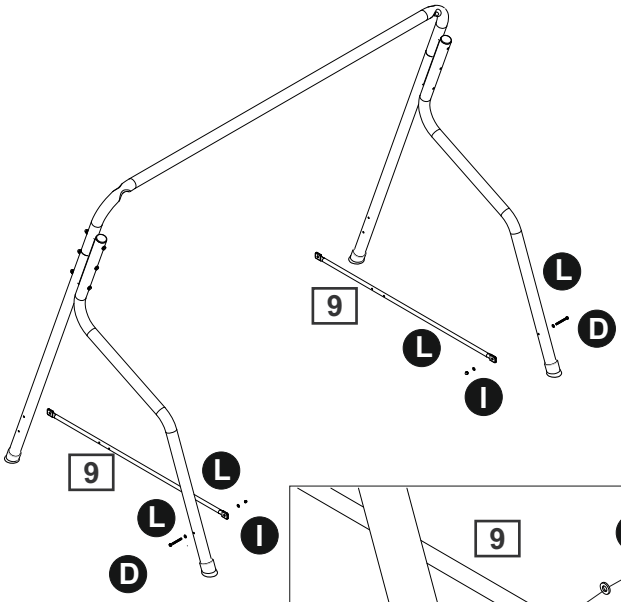


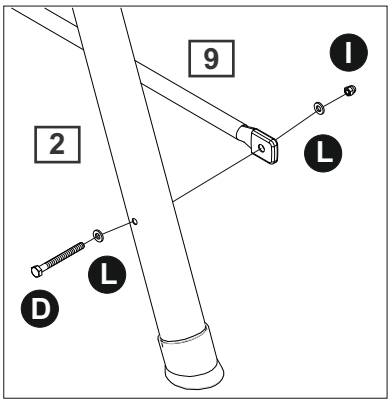

Step 7

Insert the plastic caps (V) into the end of one cross bar [10]

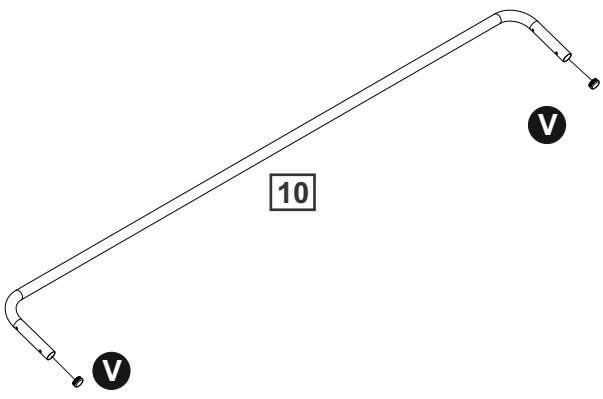





Assembly Instructions

Step 8

Assemble the cross bar [10] with the back legs [9] using screws B, washers L and nuts I


Note:
Do not fully tighten bolts.

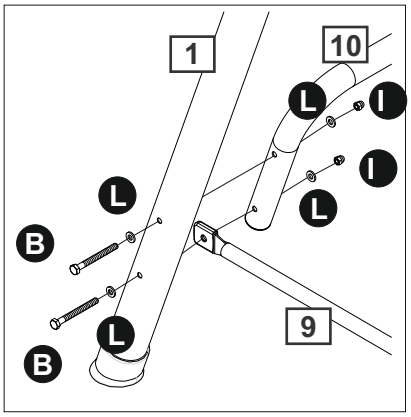

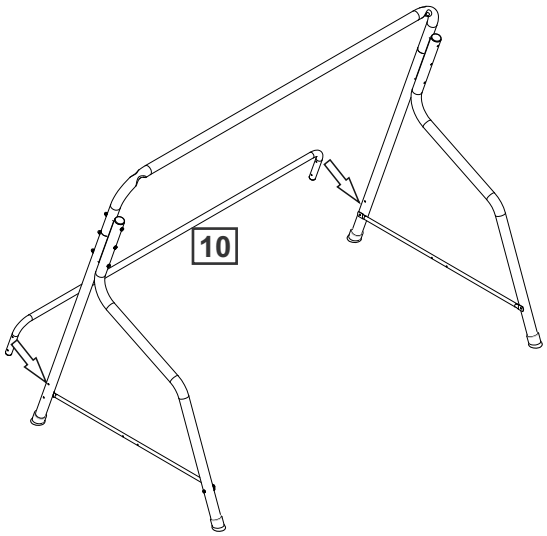

Step 9


Insert the plastic caps V into the end of the other cross bar [10]

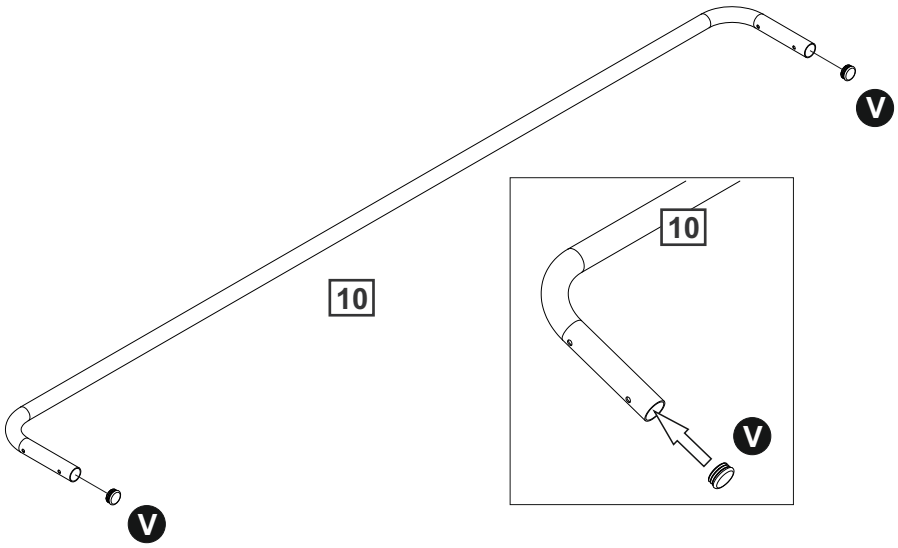


Step 10

Assemble the cross bar [10] with the side bars [9] using screws D, washers L and nuts I

Note:
Do not fully tighten bolts.

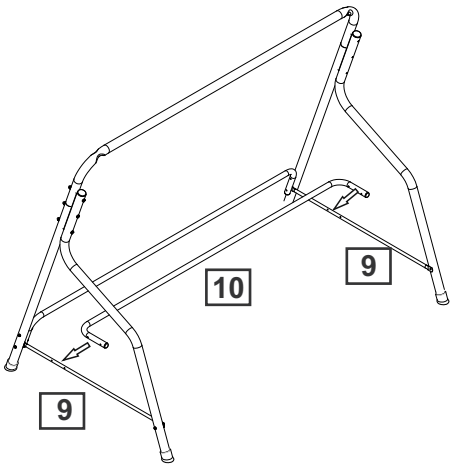


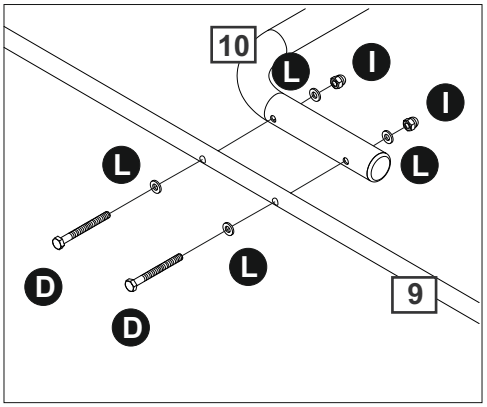

Assembly Instructions


Step 11

Insert the plastic caps (V) into the end of the armrests [7]

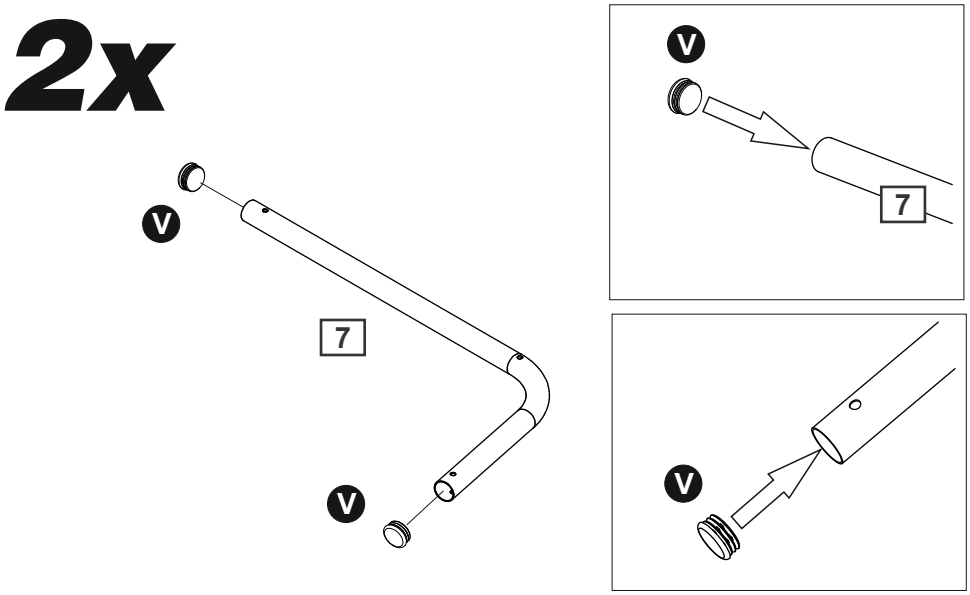


Step 12

Assemble the two seat support [6] together using screws (D), washers (L) and nuts (I)

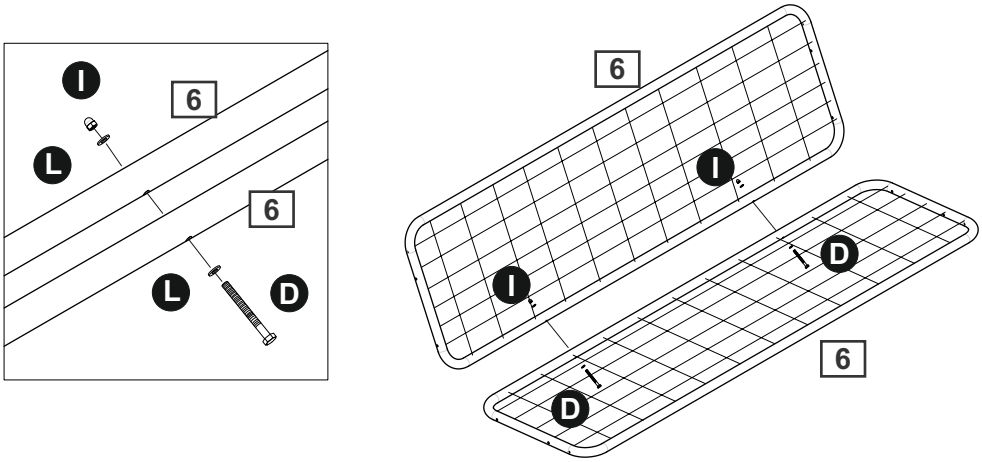

Step 13


Assemble the left armrest [7] with the seat support [6] using screws (E), washers (L) and nuts (I)

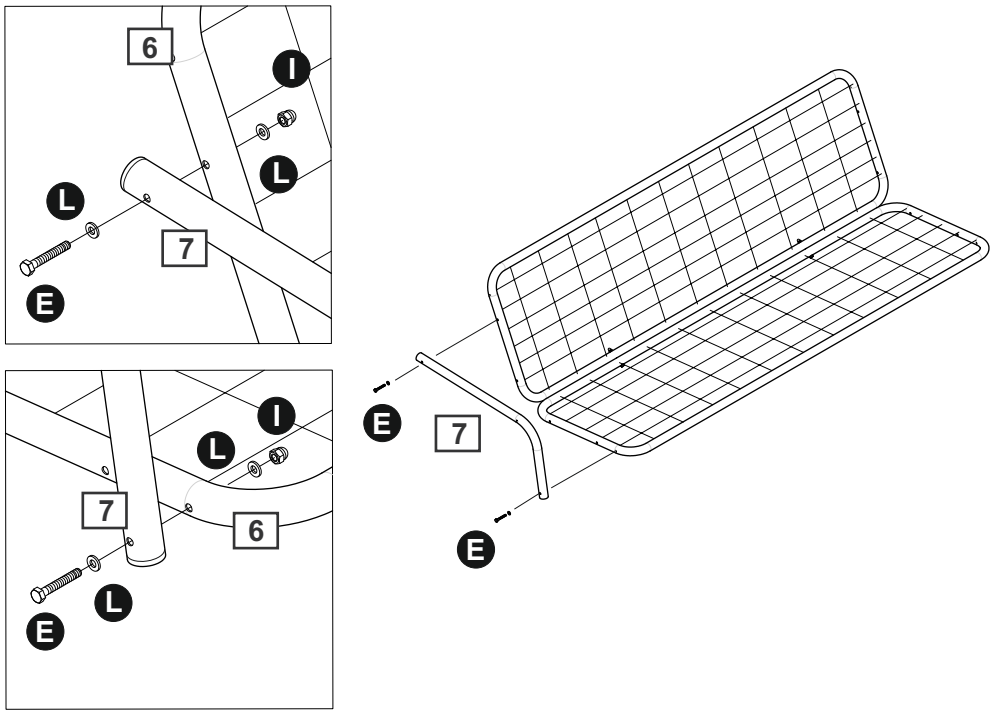



Assembly Instructions

Step 14

Assemble the right armrest [7] with the seat support [6] using screws (E), washers (L) and nuts (I)

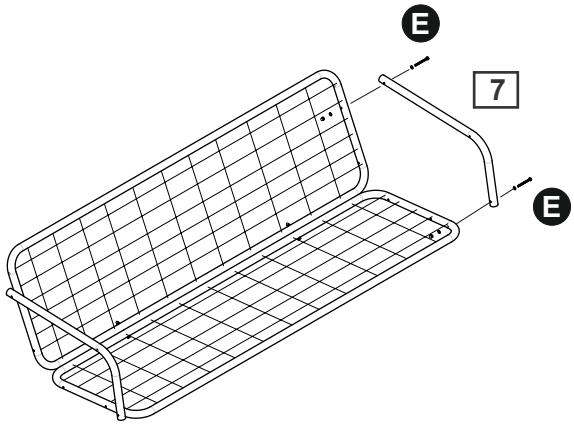







Step 15

Fix the plastic caps (T) onto the seat support bar [8]


4x

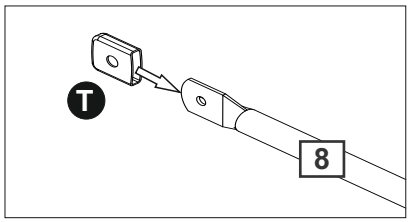


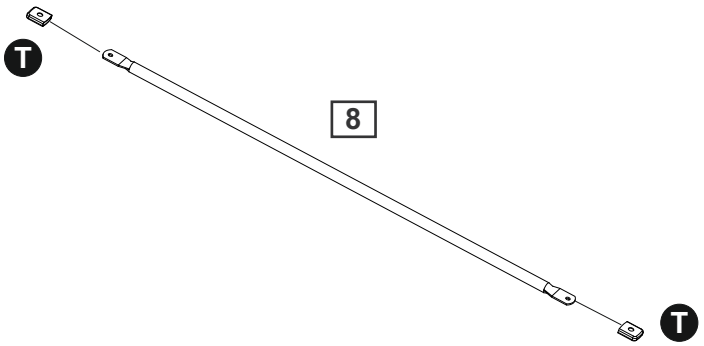

Step 16

Assemble the left back seat support bar [8] to the seat support [6] using screw (F), washers (L) and nuts (I)




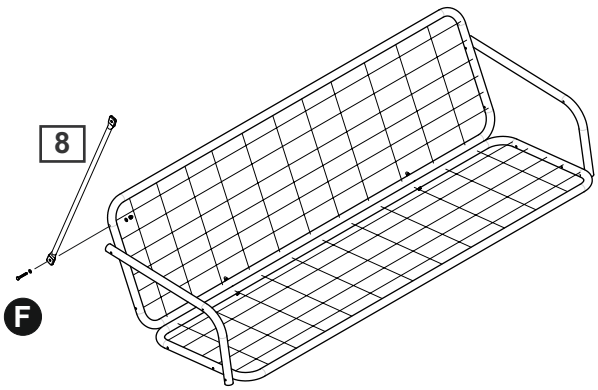


Assembly Instructions

Step 17


Assemble the right back seat support bar 8 to the seat support 6 using screw F, washers L and nuts I

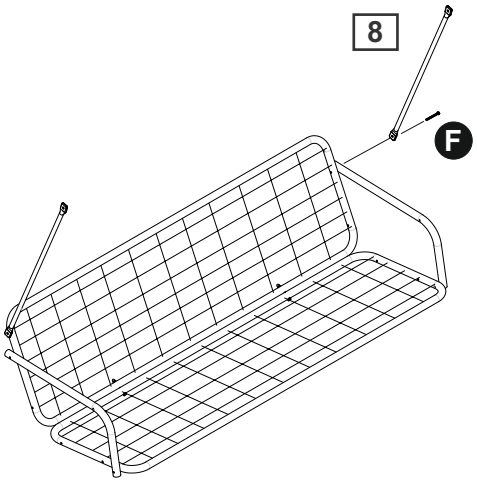




Step 18


Assemble the left front seat support bar 8 to the armrest 7 using screw F, washers L and nuts I




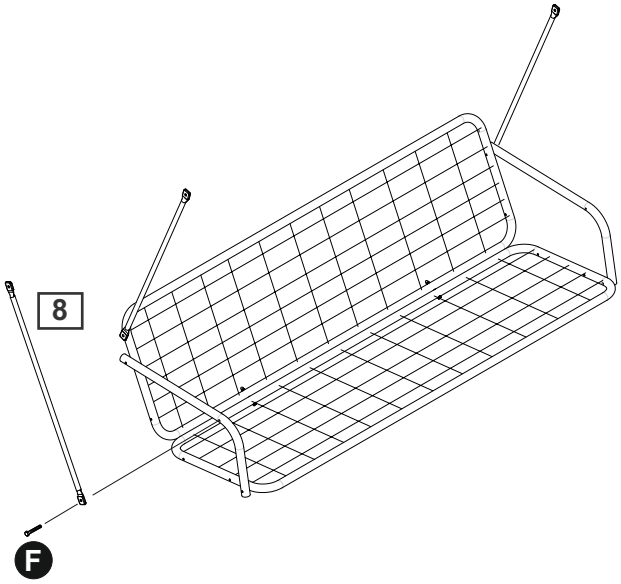

Step 19

Assemble the right front seat support bar 8 to the armrest 7 using screw F, washers L and nuts I

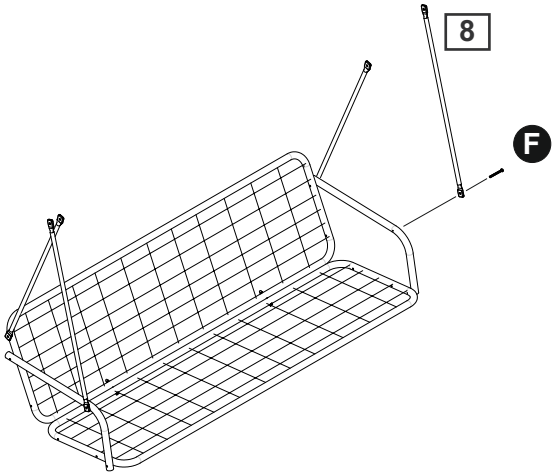





Assembly Instructions

Step 20


Insert the springs (N) into the seat support bars [8]

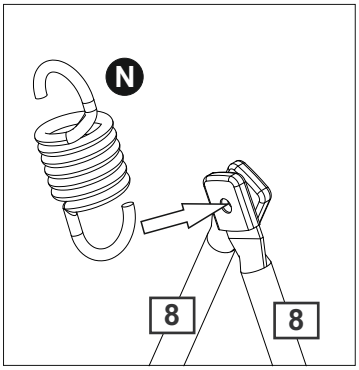


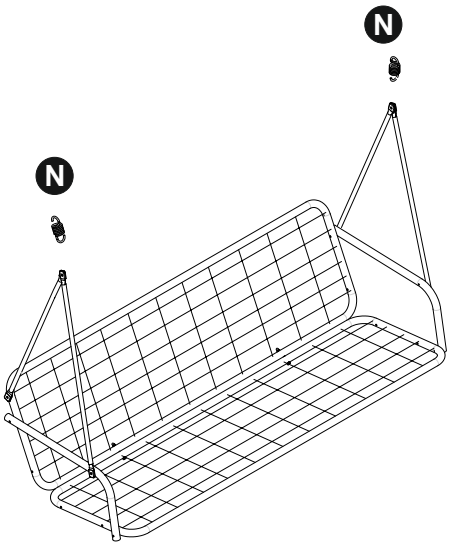

Step 21

Fix the spring (N) to the top [3]




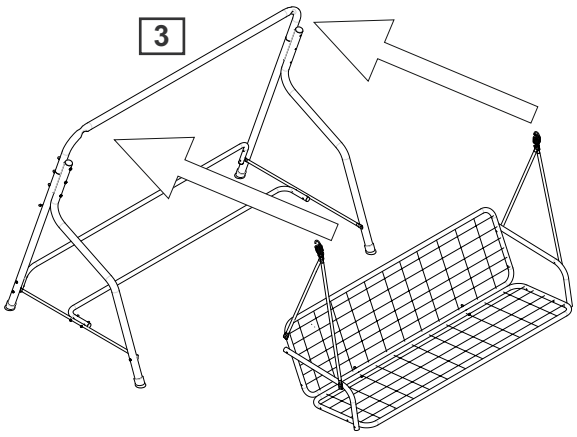


Step 22

Fix the nuts (J) to the pin (G), deep in the longest thread.

2x

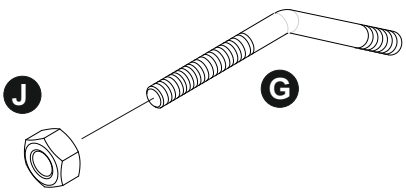


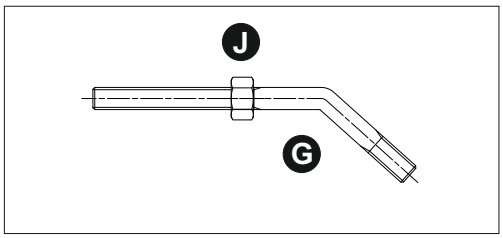

Assembly Instructions

Step 23


Insert the pin G through the plastic joint R by the shortest thread.
Push it as far as the nut J touches the plastic joint R

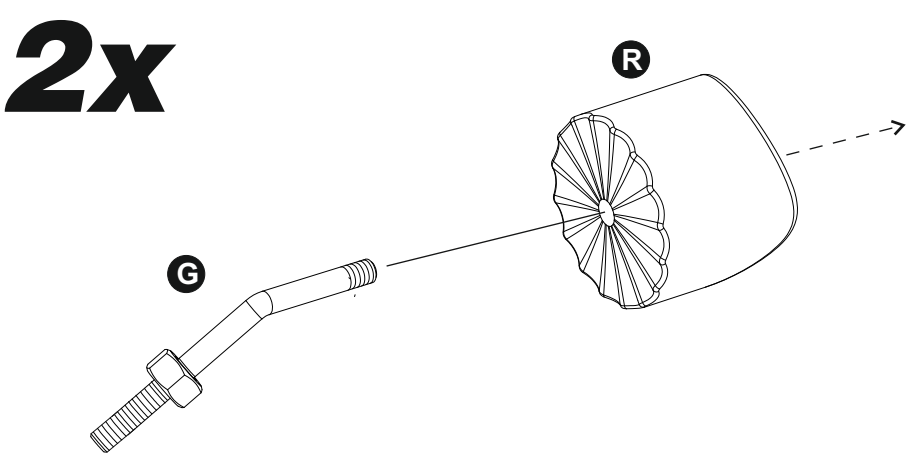


Step 24

Fix the plastic joint R to the top 3 using the washer L and the nut I


Note:
the longest thread of the pins G have to be horizontal after fixing

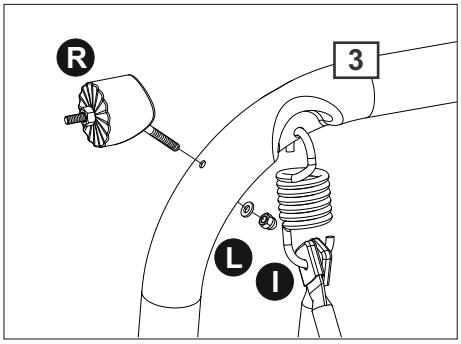

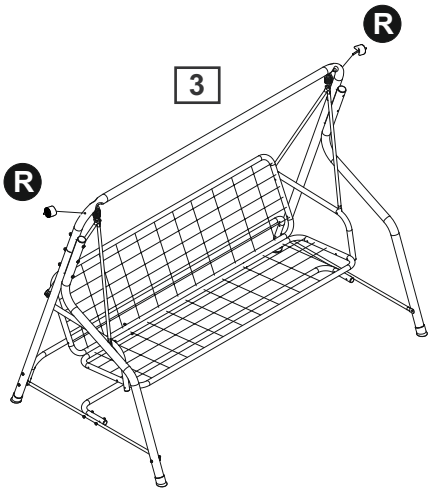

Step 25

Fix one roof bar 4 to the pin G using the washer M and the wheel U

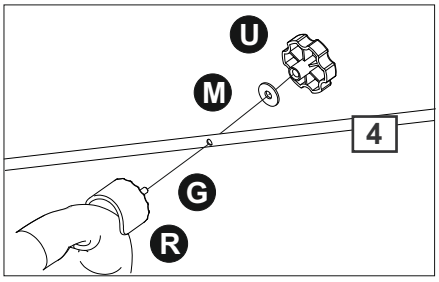




Assembly Instructions

Step 26


Insert the roof poles 5 into the canopy's slots 11

Note:
Let the roof poles pass through the complete slots

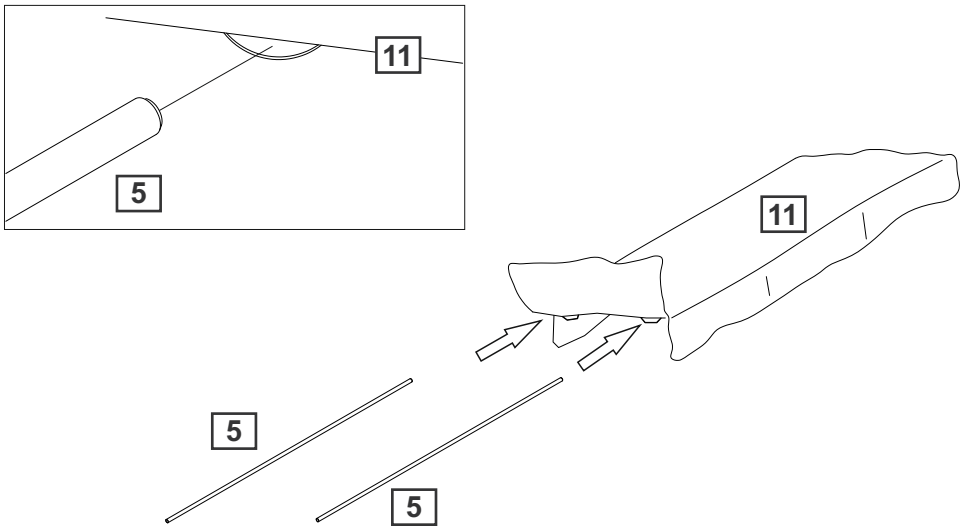


Step 27

Insert the roof poles 5 into the assembled roof bar 4

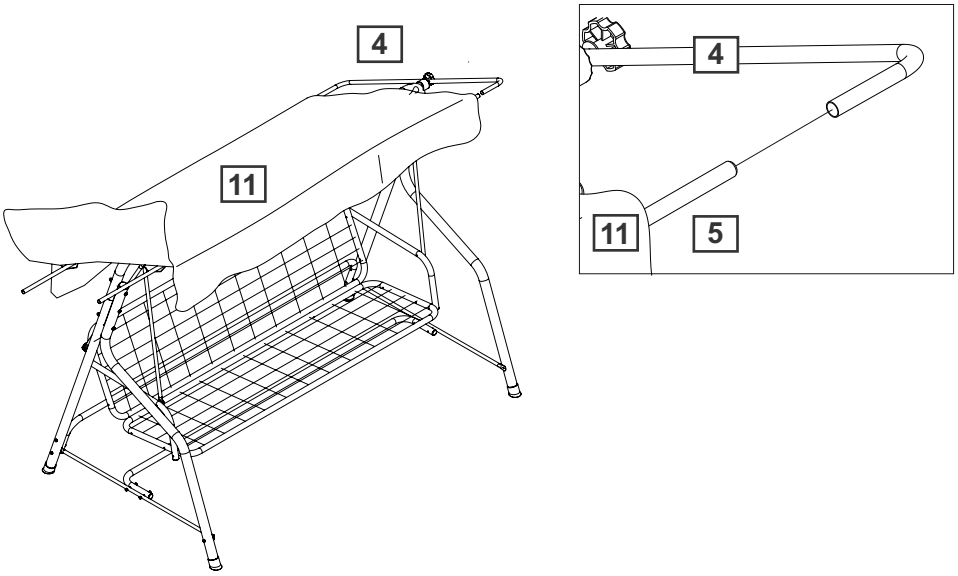

Step 28

Insert the roof poles 5 into the other roof bar 4

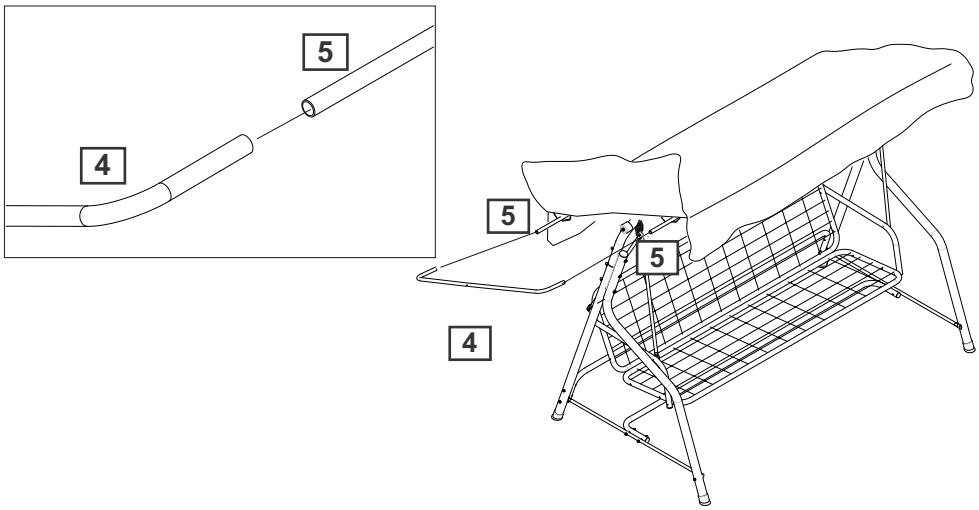

Assembly Instructions

Step 29

Fix the other roof bar 4 to the pin G using the washer M and the wheel U

Tighten completely all bolts.

Assembly is complete.

