


Winslow Bar stool

Assembly Instructions - Please keep for future reference

600/5580

600/5597

600/5607

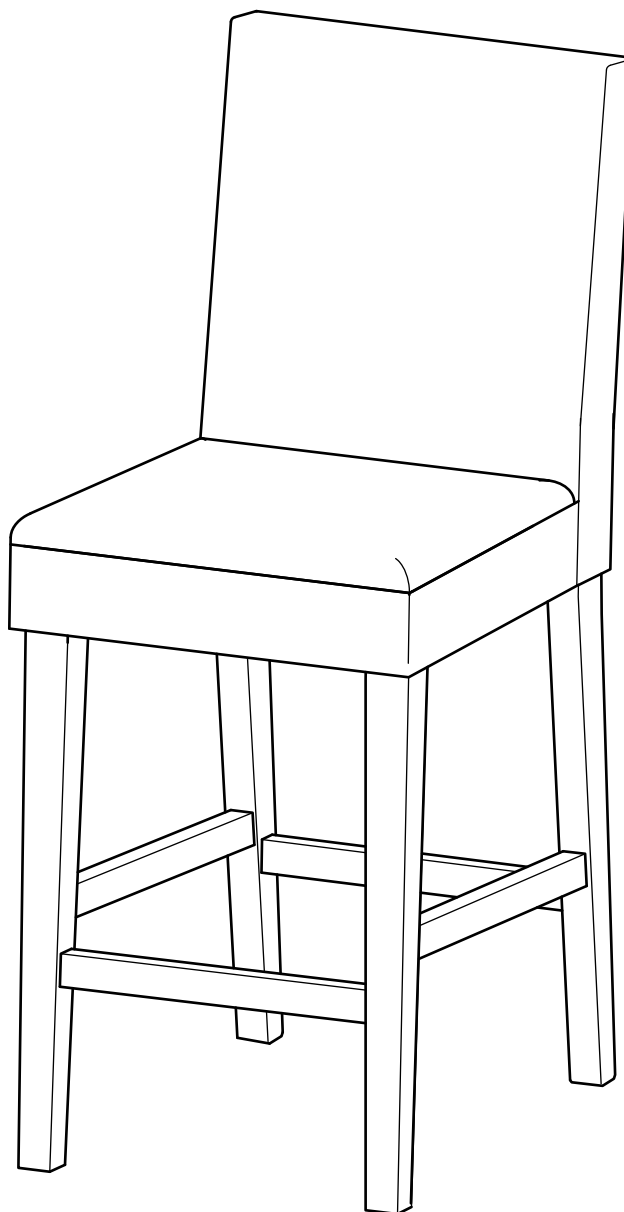

Dimensions

Width - 40cm
Depth - 53cm
Height - 100cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on page 2.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product during assembly, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor.

- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit. Only use hand screwdrivers.

- Dispose of all packaging carefully and responsibly.

- Maximum safe weight of user : 100 kgs.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.


- From time to time check that there are no loose screws on this unit.

- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the panels listed below

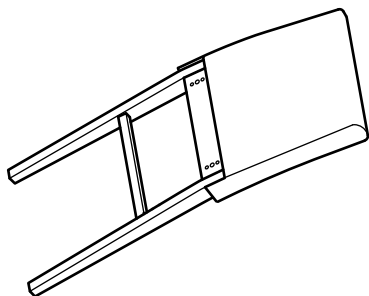


1 Chair back x 1



2 Seat x 1



3 Leg x 2

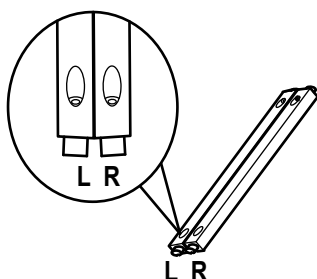

4 Side stretcher rail x 2









5 Front stretcher rail x 1

Components - Fittings

Please check you have all the panels listed below


Note :The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<p>A </p> <p>Bolt x 8</p>	<p>B </p> <p>Spring washer x 8</p>	<p>C </p> <p>Washer x 8</p>
<p>D </p> <p>Wood dowel x 2</p>	<p>E </p> <p>Screw x 6</p>	<p>F </p> <p>Allen key x 1</p>

Assembly Instructions

Step 1


a: Insert wood dowels **D** into each centre hole in the back of the seat **2**.

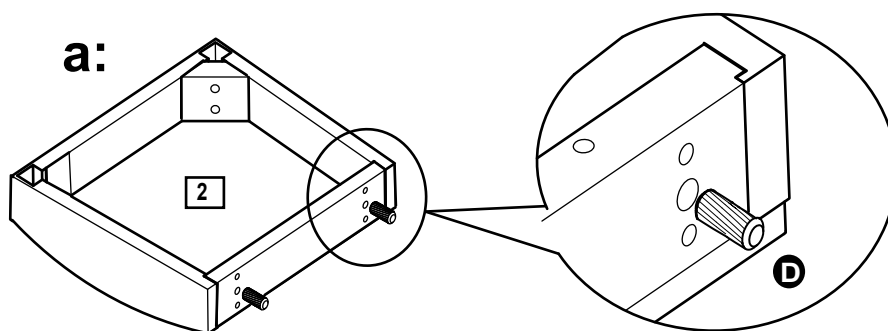

b: Insert bolts **A** with spring washers **B** and washers **C** through the holes at the back of the seat **2** into the chair back **1**. Tighten bolts with allen key **F**.

Do not fully tighten.

Screw in screw **E** into the pre - drilled holes on the side stretcher rail **4** using screwdriver.

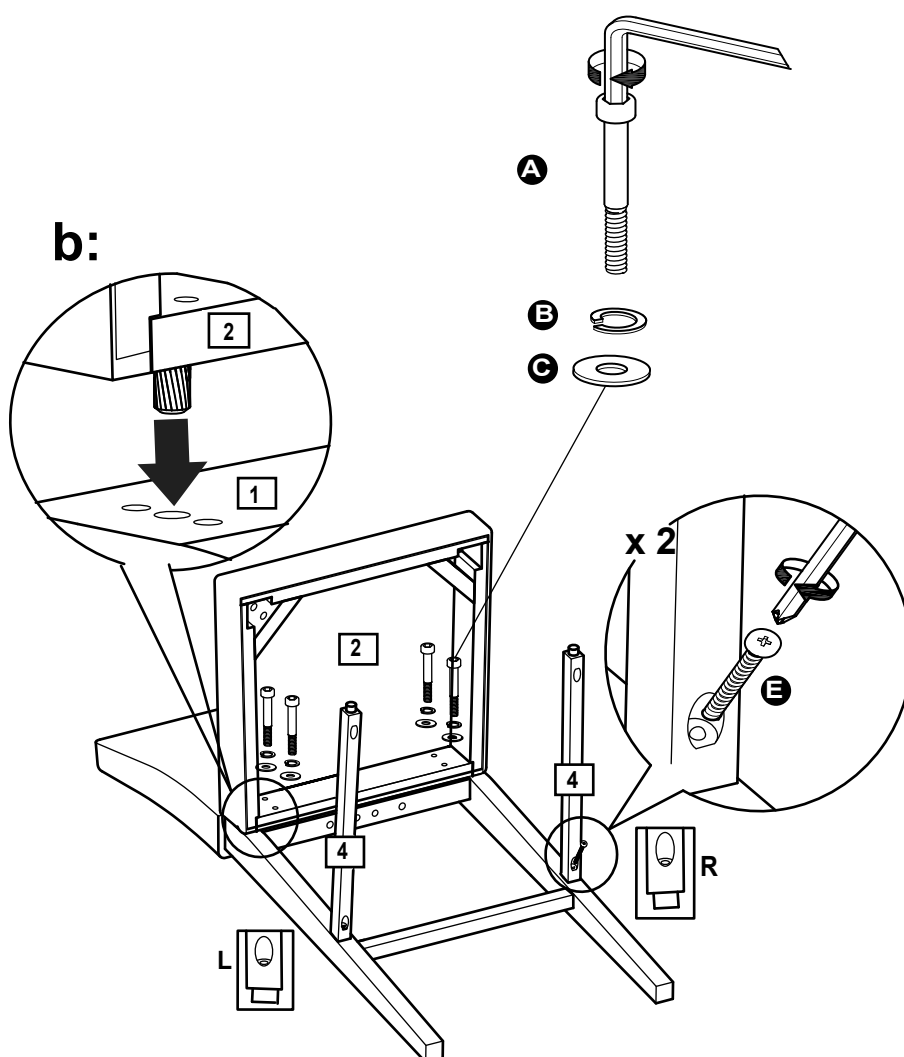


Assembly Instructions

Step 2

a: Fit the front stretcher rail **5** to the front legs. Screw in screw **E** into the pre-drilled holes on the front stretcher rail **5**.


a:

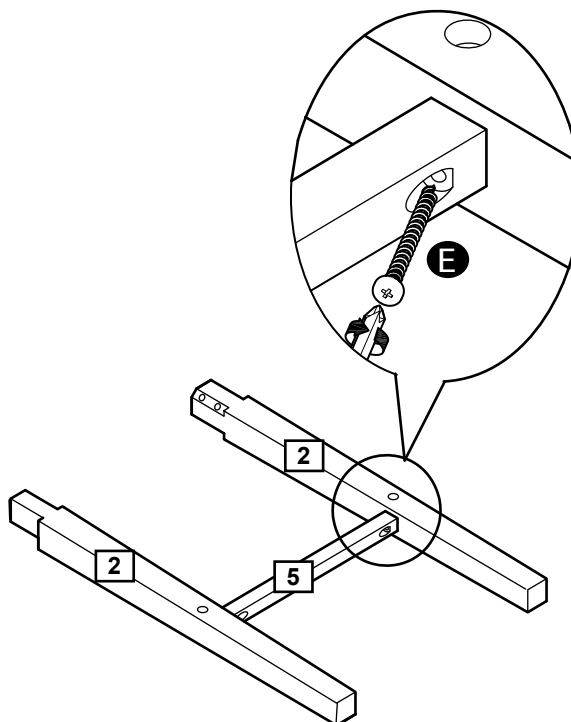

b: Attach legs **2** to front corners of the seat frame. Use bolts **A** with spring washers **B** and washers **C** into each 2 holes in the front corners. Tighten bolts with allen key **F**.

Screw in screw **E** into the pre-drilled holes on the front stretcher rail **5** using screwdriver.

b:

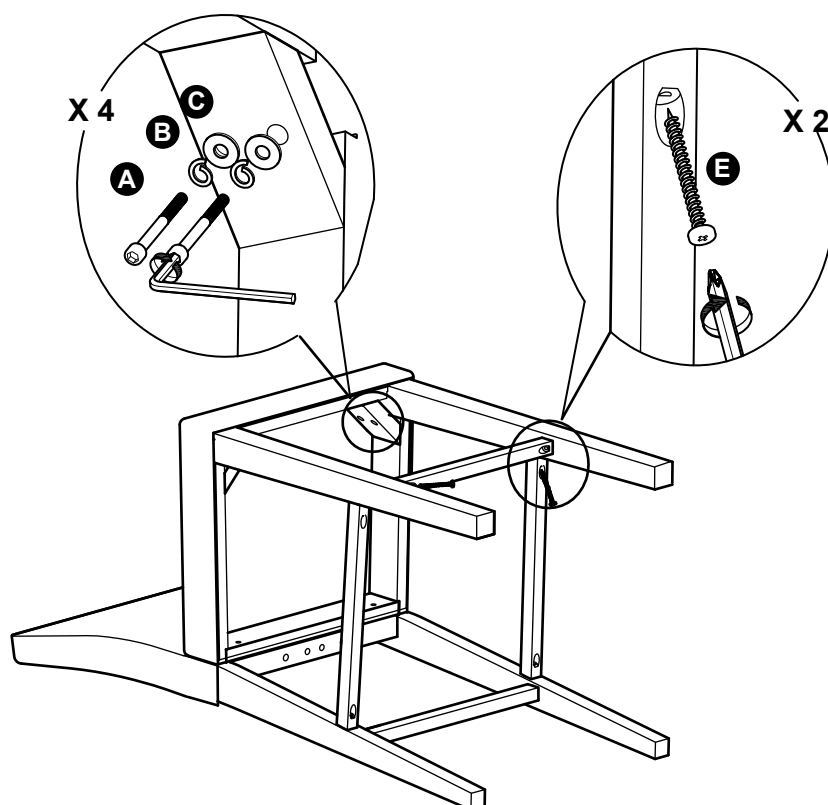

Assembly Instructions

Step 3

Note : Stand the chair on a level floor.

a: Tighten all bolts.


b: Sit on the chair to level the legs.

c: After sitting test, re - tighten bolts again, if adjustment needed.


d: Highly recommend to re - tighten all the bolts again after using the chair for 7 days.

Note : Please keep Allen key to re - tighten all bolts again when required.


a:

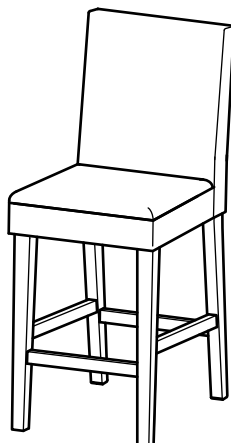


b:

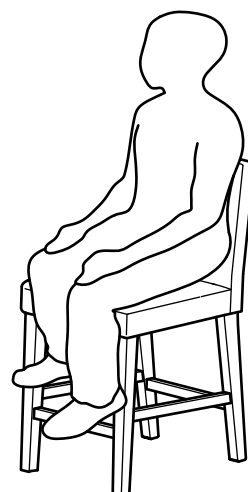

c:

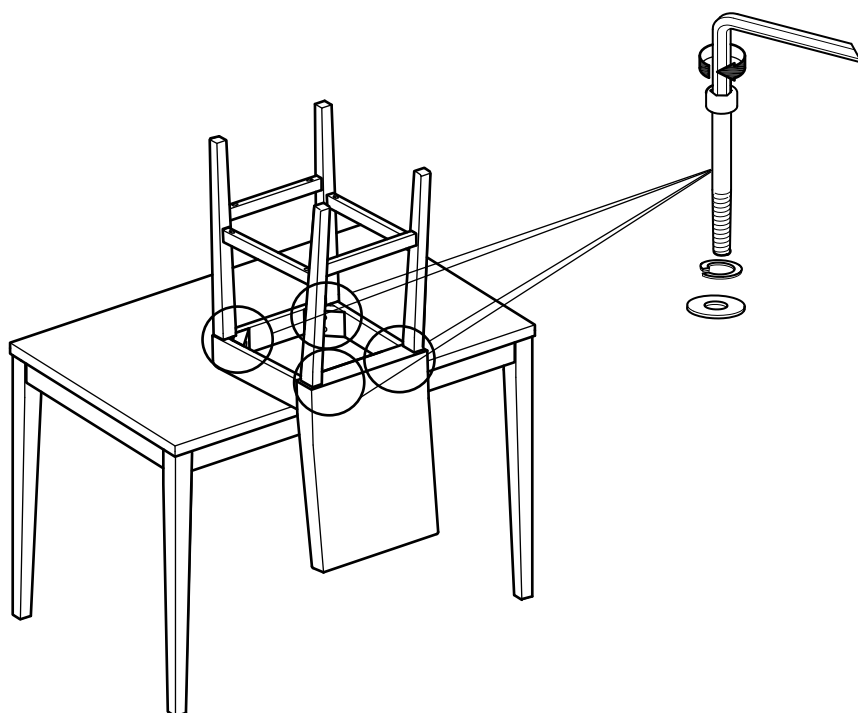

d:

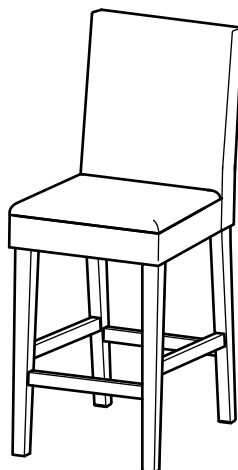

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**

Assembly Instructions

Step 3

Note : Stand the chair on a level floor.

a: Tighten all bolts.

Note : Step 3 is essential to prevent the chair from wobbling caused by uneven legs.

b: Sit on the chair to level the legs.


c: After sitting test, re - tighten bolts ,if adjustment is needed.

d: It is highly recommend to re - tighten all the bolts after using the chair for 7 days.


Note : Please keep allen key to re - tighten all bolts when required.

Assembly is complete.


a:

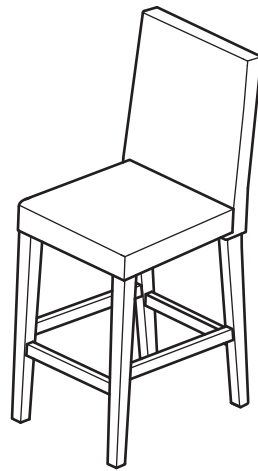


b:

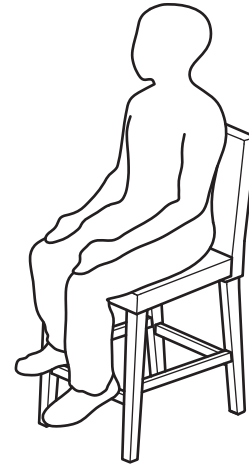

c:

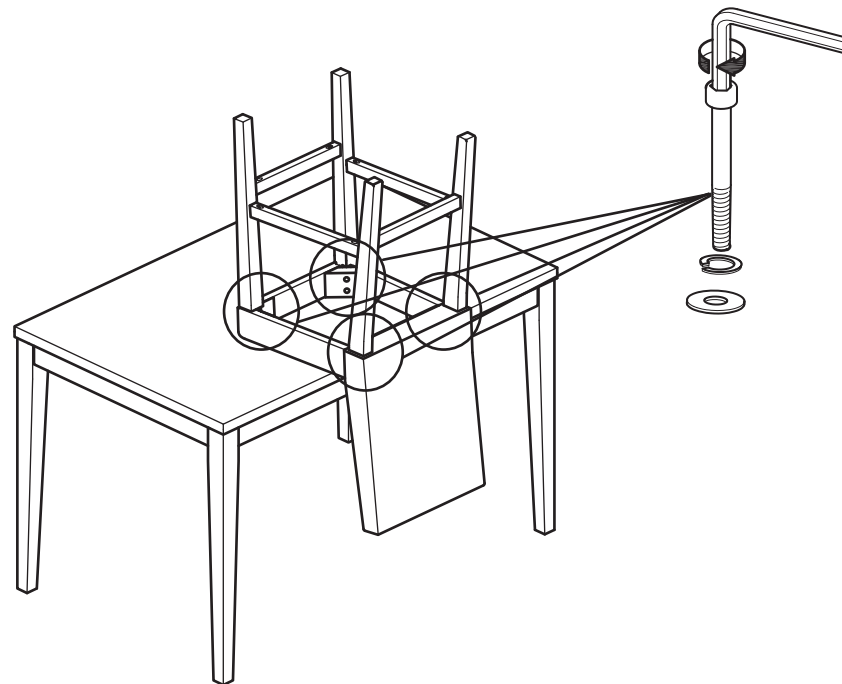

d:

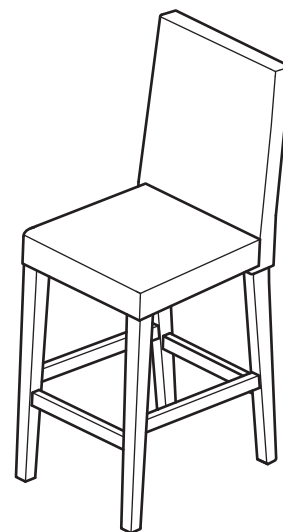

Winslow Bar stool


Assembly Instructions - Please keep for future reference

600/5580

600/5597

600/6280

600/6400

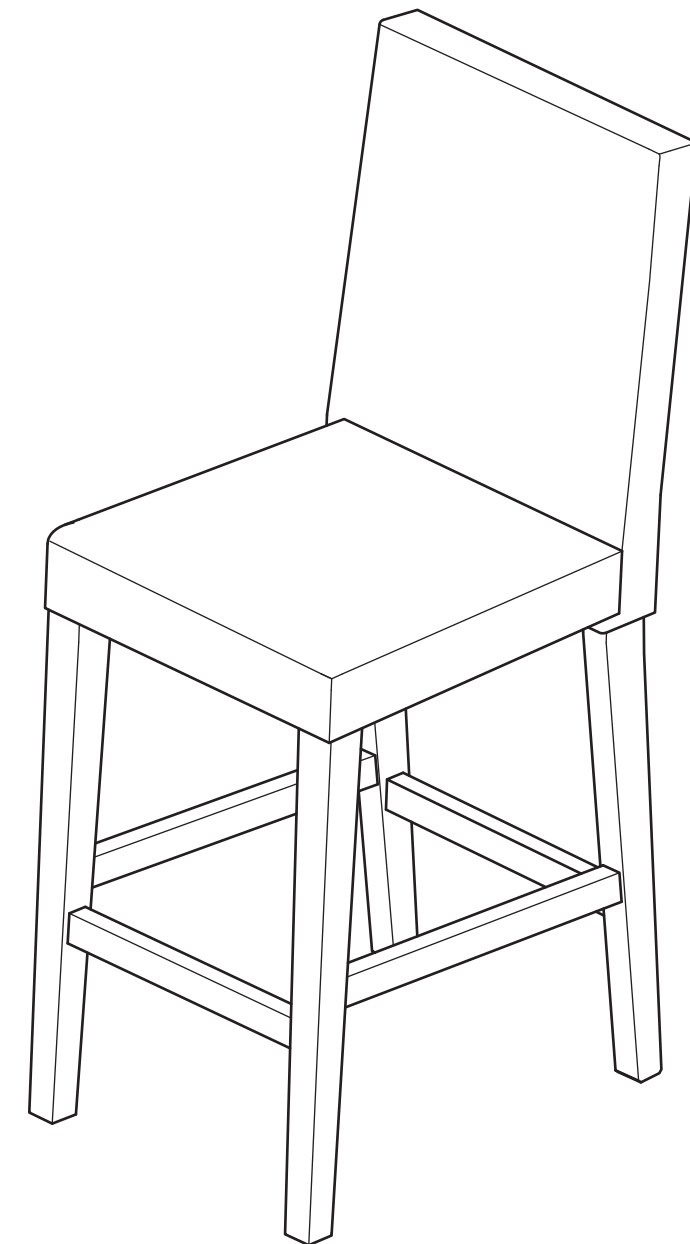

Dimensions

Width - 40cm
Depth - 53cm
Height - 100cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**

! Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on page 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product during assembly, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.
- Maximum safe weight of user: 110 Kgs.




Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Assembly Instructions

c: Fit the front stretcher rail **7** to the right leg **3** and left leg **4**.

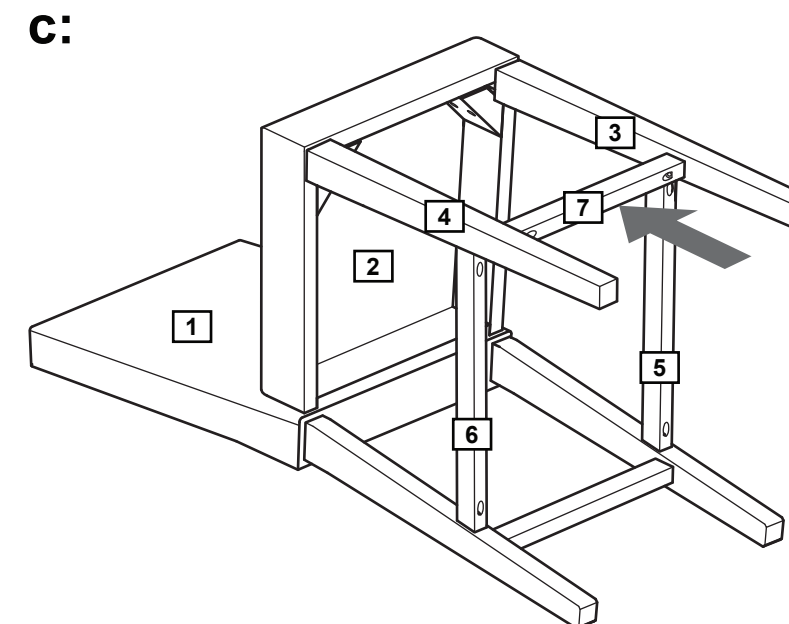

d: Turn over the chair. Screw the screw **E** into the pre-drilled holes on the front stretcher rail **7** and the right side stretcher rail **5** and the left side stretcher rail **7** using screwdriver.

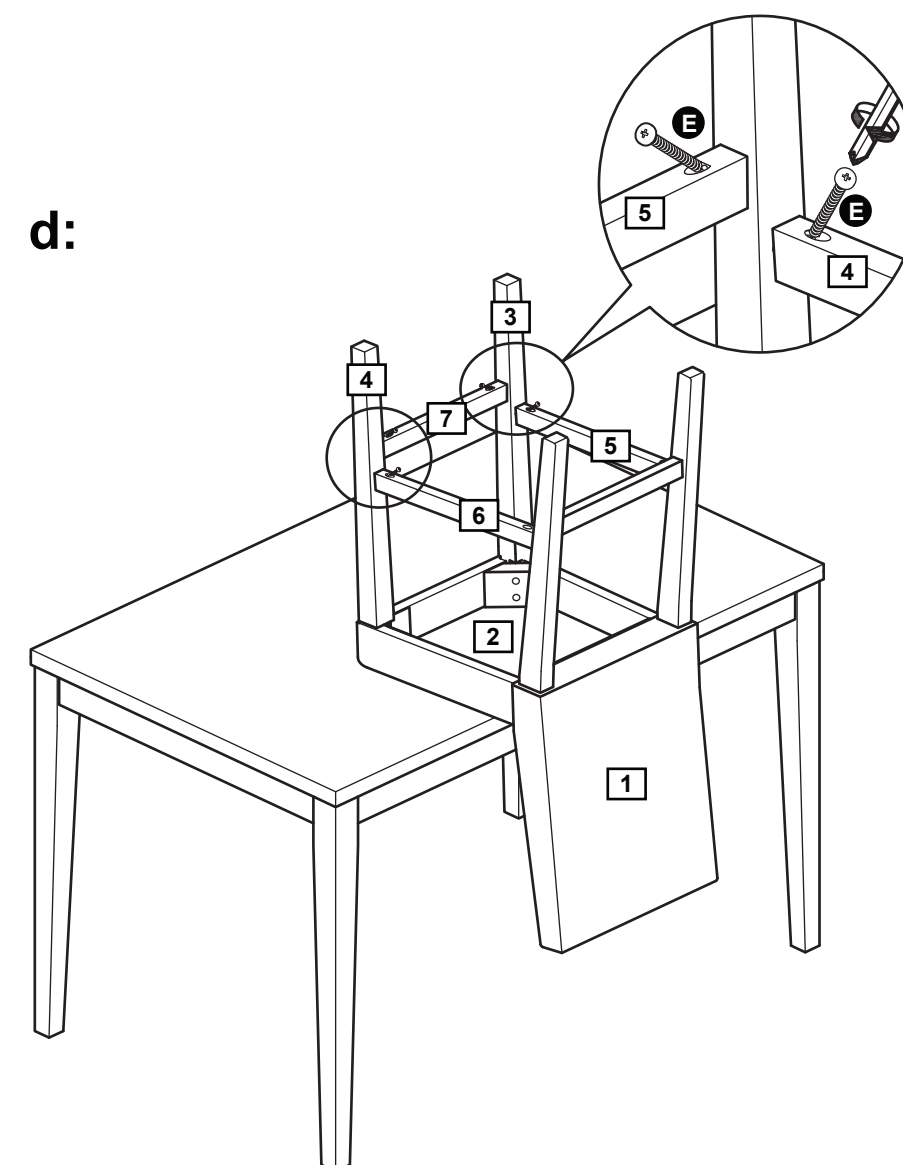

Assembly Instructions



Step 2

a: Attach left legs **4** to front corners of the seat frame. Use bolts **A** with spring washers **B** and washers **C** into each of the 2 holes in the front corners. Tighten bolts with allen key **F**.

Do not fully tighten.

b: Attach right legs **3** to front corners of the seat frame. Use bolts **A** with spring washers **B** and washers **C** into each of the 2 holes in the front corners. Tighten bolts with allen key **F**.


Do not fully tighten.

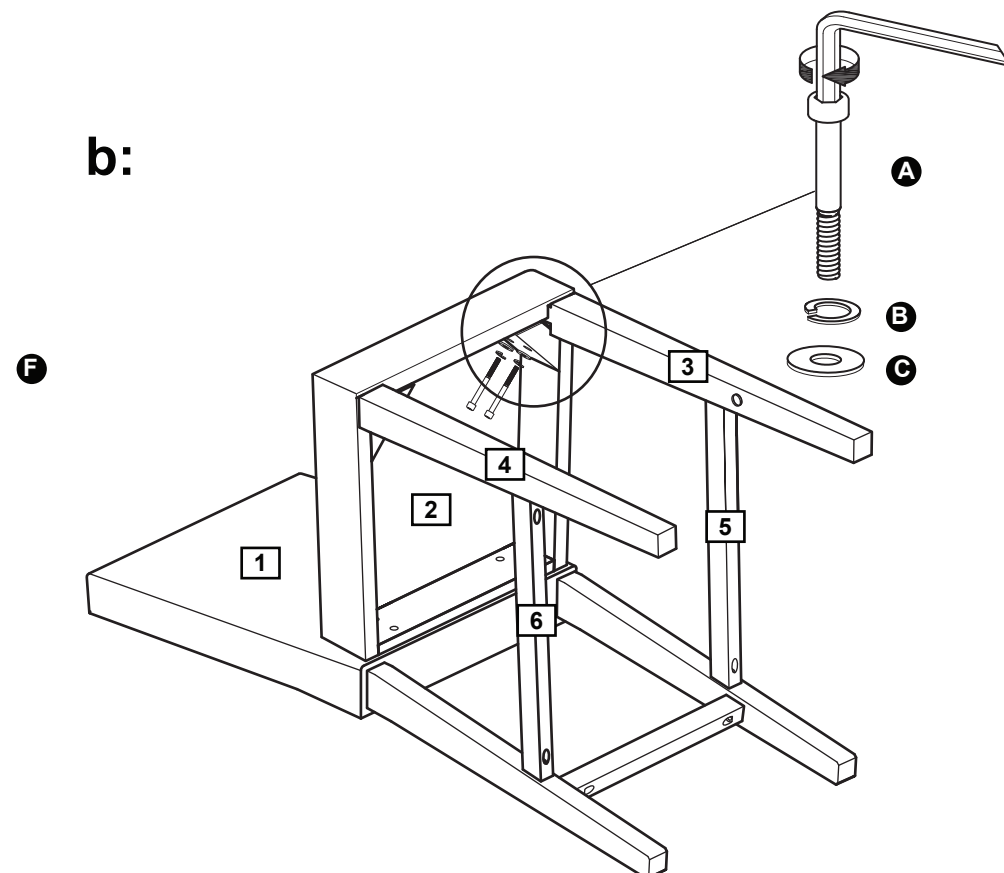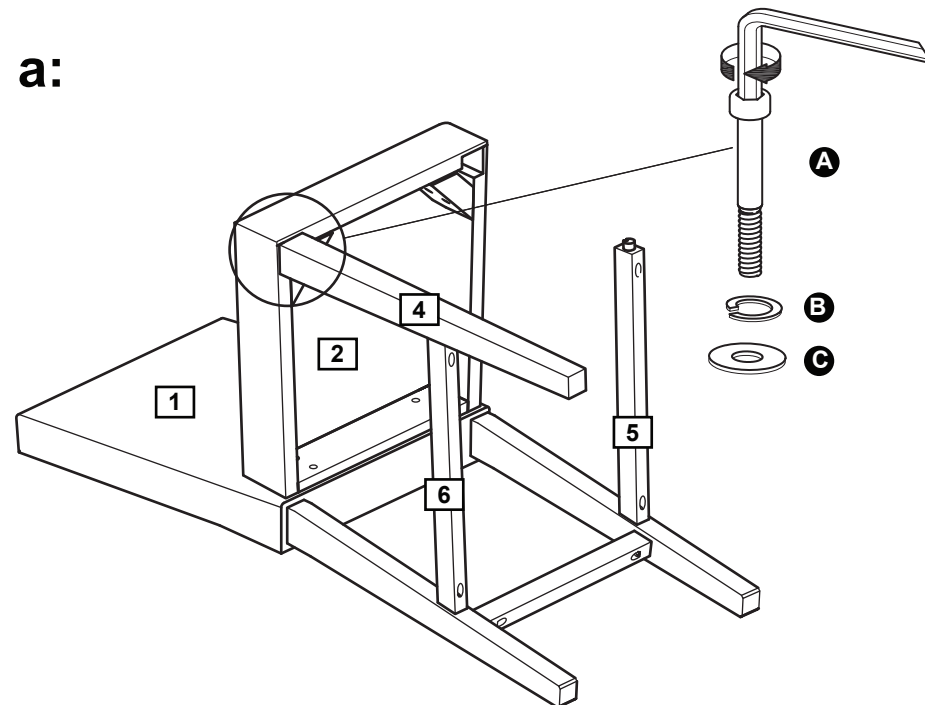


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the parts listed below

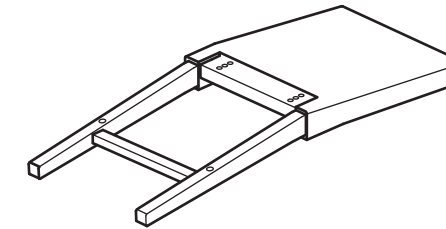


1 Chair back x 1

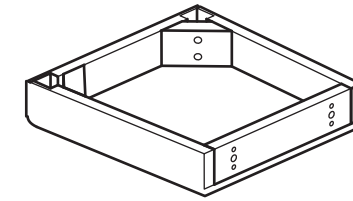

2 Seat x 1



3 Right leg x 1




4 Left leg x 1



5 Right side stretcher rail x 1



6 Left side stretcher rail x 1









7 Front stretcher rail x 1


Components - Fittings

Please check you have all the fittings listed below

Note : The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A 	B 	C 
Bolt x 8	Spring washer x 8	Washer x 8
D 	E 	F 
Wooden dowel x 2	Screw x 6	Allen key x 1

Tools required

 Phillips screwdriver
(medium & large)


Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1


a: Insert wooden dowels **D** into each centre hole in the back of the seat **2**.

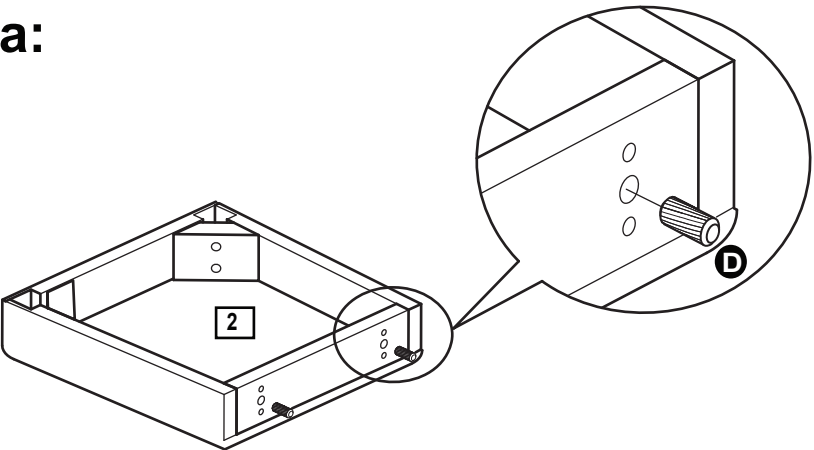

b: Insert bolts **A** with spring washers **B** and washers **C** through the holes at the back of the seat **2** into the chair back **1**. Tighten bolts with allen key **F**.

Do not fully tighten.

Screw the screw **E** into the pre - drilled holes on the right side stretcher rail **5** and the left side stretcher rail **6** using screwdriver.

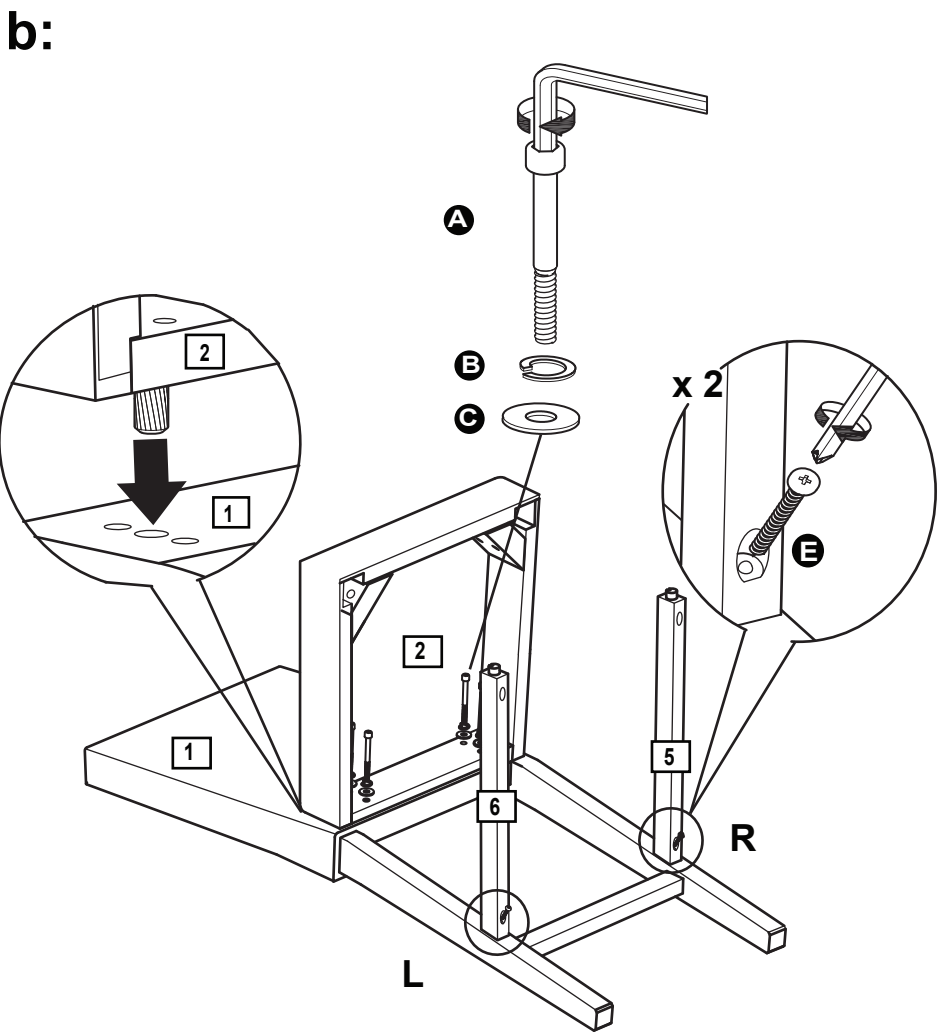

Winslow Bar Stool


Assembly Instructions - Please keep for future reference

600/6400

600/5597

600/5580

600/6280

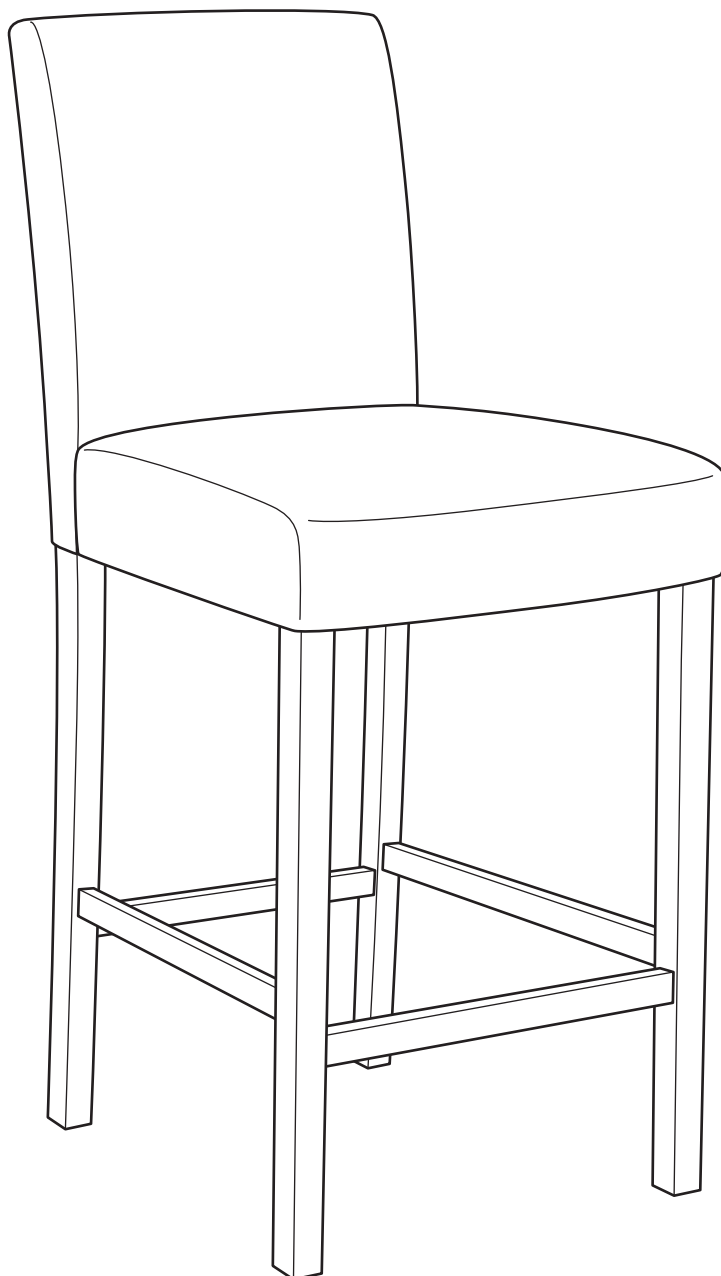

Dimensions

Width - 41cm

Depth - 52cm

Height - 100.5cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Assemble this product on a flat surface.
- Assemble all parts loosely before tightening any bolts.
- Do not discard any of the packaging until you have checked that you have all the parts and the pack of fittings.

- Discard all extra fittings and keep fittings out of reach of children.
- Unit weight: 6.9kgs.
- Maximum safe weight of user: 110kgs.
- Retain Assembly Instructions for future reference.



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Warnings

- This product should only be used on firm, level ground.
- Make sure the legs remain in contact with the ground.
- Do not stand on the product.


Care and maintenance

- Please clean the product using either damp (not wet) cloth and a mild domestic soap solution or by using an appropriate polish.
- Do not use any abrasive materials when cleaning.
- From time to time check that there are no loose bolts on this unit.

Components - Parts

If you have damaged or missing components,
call the **Customer Helpline: 08456 400800**

Please check you have all the parts listed below

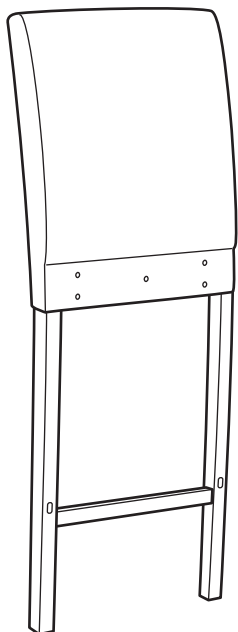

1 Backrest
(39.5 x 11 x 100cm)



2 Front right leg
(4 x 4 x 59.5cm)



3 Front left leg
(4 x 4 x 59.5cm)



4 Seat
(41 x 41 x 11.5cm)



5 Front stretcher
(34.5 x 2.5 x 3cm)








6 Side stretcher x 2
(41 x 2.5 x 3cm)


Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  M8 x 55mm Bolt x 9	B  50mm Screw x 6	C  Spring washer x 9
D  Flat washer x 9	E  Allen key x 1	

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1

Attaching backrest


Place the backrest on a flat protected surface.

Peel off bottom cloth cover of seat by pulling the cloth from the back side of the seat.

Position the seat **4** on the backrest **1** as shown and fix using bolts **A**, spring washers **C** and washers **D**. Tighten bolts using allen key **E**.

Note:

Use oval head of allen key on tight angles.

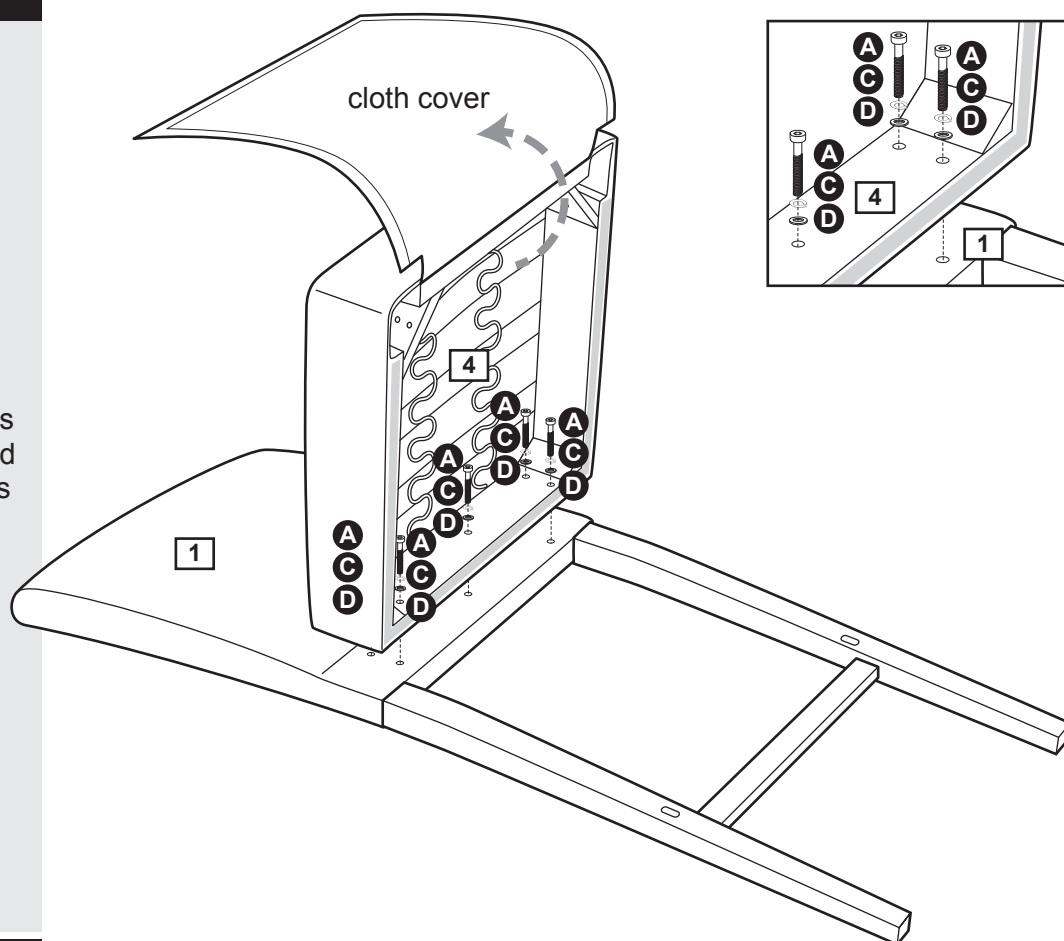

Step 2


Attaching side stretchers

Position the side stretchers **6** and insert it into holes on the back rest **1** as shown.



Note:

For the correct assembly of the side stretcher **6** to the backrest, the green arrow sticker shall be pointing up.

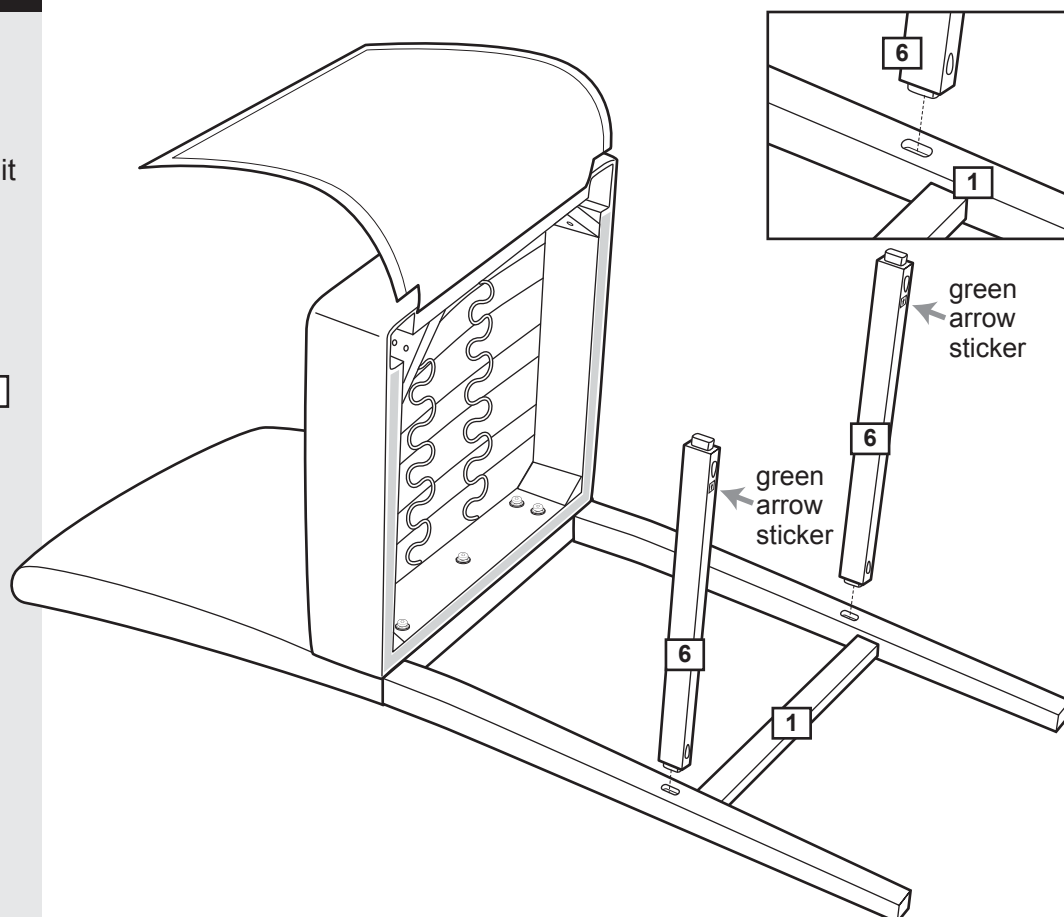

Assembly Instructions

Step 3

Attaching front legs


a: Correctly position the front legs **2** & **3** and insert it into holes on the seat **4** as shown.



Note:

Identify the front right leg **2** which is labeled with 'R' sticker and the front left leg **3** with 'L' sticker.


b: Carefully move up the front legs and insert the side stretchers **6** into holes on the front legs as shown.

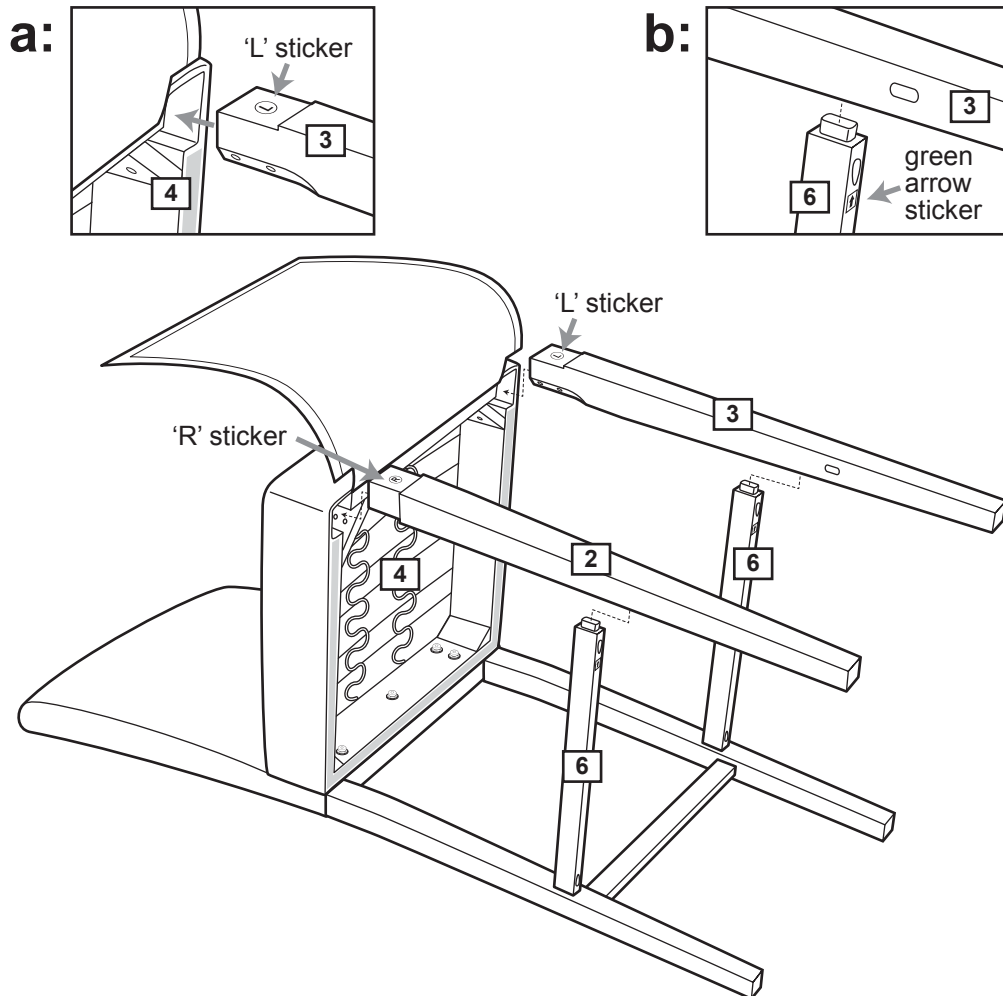

Step 4

Attaching front stretcher

Position the front stretcher **5** and carefully insert it into holes on the front legs **2** & **3** as shown.

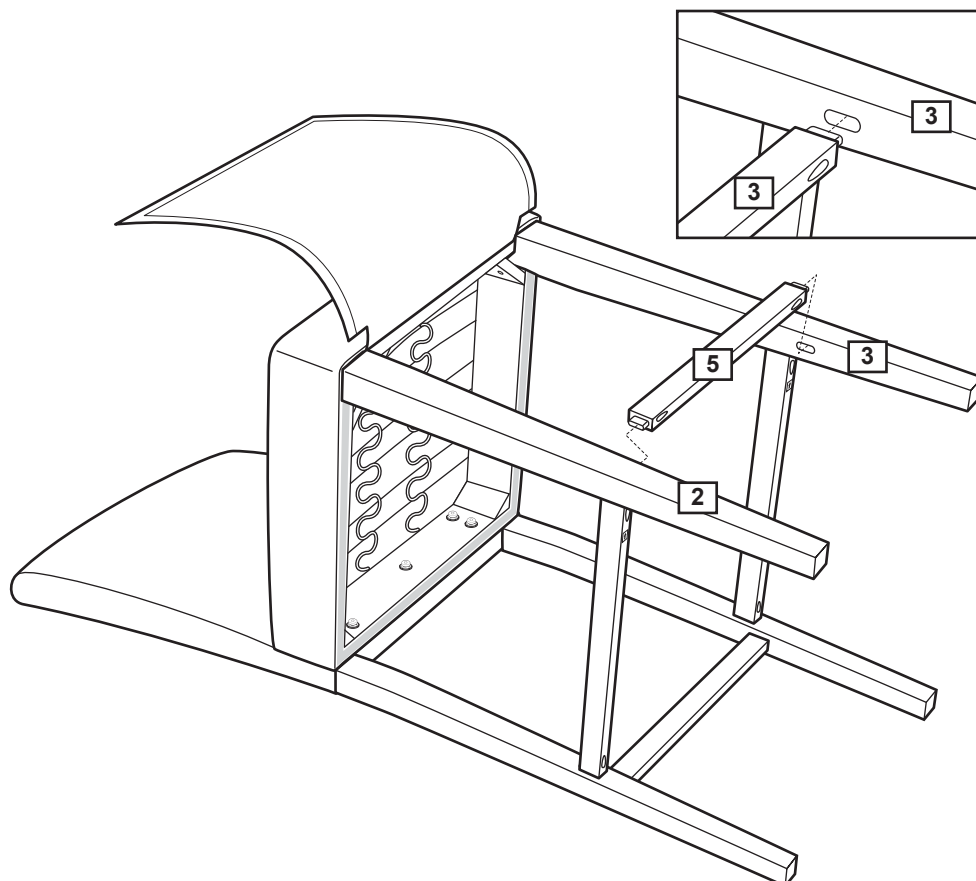

Assembly Instructions


Step 5

Fixing front legs

Secure the front legs **2** & **3** to seat **4** using bolts **A**, spring washer **C** & washers **D**. Tighten bolts using allen key **E**.

Note:

Use oval head of allen key on tight angles.

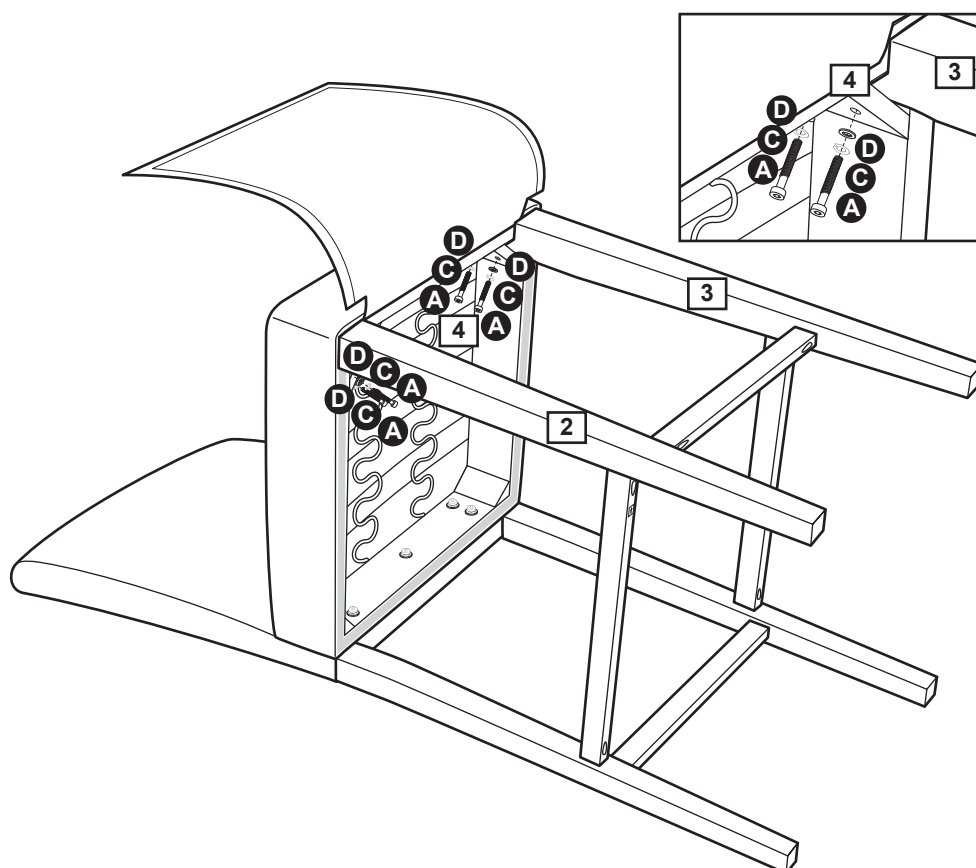

Step 6



Fixing stretchers

Carefully turn the bar stool upside down on a raised protected surface.

Secure the stretchers **5** & **6** using screws **B** and tighten using a crosshead screwdriver.

Re-attach the bottom cloth cover as shown and secure with the fasteners attached.

Carefully turn the bar stool upright and place on a flat surface.

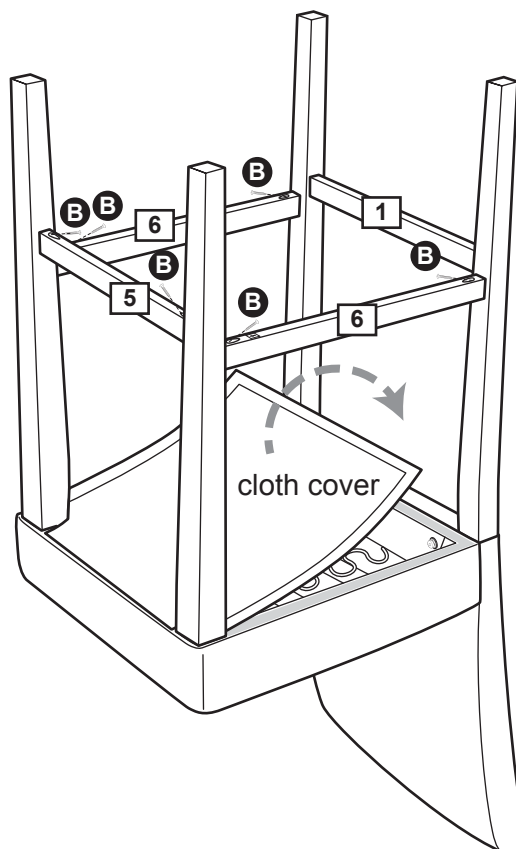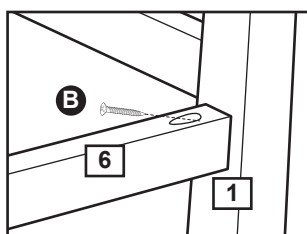

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**