
ColourMatch Gas Lift Bar Stool

Assembly Instructions - Please keep for future reference

600/6060
600/6015
600/6008
600/5982
600/5975
600/5999
239/1085
242/9380
259/5647

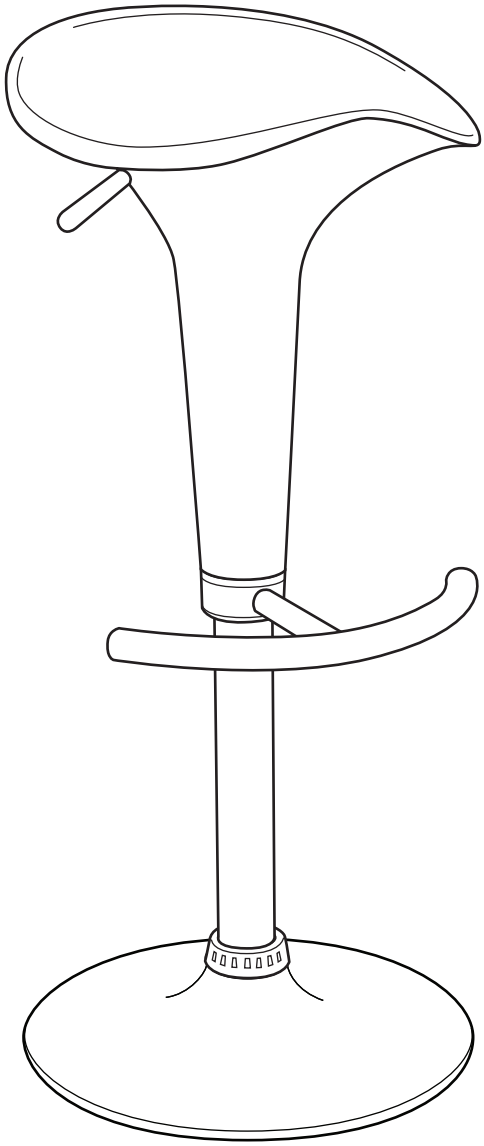

Dimensions

Width - 38.5cm
Depth - 40cm
Height - 64-86cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**
Argos = 0345 640 0800

Issue 1 - 28/04/14

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on the following pages.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Parts of the assembly will be easier with 2 people.

• During assembly do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Do not stand on the stool.

• Do not use this stool as step ladder.



• To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

• Unit weight: 5.5 kgs.

• Maximum safe weight of user: 110kgs.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints


• Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.

• Regularly check and ensure that all bolts and fittings are tightend properly.

Components - Parts

If you have damaged or missing components, call the **Customer Helpline: Argos = 0345 640 0800**


Please check you have all the parts listed below

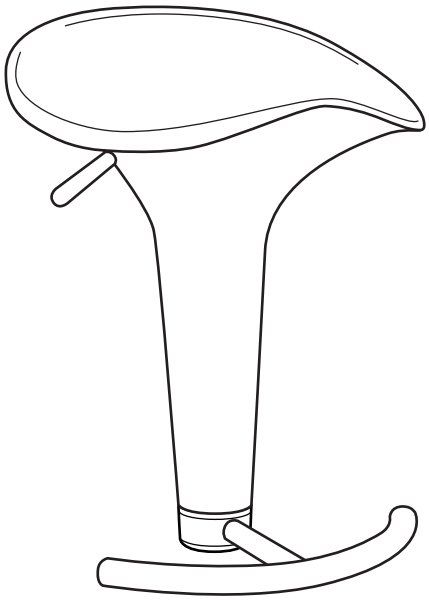


1 Seat
(38.5 x 37 x 46cm)



2 Gaslift
(Ø5 x 49-71cm)



3 Decor ring
(Ø5 x 7.5 x 2cm)

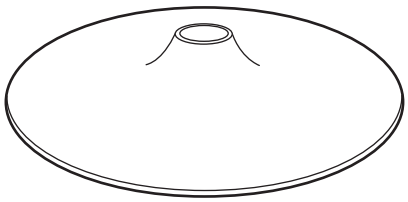

4 Base
(Ø38.5 x 8.5cm)


Assembly Instructions

Step 1

Attaching gaslift

Place the base [4] on a flat protected surface. Position the decor ring [3] on the base and insert the gaslift [2] into the decor ring and hole of the base.


Important:
Remove plastic tip cover on gaslift before assembling.

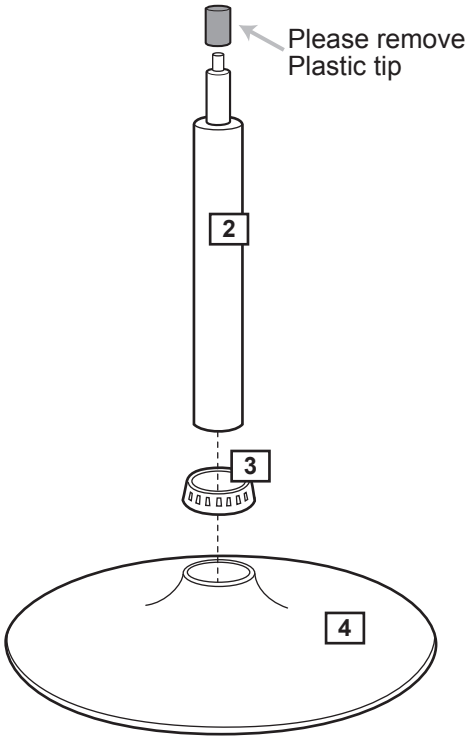

Step 2

Attaching the seat

Insert the gaslift [2] into the seat [1]. Secure by pressing down the seat firmly.

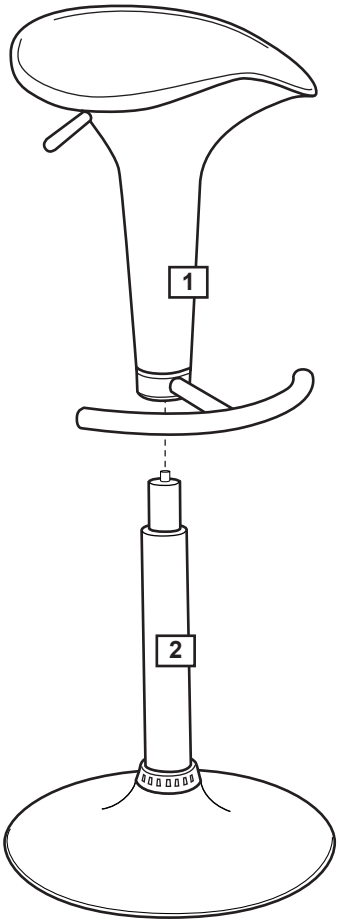


Gaslift operation

To adjust the seat higher, lift up the lever under the seat and release at desired height.

To lower the seat, lift up the lever while **fully seated** on the stool.

To ensure proper operation of the gaslift, a person must sit fully on the seat. Sitting on the tip or edges of the seat may not activate the gaslift properly.

Assembly is complete.

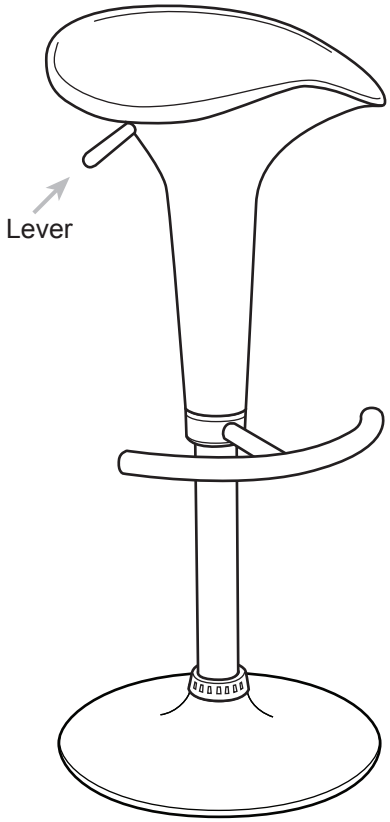


If you need help or have damaged or missing parts, call the **Customer Helpline:**
Argos = 0345 640 0800

COLOURMATCH BARSTOOL

Assembly Instructions - Please keep for future reference

600/6060
600/6015
600/6008
600/5982
600/5975
600/5999

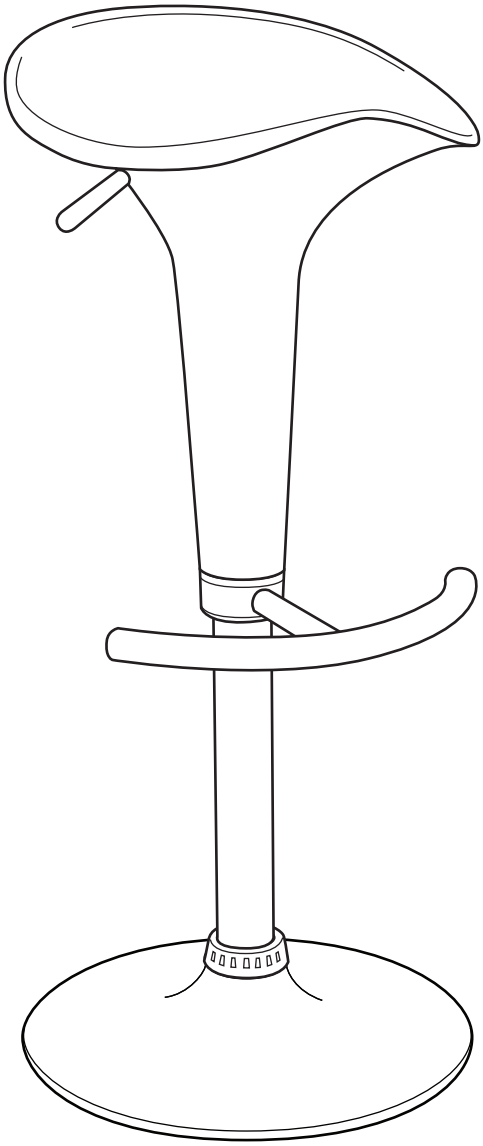

Dimensions

Width - 38.5cm
Depth - 40cm
Height - 64-86cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Issue 4 - 15/10/12

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

• At least 2 people are required to assemble this product.

• Do not discard any of the packaging until you have checked that you have all the parts and the pack of fittings.

• Assemble this product on a flat protected surface.

• Assemble all parts loosely before tightening any bolts.

• Discard all extra fittings and keep fittings out of reach of children.

• Maximum safe weight of user: 110kgs.

• Unit weight: 5.5 kgs.

• Dispose of all packaging carefully and responsibly.

• Retain assembly instruction for future reference.



• We do not recommend the use of power drill/drivers ***for inserting screws,*** as this could damage the unit. Only use hand screwdrivers.

Warnings

• Do not stand on the chair.

• Do not use the chair as a step ladder.

• Do not sit with sharp objects in back pockets as this may damage the seat surface.

• Do not knock the surface of the seat against sharp solid surfaces.

Care and maintenance

• Please clean the table surface using either damp (not wet) cloth and a mild domestic soap solution or by using an appropriate polish.


• Do not use any abrasive materials when cleaning.

• From time to time check that there are no loose bolts on this unit.

Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the parts listed below

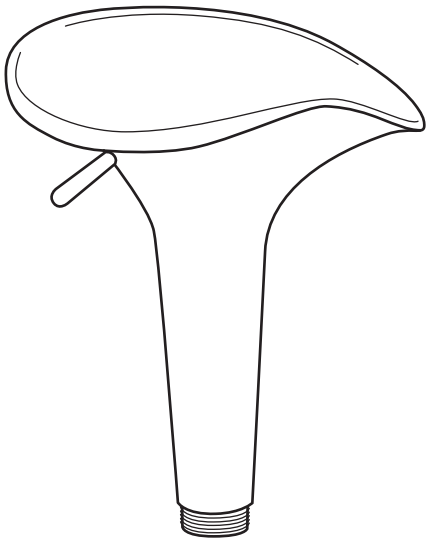


1 Seat
(38.5 x 37 x 46cm)




2 Gaslift
(Ø5 x 49-71cm)



3 Footrest
(33.5 x 20 x 3.5cm)



4 Decor ring
(Ø5 x 7.5 x 2cm)

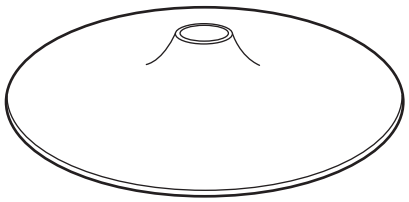

5 Base
(Ø38.5 x 8.5cm)

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A 	**B** 
Stud bolt x 1	Allen key x 1


Assembly Instructions

Step 1

Attaching gaslift

Place the base [5] on a flat protected surface. Position the decor ring [4] on the base and insert the gaslift [2] into the decor ring and hole of the base.


Important:
Remove plastic tip cover on gaslift before assembling.

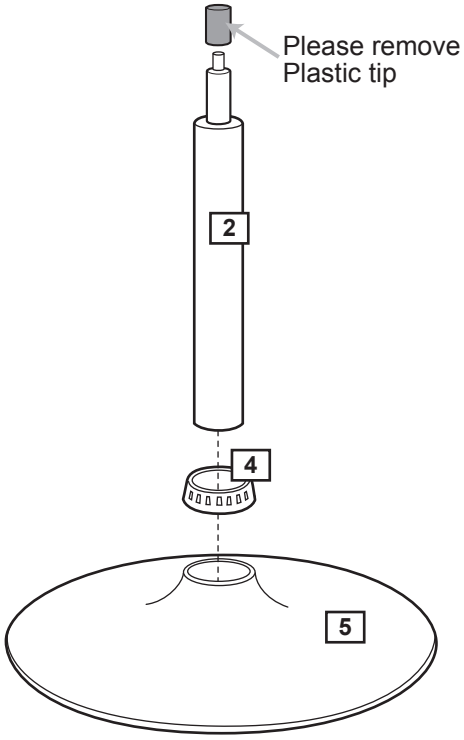

Step 2

Attaching footrest

Lay the seat [1] upside down onto a protected surface. Fix the footrest [3] onto the seat and tighten by turning in counter-clockwise direction.

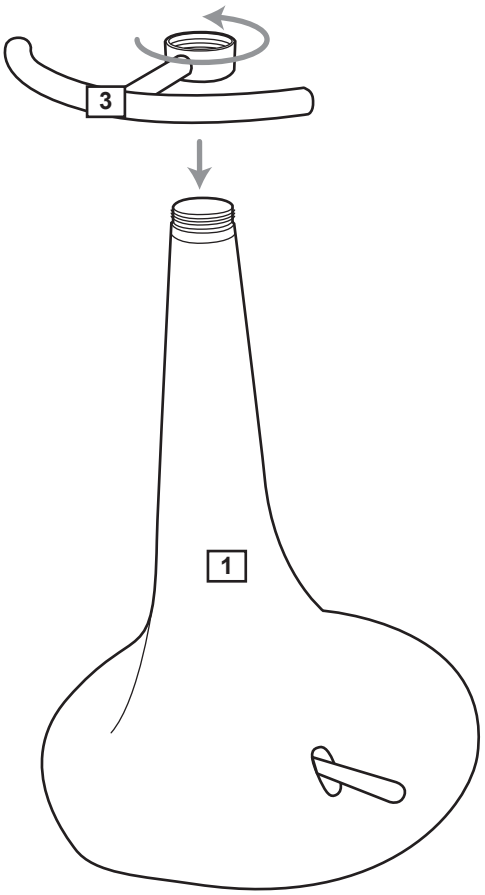


Assembly Instructions

Step 3

Attaching the seat

Insert the gaslift 2 into the seat 1. Secure by pressing down the seat firmly.

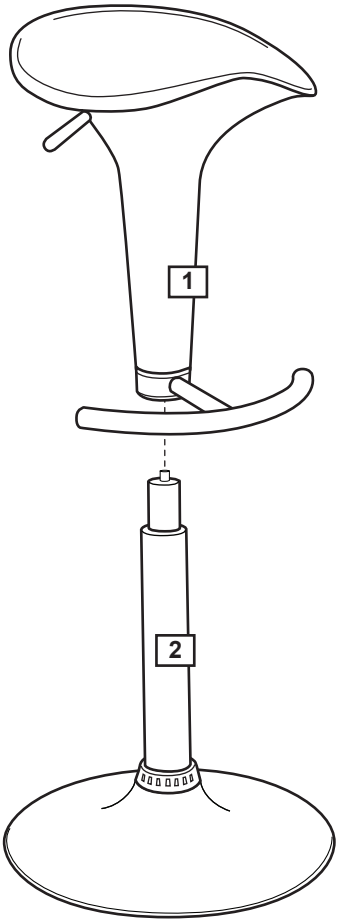

Step 4

Securing footrest

Adjust the footrest 3 and make sure to centre align it with the seat. Then secure using stud bolt Ⓐ as shown and tighten using allen key Ⓑ.


Gaslift operation


To adjust the seat higher, lift up the lever under the seat and release at desired height.

To lower the seat, lift up the lever while **fully seated** on the stool.

To ensure proper operation of the gaslift, a person must sit fully on the seat. Sitting on the tip or edges of the seat may not activate the gaslift properly.

Assembly is complete.

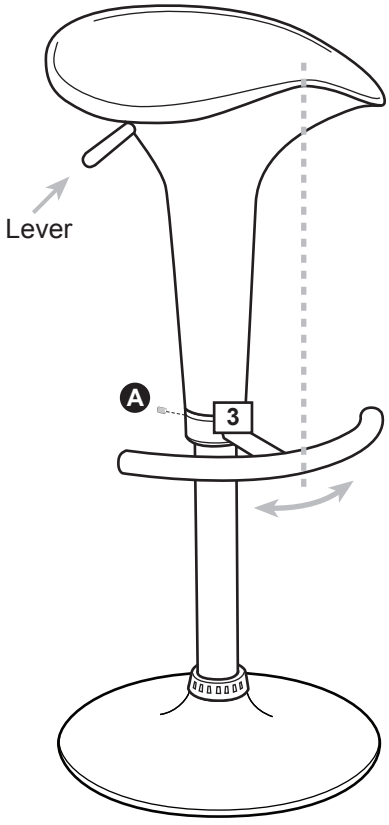



If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**