
Winslow Bar stool

Assembly Instructions - Please keep for future reference

600/5580

600/5597

600/5607

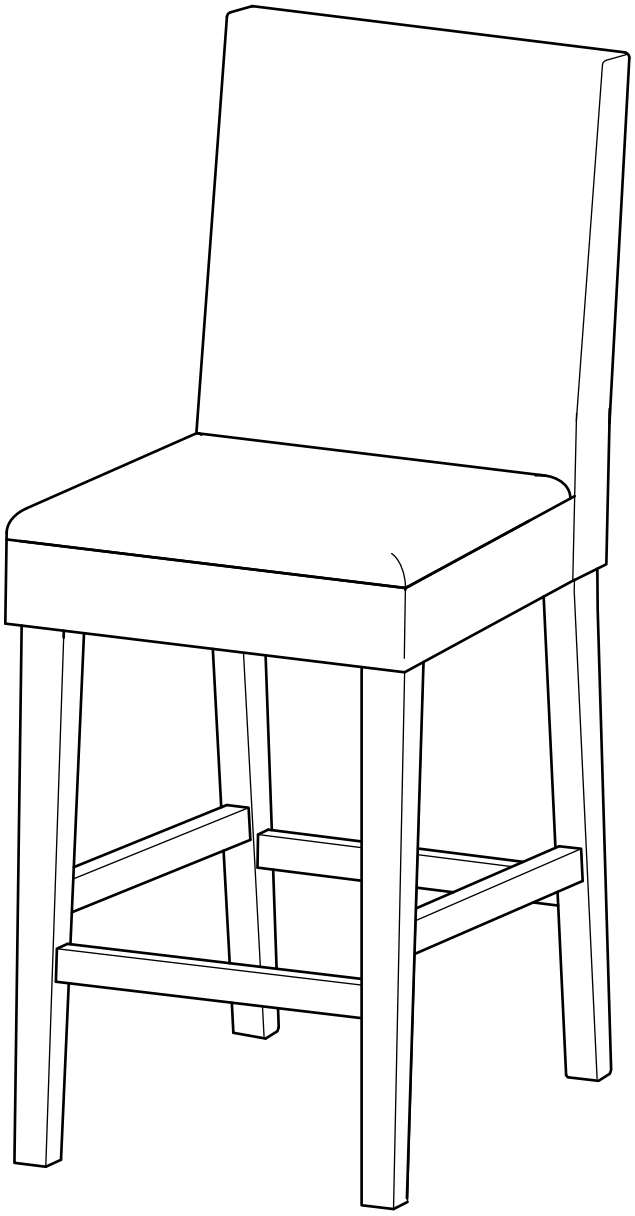

Dimensions

Width - 40cm
Depth - 53cm
Height - 100cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Issue 1 - 9/02/10

⚠ Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on page 2.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product during assembly, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drill/drivers ***for inserting screws,*** as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

• Maximum safe weight of user : 100 kgs.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.


• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the panels listed below

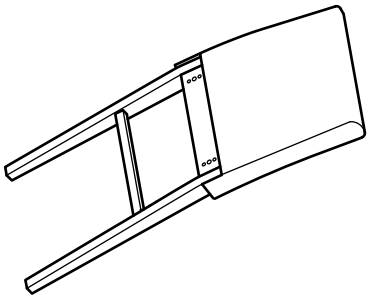


1 Chair back x 1



2 Seat x 1



3 Leg x 2



4 Side stretcher rail x 2





5 Front stretcher rail x 1

Components - Fittings

Please check you have all the panels listed below


Note :The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Bolt x 8	**B**  Spring washer x 8	**C**  Washer x 8
D  Wood dowel x 2	**E**  Screw x 6	**F**  Allen key x 1

Assembly Instructions

Step 1


a: Insert wood dowels Ⓓ into each centre hole in the back of the seat [2].

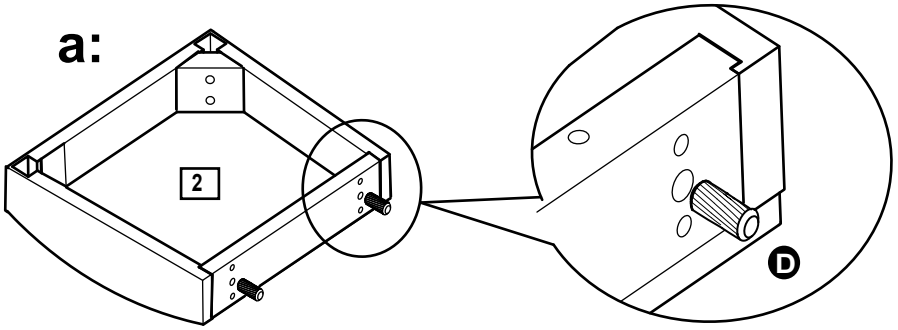

b: Insert bolts Ⓐ with spring washers Ⓑ and washers Ⓒ through the holes at the back of the seat [2] into the chair back [1] . Tighten bolts with allen key Ⓕ.

Do not fully tighten.

Screw in screw Ⓔ into the pre - drilled holes on the side stretcher rail [4] using screwdriver.

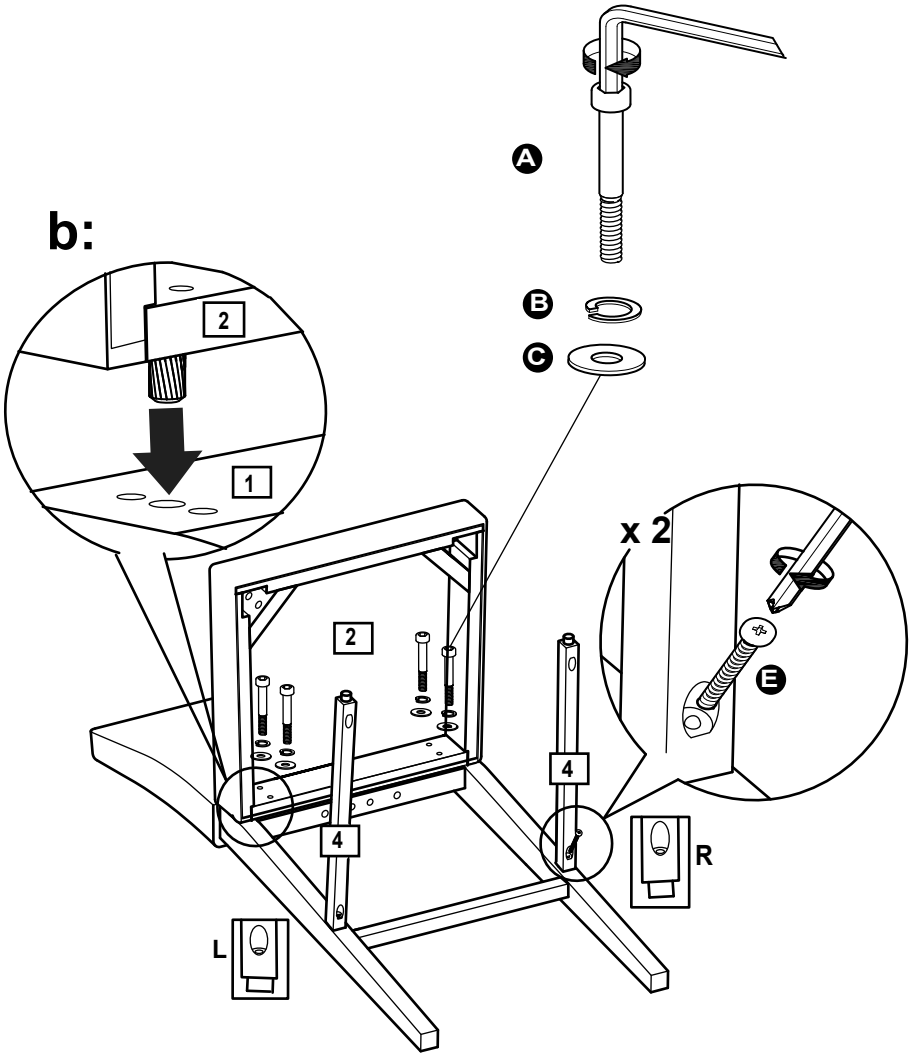


Assembly Instructions

Step 2

a: Fit the front stretcher rail [5] to the front legs. Screw in screw (E) into the pre-drilled holes on the front stretcher rail [5].


a:

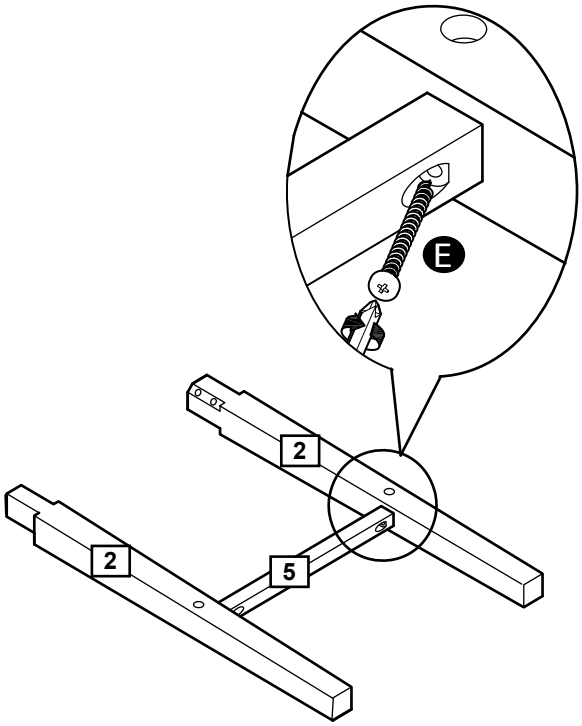

b: Attach legs [2] to front corners of the seat frame. Use bolts (A) with spring washers (B) and washers (C) into each 2 holes in the front corners. Tighten bolts with allen key (F).

Screw in screw (E) into the pre-drilled holes on the front stretcher rail [5] using screwdriver.

b:

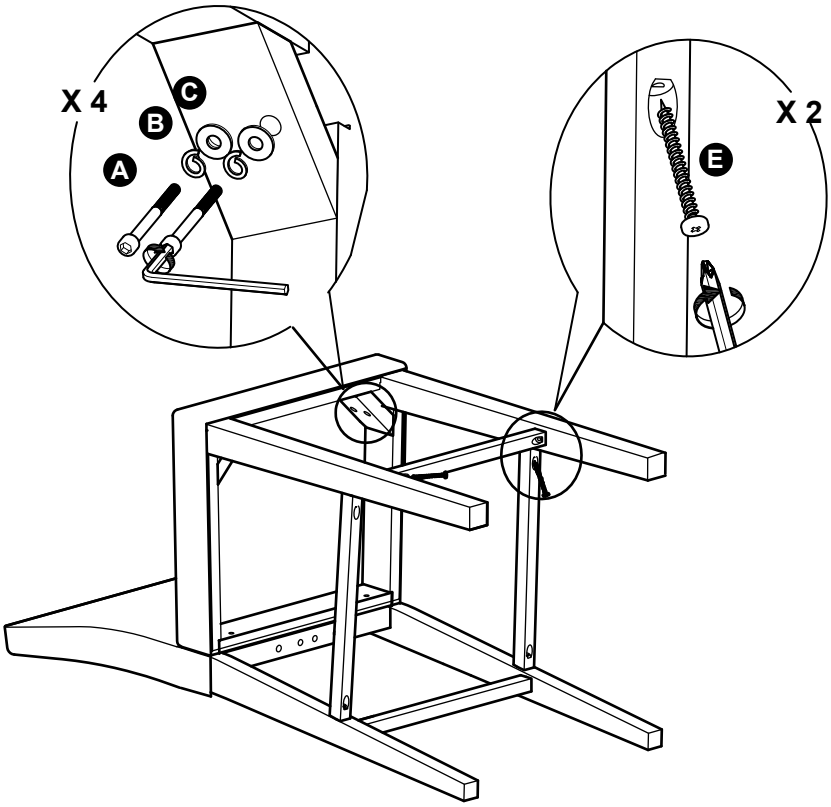


Assembly Instructions

Step 3


Note : Stand the chair on a level floor.

a: Tighten all bolts.

a:

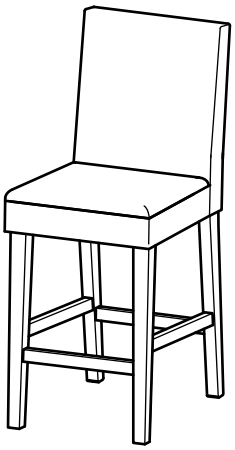


b:

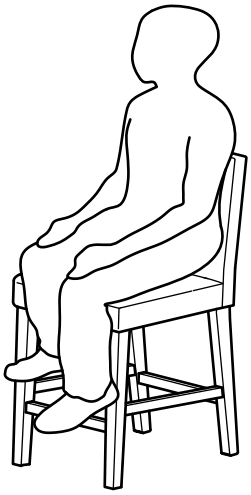

b: Sit on the chair to level the legs.

c:

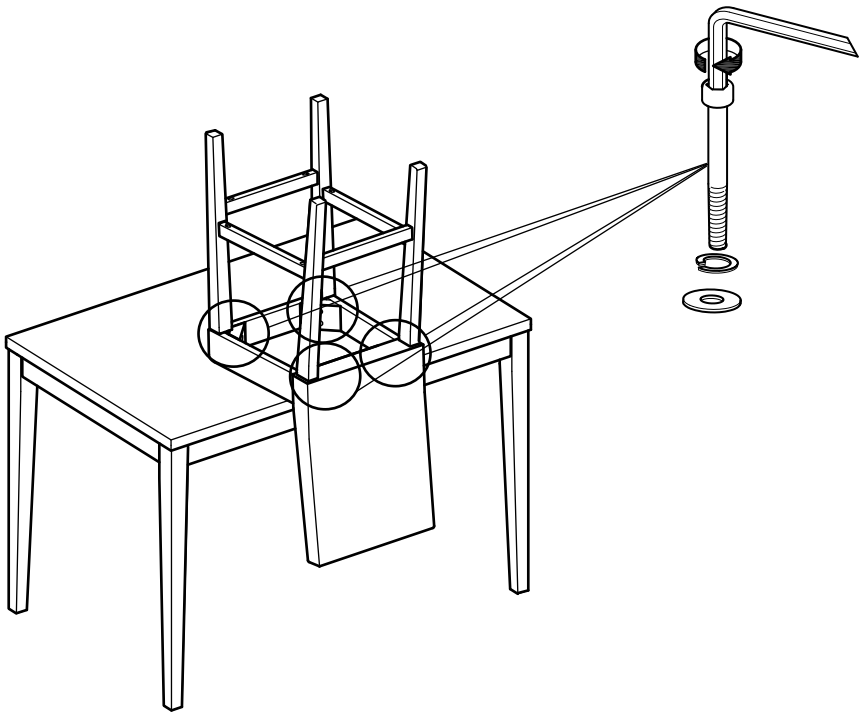


c: After sitting test, re - tighten bolts again, if adjustment needed.

d: Highly recommend to re - tighten all the bolts again after using the chair for 7 days.

Note : Please keep Allen key to re - tighten all bolts again when required.

d:

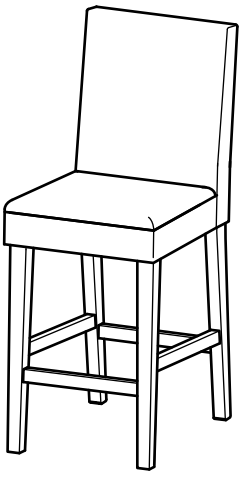

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**

Assembly Instructions


Step 3

Note : Stand the chair on a level floor.

a: Tighten all bolts.


Note : Step 3 is essential to prevent the chair from wobbling caused by uneven legs.

a:

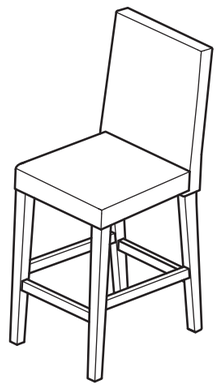


b: Sit on the chair to level the legs.

b:

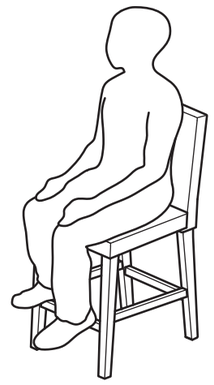

c: After sitting test, re - tighten bolts ,if adjustment is needed.


c:

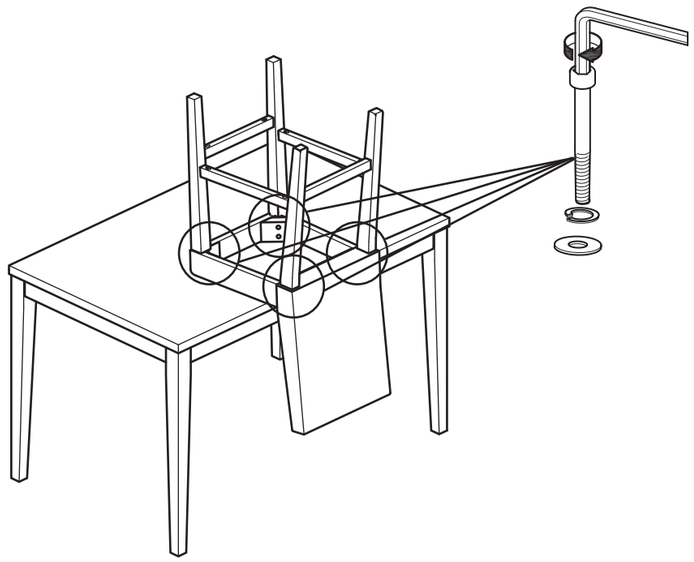

d: It is highly recommend to re - tighten all the bolts after using the chair for 7 days.

Note : Please keep allen key to re - tighten all bolts when required.

d:

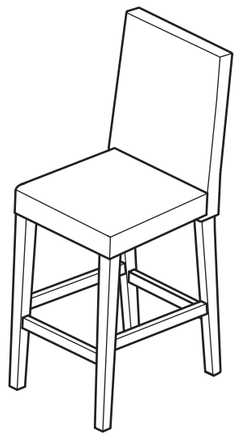


Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 0845 6400800**

Winslow Bar stool

Assembly Instructions - Please keep for future reference

600/5580
600/5597
600/6280
600/6400

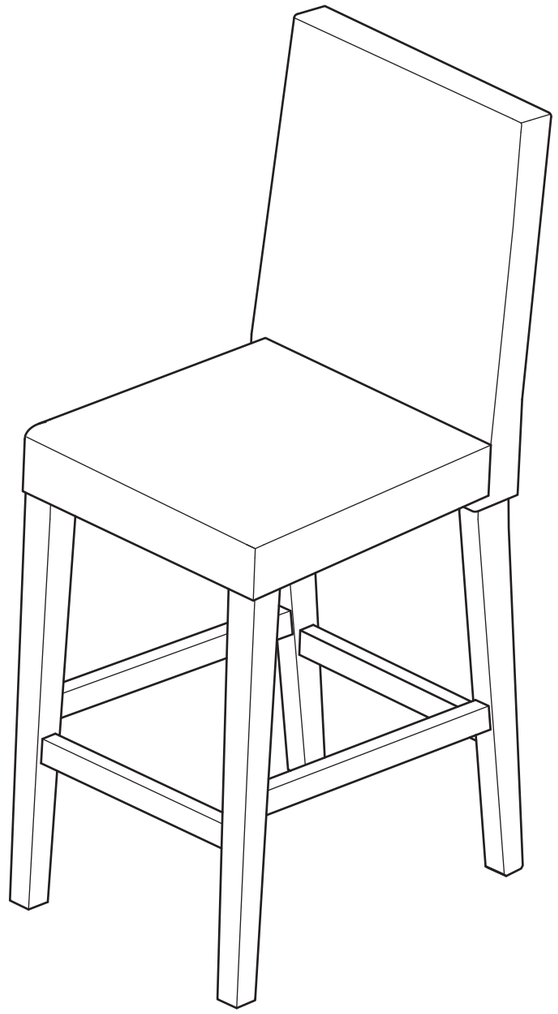

Dimensions

Width - 40cm
Depth - 53cm
Height - 100cm

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Issue 1 - 9/02/10

⚠ Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on page 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product during assembly, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drill/drivers ***for inserting screws,*** as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

• Maximum safe weight of user: 110 Kgs.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.


• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Assembly Instructions


c: Fit the front stretcher rail [7] to the right leg [3] and left leg [4] .

c:

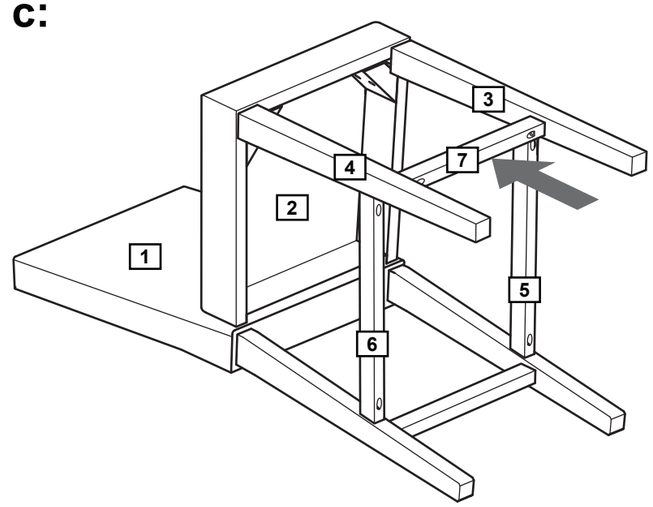

d: Turn over the chair. Screw the screw Ⓔ into the pre - drilled holes on the front stretcher rail [7] and the right side stretcher rail [5] and the left side stretcher rail [7] using screwdriver.

d:

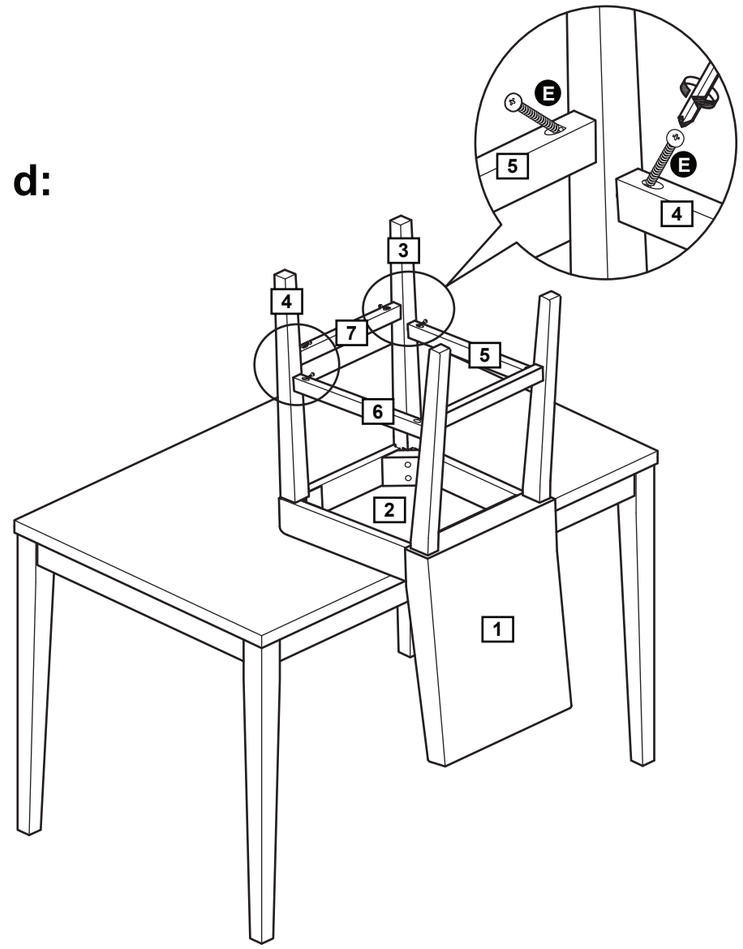


Assembly Instructions

Step 2

a: Attach left legs [4] to front corners of the seat frame. Use bolts Ⓐ with spring washers Ⓑ and washers Ⓒ into each of the 2 holes in the front corners. Tighten bolts with allen key Ⓕ .

Do not fully tighten.


a:

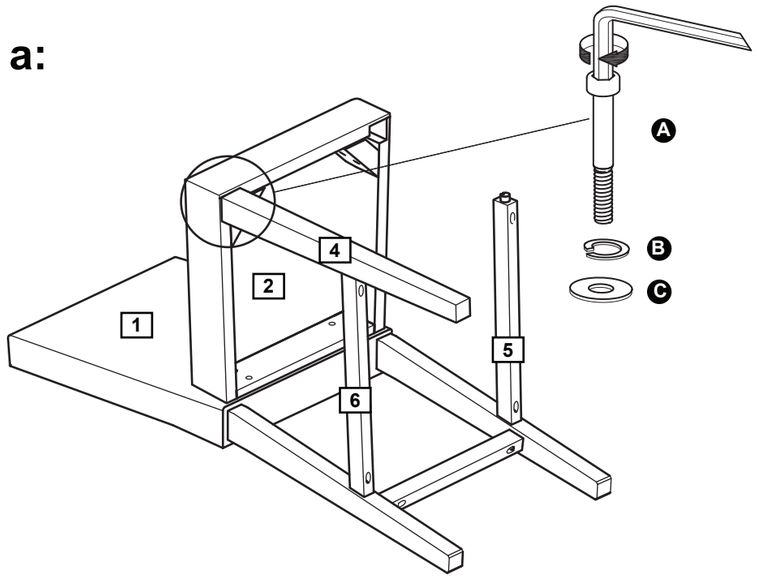

b: Attach right legs [3] to front corners of the seat frame. Use bolts Ⓐ with spring washers Ⓑ and washers Ⓒ into each of the 2 holes in the front corners. Tighten bolts with allen key Ⓕ .

Do not fully tighten.


b:

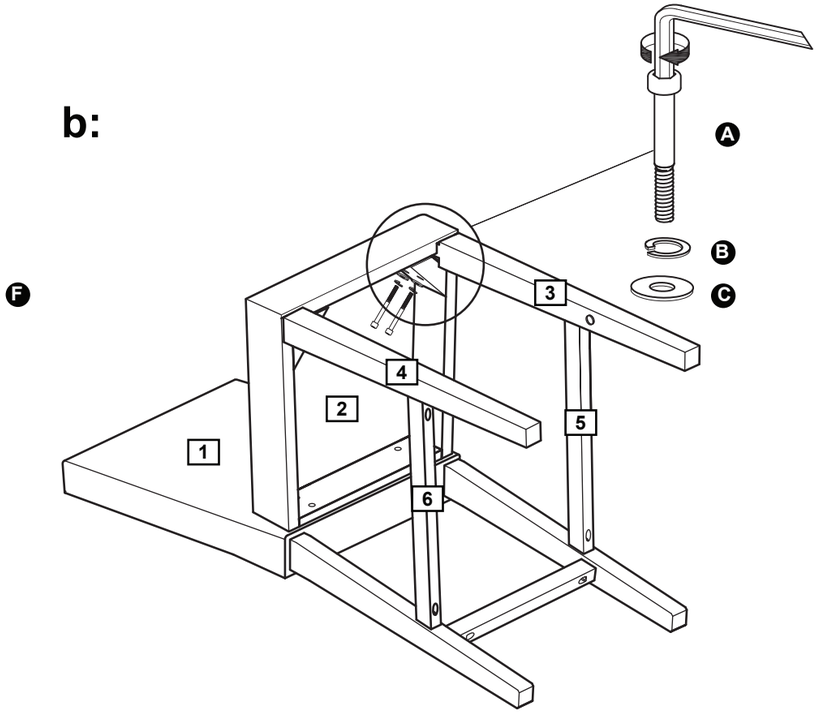


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**


Please check you have all the parts listed below

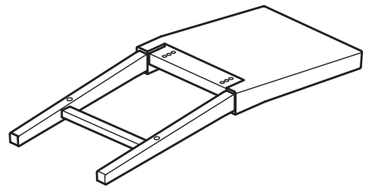


[1] Chair back x 1



[2] Seat x 1



[3] Right leg x 1



[4] Left leg x 1



[5] Right side stretcher rail x 1



[6] Left side stretcher rail x 1





[7] Front stretcher rail x 1


Components - Fittings

Please check you have all the fittings listed below

Note :The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


 Bolt x 8	 Spring washer x 8	 Washer x 8
 Wooden dowel x 2	 Screw x 6	 Allen key x 1

Tools required



Phillips screwdriver
(medium & large)

Ruler - Use this ruler to help correctly identify the screws




Assembly Instructions

Step 1

a: Insert wooden dowels Ⓓ into each centre hole in the back of the seat [2].

a:

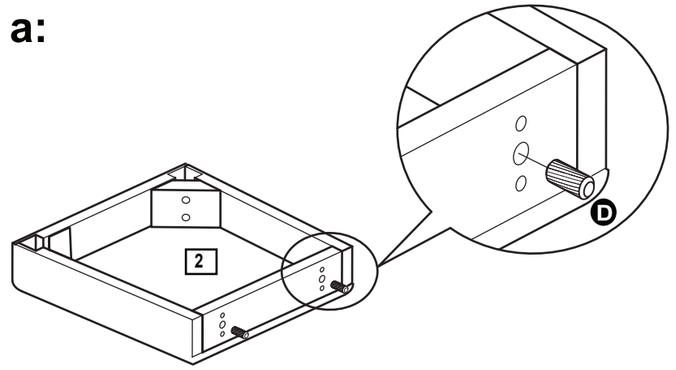


b: Insert bolts Ⓐ with spring washers Ⓑ and washers Ⓒ through the holes at the back of the seat [2] into the chair back [1]. Tighten bolts with allen key Ⓕ.

Do not fully tighten.

Screw the screw Ⓔ into the pre - drilled holes on the right side stretcher rail [5] and the left side stretcher rail [6] using screwdriver.

b:

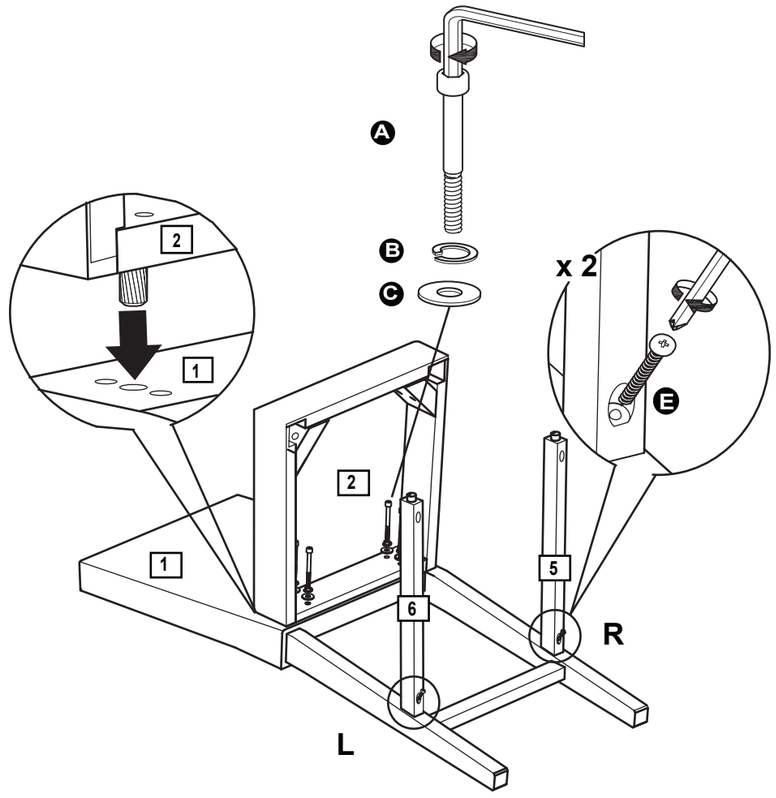

Winslow Bar Stool


Assembly Instructions - Please keep for future reference

600/6400

600/5597

600/5580

600/6280

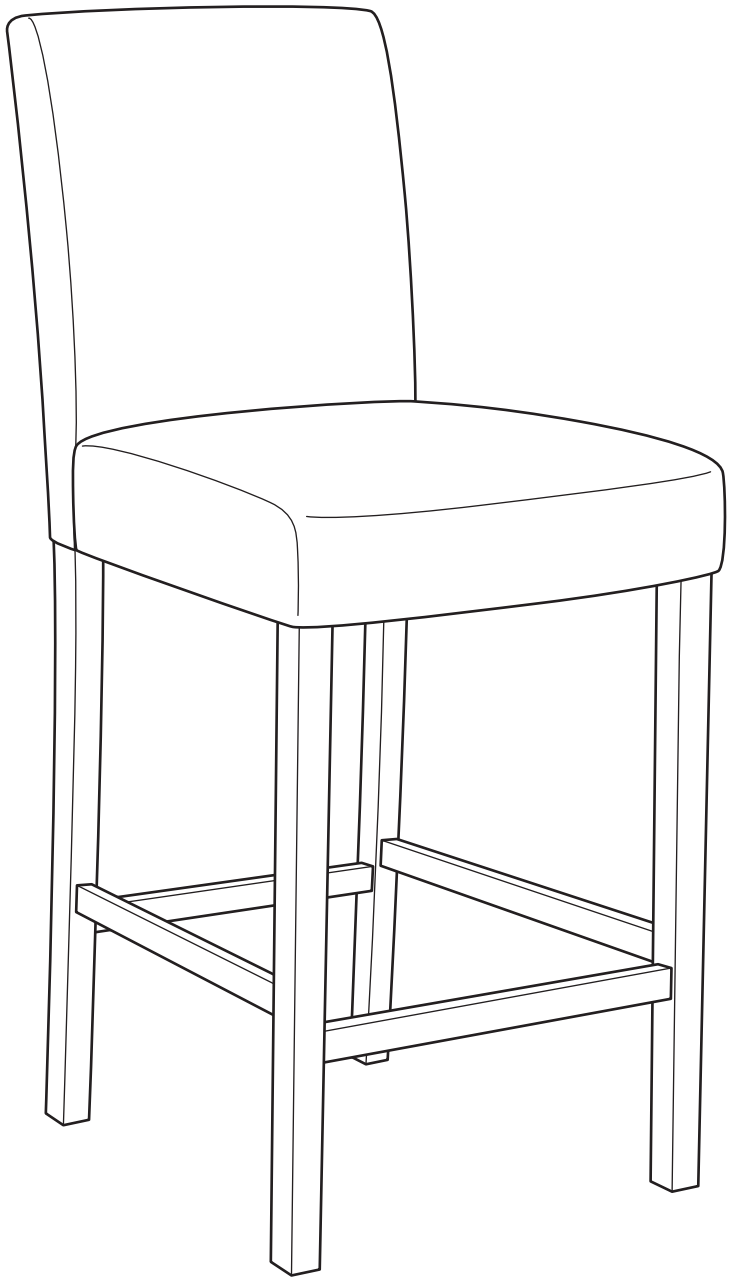

Dimensions

Width - 41cm

Depth - 52cm

Height - 100.5cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

Issue 1 - 30/08/13

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

• Assemble this product on a flat surface.

• Assemble all parts loosely before tightening any bolts.

• Do not discard any of the packaging until you have checked that you have all the parts and the pack of fittings.

• Discard all extra fittings and keep fittings out of reach of children.

• Unit weight: 6.9kgs.

• Maximum safe weight of user: 110kgs.

• Retain Assembly Instructions for future reference.



• We do not recommend the use of power drill/drivers ***for inserting screws***, as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

Warnings

• This product should only be used on firm, level ground.

• Make sure the legs remain in contact with the ground.

• Do not stand on the product.

Care and maintenance

• Please clean the product using either damp (not wet) cloth and a mild domestic soap solution or by using an appropriate polish.


• Do not use any abrasive materials when cleaning.

• From time to time check that there are no loose bolts on this unit.

Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 08456 400800**

Please check you have all the parts listed below

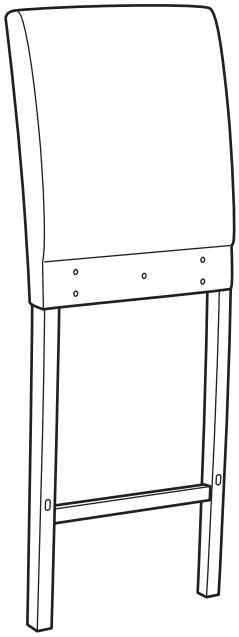


1 Backrest
(39.5 x 11 x 100cm)



2 Front right leg
(4 x 4 x 59.5cm)



3 Front left leg
(4 x 4 x 59.5cm)

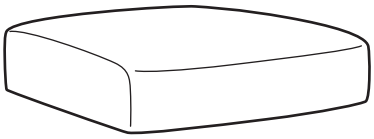

4 Seat
(41 x 41 x 11.5cm)



5 Front stretcher
(34.5 x 2.5 x 3cm)






6 Side stretcher x 2
(41 x 2.5 x 3cm)


Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  M8 x 55mm Bolt x 9	**B**  50mm Screw x 6	**C**  Spring washer x 9
D  Flat washer x 9	**E**  Allen key x 1	

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1


Attaching backrest

Place the backrest on a flat protected surface.

Peel off bottom cloth cover of seat by pulling the cloth from the back side of the seat.

Position the seat 4 on the backrest 1 as shown and fix using bolts A, spring washers C and washers D. Tighten bolts using allen key E.

Note:
Use oval head of allen key on tight angles.

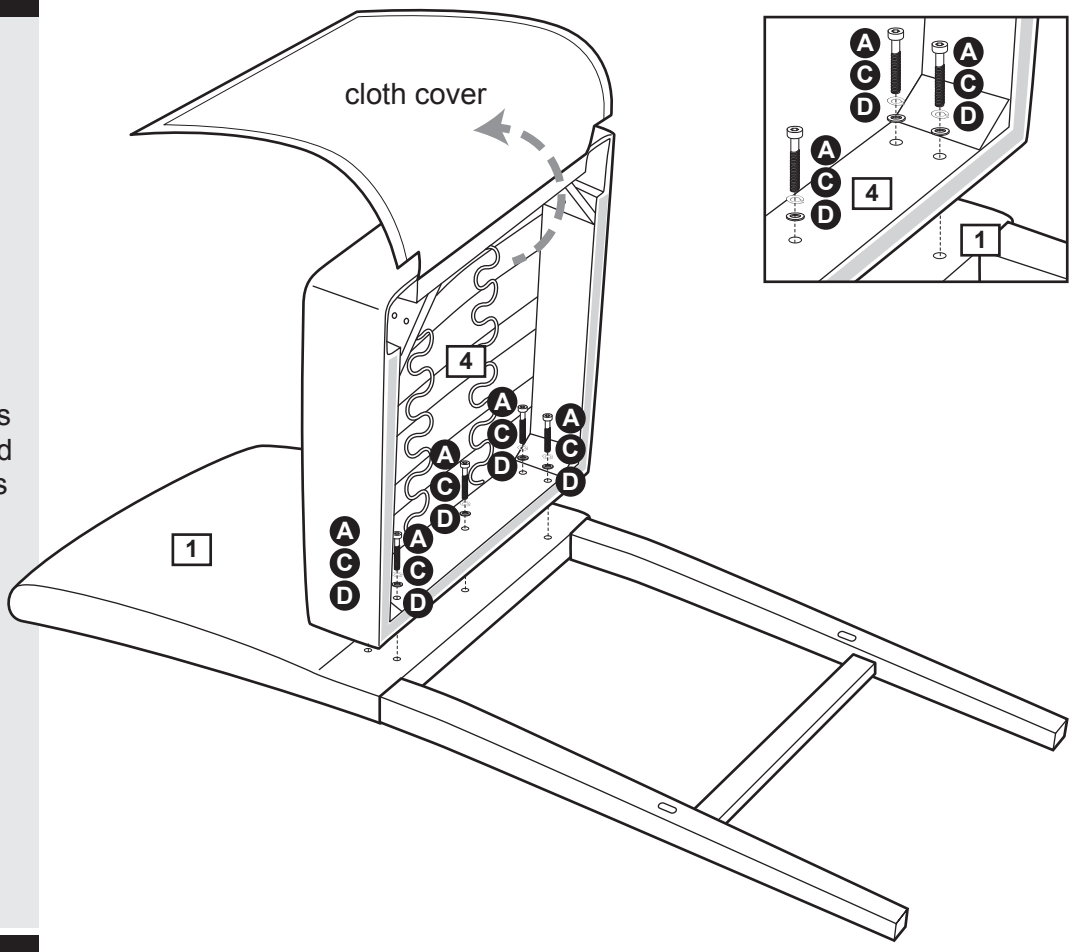


Step 2

Attaching side stretchers

Position the side stretchers 6 and insert it into holes on the back rest 1 as shown.

Note:
For the correct assembly of the side stretcher 6 to the backrest, the green arrow sticker shall be pointing up.

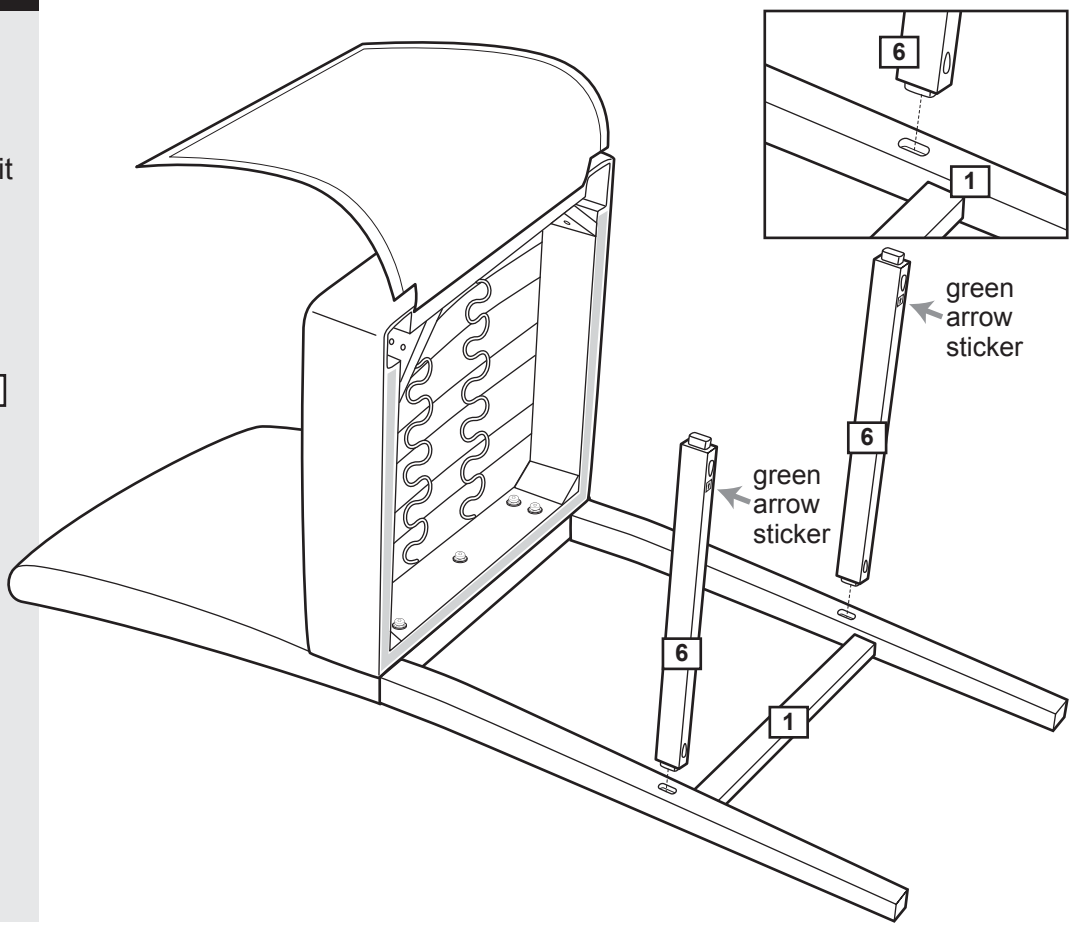

Assembly Instructions

Step 3


Attaching front legs

a: Correctly position the front legs 2 & 3 and insert it into holes on the seat 4 as shown.


Note:
Identify the front right leg 2 which is labeled with 'R' sticker and the front left leg 3 with 'L' sticker.


b: Carefully move up the front legs and insert the side stretchers 6 into holes on the front legs as shown.

a:

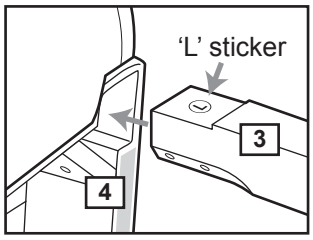

b:

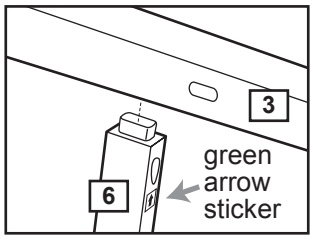


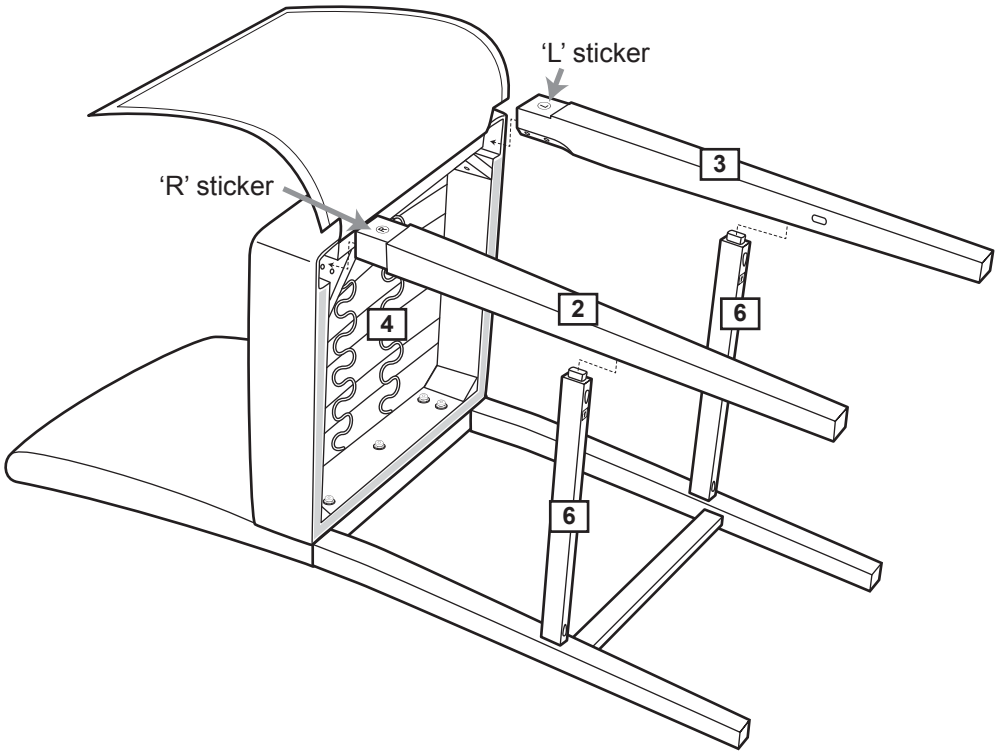

Step 4

Attaching front stretcher

Position the front stretcher 5 and carefully insert it into holes on the front legs 2 & 3 as shown.

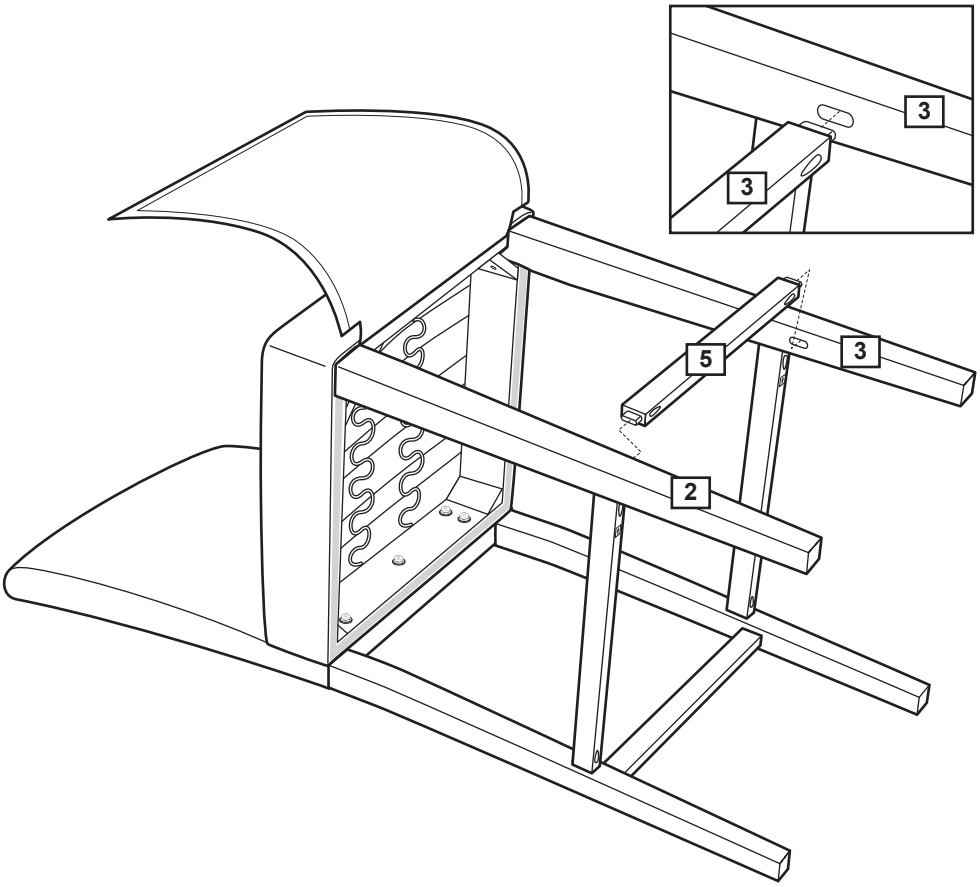


Assembly Instructions

Step 5

Fixing front legs

Secure the front legs 2 & 3 to seat 4 using bolts A, spring washer C & washers D. Tighten bolts using allen key E.

Note:
Use oval head of allen key on tight angles.

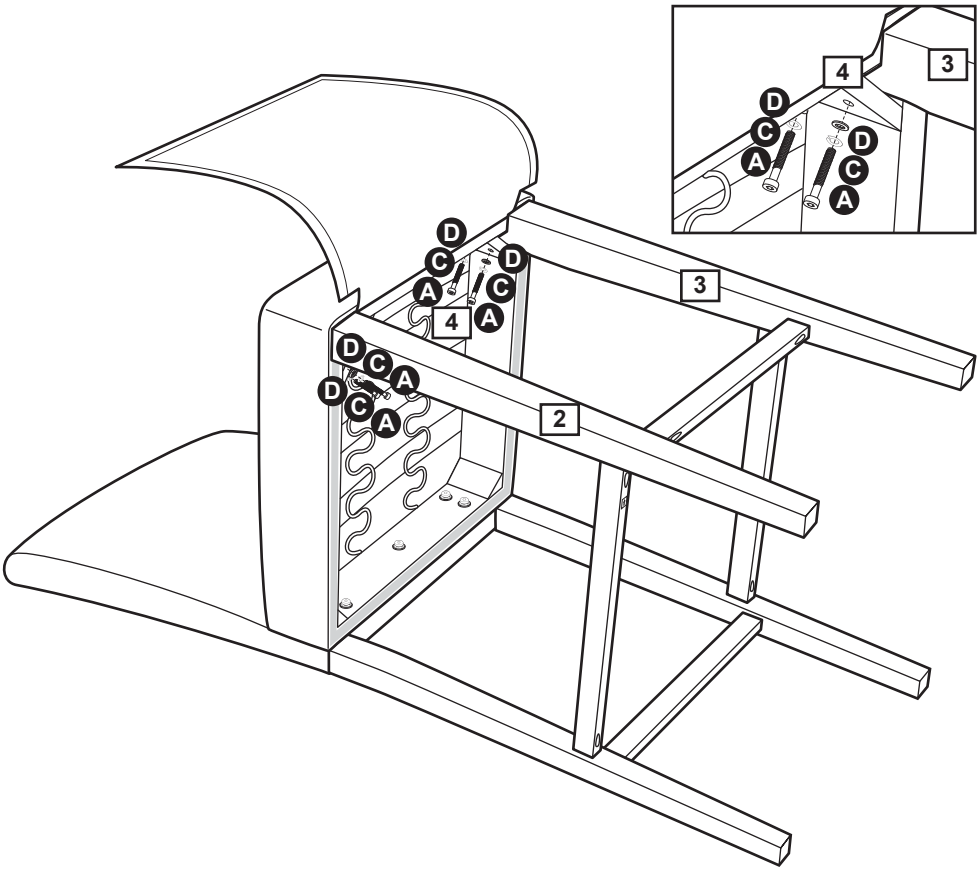

Step 6

Fixing stretchers


Carefully turn the bar stool upside down on a raised protected surface.


Secure the stretchers 5 & 6 using screws B and tighten using a crosshead screwdriver.


Re-attach the bottom cloth cover as shown and secure with the fasteners attached.

Carefully turn the bar stool upright and place on a flat surface.

Assembly is complete.

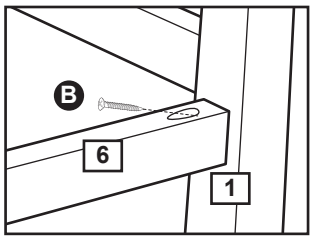

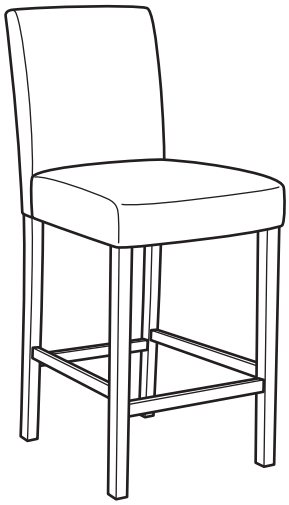

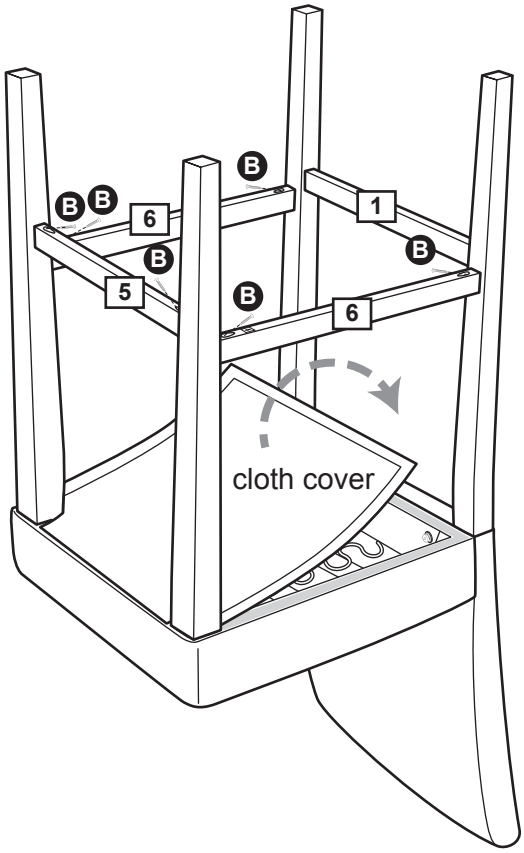

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**