Athina - 1000 Base Unit


Assembly Instructions - Please keep for future reference

608/0811

608/0938

608/0873

608/0990

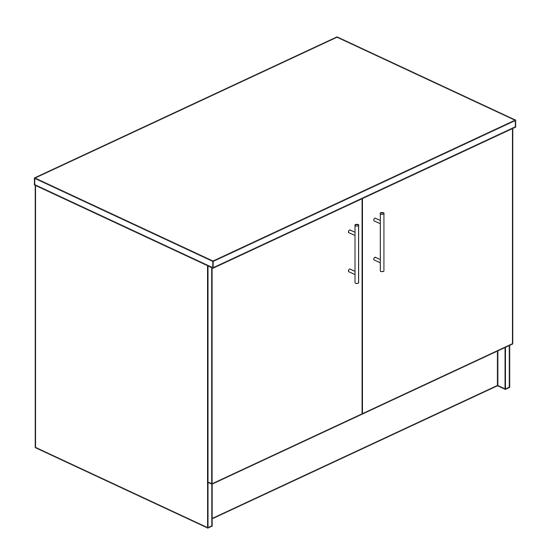

Dimensions

Width - 100cm

Depth - 59cm

Height - 89.5cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 42kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



 We do not recommend the use of power drill/drivers for inserting screws,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the bracket supplied.
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below



Left Side (D0315A) (870 X 570mm)



2 Right Side (D0316A) (870 x 570mm)




3 Top (D0339A) (1000 x 590mm)



4 Base (D0323A) (970 X 499mm)



5 Shelf (*D0324A*) (969 X 427mm)




6 Rail (D0321A) (970 x 60mm) x 2



7 Plinth (D0322A) (970 x 150mm)





9 Door (D0317A) (716 x 497mm) x 2



Back (X740) (980 x 533mm)




Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

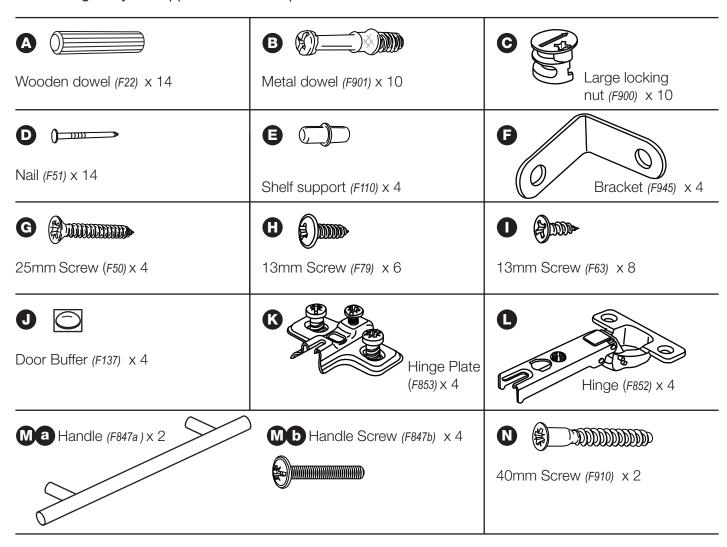

Tools required

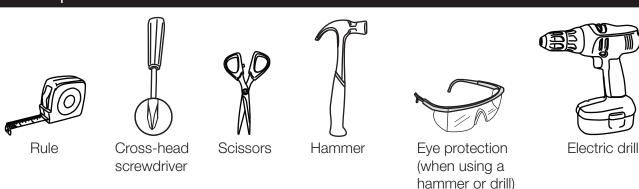

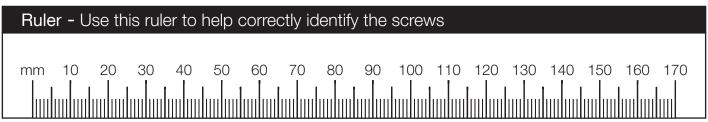

If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 08456 400800 quoting the reference numbers below

Step 1


Fit 2 brackets to the left side

Fit a bracket **F** to the left side 1, 100mm in from the back edge, see diagram.

Fit another bracket **F** to the left side 1, 100mm down from the top edge, see diagram.

Secure each bracket using screw H.

Note: The brackets must be flush with the edges of the panel.

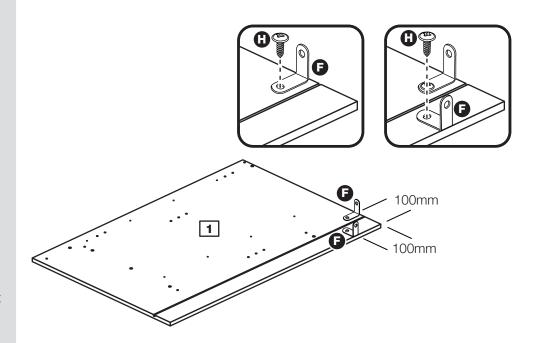


Step 2

Prepare the left side

a: Fit 2 hinge plates K onto the left side 1, making sure that the slot is facing towards the front edge.

b: Screw 5 metal dowels **B** into the holes shown on the left side 1.

Note: Tighten metal dowels up fully against the panels.

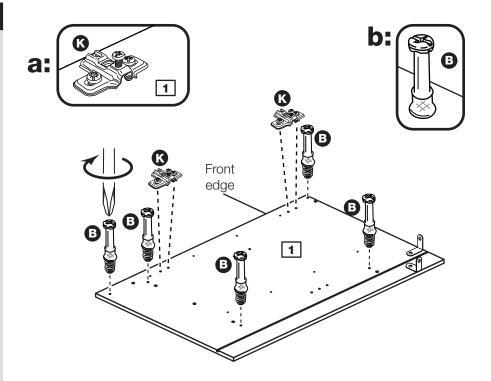

Step 3


Fit 2 brackets to the right side


Fit a bracket **f** to the right side **2**, 100mm down from the back edge, see diagram.

Fit another bracket **f** to the right side **2**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

Note: The brackets must be flush with the edges of the panel.



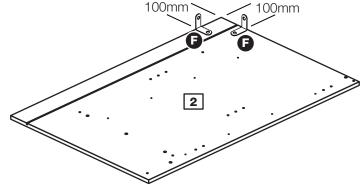


Step 4

Prepare the right side

a: Fit 2 hinge plates (s) onto the right side 2, making sure that the slot is facing towards the front edge.

b: Screw 5 metal dowels B into the holes shown on the right side 2.

Note: Tighten metal dowels up fully against the panels.

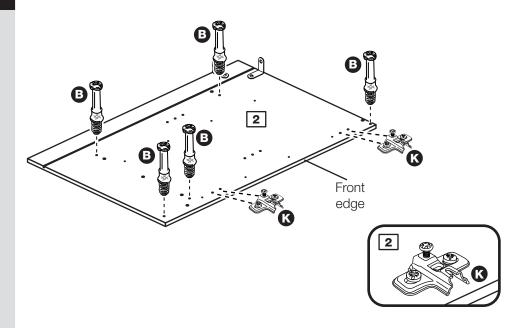

Step 5


Prepare the base

Insert 4 large locking nuts **©** into the base **4** as shown.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

Tap 6 wooden dowels **A** into the base **4** as shown.

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

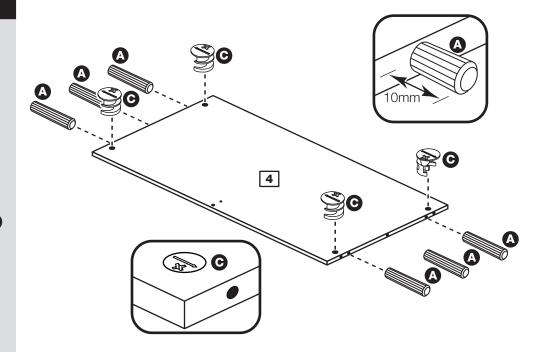


Step 6

Fit the base to the right side

Push the base 4 onto the right side 2.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the base **4**.

Note: Turn the large locking nuts **(C)** as far as they will go - more than 1/2 a turn.

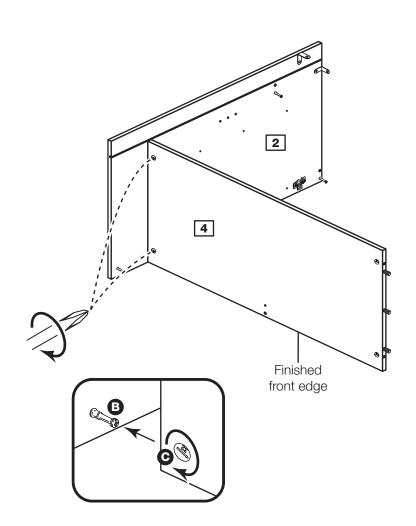


Step 7

Prepare the 2 rails and munting

Insert 2 large locking nuts **©** and 2 wooden dowels **A** into each of the 2 rails **6**.

Tap 2 wooden dowels **A** into the munting **8**.

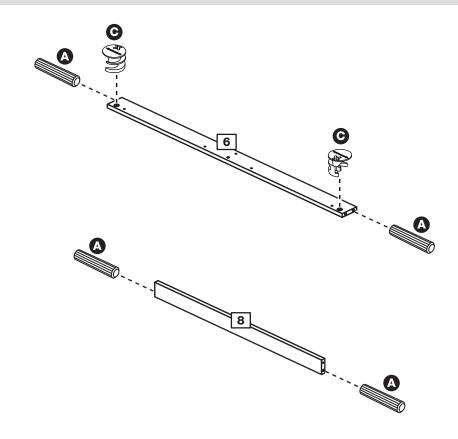


Step 8

Fit a rail to the right side

Push one of the rails 6 onto the right side 2 as shown.

Use a screwdriver to tighten the large locking nut **©**.


Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

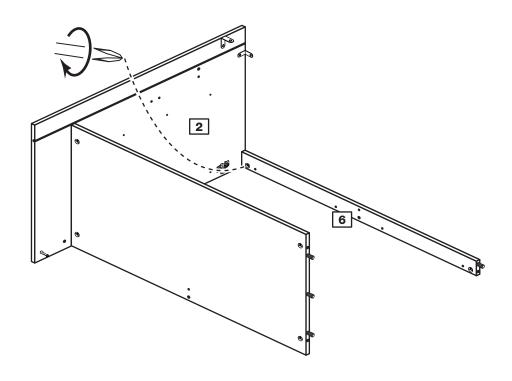

Step 9

Fit the munting


Fit the munting 8 to the rail 6 and base 4 and secure using 2 screws N.

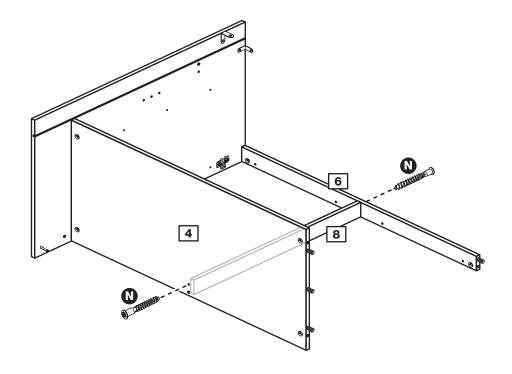

Step 10

Prepare the plinth

Insert 2 large locking nuts **©** and 2 wooden dowels **A** into the plinth **7**.

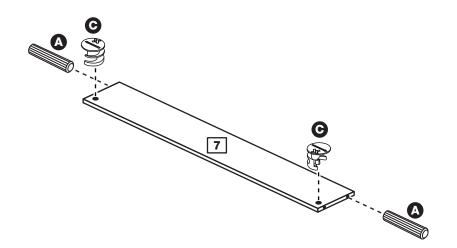

Step 11


Fit the rail and plinth

Push the rail 6 and plinth 7 onto the right side 2 as shown.

Use a screwdriver to tighten the 2 large locking nuts • fitted to the 2 panels, as shown.

Note: Turn the large locking nuts **(c)** as far as they will go - more than 1/2 a turn.

Note: Support the rail **6** until the left side has been fitted in the next stage.

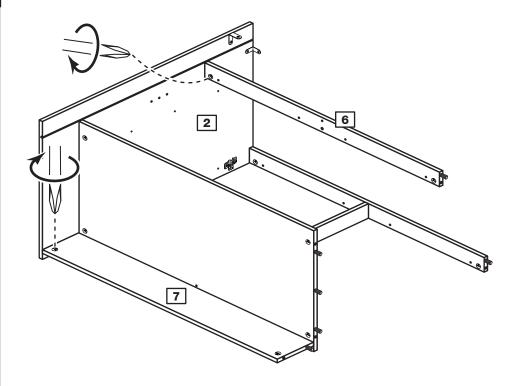


Step **12**

Fit the left side

Push the left side 1 onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **©** fitted to the base **4**, rails **6** and plinth **7**.

Note: Turn the large locking nuts as far as they will go - more than 1/2 a turn.

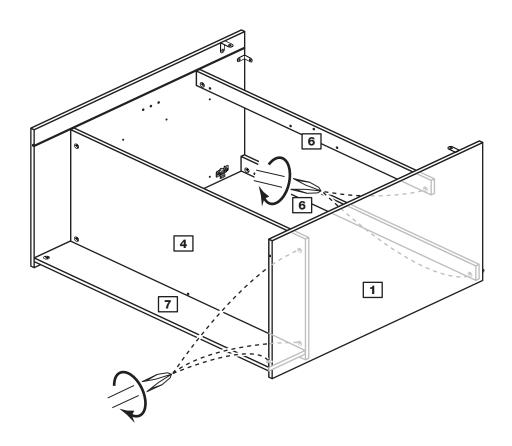

Step 13

Fit the back


a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Slide the back 10 into the grooves along the left 1 and right 2 sides, as shown.

by tapping 7 nails down into the back edge of the base 4 and 7 nails into the back edge of the rail 6.

Stand the unit up for the next stage.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

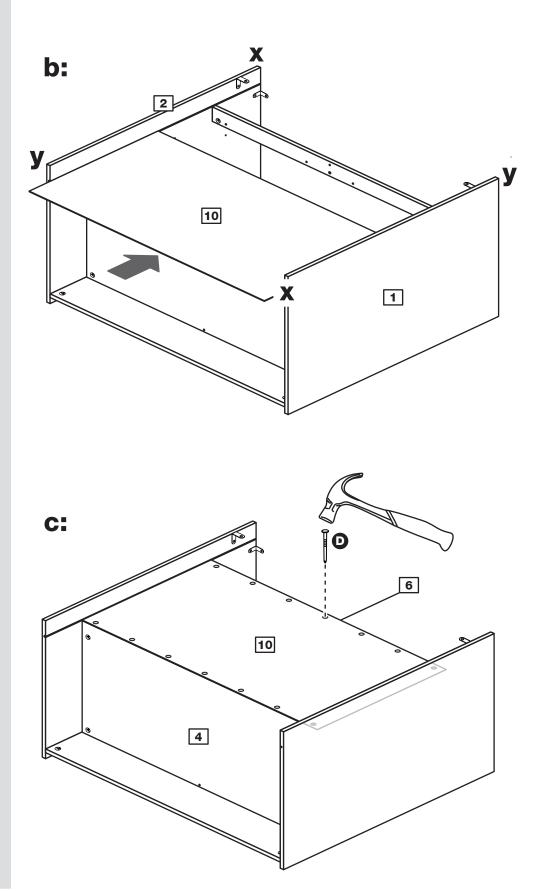

Step 14

Fit the top


Position the top 3 onto the unit, making sure that the back edge is flush with the back edge of the sides 1 and 2.

Secure the top 3 using screw (1) through the 2 brackets (2) fitted at the top edge of the side panels (1) and (2).

Step 15

Secure the front of the top

To secure the front of the top 3, screw up through the 4 holes in the rail 6 at the front of the unit using screws 6.

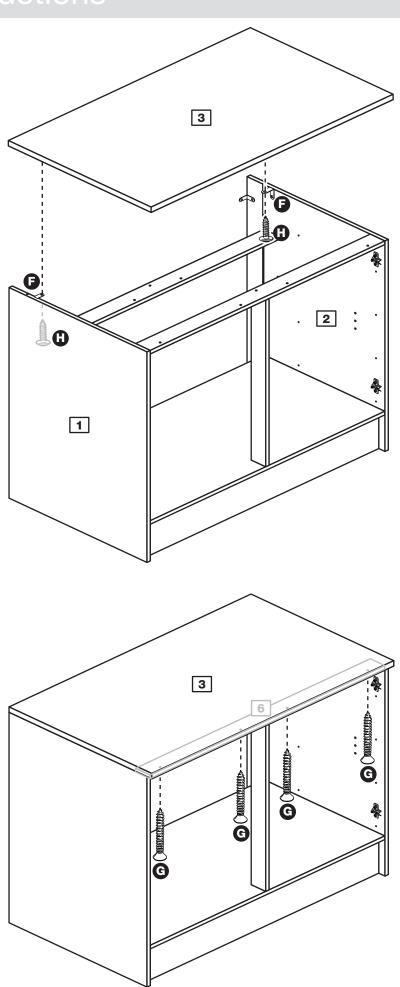


Step 16

Secure the unit to the wall

Using the brackets **f** fitted to the back edge of the sides **1** and **2** screw the unit to the wall.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the Unit to the wall.


Warning: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

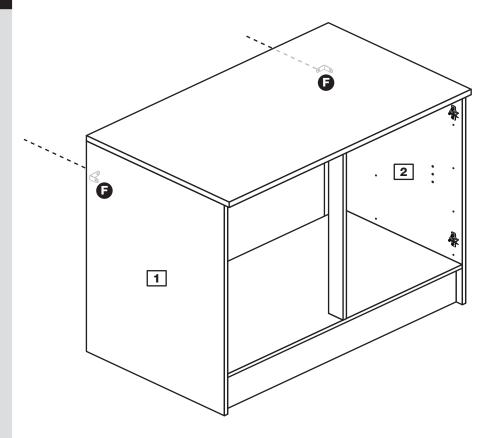

Step 17

Fit the shelf studs


Push 4 shelf studs into the holes in the side panels 1 and 2 at the desired height.

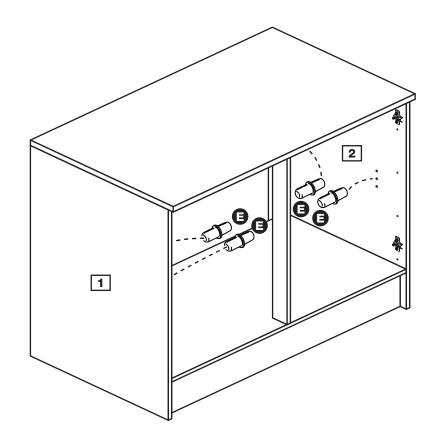

Step 18

Fit the shelf

Manouvre the shelf 5 into the unit onto the shelf studs **5**.

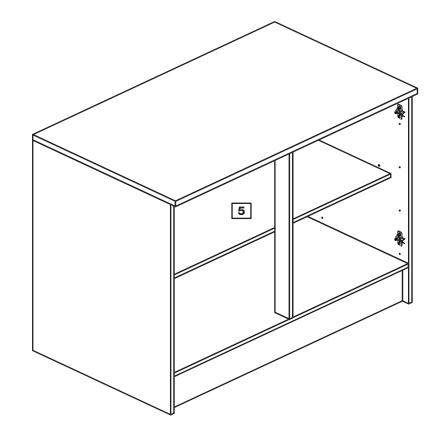


Step 19

Prepare the 2 doors

Push fit the 2 hinges into the door 9.

Secure each hinge with 2 screws ①.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the front edge of the door.

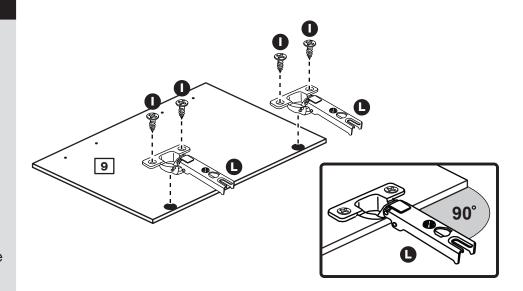

Step 20

Drill the handle holes in the door

Important: Please follow these instructions carefully.


Lay the doors 9 down onto a smooth surface.


Important: Check that the holes and hinges are in the same place as the diagrams.

Note: We recommend the use of a small piece of waste wood, placed behind the hole while drilling, to reduce the possibility of any breakout.

Using the pilot hole in the rear face of the door 9, drill through the holes indicated opposite, using a 2.5mm diameter drill.

Turn the door **9** over and open out the 2.5mm holes that you have just drilled by drilling back through them with a 5mm drill.

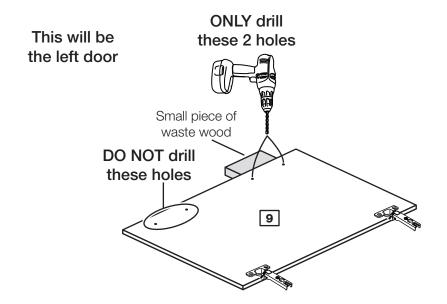

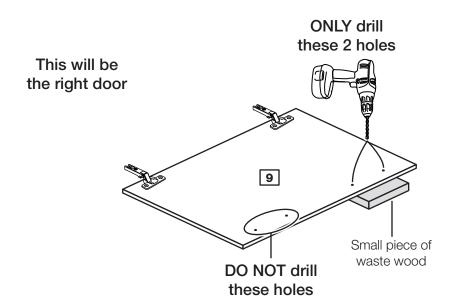

Step 21

Fit doors and handles

2 people are needed here

Note: The easiest way to attach the door **9** is to fit the top hinge first, then align and fit the other hinges.

a: Push the hinge onto the front part of the hinge plate **(S**).

b: Keep the hinge **C**FLAT against the hinge plate **C** as you slide it across as far as it will go. Tighten screw A.

C: The hinge must be flat against the hinge plate prior to any adjustment.


d: The hinge **(L)** must NOT be AT AN ANGLE to the hinge plate K when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble

being careful to

instructions a-c.

follow

e: Attach a handle Ma to the door 9 using 2 screws Mb.

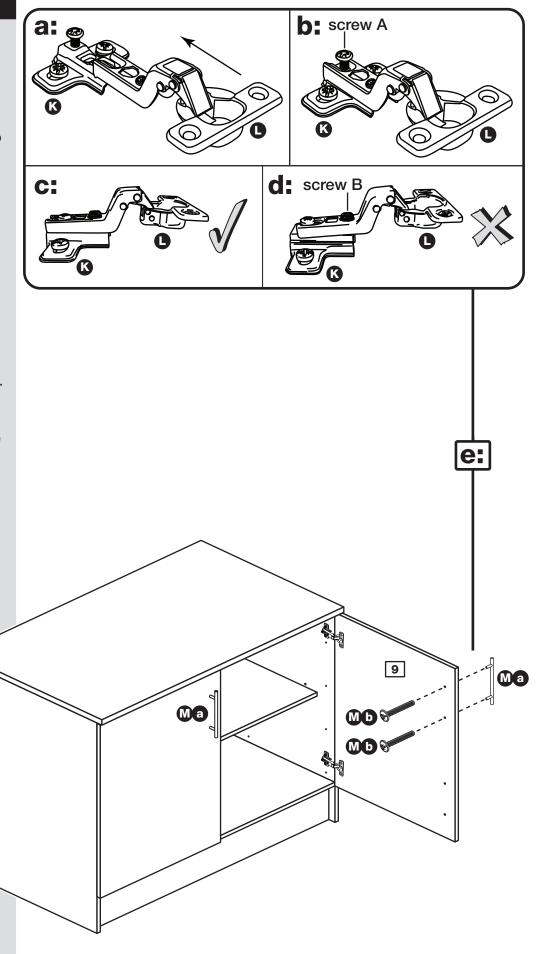

Step 22

Adjust the doors if needed

a: Height adjustment.

Loosen screws A on hinge plates and move door up or down as required.


Retighten screw A.

b: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

C: Sideways adjustment.


To move door 'out' loosen screw C.
To move door 'in' tighten screw C

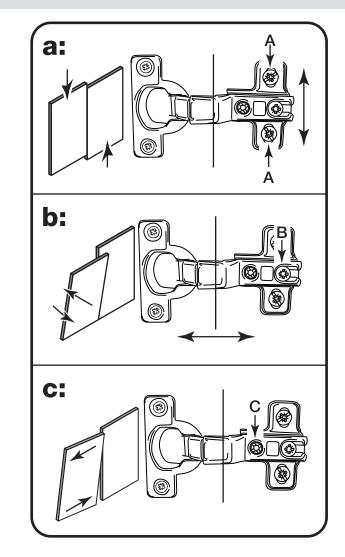

Step 23

Fit the door buffers to both doors

Stick a door buffer onto each corner of the door so that they hit the edge of the side panel when the door is closed.

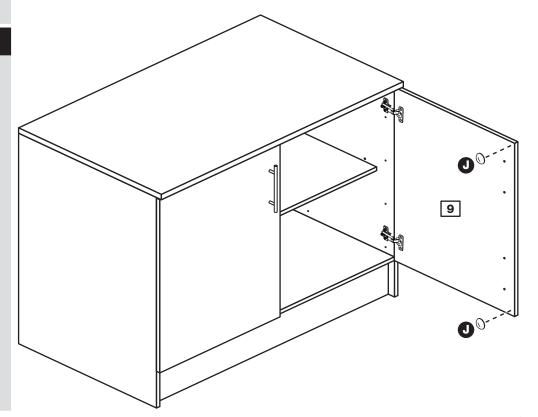


Step 24

Assembly is complete



Warning: The unit is heavy. Lift with care.

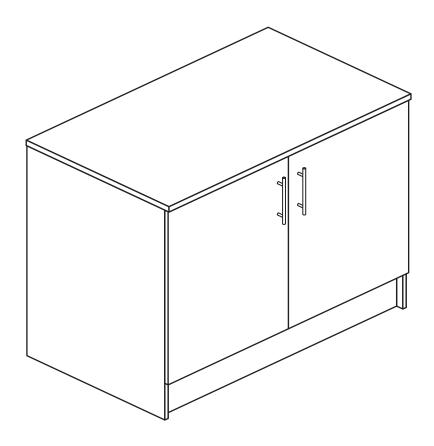

If you need help or have damaged or missing parts, call the **Customer Helpline:** 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

Athina - 1000 Base Unit

Assembly Instructions - Please keep for future reference


608/0811

608/0938

608/0873

608/0990

608/2981

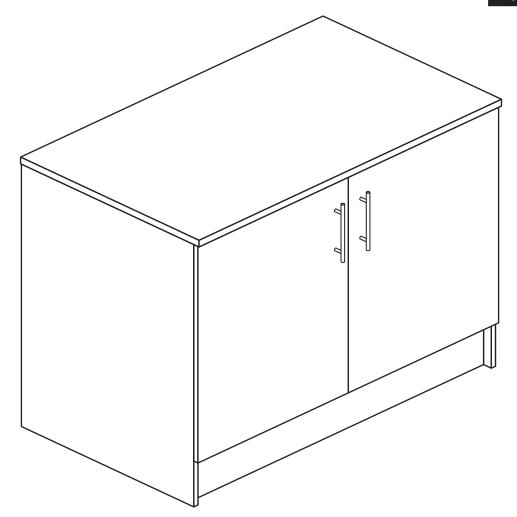

Dimensions

Width - 100cm

Depth - 59cm

Height - 89.5cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 42kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



 We do not recommend the use of power drill/drivers for inserting screws,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the brackets supplied.
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below



1 Left Side (D0315B) (870 X 570mm)



Right Side (D0316B) (870 x 570mm)



3 Top (*D0339A*) (1000 x 590mm)



4 Base (D0323A) (970 X 499mm)



5 Shelf (*D0324A*) (969 X 427mm)




6 Rail (*D0325A*) (970 x 60mm) x 2



7 Plinth (*D*0326A) (970 x 150mm)





9 Door (D0317A) (716 x 497mm) x 2



Back (X740) (980 x 533mm)




Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

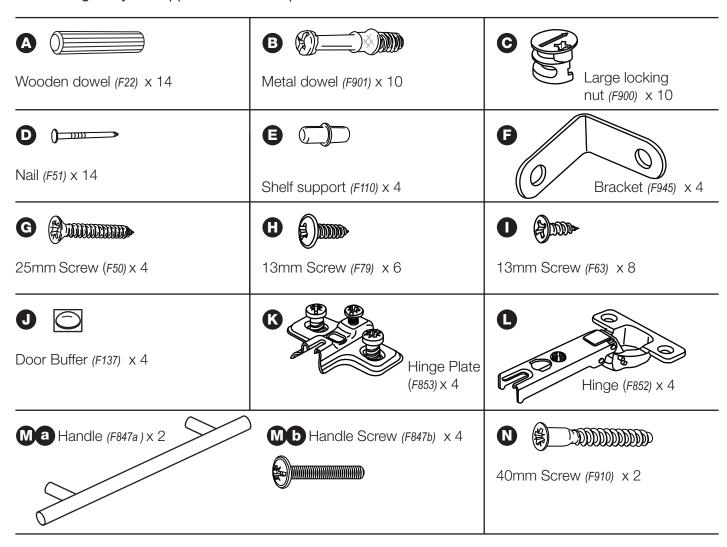

Tools required

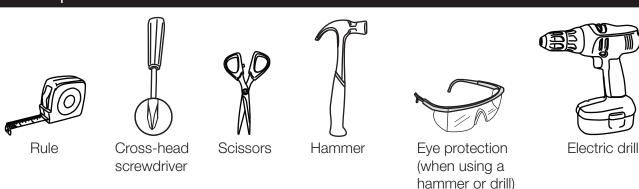

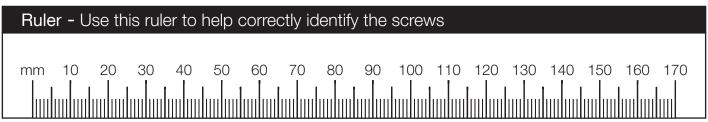

If you have damaged or missing components, call the Assembly Instructions Customer Helpline: 08456 400800 quoting the reference numbers below

Step 1


Fit 2 brackets to the left side

Fit a bracket **F** to the left side 1, 100mm in from the back edge, see diagram.

Fit another bracket **F** to the left side 1, 100mm down from the top edge, see diagram.

Secure each bracket using screw H.

Note: The brackets must be flush with the edges of the panel.

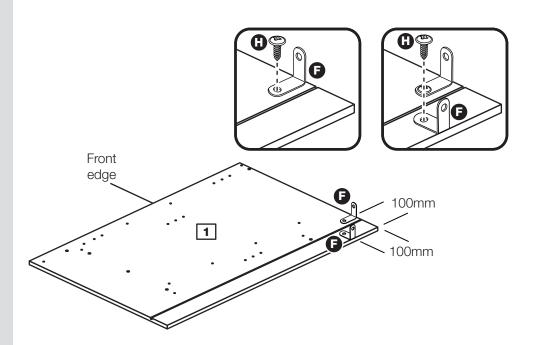


Step 2

Prepare the left side

a: Fit 2 hinge plates K onto the left side 1, making sure that the slot is facing towards the front edge.

b: Screw 5 metal dowels **B** into the holes shown on the left side 1.

Note: Tighten metal dowels up fully against the panels.

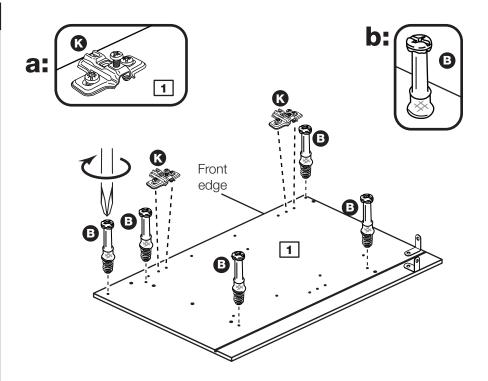

Step 3


Fit 2 brackets to the right side

Fit a bracket **f** to the right side **2**, 100mm down from the back edge, see diagram.

Fit another bracket **f** to the right side **2**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

Note: The brackets must be flush with the edges of the panel.

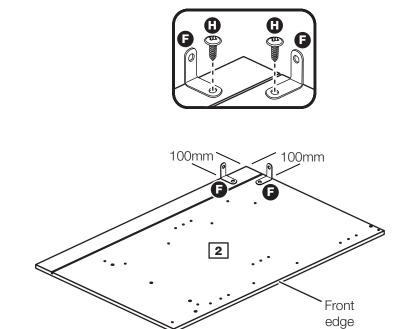


Step 4

Prepare the right side

a: Fit 2 hinge plates (s) onto the right side 2, making sure that the slot is facing towards the front edge.

b: Screw 5 metal dowels B into the holes shown on the right side 2.

Note: Tighten metal dowels up fully against the panels.

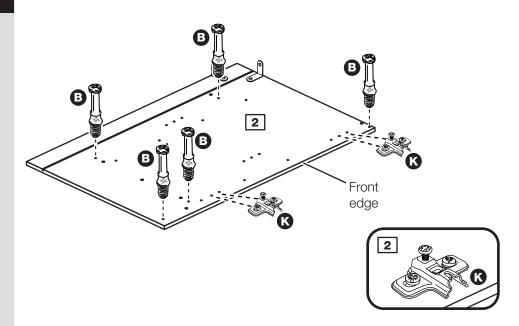

Step 5


Prepare the base

Insert 4 large locking nuts **©** into the base **4** as shown.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

Tap 6 wooden dowels **A** into the base **4** as shown.

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

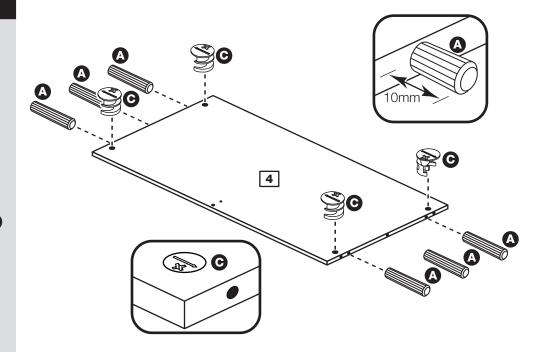


Step 6

Fit the base to the right side

Push the base 4 onto the right side 2.

Use a screwdriver to tighten the 2 large locking nuts **©** fitted to the base **4**.

Note: Turn the large locking nuts **(C)** as far as they will go - more than 1/2 a turn.

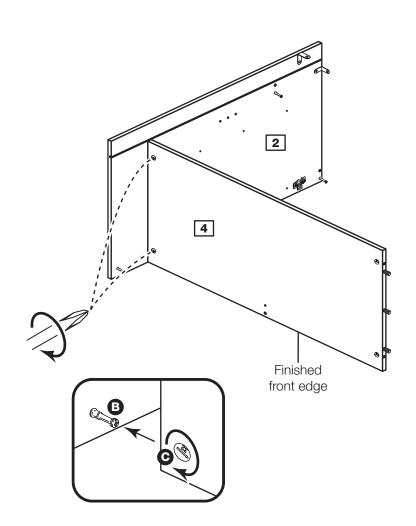


Step 7

Prepare the 2 rails and munting

Insert 2 large locking nuts **©** and 2 wooden dowels **A** into each of the 2 rails **6**.

Tap 2 wooden dowels **A** into the munting **8**.

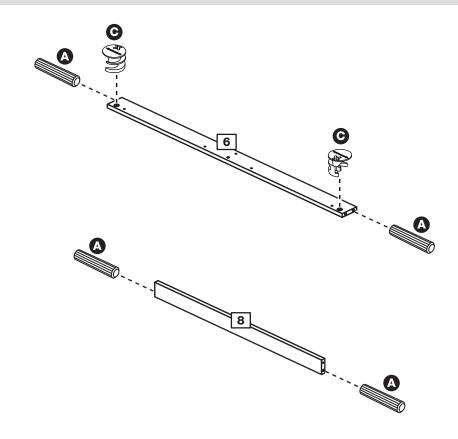


Step 8

Fit a rail to the right side

Push one of the rails 6 onto the right side 2 as shown.

Use a screwdriver to tighten the large locking nut **©**.


Note: Turn the large locking nuts **©** as far as they will go - more than 1/2 a turn.

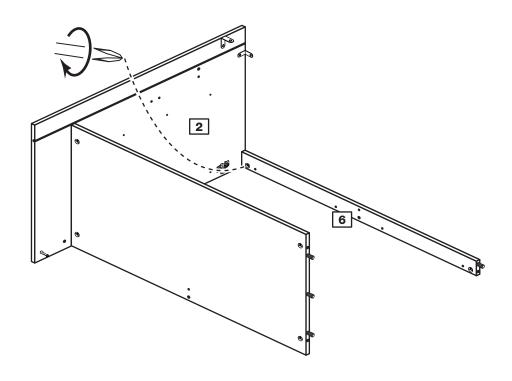

Step 9

Fit the munting


Fit the munting 8 to the rail 6 and base 4 and secure using 2 screws N.

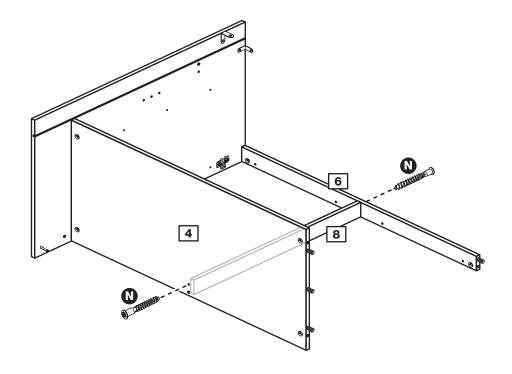

Step 10

Prepare the plinth

Insert 2 large locking nuts **©** and 2 wooden dowels **A** into the plinth **7**.

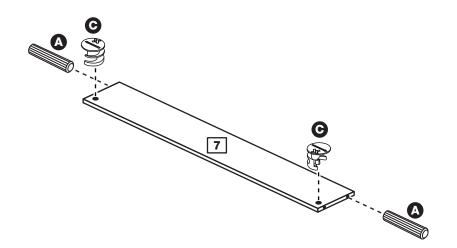

Step 11


Fit the rail and plinth

Push the rail 6 and plinth 7 onto the right side 2 as shown.

Use a screwdriver to tighten the 2 large locking nuts • fitted to the 2 panels, as shown.

Note: Turn the large locking nuts **(c)** as far as they will go - more than 1/2 a turn.

Note: Support the rail **6** until the left side has been fitted in the next stage.

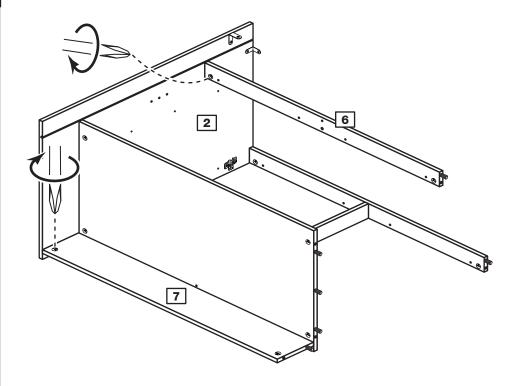


Step **12**

Fit the left side

Push the left side 1 onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **©** fitted to the base **4**, rails **6** and plinth **7**.

Note: Turn the large locking nuts as far as they will go - more than 1/2 a turn.

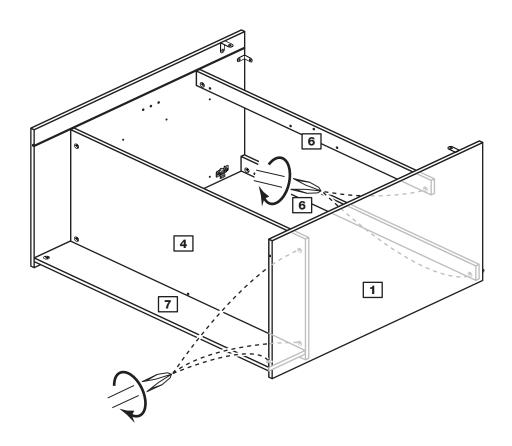

Step 13

Fit the back


a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Slide the back 10 into the grooves along the left 1 and right 2 sides, as shown.

by tapping 7 nails down into the back edge of the base 4 and 7 nails into the back edge of the rail 6.

Stand the unit up for the next stage.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

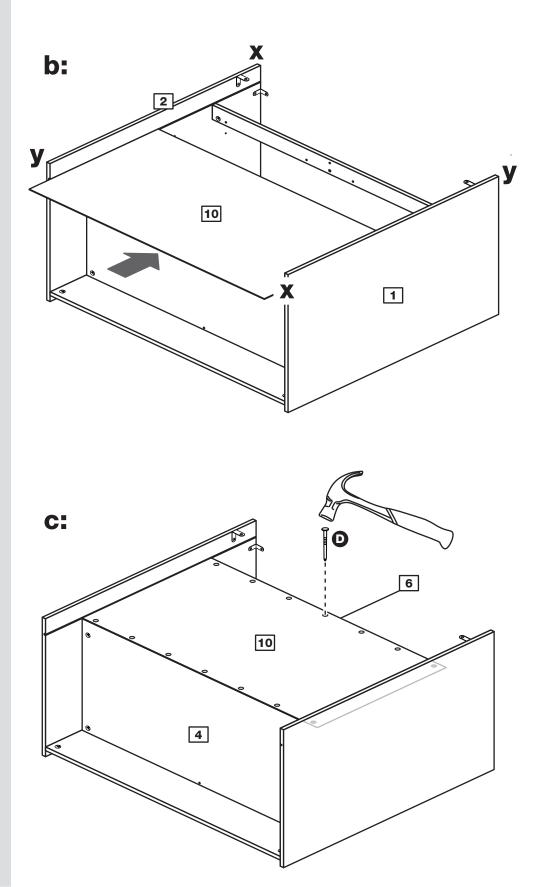

Step 14

Fit the top


Position the top 3 onto the unit, making sure that the back edge is flush with the back edge of the sides 1 and 2.

Secure the top 3 using screw (1) through the 2 brackets (2) fitted at the top edge of the side panels (1) and (2).

Step 15

Secure the front of the top

To secure the front of the top 3, screw up through the 4 holes in the rail 6 at the front of the unit using screws 6.

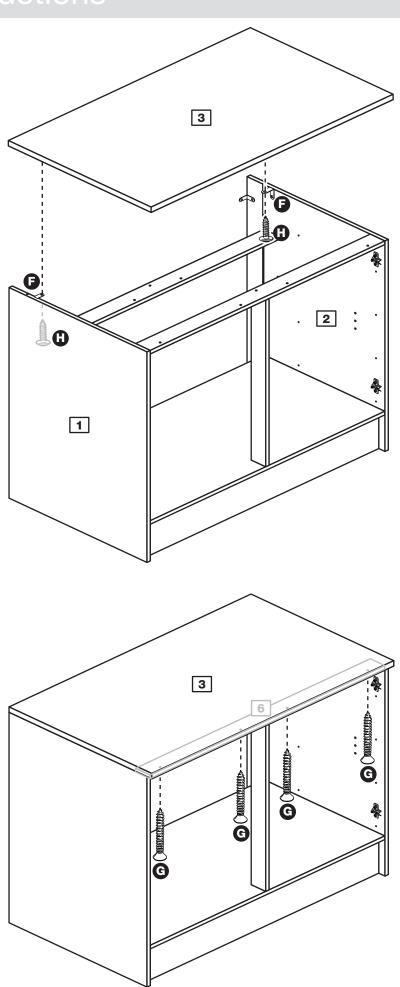


Step 16

Secure the unit to the wall

Using the brackets **f** fitted to the back edge of the sides **1** and **2** screw the unit to the wall.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the Unit to the wall.


Warning: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

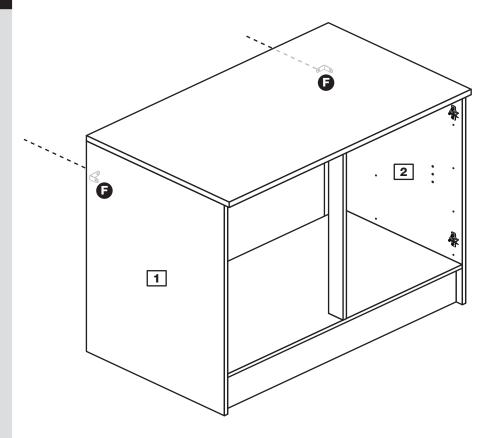

Step 17

Fit the shelf studs


Push 4 shelf studs into the holes in the side panels 1 and 2 at the desired height.

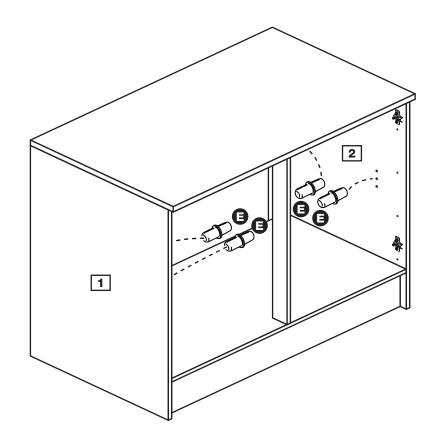

Step 18

Fit the shelf

Manouvre the shelf 5 into the unit onto the shelf studs **5**.

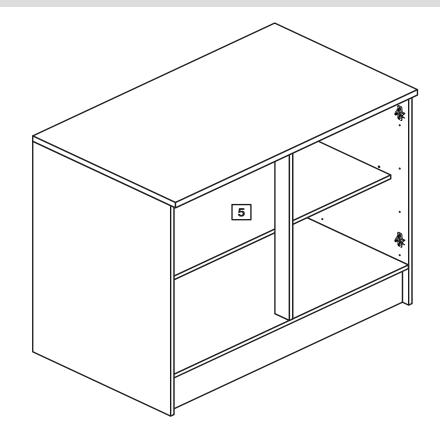


Step 19

Prepare the 2 doors

Push fit the 2 hinges into the door 9.

Secure each hinge with 2 screws .

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the front edge of the door.

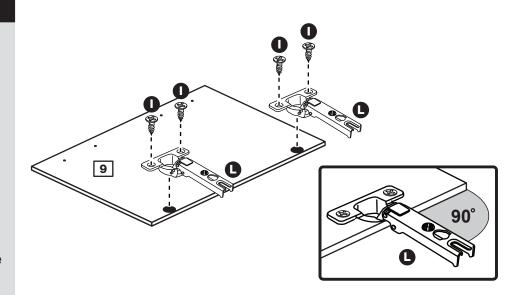

Step 20

Drill the handle holes in the door

Important: Please follow these instructions carefully.

Lay the doors 9 down onto a smooth surface.


Important: Check that the holes and hinges are in the same place as the diagrams.


Note: We recommend the use of a small piece of waste wood, placed behind the hole while drilling, to reduce the possibility of any breakout.

Using the pilot hole in the rear face of the door 9, drill through the holes indicated opposite, using a 2.5mm diameter drill.

Turn the door 9 over and open out the 2.5mm holes that you have just drilled by drilling back through them with a 5mm drill.

IMPORTANT Carefully choose which 2 holes you need to drill in each of the doors

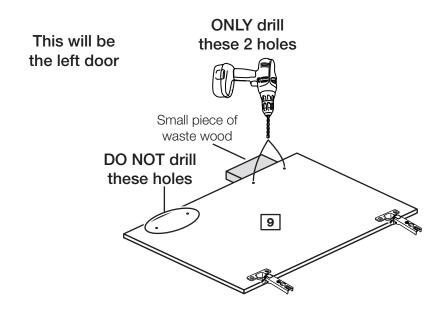

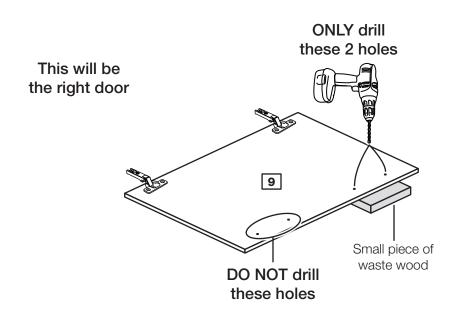

Step 21

Fit doors and handles

2 people are needed here

Note: The easiest way to attach the door **9** is to fit the top hinge first, then align and fit the other hinges.

a: Push the hinge onto the front part of the hinge plate **(S**).

b: Keep the hinge **C**FLAT against the hinge plate **C** as you slide it across as far as it will go. Tighten screw A.

C: The hinge must be flat against the hinge plate prior to any adjustment.


d: The hinge **(L)** must NOT be AT AN ANGLE to the hinge plate K when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble

being careful to

instructions a-c.

follow

e: Attach a handle Ma to the door 9 using 2 screws Mb.

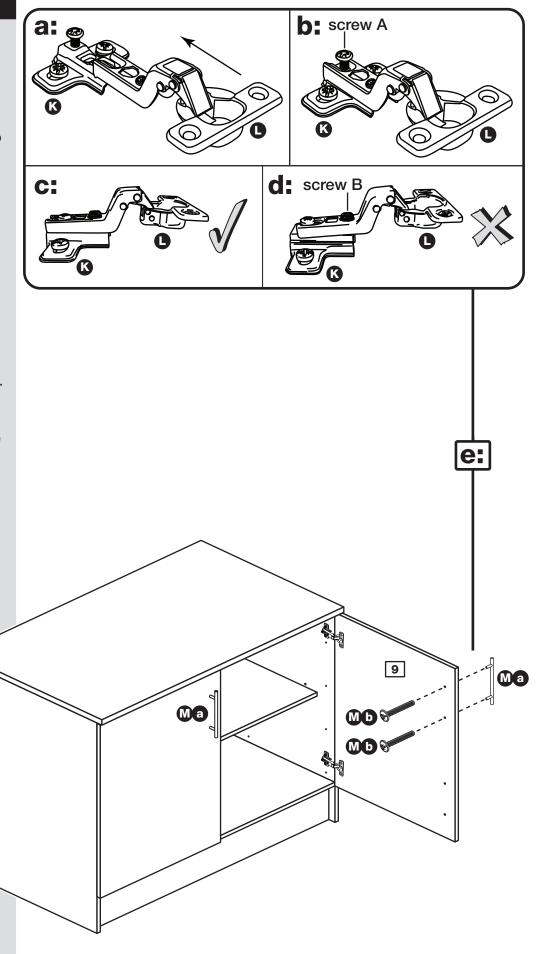

Step 22

Adjust the doors if needed

a: Height adjustment.

Loosen screws A on hinge plates and move door up or down as required.


Retighten screw A.

b: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

C: Sideways adjustment.


To move door 'out' loosen screw C.
To move door 'in' tighten screw C

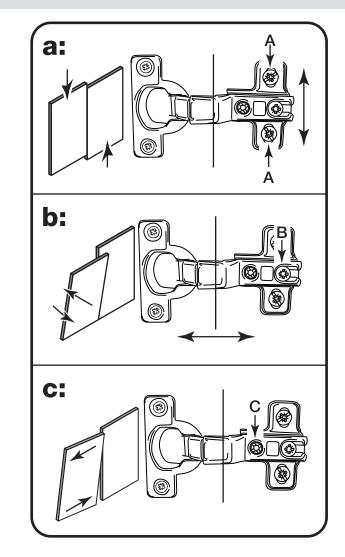

Step 23

Fit the door buffers to both doors

Stick a door buffer onto each corner of the door so that they hit the edge of the side panel when the door is closed.

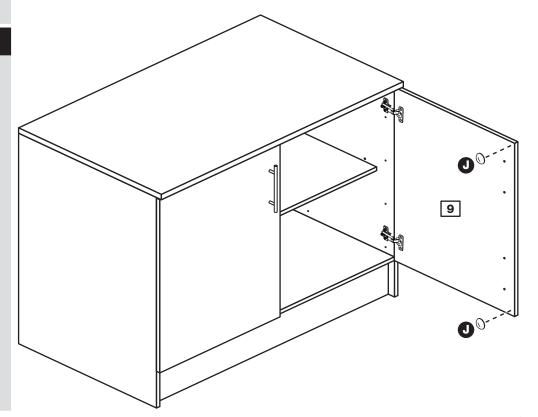


Step 24

Assembly is complete



Warning: The unit is heavy. Lift with care.

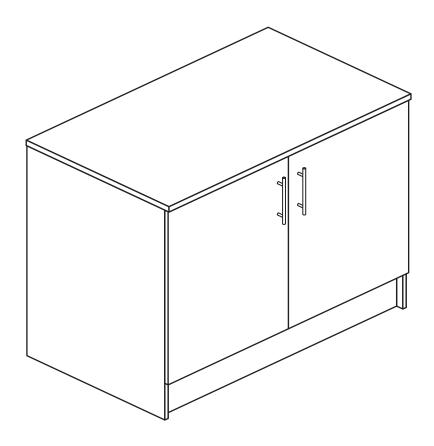

If you need help or have damaged or missing parts, call the **Customer Helpline:** 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW