
Black Bevelled Mirror 105x74cm

Simple Assembly Instructions - **Please keep for future reference**

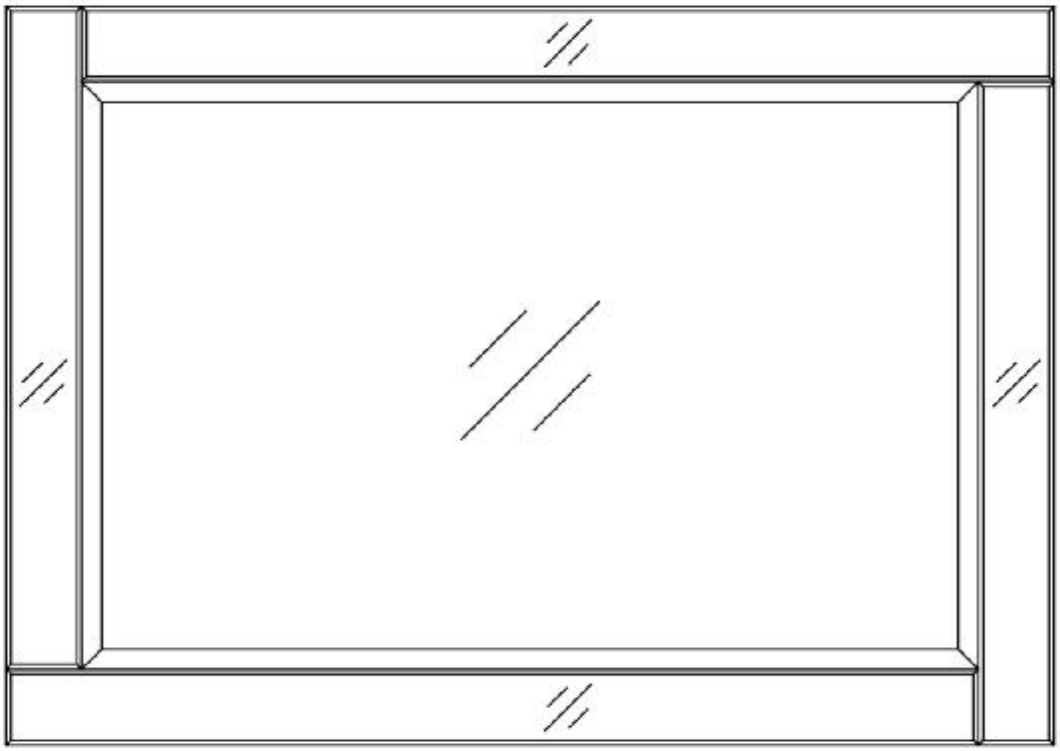

IMPORTANT

1. *Read these instructions carefully and familiarise yourself with the procedure before assembling the unit.*

2. *Check that you have all the component parts following the list on the back cover and familiarise yourself with each part before proceeding.*


3. *Take all the fittings out of the plastic bag and separate them into their groups.*

4. *Ensure you have enough space to lay out all the parts before assembly.*

5. *To avoid scratching it is recommended that you assemble the unit on a soft level surface.*


Components

Ⓐ 1 x Mirror

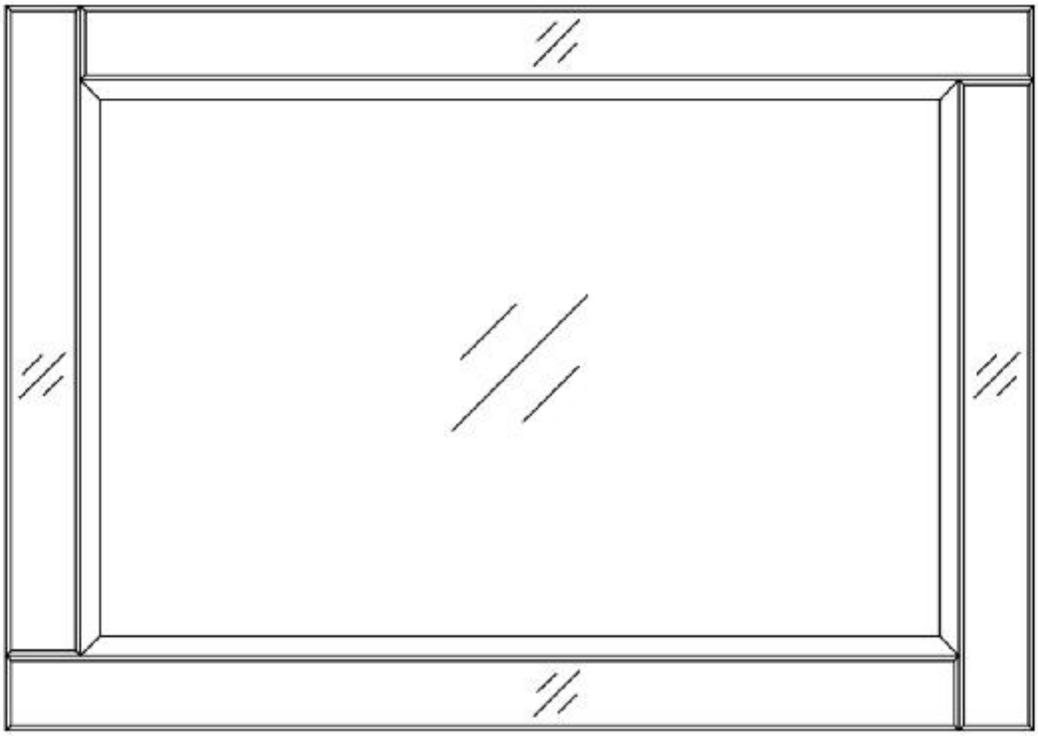

Fittings


Ⓐ 4 x Screw




Ⓑ1 x Hex Key



Ⓒ 2 x Bracket



Ⓓ 1 x Wire

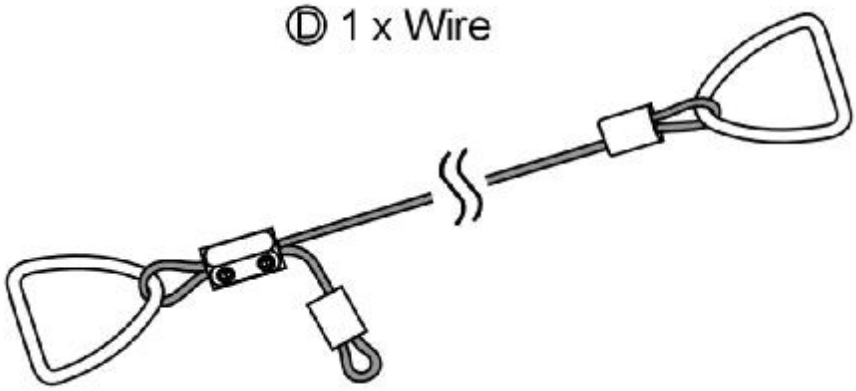

Assembly Instructions

Stage 1 – Attaching the Hanging Wire

BS 7449:1991
Model / Catalogue Number: 623-6122 (D)
Retailer: ARGOS
Retailer address:
489-499 Avebury Boulevard, Saxon Gate West, Central Milton Keynes, Bucks, MK9 2NW

NOTE: This unit contains 4mm film backed mirror. If the mirror is chipped or broken, replace with mirror of the type described on this label. Consult the furniture retailer or agent with regard to obtaining a manufacturing specification of the shape for replacement mirror quoting the model number, and batch number of date of manufacture of this item.

NOTE: It would be useful to ask someone to help you at this stage.

1. Screw the bracket Ⓒ into the pre-drilled holes with Screws Ⓐ ensuring that the ring on the hanging wire Ⓓ is under the bracket before attaching to the mirror back as shown in Fig 1.
2. Follow the same procedure to fit the other end to the corresponding predrilled holes.
3. You can adjust the length and tension of the wire by loosening both grub screws and fitting the wire to the correct length on one end of the wire.

Always check all the screws are tight and the wire is well fitted before finally hanging to position.
See fig. 2

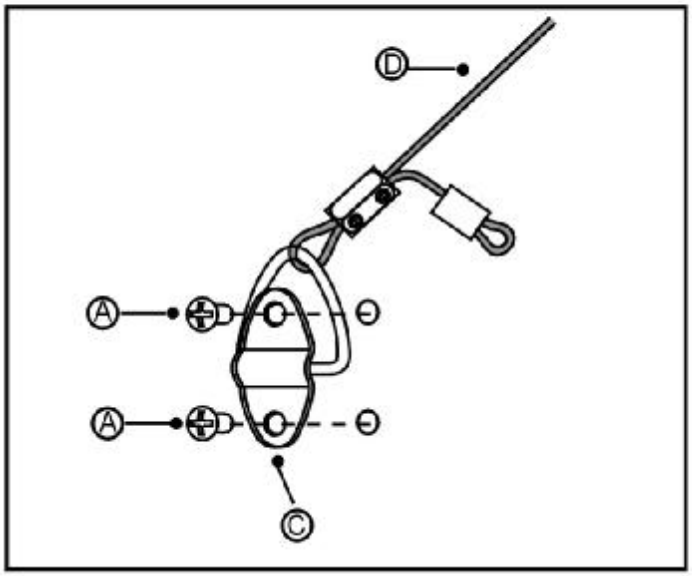


fig. 1

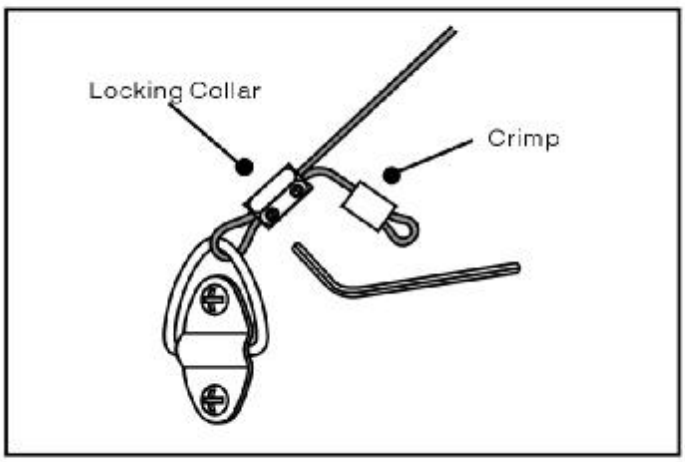


fig. 2

NOTE: Do NOT cut off the crimp when shortening the wire.

Make sure the two wires are laying flat withing the locking collar so that they are both secured with the grub screws.

Assembly Instructions

Stage 2 – Wall Mounting

IMPORTANT: When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs supplied are suitable for supporting the unit. Consult a qualified tradesperson if you are not sure.

WALL MOUNTING: Hold the unit against the wall in the desired location and check if it is horizontal. Mark the wall to indicate where to drill the hole. See fig. 3.

NOTE: It would be useful to ask someone to help you at this stage.

1. Insert a wall plug into the drilled hole. Then screw in a screw.

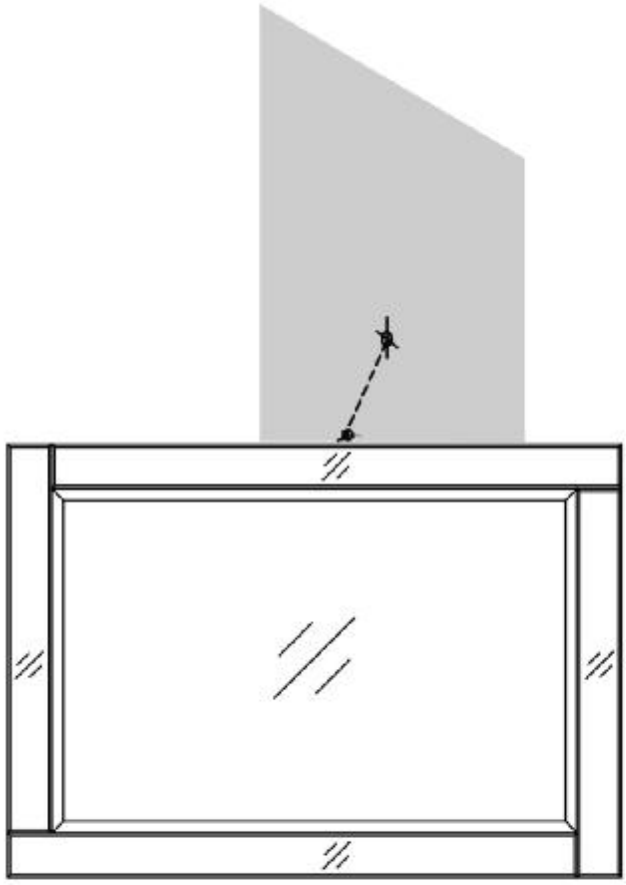


fig. 3

Assembly Instructions

Stage 3 – Hanging the Mirror

CAUTION: When handling glass always take extra care. Ensure no children are in the assembly area.

1. Hang the Mirror Ⓐ as desired using correct fixings (Please seek advice of a qualified trades person if at all unsure).
   See fig. 4.

NOTE: Before use always make sure the unit is secure.

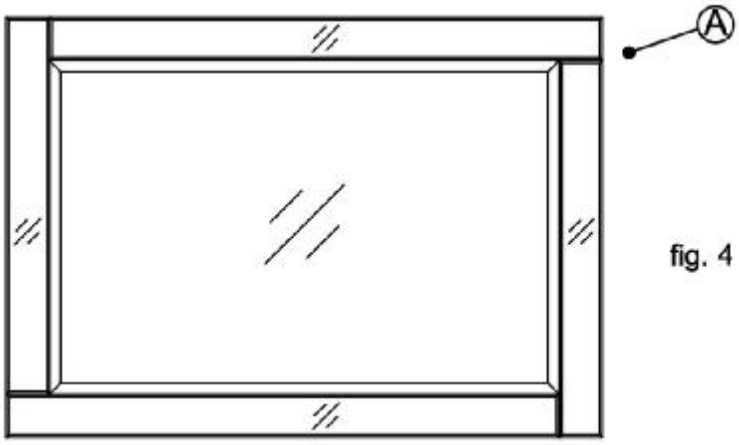


fig. 4

WARNING: Do not strike the glass with hard or pointed items.
Do not sit or stand on the glass surface, as this will cause a hazard.
When cleaning the glass use a damp cloth or chamois leather with washing up liquid.
Do not use washing powders or any other substances containing abrasives since these substances will scratch the glass.
It is essential that this unit be fixed to a wall with the correct type of fixing.
Do not place very hot or very cold items against or in close proximity to glass surfaces unless adequately thick insulating material is used to prevent such items from coming into contact with the glass.

Care and Maintenance

Safety
To avoid any risk of suffocation to animals or children dispose of the plastic bags immediately.

Cleaning
As with all surfaces clean with a damp cloth and mild detergent, do not use bleach or abrasive products.

Fitting
From time to time please ensure there are no loose screws on the product.

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.

⚠ *Important:* When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.

Hints:

1: General rule: ⚠ Always use a larger screw and wall plug if you are not sure.

2: Ensure you use the recommended drill bit to match the wall plug and hole size.

3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.


4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.

5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 **"General Purpose" wall plug**

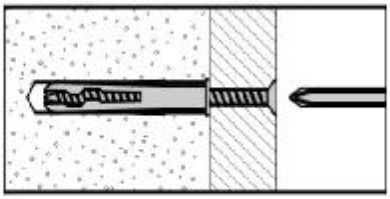


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 **"Plasterboard" wall plug**

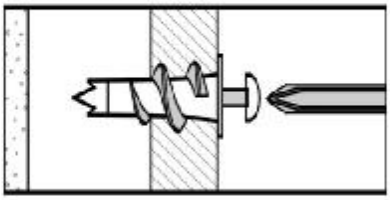


For use when attaching light loads on to plasterboard partitions.

No.3 **"Cavity Fixing" wall plug**

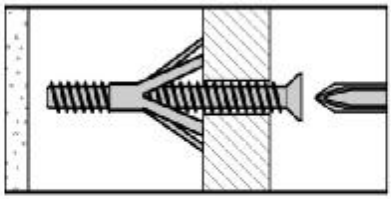


For use with plasterboard partitions or hollow wooden doors.

No.4 **"Cavity Fixing-Heavy Duty" wall plug**

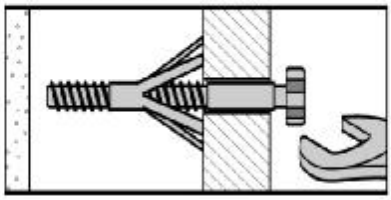


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 **"Hammer Fixing" wall plug**

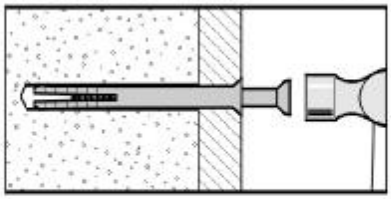

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 **"Shield Anchor" wall plug Heavy loads**

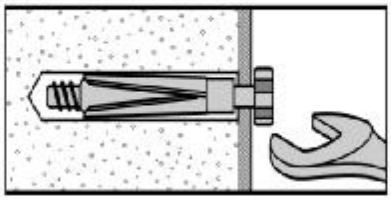

For use with heavier loads such as TV & HiFi speakers and satelite dishes etc.

⚠ Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.

Revision 2 - 7/10/09