

CAST METAL BISTRO TABLE


Simple Assembly Instructions – Please keep for future reference



COMPONENT PARTS AND FITTINGS



(A) Table Top x 1

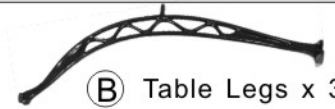

(B) Table Legs x 3



(C) Round leg support x 1



(M) Studs x 6



(D) Big Washers x 6



(E) Big Spring Washers x 6



(F) Big Nuts x 6



(G) Flat head bolt x 3



(H) Small Washers x 3



(J) Small Spring Washers x 3



(K) Small Nuts x 3

IMPORTANT

1. It is important not to overtighten nuts as this may cause damage to threads.
2. Do not sit on the table as this may cause damage.
3. To extend product life and appearance it is not recommended to leave your garden furniture outside during winter months.

ASSEMBLY INSTRUCTIONS

1. Lay the table top (A) upside down on an even soft clean surface.
2. Fix the studs (M) into the table top, then fit the three table legs (B) over the fixed studs (M) and bolt in position using washers (D), (E) and nuts (F).
(See fig. 1)
DO NOT OVER TIGHTEN.
3. Attach the round leg support (C) to the three legs using flat head bolts (G), washers (H), (J) and nuts (K).
(See fig. 2)
DO NOT OVER TIGHTEN.
4. Tighten all nuts, but do not over tighten.
5. The rubber screw caps at the bottom of the three legs can be adjusted, if necessary, to make the legs level with the ground.

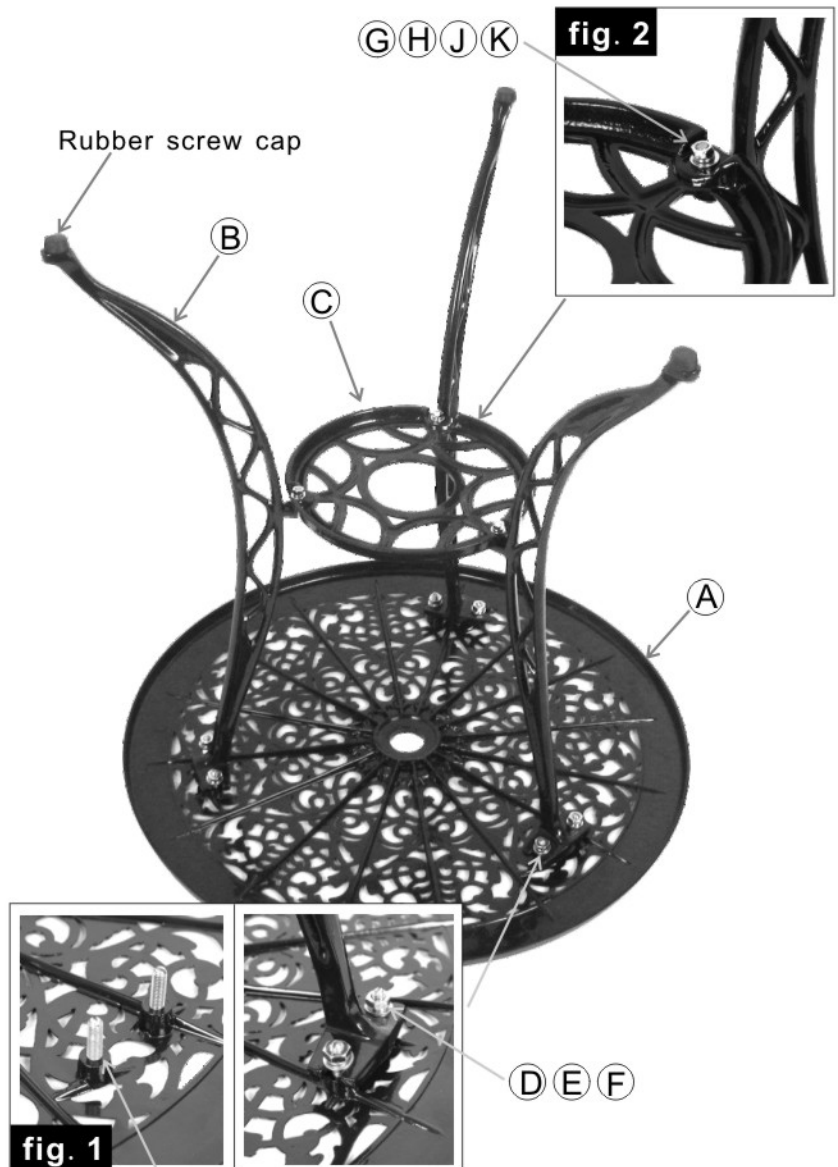


fig. 1

fig. 2

Fix the studs (M) into the table top

CAST METAL BISTRO CHAIR

Simple Assembly Instructions – Please keep for future reference



PARTS AND FITTINGS FOR TWO CHAIRS



(A) Backrest x 2



(C) Chair Leg x 8



(B) Chair seat x 2



(D) Washers x 20



(E) Spring Washers x 20



(F) Nuts x 20

IMPORTANT

1. It is important not to overtighten nuts as this may cause damage to threads.
2. Do not sit on the table as this may cause damage.
3. To extend product life and appearance it is not recommended to leave your garden furniture outside during winter months.
4. Periodically check nut and bolts for tightness.

ASSEMBLY INSTRUCTIONS

1. Fit the backrest (A) to the seat (B) by inserting the prefixed studs into the two holes at the back of the seat. (See fig 1). Bolt together using washers (D), (E) and nuts (F). (See fig 2).


DO NOT OVER TIGHTEN.

2. Turn the unit upside down. Fix the back legs and then the front legs (C) to the chair seat (B) by fitting the prefixed studs into the two holes in the top of the legs. Bolt together using washers (D), (E) and nuts (F). (See fig 2).


DO NOT OVER TIGHTEN.

3. The rubber screw caps at the bottom of the four legs can be adjusted, if necessary, to make the legs level with the ground.

fig. 1

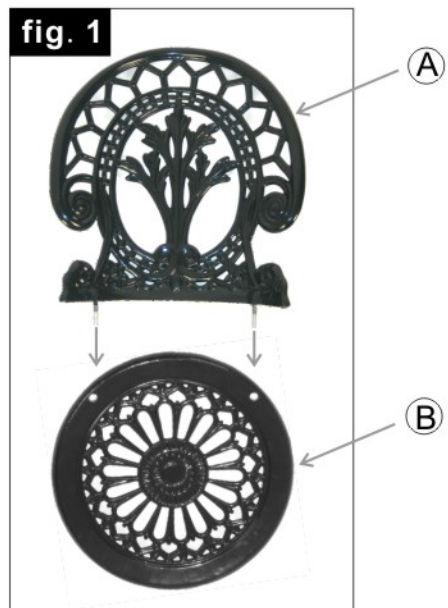

Rubber screw cap

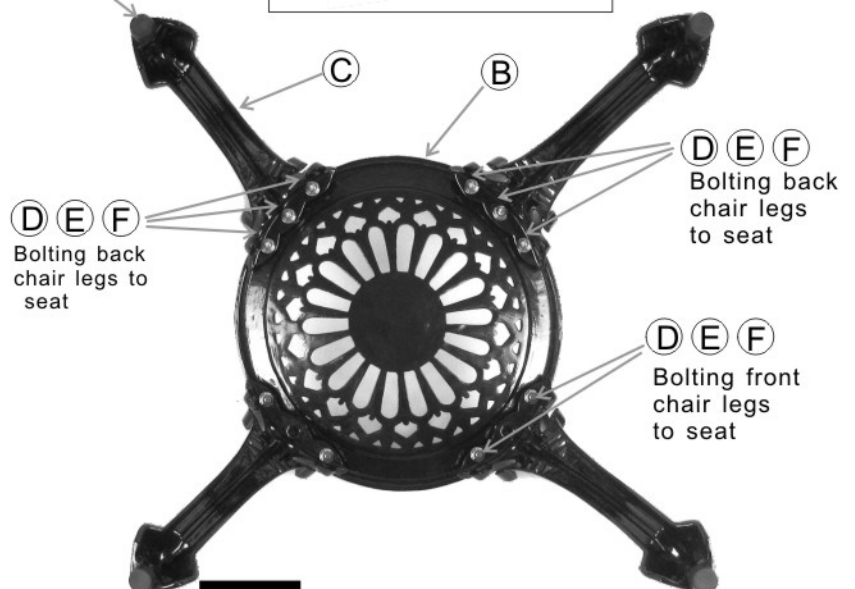

(D) (E) (F)
Bolting back chair legs to seat

(D) (E) (F)
Bolting back chair legs to seat

(D) (E) (F)
Bolting front chair legs to seat

fig. 2

View of the underside