

# Hallingford - 3 Drawer Dressing Table

Assembly Instructions - Important: Retain these instructions for future reference

797/3178


806/9249

806/9995

792/6888

808/4516

888/2282

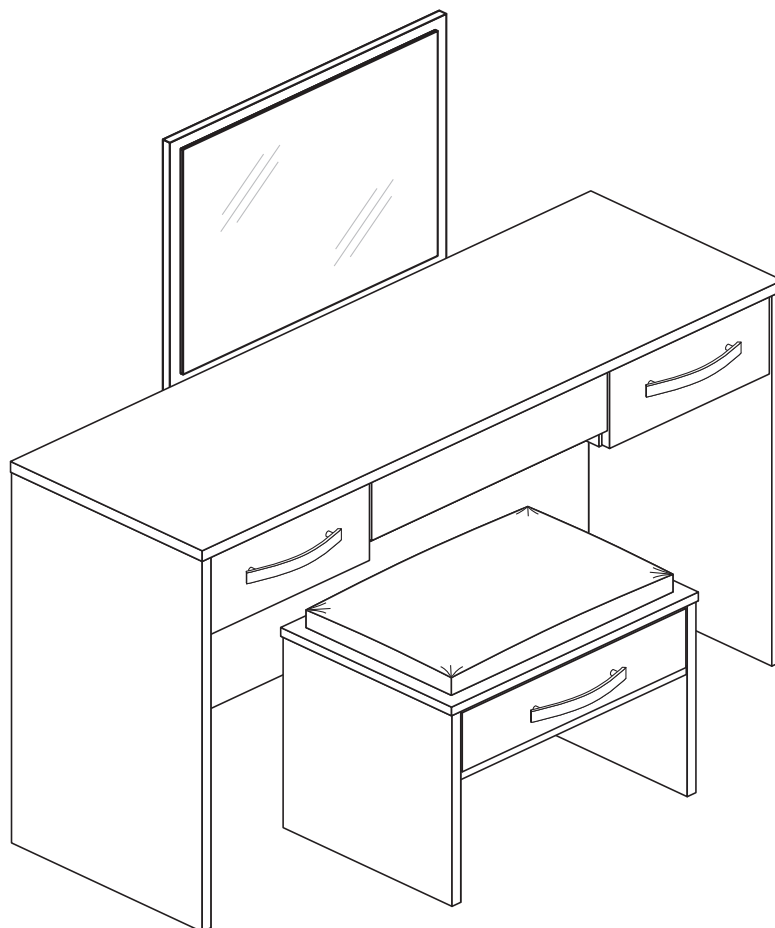

## WARNING!

In order to prevent overturning, this product must be used with the 2 wall attachment devices provided

### Dimensions

Width - 119.9cm

Depth - 41.1cm

Height - 79.5cm

More help is available throughout this booklet by scanning in the QR codes or typing in the links



**MADE IN  
BRITAIN**

**Important - Please read these instructions fully before starting assembly**

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)

Alternatively, call the Spares Helpline on: 0330 016 1114

For any other queries please contact the Customer Helpline on: 0345 640 2020



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 44kgs. Please lift with care.
- Assembly to be carried out by a competent adult only.
- Check you have all the components and tools listed on pages 1 to 3 for the Dressing Table and pages 22 to 23 for the Stool.
- Remove all fittings from the plastic bags and separate them into their groups.
- During assembly children should be kept away from the product due to possible risk of injury.
- Installation shall only be carried out exactly according to the manufacturer's instructions - otherwise a safety risk can occur if incorrectly installed.

- Parts of the assembly will be easier with 2 people.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit. Only use hand screwdrivers.

- **WARNING:** To prevent possible overbalancing this unit **must be secured** to a wall using the 2overbalance protector kits supplied.
- Dispose of all packaging carefully and responsibly.
- Do not use this item if any components are missing or damaged.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- Regularly check all fastenings to ensure that they are properly tightened.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

## Components - Panels for Dressing Table

If you need help or have damaged or missing parts, please refer to page 2

Please check you have all the panels listed below




**1** Top (DF-00018006)  
(119.9 x 39.6cm)




**2** Small Cross Rail (DF-00018009)  
(32.1 x 9.2cm) x 2

# Components - Panels for Dressing Table


Please check you have all the panels listed below

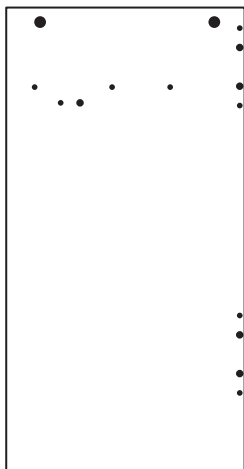

**3** Left Side (DF-00018007)  
(76.7 x 39.4cm)

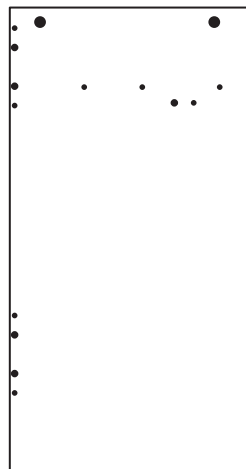


**4** Right Side (DF-00018008)  
(76.7 x 39.4cm)




**5** Top Modesty (DF-00018002)  
(115.9 x 19.2cm)




**6** Bottom Modesty (DF-00018013)  
(115.9 x 19.2cm)




**7** Left Divider (DF-00018004)  
(16.7 x 35.75cm)




**8** Right Divider (DF-00018005)  
(16.7 x 35.75cm)

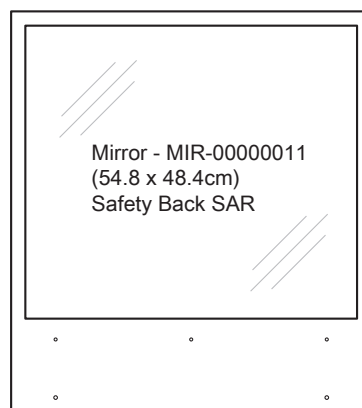

**9** Mirror Back (DF-00018003)  
(59.5 x 66.2cm)



**10** Left Drawer Front (DF-00018010)  
(33 x 16.2cm)



**11** Right Drawer Front (DF-00018011)  
(33 x 16.2cm)



**12** Deep Left Drawer Side (WD350-130LH)  
(35 x 13cm) x 2



**13** Deep Right Drawer Side (WD350-130RH)  
(35 x 13cm) x 2




**14** Deep Drawer Back (W271-130)  
(27.1 x 13cm) x 2



**15** Deep Drawer Base (T282-347)  
(28.2 x 34.7cm) x 2



**16** Centre Drawer Front (DF-00018012)  
(48.7 x 12.2cm)



**17** Narrow Left Drawer Side (WD350-95LH)  
(35 x 9.5cm)



**18** Narrow Right Drawer Side (WD350-95RH)  
(35 x 9.5cm)



**19** Narrow Drawer Back (W436-95)  
(43.6 x 9.5cm)













**20** Narrow Drawer Base (T447-347)  
(44.7 x 34.7cm)

# Components - Fittings for Dressing Table








Please check you have all the fittings listed below

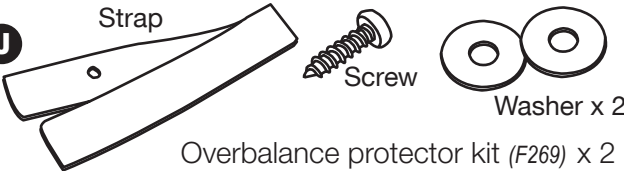**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.






## Bag 1a

<b>A</b>  Metal dowel (F901) x 20	<b>B</b>  Large locking cam nut (F900) x 20	<b>C</b>  Wooden dowel (F22) x 20	<b>D</b>  Plastic Nail (F91) x 4
<b>E</b>  45mm Screw (F65) x 3	<b>F</b>  13mm Screw (F63) x 6	<b>G</b>  9mm Screw (F73) x 18	<b>H</b>  9mm Screw (F74) x 2
<b>I</b>  Connecting Sleeve (F432) x 2	<b>J</b>  Strap Screw Washer x 2 Overbalance protector kit (F269) x 2		

## Bag 2

<b>A</b>  Metal dowel (F901) x 6	<b>F</b>  13mm Screw (F63) x 12	<b>K</b>  Small locking cam nut (F3) x 6	<b>L</b>  19mm Screw (F461) x 4
<b>M</b>  Knock-in Peg (F171GY) x 12	<b>N</b>  Wedgex (F639) x 6	<b>Ruler</b> - Use this ruler to help correctly identify the screws 	
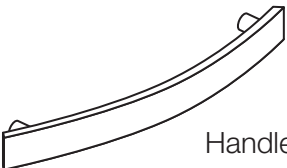
## Individual Fittings Bags

<b>Oa</b>	 <p>350mm long</p> <p>CL Runner (F422) x 3</p>	<b>P</b>  <p>Handle (F278) x 2</p>
<b>Ob</b>	 <p>CR Runner (F424) x 3</p>	
<b>Oc</b>	 <p>DL Runner (F425) x 3</p>	
<b>Od</b>	 <p>DR Runner (F426) x 3</p>	
<b>Tools required</b> Scissors • Rule • Hammer • Spirit level • Cross-head screwdriver • Bradawl • Eye protection (when using a hammer or drill) • Electric drill (only use when drilling into walls) •		



# Assembly Instructions

## Step 1

Let's assemble the Dressing Table carcass first - Open Bag 1a

### Prepare the left side

**a:** Fit a CL runner **Oa** to the left side **3**.

The 1st screw **G** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**b:** Mark the top hole of the runner **Oa** with a bradawl and then fit a screw **F**.

Insert 2 large locking cam nuts **B** into the left side **3**.

**Note:** The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.

Tap 2 wooden dowels **C** into the left side **3**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.


**c:** Screw 5 metal dowels **A** into the left side **3**.

**Note:** Tighten the metal dowels up fully against the panels.





Fixing Bottom Mounted Runners


<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

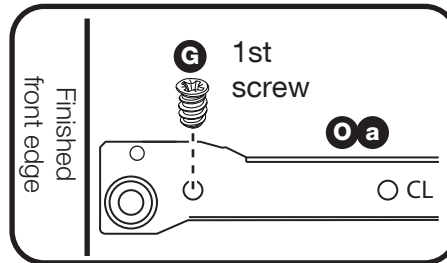


**a:**

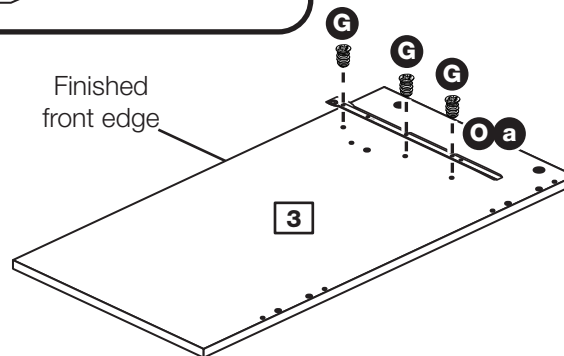

**b:**

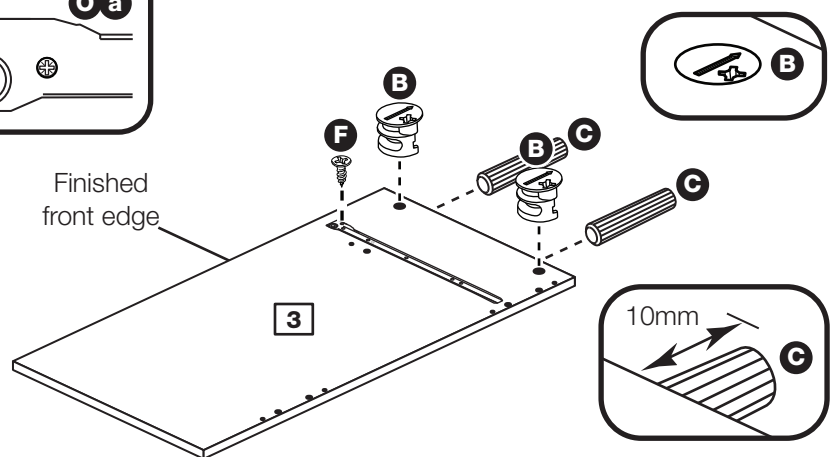

**c:**

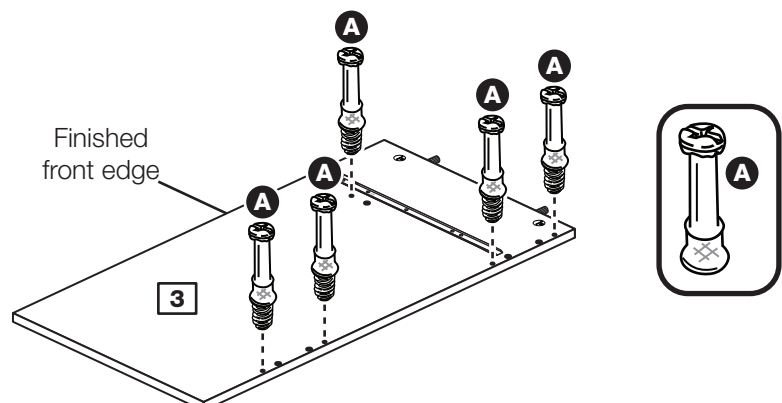


# Assembly Instructions

## Step 2

### Prepare the top modesty and bottom modesty

Tap 4 wooden dowels **C** into the top modesty **5** and the bottom modesty **6**.

Insert 4 large locking cam nuts **B** into the top modesty **5** and the bottom modesty **6**.

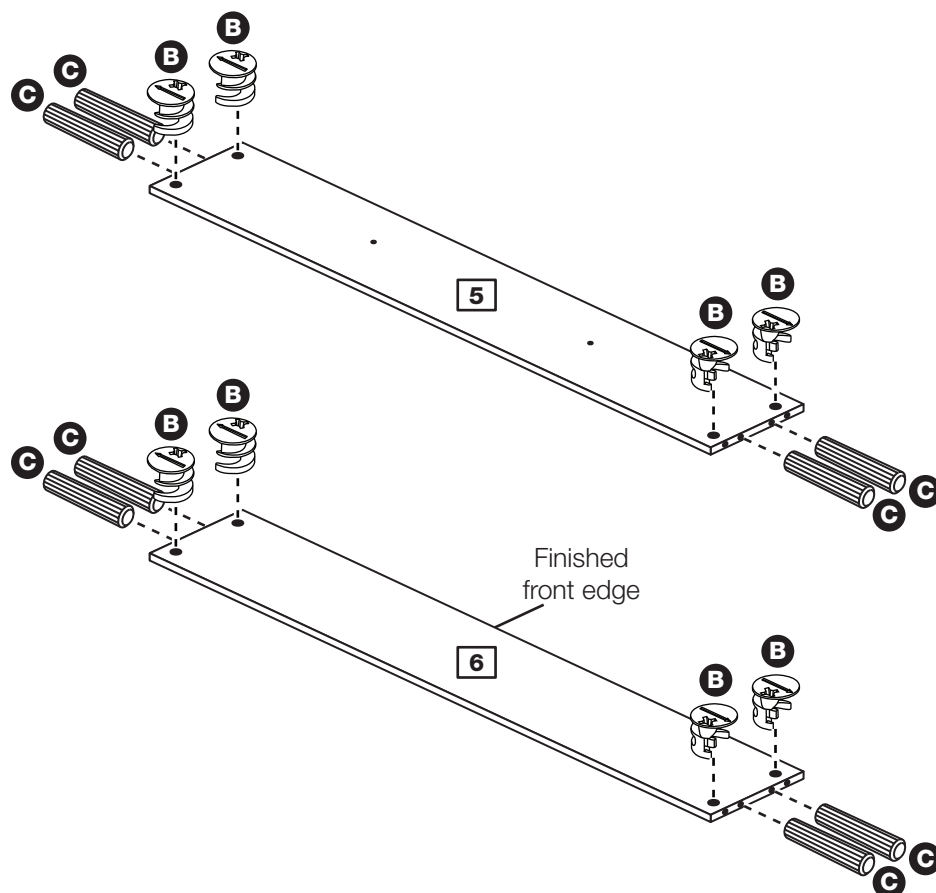


## Step 3

### Fit the 2 modesty panels to the left side

Push the top and bottom modesty panels **5** and **6** down onto the left side **3**.

Use a screwdriver to tighten the 2 large locking cam nuts **B** fitted to each modesty panel **5** and **6**.

**Note:** Turn the large locking cam nuts **B** as far as they will go - more than 1/2 a turn.

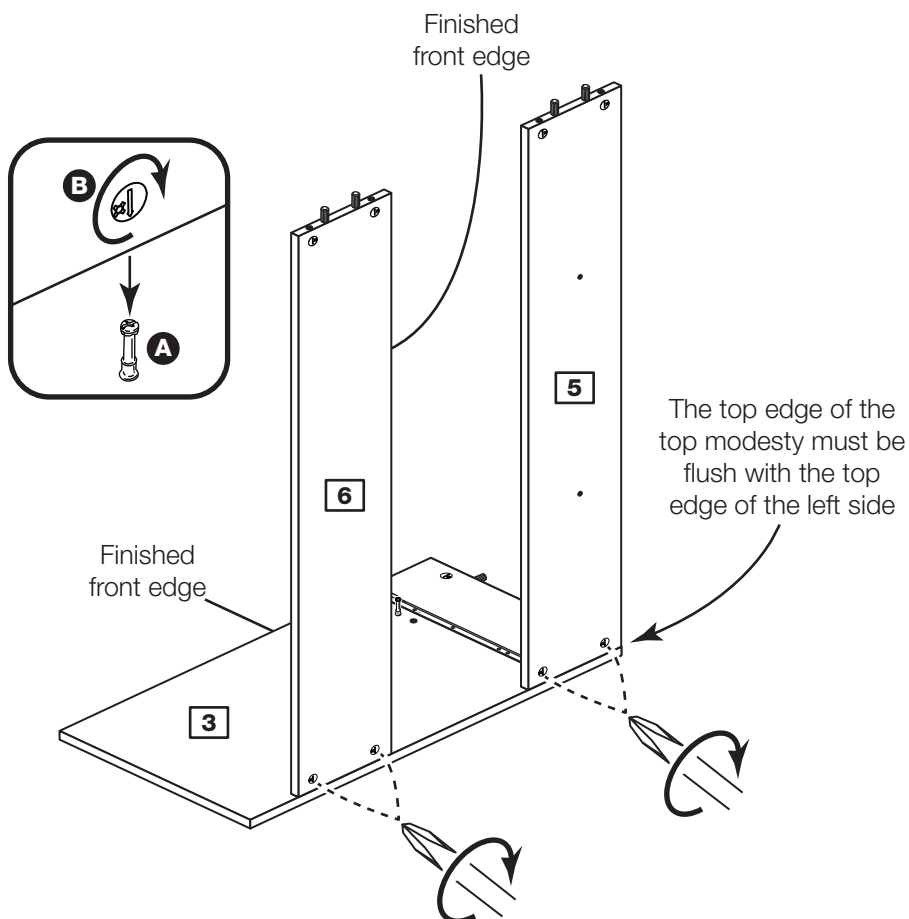

# Assembly Instructions

## Step 4

### Prepare the right side

**a:** Fit a CR runner **O b** to the right side **4**.

The 1st screw **G** uses the 1st hole in from the front of the runner.






The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**b:** Mark the top hole of the runner **O b** with a bradawl and then fit a screw **F**.

Insert 2 large locking cam nuts **B** into the right side **4**.

Tap 2 wooden dowels **C** into the right side **4**.

**c:** Screw 5 metal dowels **A** into the right side **4**.

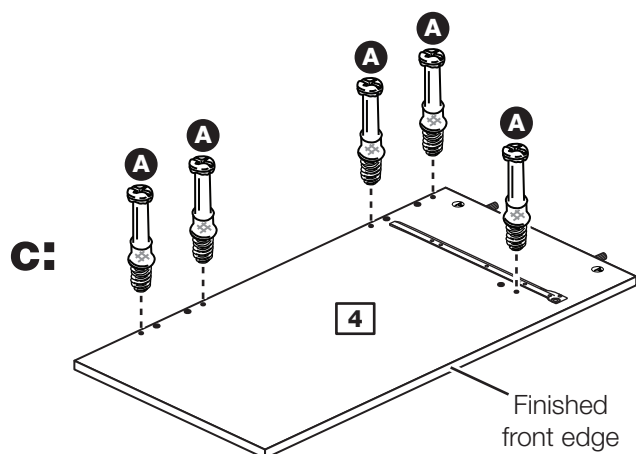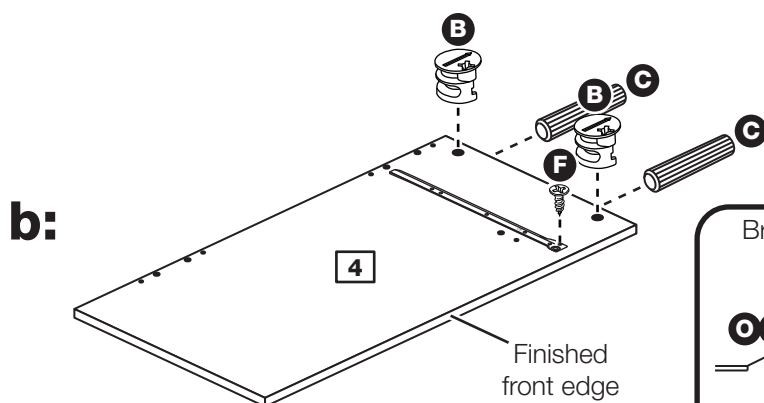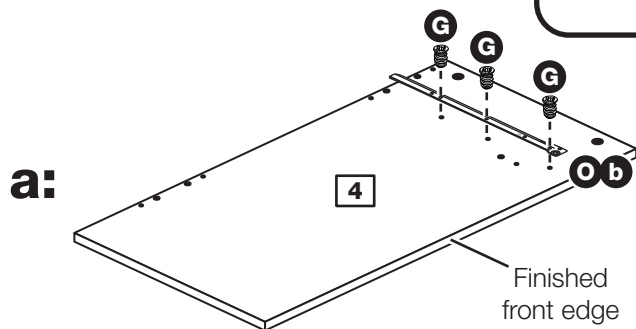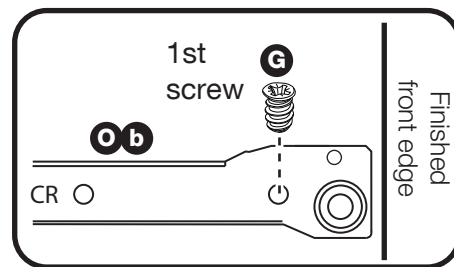

# Assembly Instructions


## Step 5

### Fit the right side

Push the right side **4** down onto the modesty panels **5** and **6**.

Use a screwdriver to tighten the 2 large locking cam nuts **B** fitted to each modesty panel **5** and **6**.

**Note:** Support the right side until you lay the assembly down in the next step.

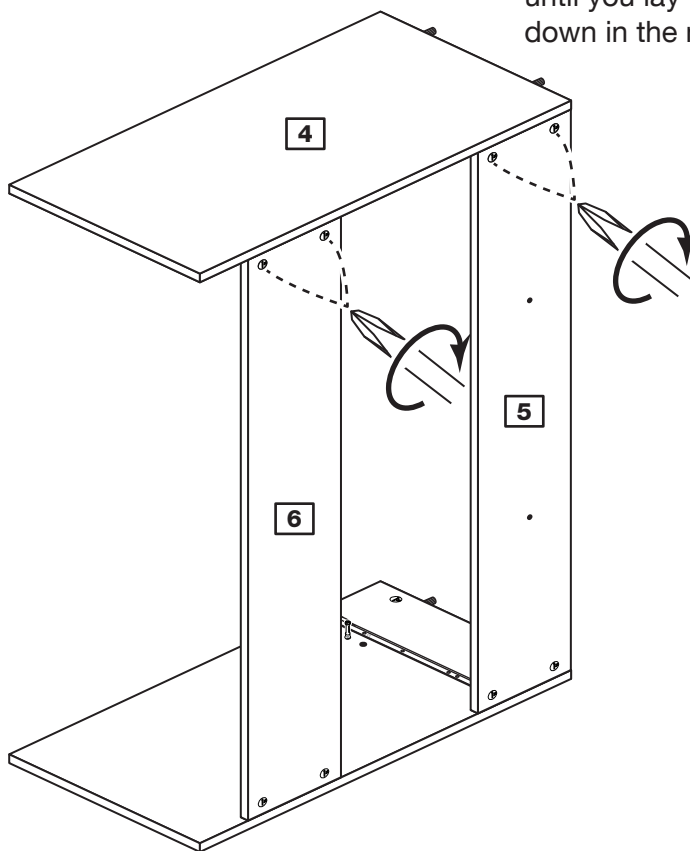


## Step 6

### Lay the unit down

Carefully lay the unit down onto its back.



**Warning:** The unit is heavy. Lift with care.

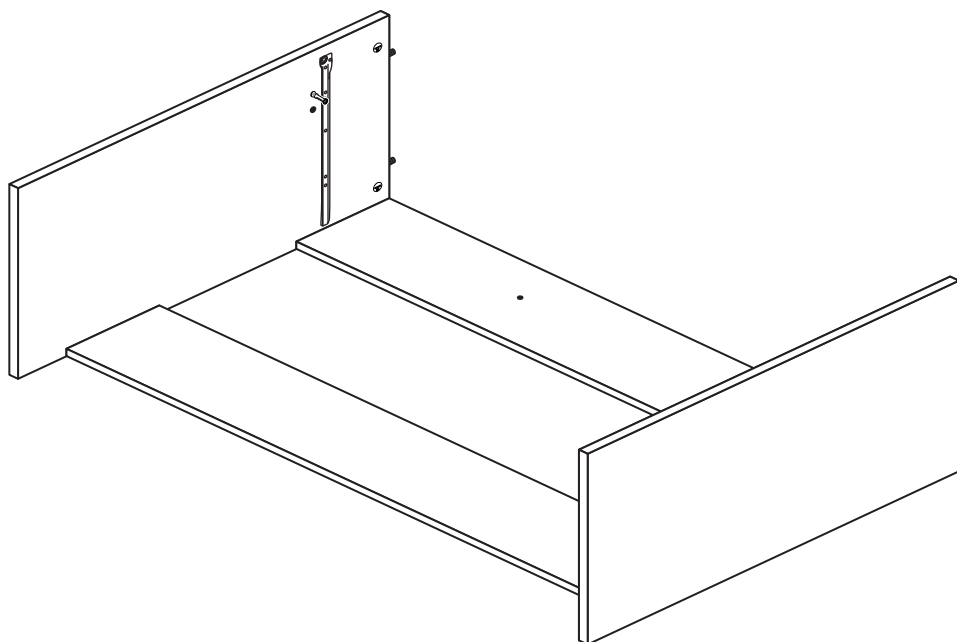

# Assembly Instructions

## Step 7

### Prepare the left divider

**a:** Fit a CL runner **Oa** to the left divider **7**.

The 1st screw **G** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**b:** Mark the top hole of the runner **Oa** with a bradawl and then fit a screw **F**.

**c:** Insert 2 large locking cam nuts **B** into the left divider **7**.

Tap 2 wooden dowels **C** into the left divider **7**.

### Turn the divider over







**d:** Fit a CR runner **Ob** to the left divider **7**.

The 1st screw **G** uses the 1st hole in from the front of the runner.





The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**e:** Mark the top hole of the runner **Ob** with a bradawl and then fit a screw **F**.

Screw a metal dowel **A** into the left divider **7**.

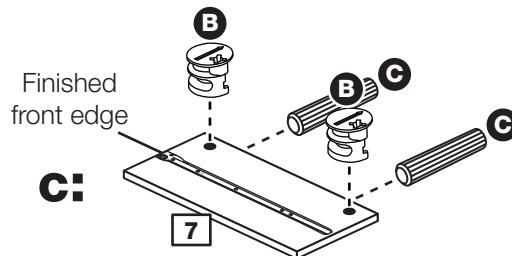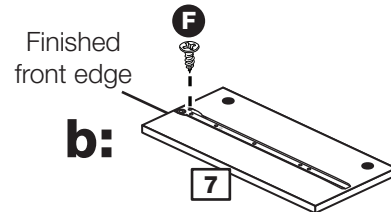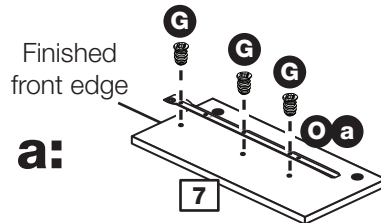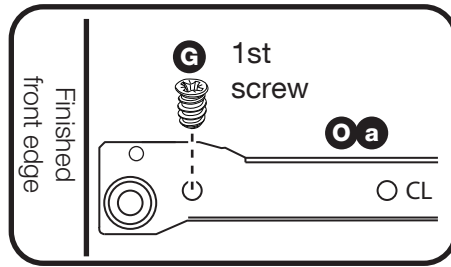

*Turn the divider over*

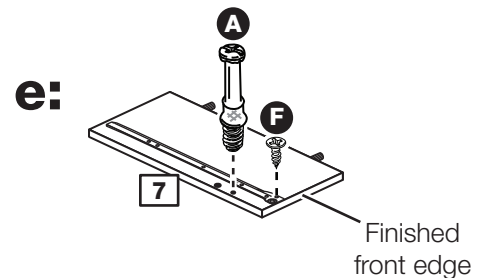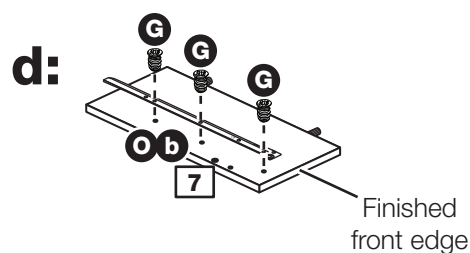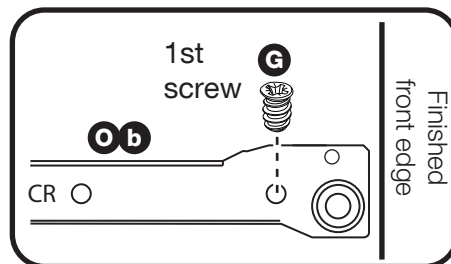


# Assembly Instructions

## Step 8

### Prepare the 2 small cross rails

Tap 2 wooden dowels **C** into each of the 2 small cross rails **2**.

Insert 2 large locking cam nuts **B** into each of the 2 small cross rails **2**.

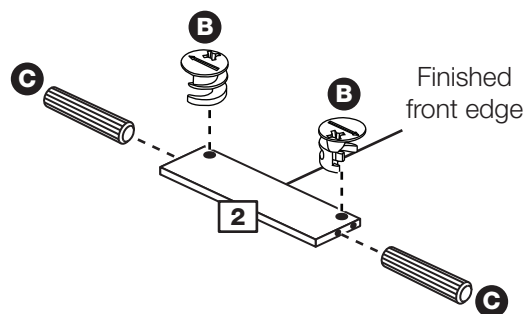


## Step 9

### Fit a small cross rail to the left divider

Push a small cross rail **2** down onto the left divider **7**.

Use a screwdriver to tighten the large locking cam nut **B** fitted to the small cross rail **2**.

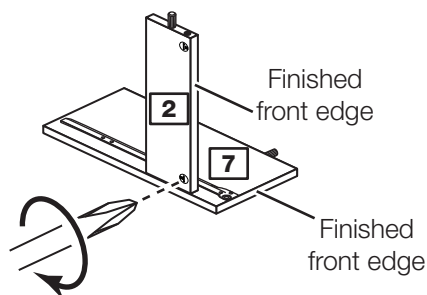


## Step 10

### Fit the small cross rail and left divider

Push the small cross rail **2** onto the left side **3**.

Use a screwdriver to tighten the large locking cam nut **B** fitted to the small cross rail **2**.

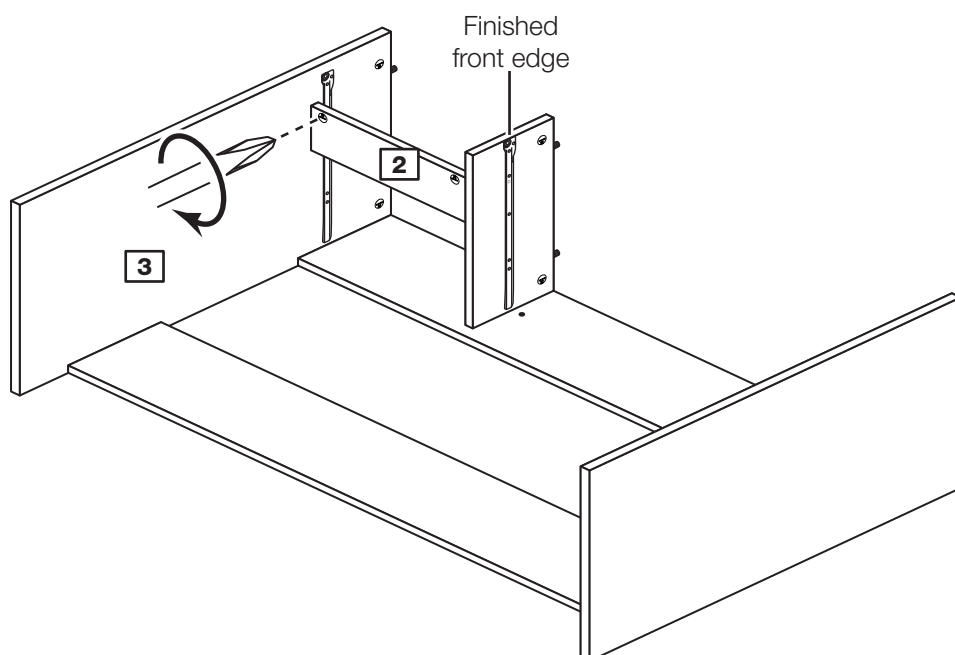

# Assembly Instructions

## Step 11

### Prepare the right divider

**a:** Fit a CR runner **O b** to the right divider **8**.

The 1st screw **G** uses the 1st hole in from the front of the runner.

The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**b:** Mark the top hole of the runner **O b** with a bradawl and then fit a screw **F**.

**c:** Insert 2 large locking cam nuts **B** into the right divider **8**.

Tap 2 wooden dowels **C** into the right divider **8**.

### Turn the divider over







**d:** Fit a CL runner **O a** to the right divider **8**.

The 1st screw **G** uses the 1st hole in from the front of the runner.





The 2nd and 3rd screws **G** use the holes that line up with the other panel holes.

**e:** Mark the top hole of the runner **O a** with a bradawl and then fit a screw **F**.

Screw a metal dowel **A** into the right divider **8**.

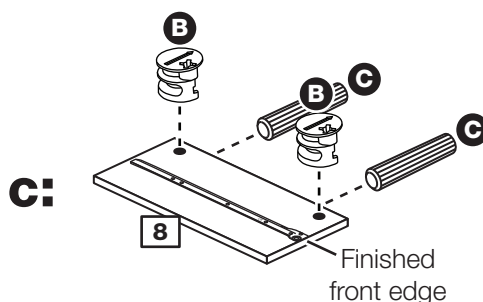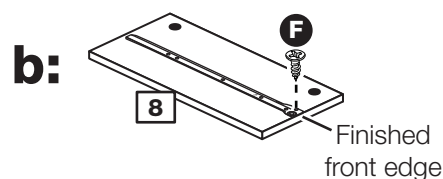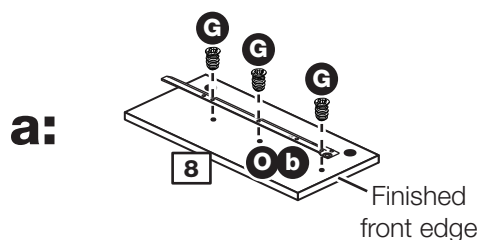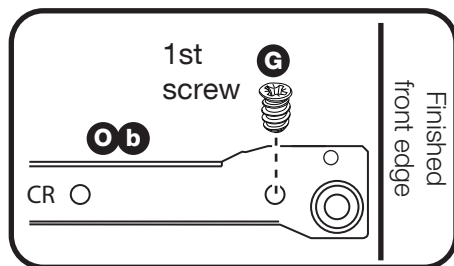

*Turn the divider over*

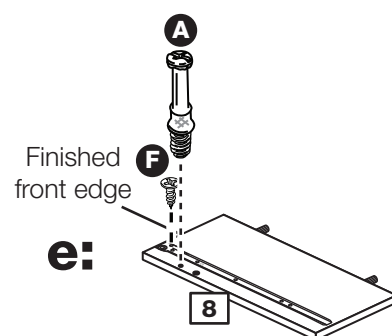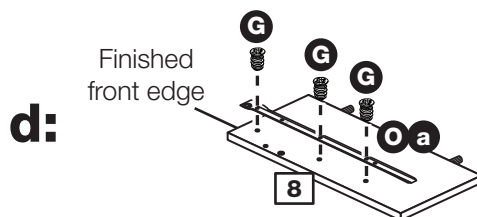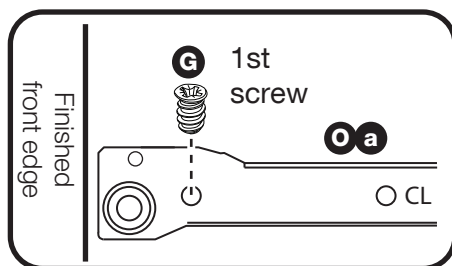


# Assembly Instructions

## Step 12

### Fit a small cross rail to the right divider

Push a small cross rail **2** down onto the right divider **8**.

Use a screwdriver to tighten the large locking cam nut **B** fitted to the small cross rail **2**.

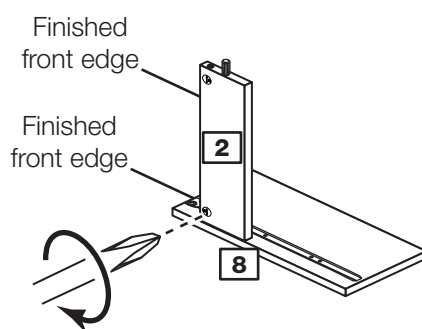


## Step 13

### Fit the small cross rail and right divider

Push the small cross rail **2** onto the right side **4**.


Use a screwdriver to tighten the large locking cam nut **B** fitted to the small cross rail **2**.

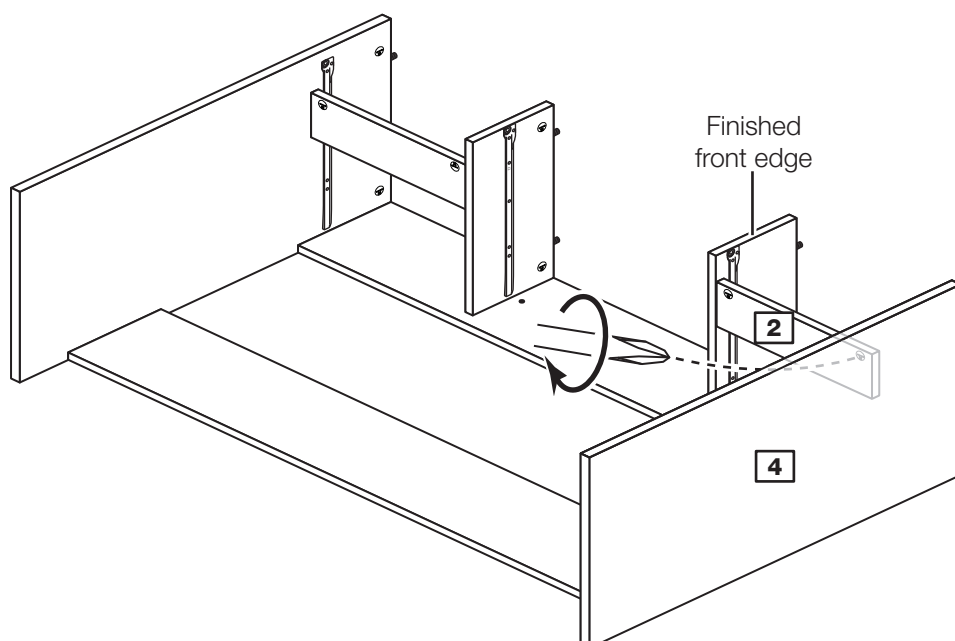

## Step 14

### Prepare the top

Screw 8 metal dowels **A** into the top **1**.

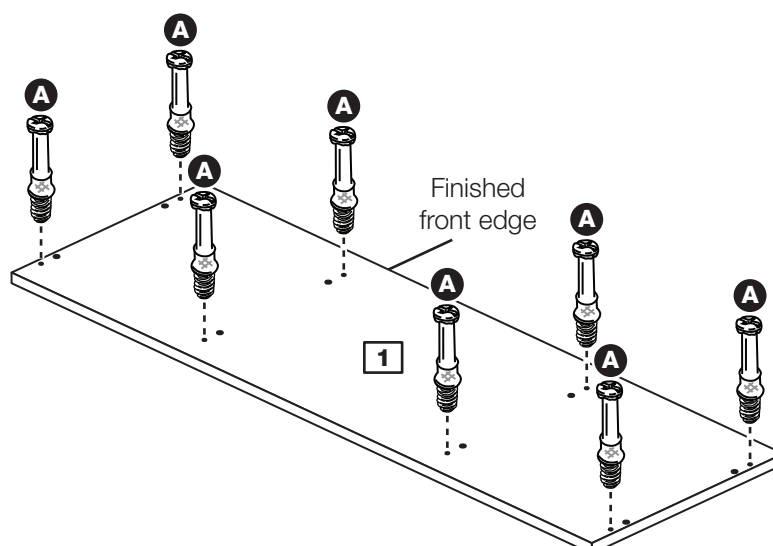




# Assembly Instructions

## Step 15

### Fit the top

Push the top **1** onto the assembly.

Use a screwdriver to tighten the 8 large locking cam nuts **B** fitted to the left side **3**, right side **4**, left divider **7** and right divider **8**.

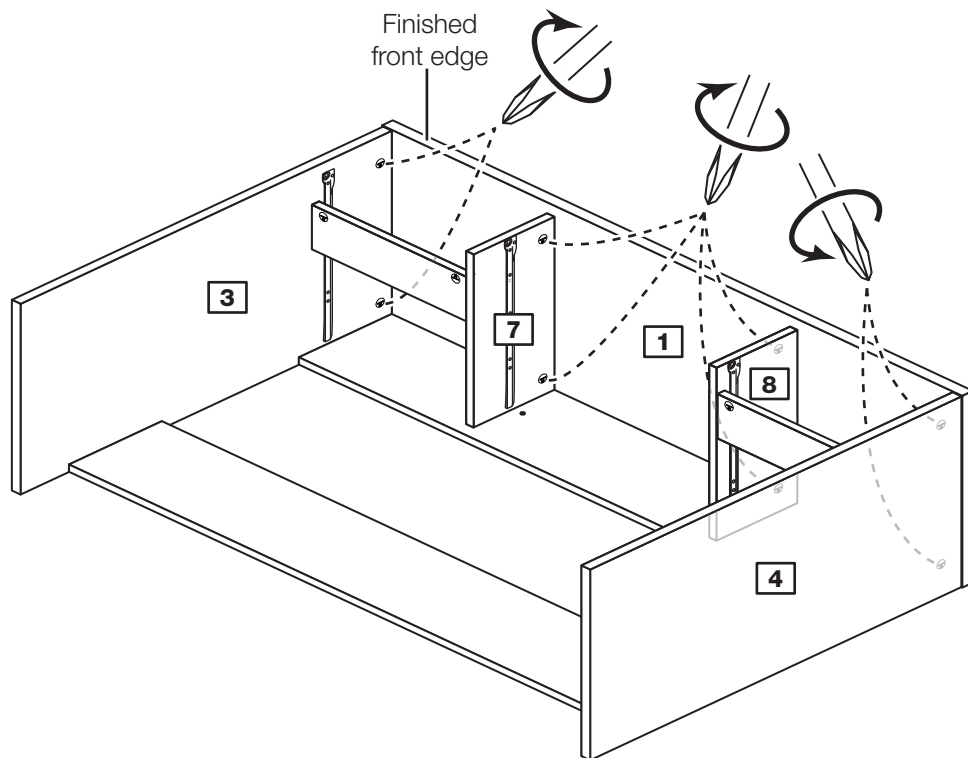

## Step 16


### Fit the 4 plastic nails

Tap 2 plastic nails **D** into the bottom edge of each of the sides **3** and **4**.

**Carefully stand the unit up for the next step.**



**Warning:** The unit is heavy. Lift with care.

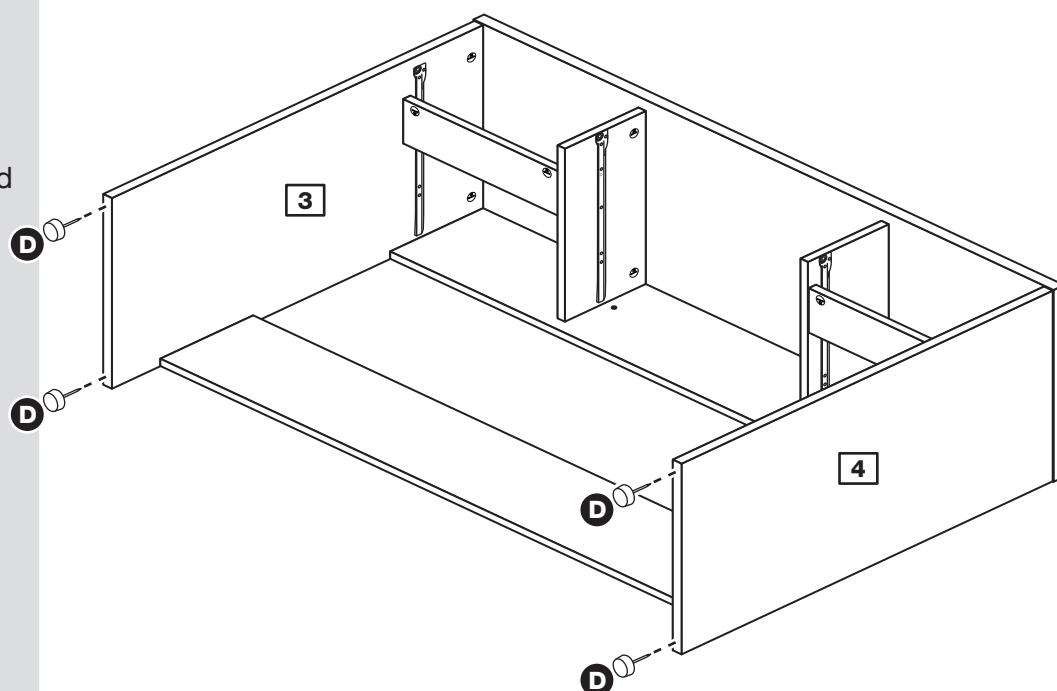


# Assembly Instructions

## Step 17

Fit the mirror back

From the front of the unit, push the 2 connecting sleeves **I** through the holes in the top modesty **5** and then locate them into the holes in the mirror back **9**


From the rear of the mirror back **9** insert the screws **H** into the connecting sleeves **I** and firmly tighten them up.

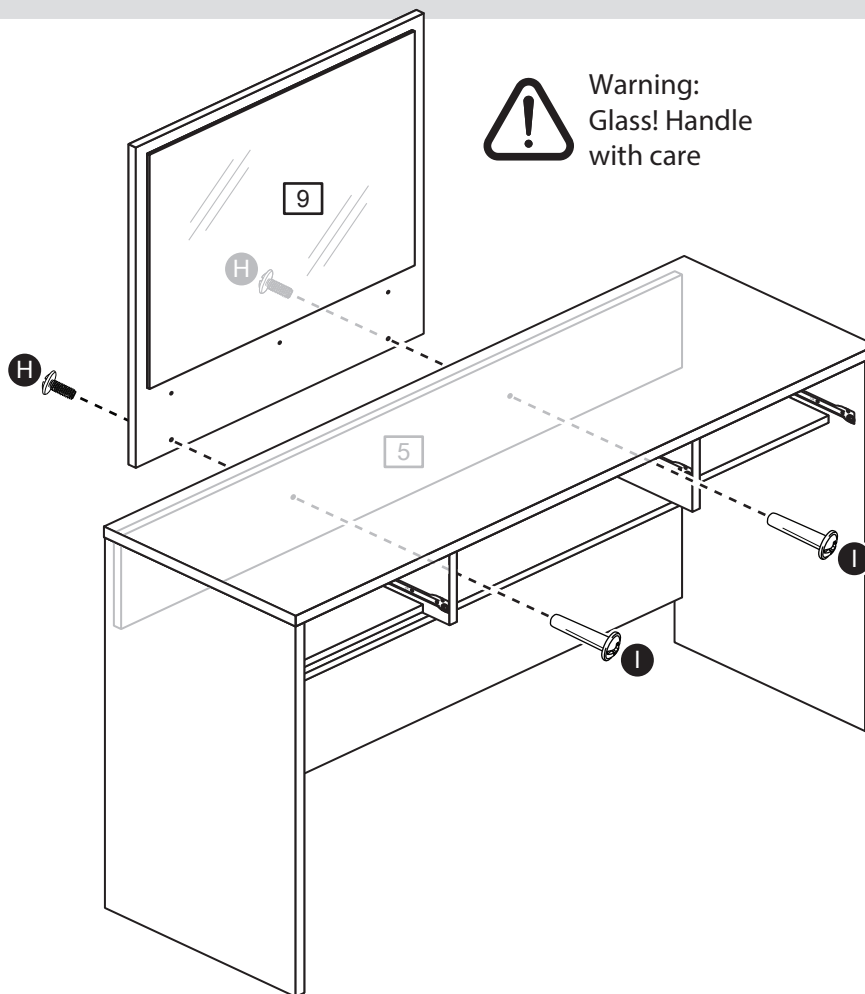

## Step 18

Secure the mirror back **9**

Secure the mirror back to the back edge of the top **1** using the 3 screws **E**

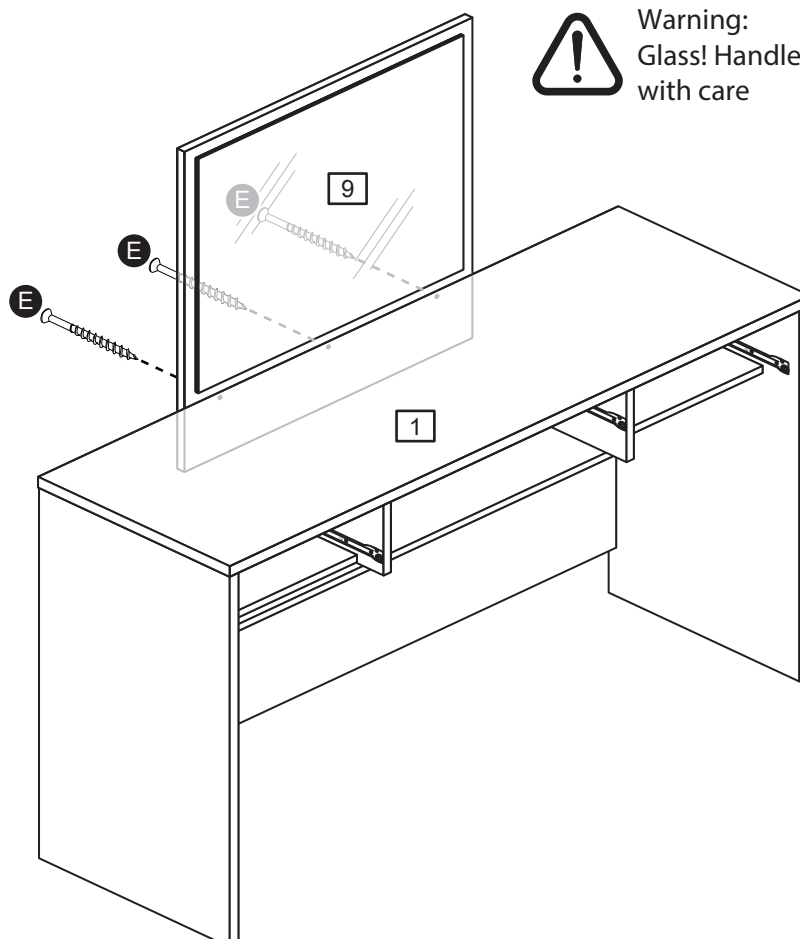

# Assembly Instructions

## Step 19

Fit the 2 overbalance protector kits

To prevent possible overbalancing this unit must be secured to a suitable wall by fitting of the 2 overbalance protector kits **J** to the unit


Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc.  
If in doubt, consult an expert.


## WARNING!

In order to prevent overturning this product must be used with the 2 wall attachment devices provided

### Example

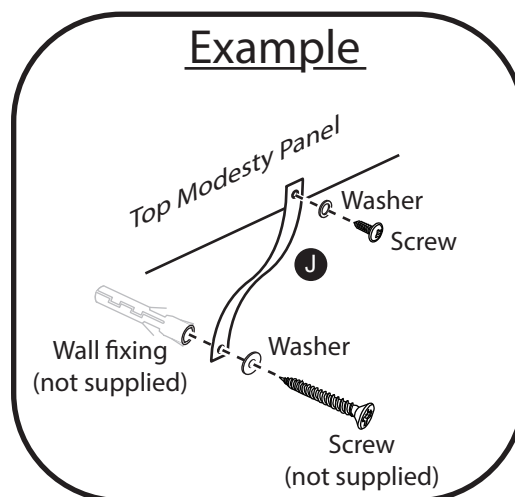


See the next page for a guide to wall mounting and fixings

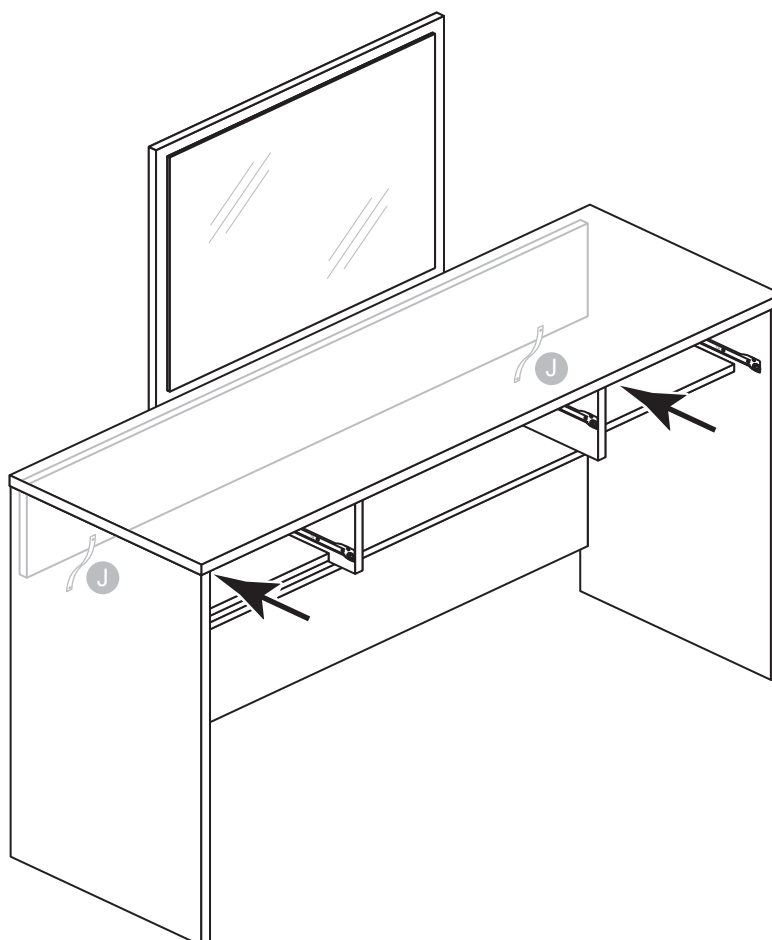

# A Guide to Wall Mounting & Fixings

## Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



**Important:** When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


## Hints:

- 1: General rule: Always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

## Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

### No.1 "General Purpose" wall plug

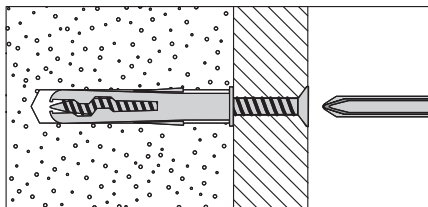


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

### No.2 "Plasterboard" wall plug

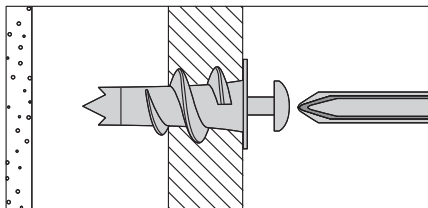


For use when attaching light loads on to plasterboard partitions.

### No.3 "Cavity Fixing" wall plug

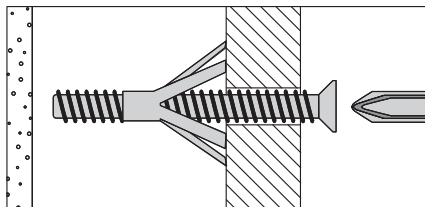


For use with plasterboard partitions or hollow wooden doors.

### No.4 "Cavity Fixing-Heavy Duty" wall plug

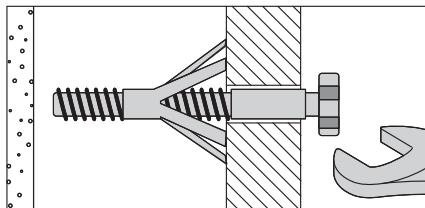


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

### No.5 "Hammer Fixing" wall plug

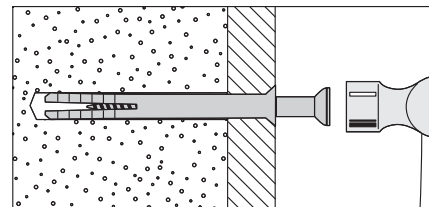

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

### No.6 "Shield Anchor" wall plug Heavy loads

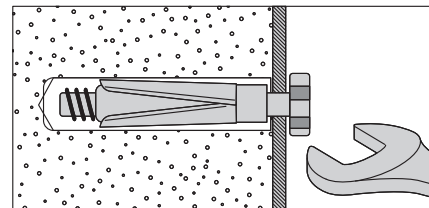

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



## Care & Maintenance

**Safety:** Always check the fitting and location to ensure your safety in and around the home.

**Fitting:** From time to time check the fitting to ensure the wall plugs or screws do not become loose.

# Assembly Instructions

## Step 20

### Prepare the left and right drawer fronts


Screw 2 metal dowels **A** into both the left drawer front **10** and the right drawer front **11**.

**Note:** Tighten the metal dowels up fully against the panels.



Drawer Assembly

[www.youtube.com/watch?v=lnNBV\\_uuMmo](https://www.youtube.com/watch?v=lnNBV_uuMmo)

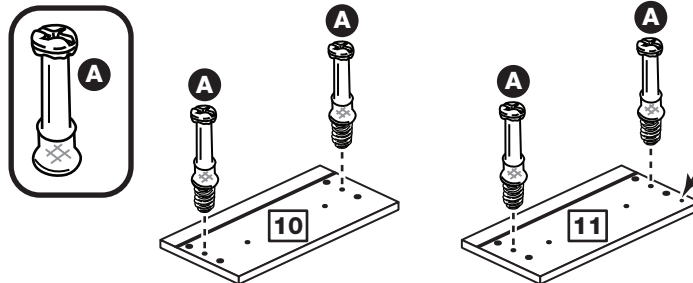


## Step 21

### Prepare the 2 sets of deep drawer sides

Insert a small locking cam nut **K** into the deep left drawer sides **12** and deep right drawer sides **13**.

**Note:** The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.

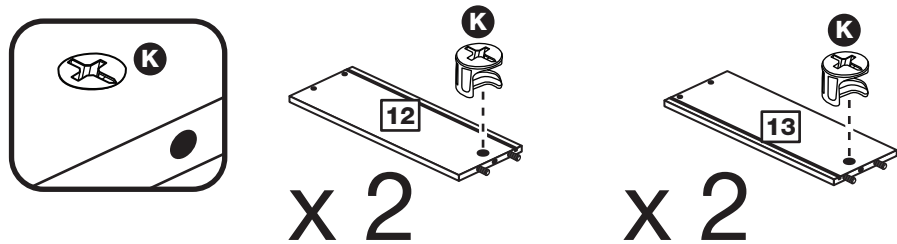


## Step 22

### Attach the deep drawer sides to the left and right drawer fronts

Push the deep left drawer side **12** and deep right drawer side **13** onto the back of the left and right drawer fronts **10** and **11**.

Turn the small locking cam nuts **K** on the deep left drawer side **12** and deep right drawer side **13**.

**Note:** Turn the locking cam nuts **K** clockwise to secure panels - more than 1/2 a turn.

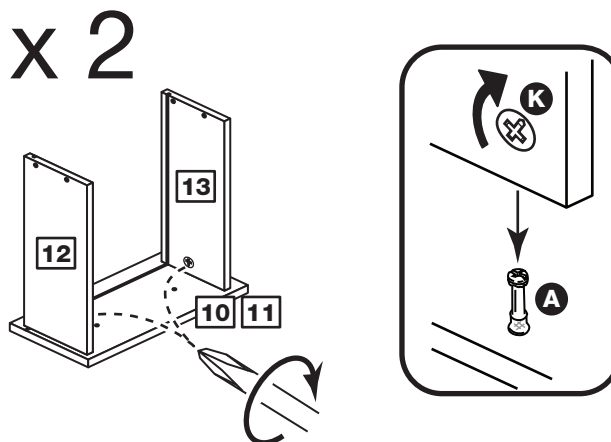


# Assembly Instructions

## Step 23

### Fit the deep drawer bases

Slide the deep drawer base **15** down into the grooves in the deep drawer sides **12** and **13** and down into the groove in the left drawer front **10** and right drawer front **11**.

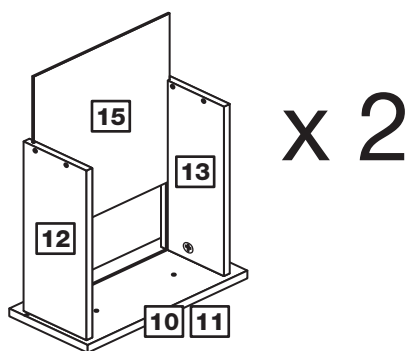


## Step 24

### Fit the deep drawer backs

Fit the deep drawer back **14** between the deep drawer sides **12** and **13**. Make sure that the deep drawer base **15** fits into the groove in the deep drawer back **14**.


Hold the deep drawer back **14** in position and tap the knock-in pegs **M** through the holes in the deep drawer sides **13** and **14**.

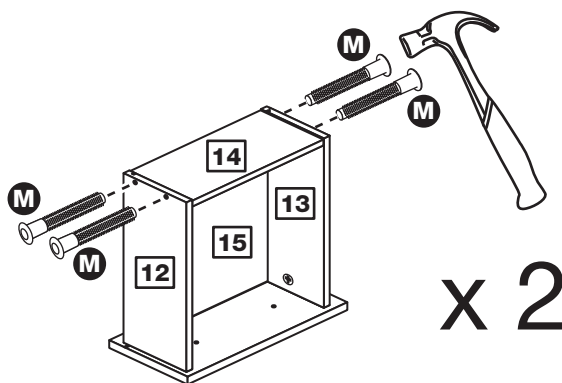

## Step 25

### Fit the handles


Attach a handle **P** to the left and right drawer front **10** and **11** using screws **L**.

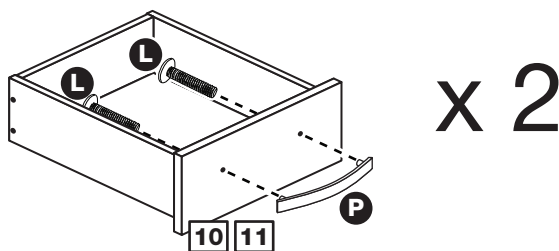


## Step 26

### Fit the wedgfixes

Turn the 2 deep drawer assemblies over and slide 2 wedgfixes **N** into the front and back grooves, as shown, and tighten up the screws.

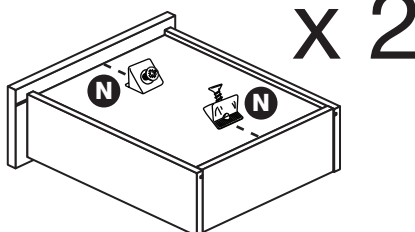

**Important:** Make sure that the drawer assembly is square before fitting the wedgfixes.



# Assembly Instructions

## Step 27

### Fit runners to the drawers


Fit the DL runner **Oc** to the bottom edge of the left drawer side **12**, as shown, making sure that it is pushed up against the back of the drawer front **10** and **11**. Use a bradawl to mark the fixing positions, then secure with 2 screws **F**.

Fit the DR runner **Od** to the bottom edge of the right drawer side **13** using the same method.



Fixing Bottom Mounted Runners


<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

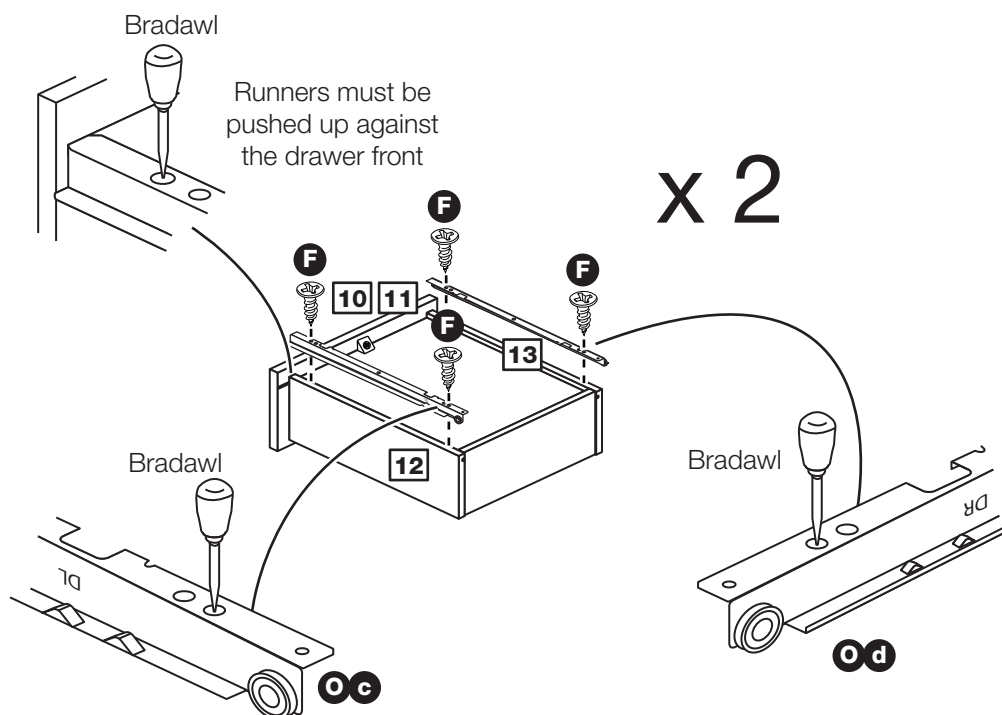

## Step 28

### Prepare the centre drawer front

Screw 2 metal dowels **A** into the centre drawer front **16**.






## Step 29

### Prepare the narrow drawer sides

Insert a small locking cam nut **K** into the narrow left drawer side **17** and narrow right drawer side **18**.

**Note:** The arrow on the locking cam nut **must** point towards the hole in the edge of the panel.





# Assembly Instructions

## Step 30

### Attach the narrow drawer sides to the centre drawer front

Push the narrow left drawer side **17** and narrow right drawer side **18** onto the back of the centre drawer front **16**.


Turn the small locking nuts **K** on the narrow left drawer side **17** and narrow right drawer side **18**.

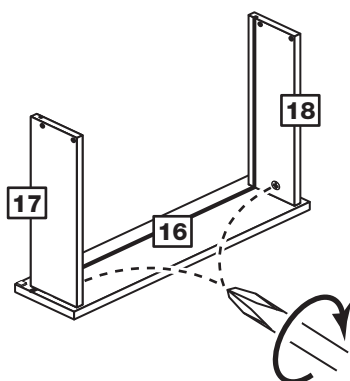

## Step 31

### Fit the narrow drawer base

Slide the narrow drawer base **20** down the grooves in the narrow drawer sides **17** and **18** and down into the groove in the centre drawer front **16**.

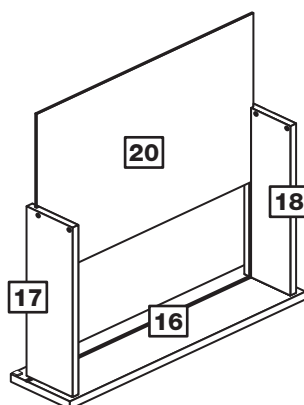


## Step 32

### Fit the narrow drawer back

Fit the narrow drawer back **19** between the narrow drawer sides **17** and **18**.

Make sure that the drawer base **20** fits into the groove in the narrow drawer back **19**.

Hold the narrow drawer back **19** in position and tap the knock-in pegs **M** through the holes in the narrow drawer sides **17** and **18**.

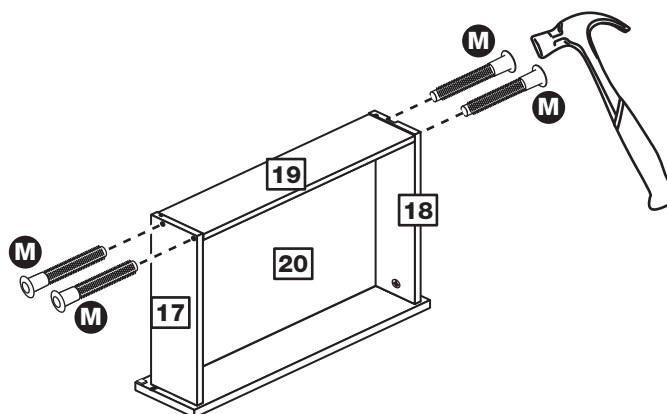




# Assembly Instructions


## Step 33

### Fit the wedgefixes

Turn the narrow drawer assembly over and slide 2 wedgefixes **N** into the front and back grooves, as shown, and tighten up the screws.

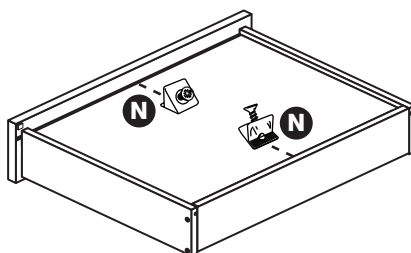

**Important:** Make sure that the drawer assembly is square before fitting the wedgefixes.




## Step 34

### Fit runners to the drawer

Fit the DL runner **Oc** to the bottom edge of the narrow left drawer side **17** as shown, making sure that it is pushed up against the back of the centre drawer front **16**. Use a bradawl to mark the fixing positions, then secure with 2 screws **F**.

Fit the DR runner **Od** to the bottom edge of the narrow right drawer side **18** using the same method.

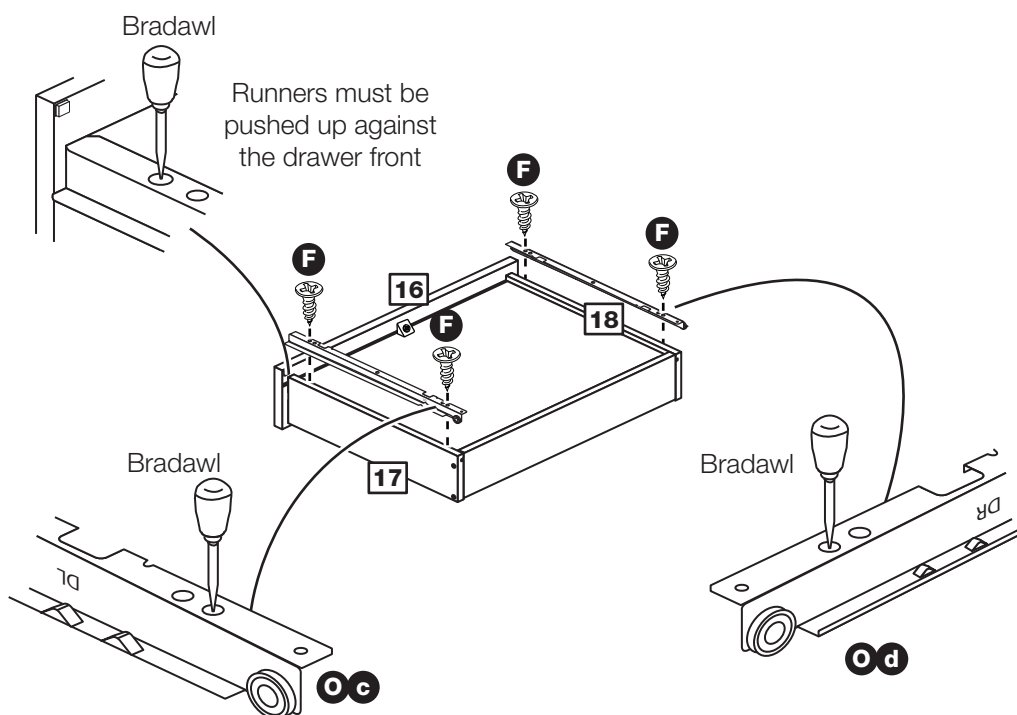

# Assembly Instructions

## Step 35


Fit the drawers

Slide the wheels of the runners fitted to the drawers, over the wheels of the runners fitted to the side panels and push the drawers into position.



Fixing Bottom Mounted Runners

<https://www.youtube.com/watch?v=Z6lGMy19h7Q>

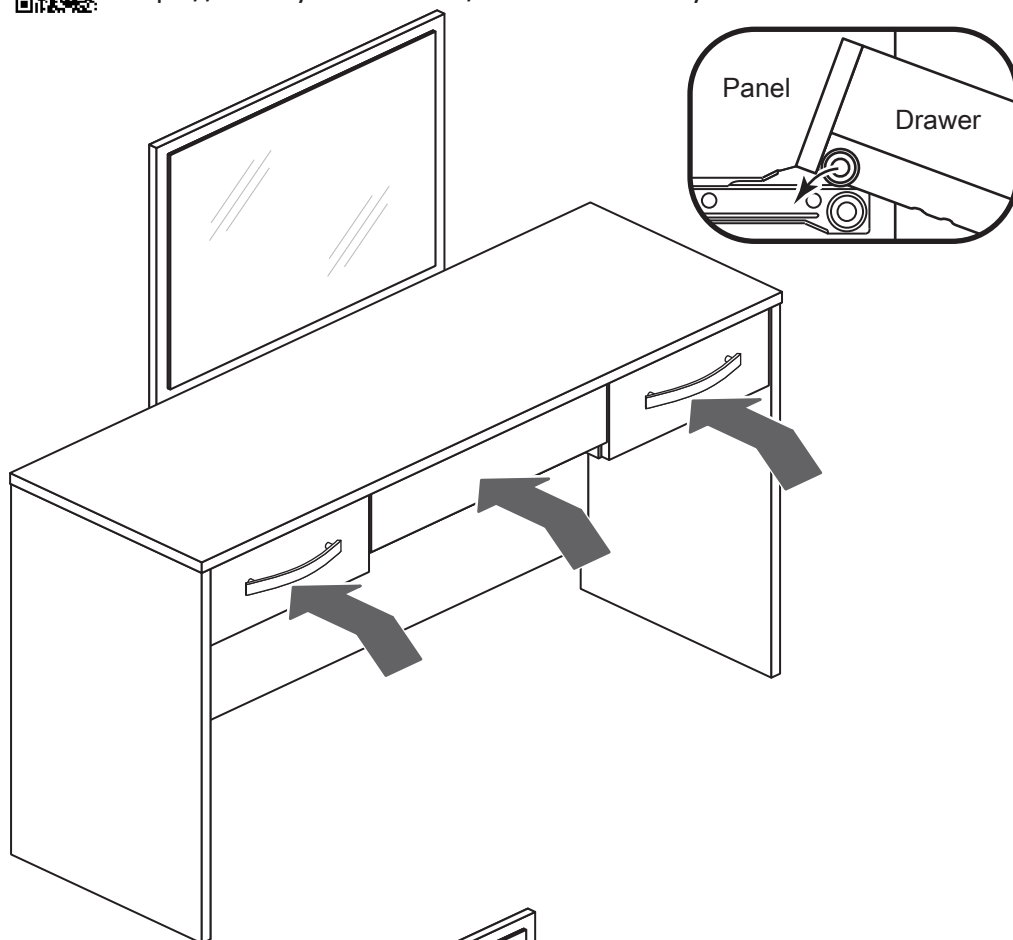

## Step 36



Please remove any blue protective film from panel edges and clear protective film from panel surfaces and clean the mirror


# Components - Panels for Stool

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)


Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020


Please check you have all the panels listed below




**21** Stool Left Side (DF-00013090)  
(39.6 x 34.9cm)



**22** Stool Right Side (DF-00013091)  
(39.6 x 34.9cm)

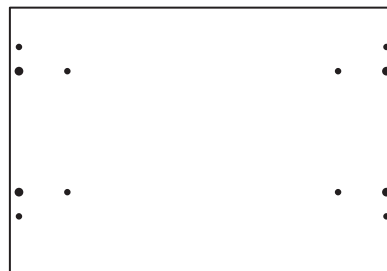


**23** Stool Top (DF-00013088)  
(51 x 35.3cm)



**24** Stool Cross Rail (DF-00013089)  
(46.8 x 6cm) x 2



**25** Stool Back Rail (DF-00013093)  
(46.8 x 12.8cm) x 2



**26** Stool Drawer Front (DF-00013092)  
(46.2 x 12.2cm)



**27** Stool Left Drawer Side (W300-95LH)  
(30 x 9.5cm)




**28** Stool Right Drawer Side (W300-95RH)  
(30 x 9.5cm)



**29** Stool Drawer Base (T447-297)  
(44.7 x 29.7cm)



**30** Stool Drawer Back (W436-95)  
(43.6 x 9.5cm)



**31** Seat Pad (FHALPAD)  
(458 x 300mm)

# Components - Fittings for Stool

If you need help or have damaged or missing parts, please visit [www.argos-support.co.uk](http://www.argos-support.co.uk) or email: [Help@ClickSpares.co.uk](mailto:Help@ClickSpares.co.uk) (quoting your original order number)







Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020







Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.



## Bag 1

<b>A</b> 	<b>B</b> 	<b>C</b> 
Metal dowel (F901) x 12	Large locking cam nut (F900) x 12	Wooden dowel (F22) x 16
<b>D</b> 	<b>G</b> 	<b>Q</b> 
Plastic Nail (F91) x 4	9mm Screw (F73) x 4	32mm Screw (F72) x 4


## Bag 2

<b>A</b> 	<b>H</b> 	<b>K</b> 
Metal dowel (F901) x 2	9mm Screw (F74) x 2	Small locking cam nut (F3) x 2
<b>L</b> 	<b>M</b> 	<b>N</b> 
19mm Screw (F461) x 2	Knock-in Peg (F171GY) x 4	Wedgefix (F639) x 2

## Individual Fittings Bags
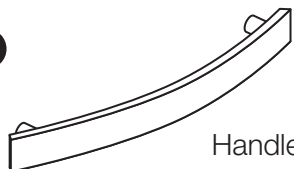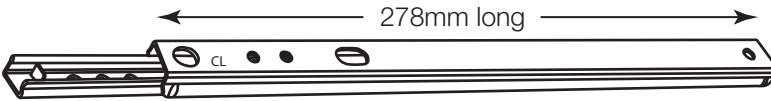
<b>P</b> 	<b>R</b> 
Handle (F278) x 1	Drawer runner (F1004) x 2

Ruler - Use this ruler to help correctly identify the screws

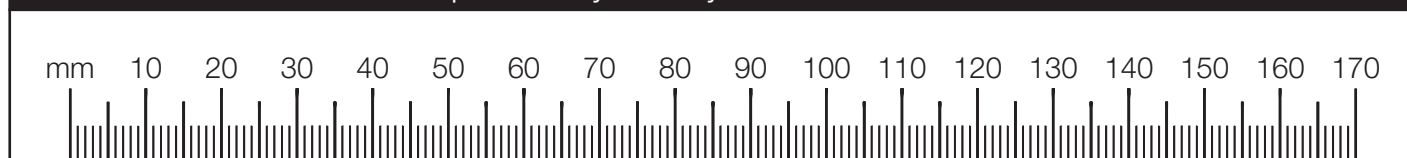

# Assembly Instructions

## Step 37

Let's assemble the Stool carcass - Open Bag 1


### Prepare the stool left side




Fitting Ball Bearing Runners

[www.youtube.com/watch?v=yG4xtiJJeSg](https://www.youtube.com/watch?v=yG4xtiJJeSg)


**a:** Place a runner **R** on the stool left side **21** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **G**.

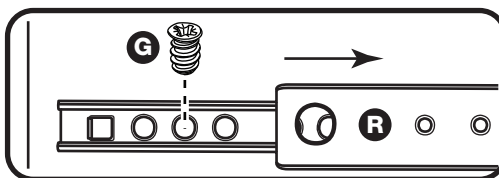

**b:** Slide the runner **R** back the other way and fit the 2nd screw **G** into the corresponding hole in the stool left side **21**.


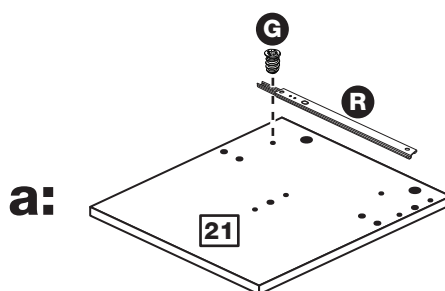


**c:** Screw 4 metal dowels **A** into the stool left side **21**.

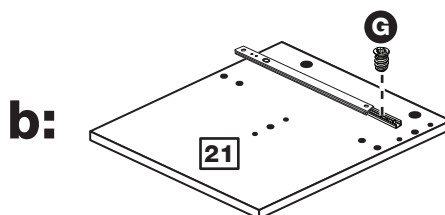

**d:** Insert 2 large locking cam nuts **B** into the stool left side **21**.

Tap 2 wooden dowels **C** into the stool left side **21**.

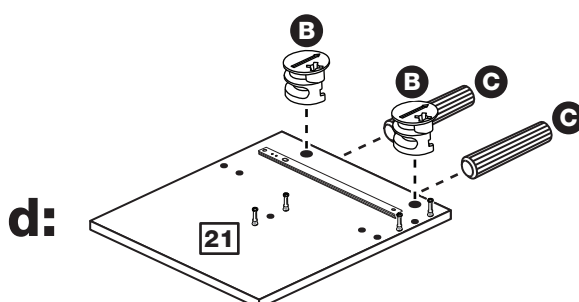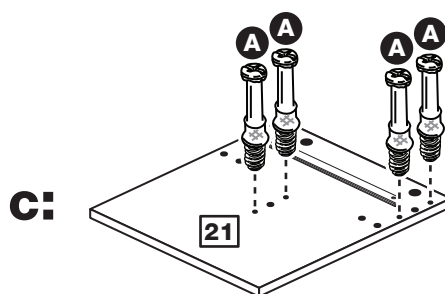

# Assembly Instructions

## Step 38

### Prepare the stool right side


**a:** Place a runner **R** on the stool right side **22** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **G**.

**b:** Slide the runner **R** back the other way and fit the 2nd screw **G** into the corresponding hole in the stool right side **22**.


**c:** Screw 4 metal dowels **A** into the stool right side **22**.

**d:** Insert 2 large locking cam nuts **B** into the stool right side **22**.


Tap 2 wooden dowels **C** into the stool right side **22**.

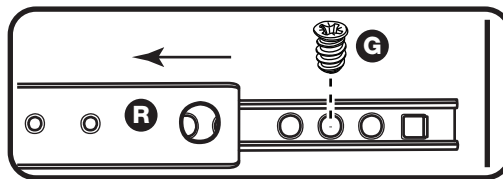


**a:**

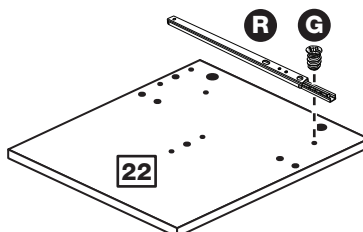


**b:**

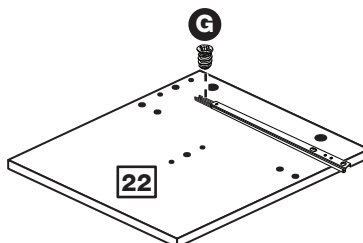

**c:**

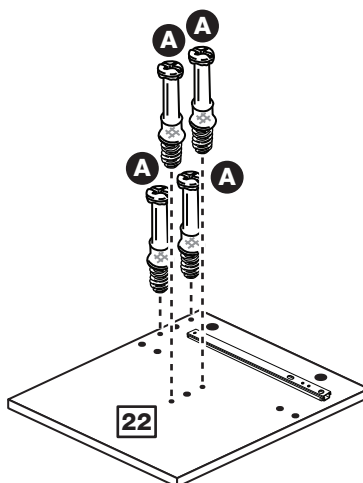

**d:**

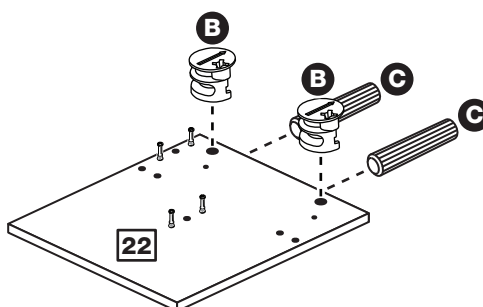


# Assembly Instructions

## Step 39

### Prepare the 2 stool back rails

Tap 2 wooden dowels **C** into each of the 2 stool back rails **25**.

Insert 4 large locking cam nuts **B** into each of the 2 stool back rails **25**.

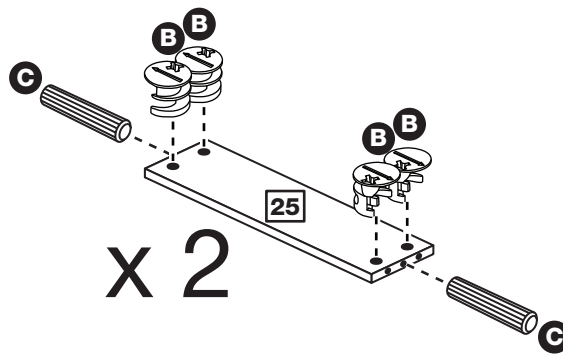


## Step 40

### Fit a stool back rail to the stool right side

Push a stool back rail **25** down onto the stool right side **22**.

Use a screwdriver to tighten the 2 large locking cam nuts **B** fitted to the 2 stool back rail **25**.

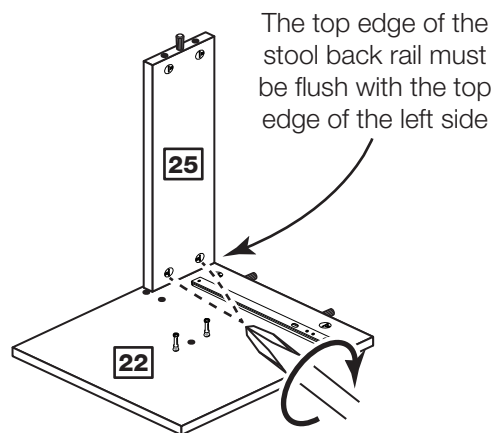


## Step 41

### Fit the other stool back rail

Push a stool back rail **25** down onto the stool right side **22**.


Use a screwdriver to tighten the 2 large locking cam nuts **B** fitted to the 2 stool back rail **25**.

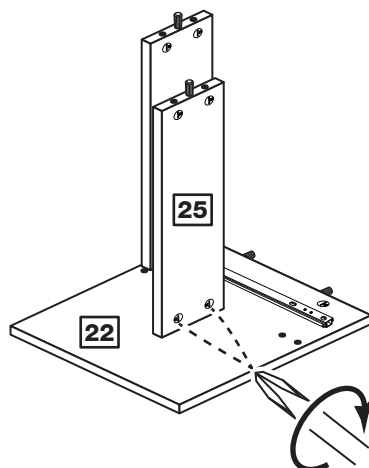

## Step 42

### Prepare the 2 stool cross rails

Tap 4 wooden dowels **C** into each of the 2 stool cross rails **24**.

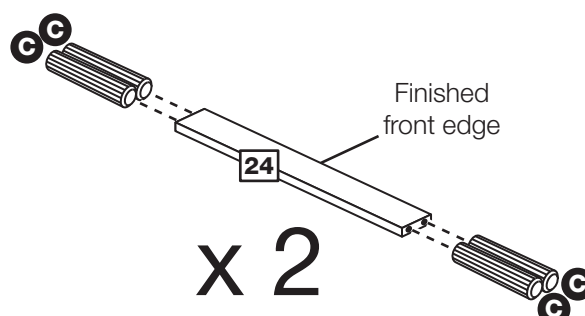


# Assembly Instructions

## Step 43

### Fit the 2 stool cross rails

Push the 2 stool cross rails **24** down onto the stool right side **22**.

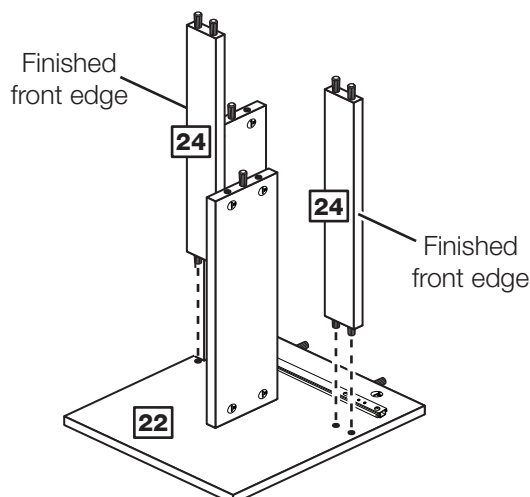


## Step 44

### Fit the left side

Push the left side **21** onto the assembly.

Use a screwdriver to tighten the 2 large locking cam nuts **B** fitted to each of the 2 stool back rails **25**.

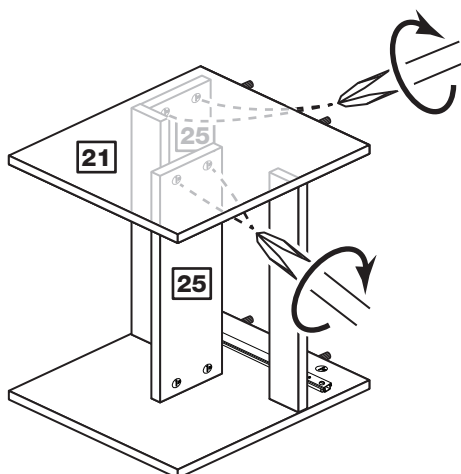


## Step 45

### Fit the 4 plastic nails

Tap 2 plastic nails **D** into the bottom edge of each of the sides **21** and **22**.

**Carefully stand the unit up for the next step.**

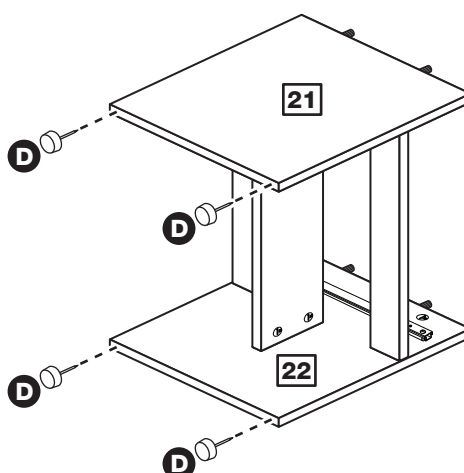




# Assembly Instructions

## Step 46

### Prepare the stool top

Screw 4 metal dowels **A** into the stool top **23**.

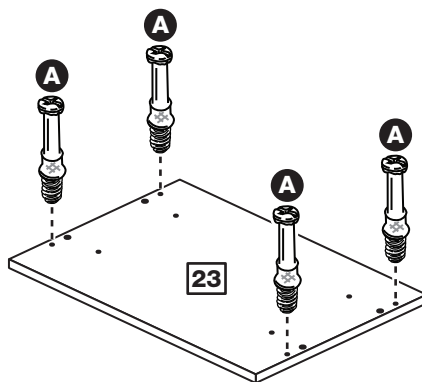


## Step 47

### Fit the seat pad to the stool top

Fit the seat pad **31** to the stool top **23** using 4 screws **Q**.

**Note:** Make sure that you screw into the hard surface of the seat pad.

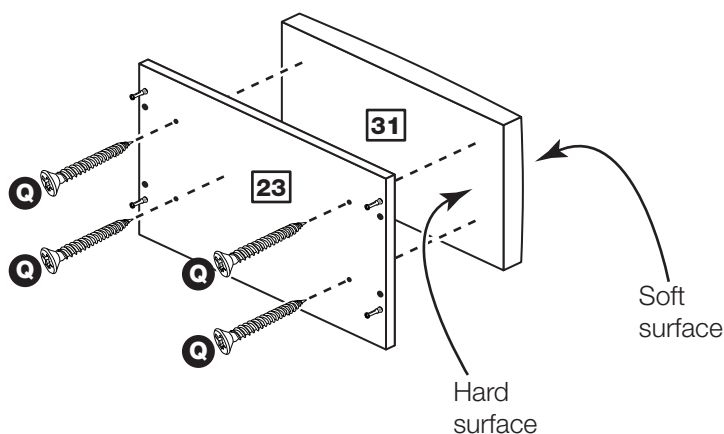


## Step 48

### Fit the stool top

Push the stool top **23** down onto the stool sides **21** and **22**.

Use a screwdriver to tighten the 4 large locking cam nuts **B** fitted to the stool sides **21** and **22**.

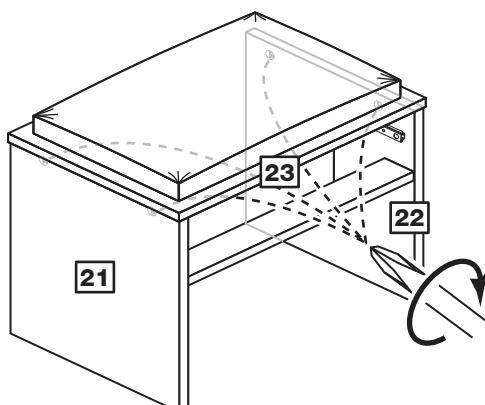


# Assembly Instructions

## Step 49

### Prepare the stool drawer front

Screw 2 metal dowels **A** into the stool drawer front **26**.




Now assemble the drawer for the Stool - Open Bag 2

## Step 50

### Prepare the stool drawer sides


Insert a small locking cam nut **K** into the stool left drawer side **27** and stool right drawer side **28**.

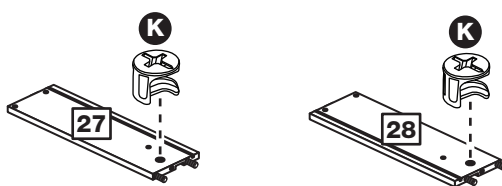

## Step 51

### Attach the stool drawer sides to the stool drawer front

Push the stool left drawer side **27** and stool right drawer side **28** onto the back of the stool drawer front **26**.




Turn the small locking nuts **K** on the stool left drawer side **27** and stool right drawer side **28**.

## Step 52

### Fit the stool drawer base

Slide the stool drawer base **29** down the grooves in the stool drawer sides **27** and **28** and down into the groove in the stool drawer front **26**.

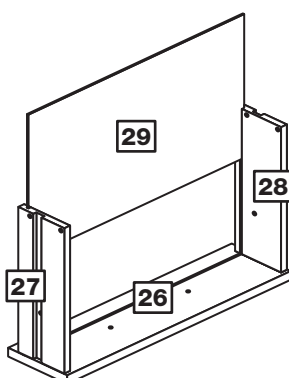


# Assembly Instructions

## Step 53

### Fit the stool drawer back

Fit the stool drawer back **30** between the stool drawer sides **27** and **28**. Make sure that the stool drawer base **29** fits into the groove in the stool drawer back **30**.


Hold the stool drawer back **30** in position and tap the knock-in pegs **M** through the holes in the stool drawer sides **27** and **28**.

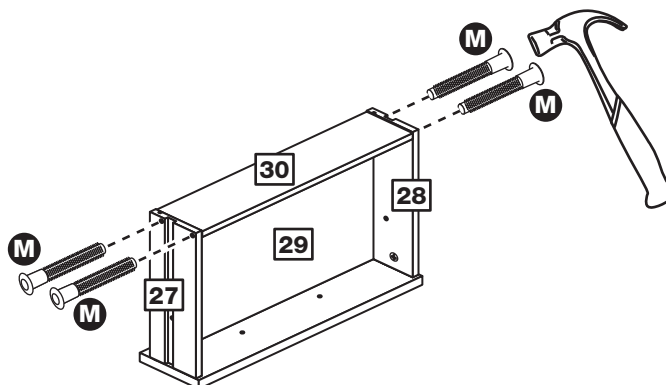

## Step 54

### Fit the handle


Attach a handle **P** to the stool drawer front **26** using screws **L**.

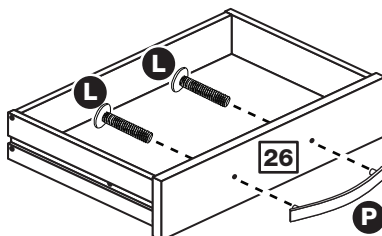

## Step 55

### Fit the wedgfixes

Turn the stool drawer assembly over and slide 2 wedgfixes **N** into the front and back grooves, as shown, and tighten up the screws.

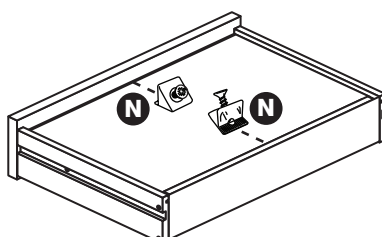

# Assembly Instructions

## Step 56

### Fit the stool drawer

Slide both the runners **R** forward and locate the drawer sides **27** and **28** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **R**.

Working from the inside of the drawer, insert 2 screws **H** through the drawer sides and out into the 2nd threaded hole in the runner.


**Note:** Do not overtighten the screws **H**.

If they catch on the runner you may need to loosen them slightly.




Fitting Ball Bearing Runners


[www.youtube.com/watch?v=yG4xtiJJeSg](http://www.youtube.com/watch?v=yG4xtiJJeSg)

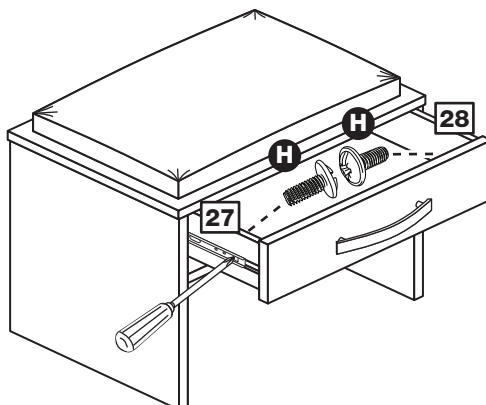

**Warning:** Use a screwdriver to position the runners as they could have sharp edges.

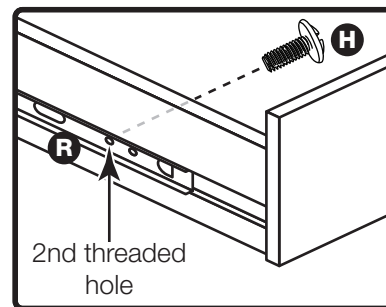

## Step 57

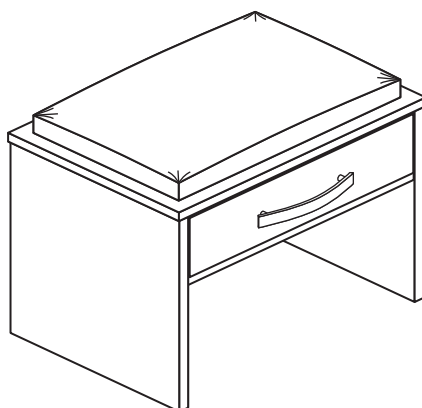

**The Stool  
assembly is complete**

Please remove any blue protective film from panel edges and clear protective film from panel surfaces