



Muskoka

Portable Foam Wall Spa



Instruction Manual

220-240V 50Hz 13A

Read this manual before operation

canadianspacompany.com

CONTENTS:

IMPORTANT SAFETY INSTRUCTIONS	PART 6: WATER MAINTENANCE
IMPORTANT SAFETY INSTRUCTIONS	PART 7: DRAIN & STORE
PART 1: PACKAGE LIST	PART 8: OPERATION CHECK LIST
PART 2: SPECIFICATIONS	PART 9: CONTROL UNIT MESSAGES.....
PART 3: CONTROL UNIT FUNCTIONS	PART 10: TROUBLESHOOTING.....
PART 4: INSTALLATION	SPA ACCESSORIES
PART 5: USAGE	

IMPORTANT SAFETY INSTRUCTIONS:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS:

Basic safety precautions should always be followed when installing and using this electrical equipment.

WARNING: The spa has been supplied with a residual operating current not exceeding 30 mA. The RCD must be tested before each use.

WARNING: No part of the appliance is to be located above the spa during use.

WARNING: This appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capability.

WARNING: TO AVOID ELECTRIC SHOCK, DO NOT USE THE SPA WHEN IT IS RAINING.

WARNING: Children should be supervised at all times around the appliance.

WARNING: If the supply cord is damaged, it must be replaced by the manufacturer, its service agent, or similarly qualified persons in order to avoid a hazard.

WARNING: To reduce the risk of electric shock, do not use an extension cord to connect unit to the electrical supply; use a properly located outlet.

WARNING: Make sure the home fixed connection box is more than 3.5m away from the spa.

WARNING: RISK OF ELECTRIC SHOCK. DO NOT BURY CORD. Ensure the electrical cord is located away from lawn mowers, hedge trimmers, and other equipment. Reduce the risk of electric shock by replacing damaged cords immediately.

WARNING: Electric installations should fulfil the requirements of local standards. Appliance live parts, except parts supplied with safety-low voltage not exceeding 12 V, must be inaccessible to a person in the spa.

WARNING: Parts incorporating electrical components, except remote control devices, must be placed a safe distance away or fixed in position so that they cannot fall into the spa.

WARNING: Do not switch on if there is any possibility that the water in the spa is frozen.

IMPORTANT SAFETY INSTRUCTIONS:

DANGER: Risk of Electric Shock. Install at least 5 feet (1.5 m) from all metal surfaces.

DANGER: Risk of Electric Shock. Do not permit any electrical appliances, such as a light, telephone, radio, or television, within 5 feet (1.5 m) of a spa.

DANGER: Risk of Accidental Drowning. Extreme caution must be exercised to prevent unauthorized access by children. To avoid accidents, ensure that children cannot use this spa unless they are supervised at all times.

DANGER: Never operate spa if the suction fittings are broken or missing. Never replace a suction fitting.

CAUTION: Always consult your doctor before:

- a) The use of alcohol, drugs, or medication, before or during spa use may lead to unconsciousness with the possibility of drowning.
- b) Obese persons and people with a history of heart disease, low or high blood pressure, circulatory system problems, or diabetes, should consult a physician before using a spa.
- c) Persons using medication should consult a physician before using a spa since some medication may induce drowsiness, while other medication may affect heart rate, blood pressure, and circulation.
- d) Pregnant or possibly pregnant women should consult a doctor before using spa.

CAUTION: Wet areas around the spa can be slippery; always enter and exit the spa slowly and cautiously.

CAUTION: In order to avoid a heater cut out and loss of operation, this appliance must NOT be supplied through an external switching device, such as a timer, or connected to a circuit that is regularly switched on and off by the utility.

CAUTION: Do not use the spa immediately following strenuous exercise.

CAUTION: Maintain water chemistry in accordance with the manufacturer's instructions.



Canadian Spa Co. Manufacturing extends the following warranties to the original purchasers of its portable Spas:

Vinyl Warranty: Canadian Spa Co. warrants the vinyl finish against defects in material and workmanship and specifically against blistering, cracking, or de-lamination, for the period of one (1) year from the original purchase date to the original purchaser. If Canadian Spa Co. determines the vinyl to be defective during this period, Canadian Spa Co. will repair or, at its option, replace the defective spa liner/bladder without charge to the customer.

Plumbing Warranty: Canadian Spa Co. warrants the plumbing of the spa will remain free from leaks for the period of one (1) year from the date of purchase to the original purchaser.

Equipment Warranty: Canadian Spa Co. warrants the equipment pack (pump, blower, heater, and control system) against malfunction and defects of the materials and workmanship for one (1) year from the date of the purchase to the original purchaser.

Extent of Warranty: This Limited Warranty applies to

portable spas manufactured after January 1 2017 and sold by authorized Canadian Spa Co. dealers to residential retail customers. This Limited Warranty is given only to the first retail purchaser and terminates upon transfer of ownership. No warranty is provided on filters or any dealer installed accessories.

Cost of installation, removal, and/or shipping of the spa, is not covered by this Limited Warranty. In the event that Canadian Spa Co. deems the removal of the spa to a place of repair necessary or that the spa must be replaced, any and all costs of the spa removal and replacement (landscaping, decking, fencing and/or structure removal, alteration and/or replacement; or other costs of providing access to the spa) will be billed to the purchaser.

This Warranty applies only to spas in single family, residential installations.

This Limited Warranty becomes void if the spa is placed in commercial or hire application.

PART 1: PACKAGE LIST

Muskoka Spa:

Take all the spa components out of the box and check your instruction manual that all the following key components are present:



(A) Foam Walls x 8



(B) Foam Connectors x 16



(C) Portable Control Unit



(D) Bottom Liner



(E) Inner liner



(F) Inflatable Lid



(G) Inlet/Outlet Caps x 2



(H) Filter cartridges x 2



(I) Connectors x 3 (fitted to top liner) plus 1 x spare



(J) Drain Hose



(K) Inflation Hose



(L) Ground sheet



PART 2: SPECIFICATIONS

Item:	KP-10012 (CA17534GB) - Muskoka
Seating Capacity	6 Persons
Spa Dimension (inner)	160 x 73cm (63" x 29")
Spa Dimension (outer)	184cm x 73cm (73" x 29")
Water Capacity	1230L
Voltage	220-240V 50Hz
Heater	2040W
Massage Jet Pump	L1: 400W, L2: 650W, L3: 850W
Filter Pump	40W
Max. Heat Temperature	40°C (104°F)
Spa Lid Material	Polyester Laminated PVC, Synthetic Leather
Liner	Polyester Laminated PVC
Net Weight	47.6kg / 104.7lbs
Gross Weight	53.9kg / 118.6lbs
Package Dimensions	#1: 75 x 55 x 62cm / 30" x 22" x 25" #2: 110 x 79 x 76cm / 43" x 31" x 30"
Test Certificate (Pump only)	CE
Heating Efficiency (Ambient temperature is 68°F / 20°C)	1.5-2 (°F) / hr

Quick assembly:



PART 3: CONTROL UNIT FUNCTIONS

The Portable Control Unit (PCU):



PCU Controls Digital Spa Control Centre:



Functions of the Spa Portable Control Unit

- **LED Display:** Once powered-up, the LED display will show the current water temperature automatically.
- **'Temperature Adjustment' Buttons:** Raise or lower set temperature. Pressing one of the temperature adjustment buttons will cause the LED display to flash. When it is flashing, you can set the desired temperature. The value will increase or decrease by 1°F/ 1°C for each press.
- **Temperature Adjustment Ranges:** 86°F - 104°F/ 30°C - 39°C **NOTE:** There may be a 3-4 degree variance between the temperature shown on the PCU and the temperature of the spa water.
- **'Temperature Mode' Button:** Press this button to change from Celsius to Fahrenheit.
- **'JETS' Button:** Press the 'JETS' button to activate the Jet Massage System on the spa. Pressing once will start the lowest speed of the jets (L-1 will display on the screen). Press again to increase the speed of the jets to L-2, and press again to reach the highest jet speed, L-3. Hold down the 'JETS' button for 5 seconds to turn jets off. When jets turn off, "FIL" will display on the screen to indicate the filtration and heat is back on.
- **Lock Button:** Hold down for 5 seconds to lock all button functions. Repeat to remove lock. **NOTE:** It is highly recommended that PCU buttons are locked when PCU is left unattended.
- **'HEAT' Button:** Once desired temperature is set press 'HEAT' to begin heating.


NOTE:

- The massage system will stop automatically after 30 minutes of operation. You can re-activate the jet function by pressing the 'JETS'.
NOTE: Heater will automatically turn on when jets turn off.
- Heating and jet function can not be activated at same time. When heating system is working, pressing 'JETS' will change heating mode into jet mode: heating and filtering are shut down, jet system is activated. When jets are turned off, heating and filtering automatically resumes.
NOTE: Keeping jets on for a long period of time may cause spa water to lose heat.
- Pressing 'HEAT' activates the heating and filtering system at the same time. The 'HEAT' button will display a solid red light as spa water heats up. Once desired temperature is reached, the heater will go into standby mode, which will be indicated with a flashing red light.
NOTE: Heater will not resume until spa water drops 4-5 degrees below set temperature for maximum efficiency. You can also manually restart the heater by pressing 'HEAT' when heater is turned off.
- This spa is equipped with automatic moisture protection which will activate the blower of the PCU once a day for up to 60 seconds. This helps to prevent condensation build up and increase the lifespan of the PCU.


PART 4: INSTALLATION

1. Site Selection

IMPORTANT: Before you position, construct, and fill with water follow these instructions:



Clean surface



Level ground



Fill the tub up to the water lines on both interior sides of the spa to ensure the spa is level.


1. Place in an area more than 8.2 sq ft (2.5 sq mtrs).
2. Place spa on a surface that supports more than 661lb/ft² (300 kg/2).
3. The spa must be on a clean level ground. If placed on uneven ground the weight of the spa water may cause the spa to become distorted; this is not covered by the manufacturer's warranty. **NOTE:** Uneven exposure to the sun may cause ballooning in the inflatable lid.

2. Test RCD & Inflate Lid

a) Perform RCD Test

WARNING: RISK OF ELECTRIC SHOCK. The RCD plug must be tested before each use. Do not use if RCD test fails.

1. Insert the plug into the power outlet.
2. Press the "RESET" button, the indicator light will illuminate.
3. Press the "TEST" button, the indicator light turns off.
4. Press the "RESET" button, the indicator light will illuminate; the pump is ready to use.

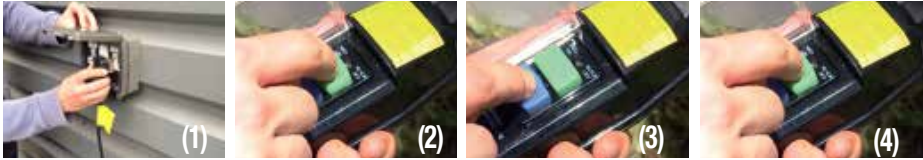

b) Inflate the Lid

Connect the Inflation Hose to the Inflation Port on the PCU and then connect the other end to the Inflation Port on the lid and press 'JETS' to inflate the lid. Once inflated close the Valve Cap and press the 'TEST' button on the RCD to turn PCU off. When inflating, only top cap on the Check Valve needs to be opened, when deflating lid, the entire valve should be unscrewed. **NOTE:** Please disconnect the power after you inflate the top lip. The heater will automatically turn on after 20 minutes of the Spa being plugged in. If there's no water in the Spa, "E6" will appear after a few minutes and you will hear the noise of the filter pump dry run. In this case, please switch off the power then "E6" will automatically clear.

3. Spa Assembly


- 1) Take the Thermal Ground Sheet and position it where the footprint of the spa will be. Take the body's Vinyl Liner and position it on top of the ground sheet.



- 2) Position Foam Panel 1 (with holes - see fig.a), aligning it exactly with the corresponding holes in the Vinyl Liner.




- 3) Assemble the remaining blank Foam Panels until spa is complete. As you assemble the walls install the top and bottom wall connectors between the foam walls as shown.



Ensure to insert the top and bottom wall connectors as you assemble the foam wall

TIP: Gripping the Foam Panel on both sides and giving it a small wiggle can help guide it in if it gets stuck.

- 4) Ensure you put the cut out of the drain (fig.b) inside to the left of the three holes.




- 5) Insert the body of the liner into the centre of the Spa, ensure the holes of the Portable Control Unit foam fit into the holes of the liner and the Drain Hose goes through the hole in the bottom of the Liner.



- 6) Pull the Spa Top Liner down and align with Spa Base Liner. Zip the two liners together. TIP: Ensure top and bottom zippers are aligned before pulling the Top Liner down.



- 7) Insert the three pipes into the three holes. These will attach to the Portable Control Unit. The Drain Hose will come through the bottom of the liner as well (see figure c). Smooth out wrinkles in the liner to the best of your ability and pat out any pockets of air.

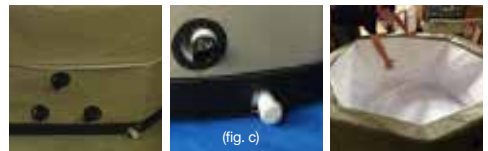

4. Connect the Portable Control Unit to the Spa

Position the PCU next to the spa, remove the Inflation Hose and align the Connection Hoses to the spa. Use slight force to evenly push the end of the connector hose into the PCU's connector port. Screw to tighten and seal the connector. Attach the Aromatherapy canister to the blower port of the PCU. Attach the remaining connector to the aromatherapy port, and attach the other end to the corresponding connection on the spa.



NOTE: connectors must be held straight when attaching. Attaching at an angle can result in damage to the connector.

NOTE: Ensure connectors have 'o'-ring gaskets in proper position



Aromatherapy feature

To use aromatherapy, simply unscrew cap on Aromatherapy Port and insert canister of scented Aromatherapy Beads. Replace Cap on Aromatherapy Port. The aromatherapy scents will activate once the 'JETS' button has been pressed.

5. Install the Filter Cartridge

Open the Filter Housing lid. Put the new filter cartridge into the cartridge chamber. Replace Filter Housing Cap and seal by screwing Cap Fitting on. **NOTE:** Ensure orange 'o'-ring is placed correctly inside housing.



6. Pre-Fill Check

Ensure the drain outlet is extended for future draining/access. Check the stopper on the bottom of the spa and the Drain Cap, ensure both are closed tight. Fill the spa with water using a garden hose until reaching the water level printed on both interior sides of the spa wall. These lines are also used as an indication of the levelness of the spa.

NOTE: PCU must be connected to the spa prior to filling. **NOTE:** Do not use hot water to fill Spa.



7. Purge Air From Portable Control Unit


Unscrew the Air Valve counter-clockwise and release the air until a small amount of water is coming out, then screw the Air Valve clockwise tightly. Use a towel to dry off the PCU.

IMPORTANT: Make sure PCU is turned off, and all connector caps are removed before performing this step.



8. Thermal Blanket

Place Thermal Blanket on water surface with the bubbles facing down for more efficient heating and improved heat retention.



PART 5: USAGE

Press the 'Up' and 'Down' arrows to set desired temperature, and press heat to start the heater. Place lid on the spa while heating. It can take 24-48 hours for your spa to reach its set temperature. See Part 3 for complete list of Control Functions. Press the Jet Massage Button to activate massage system. We suggest a temperature range between (37-39°C) 98.6°F-102°F during the winter. The massage system will stop automatically after 30 minutes of operation to reduce energy consumption.



Lock the Cover Buckle

Push the square pad upwards to lock and downwards to unlock.

Cleaning / Replacing Filter Cartridge

WARNING: RISK OF ELECTRIC SHOCK. Unplug the PCU before beginning spa maintenance.

NOTE: A dirty filter cartridge may contaminate the spa water and cause damage to the heating function.



1. Carefully thread the three plastic caps onto the inlet/outlet ports on inner spa wall. (Ensure the rubber gaskets are in place within the plastic caps)
2. Remove filter housing lid by turning it anti-clockwise, then remove the filter cartridge.
3. Rinse off filter cartridge with water and reuse if possible. Replace filter if the cartridge remains dirty after rinsing or is badly discoloured.
4. Put the cleaned filter back into the cartridge housing and close the lid by turning it clockwise.
5. Remove caps from inlet/outlet ports on inner spa wall and allow water to flow into pump. Tub is now ready for use.



PART 6: WATER MAINTENANCE

The filter cartridge should be cleaned weekly and replaced on a monthly basis, or depending on use. A reminder will appear to change the filter after 25 days ('CHG FIL'). Hold down 'HEAT' for 5 seconds to clear the message. Change water once a month or depending on use and use appropriate spa chemicals. Please pay attention to the chemicals used and dosage. Spa damage resulting from misuse of chemicals is not covered by the warranty.

Water Balance: We recommend you maintain your water balance: PH value: 7.2 - 7.6; Free Chlorine: 2ppm - 3ppm; Alkalinity: 120-150ppm. Use a test kit to test your spa water before each use of the spa, or at least once per week.

Water Sanitation: We suggest using chlorine or bromine granules to disinfect the spa's water.

NOTE: Chlorine/Bromine tablets are not recommended.

Cleaning the Spa: Clean the spa with soap and water, then rinse. Leave it outside (away from direct sunlight) to dry.

Repairs: Small holes or punctures can be repaired with the repair kit that comes with the spa (glue not included)

Maintenance & Troubleshooting:

PROBLEM	POSSIBLE CAUSE	SOLUTION
Cloudy water	High pH (test to verify) Poor filtration High dissolved solids	Add pH down Clean filter w/Filter Free Empty spa and re-fill
Odour	High level of organic contaminants	Increase the amount of Chlorine
Eye skin/irritation	Low pH and/or alkalinity combined Chlorine due to organic contamination	Add Alkalinity Booster Increase the amount of Chlorine Granules



PART 7: DRAIN & STORE

Drain System

Locate and remove the external threaded Drain Cap. Attach Drain Hose to Drain Outlet. Locate and remove the stopper on the spa floor to allow water to drain.



Dry the Spa and Portable Control Unit

After a RCD test, press 'JETS' to blow out the water inside the jet holes. Turn PCU off and disconnect all connectors from connection ports on the PCU. Turn PCU back on and run blower for 30 seconds to allow excess water to clear from blower port. Unplug RCD and hold PCU at an angle, allowing water to drain from connection ports. Once water flow stops, remove Filter Housing Lid and hold PCU upside down. Give the PCU a slight shake, allowing all excess water to be removed. Close Filter Housing Lid when complete. **NOTE:** PCU must be stored upright. Leaving PCU at an angle or upside down may result in damage.



Storage

Use a towel to wipe off the spa and dry for 24 hours. Unscrew the Air Valve on the lid. Once the lid has been deflated and the Foam Panels have been disassembled, gently fold them for storage. It is recommended that you store the spa in its original package in a warm dry place.

PART 8: SPA OPERATION CHECK LIST



CHECK 1: Water Level

Ensure water level meets fill lines on both interior sides of the spa. Check if this resolves the PCU's malfunctioning.



CHECK 2: Inside Connection Caps

Make sure the clear Inlet/Outlet caps have been removed before turning on the PCU.



CHECK 3: Bleed Air out of Portable Control Unit

If PCU makes a grinding noise, no water is going to the pump. Bleed the air out of the pump by unscrewing the Air Valve. Check if this resolves the pump's malfunctioning.



CHECK 4: Back Flush PCU

Back flushing the PCU is a good practice to carry out every few months to aid in PCU performance and longevity. Simply remove the PCU from the tub connections (cap ports inside tub first if you do not want to drain spa) remove the filter and run water from a garden hose into the 'Heater Port'. Flush for 30 seconds and hold PCU upside down to drain remaining water.

PART 9: CONTROL UNIT MESSAGES

CODE	Causes	Solutions
E1/ E2	Temperature control sensor short circuit or open circuit	<ol style="list-style-type: none"> 1. Unplug RCD from outlet 2. Please contact for service
E3	High Heat: The water is over 113F(45°C)	<ol style="list-style-type: none"> 1. Unplug the RCD cable from the outlet 2. See Part 8: Spa Operation Check List for possible solutions 3. Power on spa again to see if error is resolved, if not please contact for service Note: filling with hot tap water upon initial fill may cause this error. Drain and refill with cold water
E4	Freezing Conditions Detected: The water is lower than 36F(2°C)	<ol style="list-style-type: none"> 1. Unplug the RCD cable from the outlet 2. See Part 8: Spa Operation Check List for possible solutions 3. Power on spa again to see if error is resolved, if not please contact for service
E5	Overheat: The water is over 122F(50°C)	<ol style="list-style-type: none"> 1. Unplug the RCD cable from the outlet 2. See Part 8: Spa Operation Check List for possible solutions 3. Power on spa again to see if error is resolved, if not please contact for service. Note: filling with hot tap water upon initial fill may cause this error. Drain and refill with cold water
E6	Inlet or outlet on inner wall are blocked Filter cartridge is too dirty Spa water does not reach minimum water level Air-lock in pump	See Part 8: Spa Operation Check List for possible solutions, otherwise contact for service
E7	Heater Dry	See Part 8: Spa Operation Check List for possible solutions, otherwise contact for service
CH6 FIL	Automatic timed reminder to check filters	Hold down 'HEAT' for 5 seconds

NOTE: Daily purge: The pump will bubble 1 minute every 24h for daily purge. **Filter alarm system:** If you keep using the spa for 150h will activate the filter alarm system by showing "CHG FIL. Tern" around to remind to change the filter, you can push the heater button for 3-5s ,the timer will be reset.

PART 10: TROUBLESHOOTING

Problems	Causes	Solutions
Spa Pump Does Not Operate	<ul style="list-style-type: none"> • RCD tripped • RCD broken • Check power source 	<ul style="list-style-type: none"> • Power failure • Reset RCD/check if the cable is rated 2kW / 15A • Call for service if it does not reset
Spa Pump Does Not Heat Properly	<ul style="list-style-type: none"> • Temperature set is too low • Filter Cartridge is dirty • Water level is too low • Heating element failed 	<ul style="list-style-type: none"> • Ensure inlet/outlet ports are not blocked <ul style="list-style-type: none"> • Set to a higher temperature • Clean/replace the filter cartridge • Fill water to min. water level • Call for service
Jet Massage System Does Not Work	<ul style="list-style-type: none"> • Pump is too hot • 30-minute auto shut off feature is activated • Something is wrong with the control panel 	<ul style="list-style-type: none"> • Unplug the RCD cord • When the pump has cooled, reset the RCD and press 'JETS' to reactivate • Call for service if it does not reset
Water Filtration Is Not Working	<ul style="list-style-type: none"> • Dirty filter cartridge • Inlet/outlet port blocked <ul style="list-style-type: none"> • Air lock • Something is wrong with the control panel 	<ul style="list-style-type: none"> • Clean/replace the filter cartridge <ul style="list-style-type: none"> • Clean the inlet/outlet ports • Purge air from the pump as previously outlined • Call for service if it does not reset
Portable Control Unit Leaking	<ul style="list-style-type: none"> • Adaptor seal improperly located • Water leakage from pump body 	<ul style="list-style-type: none"> • Ensure Check Valve below PCU is tightened <ul style="list-style-type: none"> • Check the pump body • Call for service
Spa Leaking	<ul style="list-style-type: none"> • Spa is torn or punctured 	<ul style="list-style-type: none"> • Use provided repair patch as previously outlined
Water Is Not Clean	<ul style="list-style-type: none"> • Insufficient filtering time • Dirty filter cartridge • Improper chemical treatment 	<ul style="list-style-type: none"> • Clean/replace the filter cartridge • Change the spa water completely • Refer to the chemical manufacturer's instructions.
Red Light Blinking	<ul style="list-style-type: none"> • Spa has reached set temperature 	<ul style="list-style-type: none"> • The PCU does not stop heating until the current water temperature reaches the set temperature indicated by the 'blinking' red light.

IMPORTANT : PLEASE KEEP ALL ORIGINAL PACKAGING IN CASE OF WARRANTY ISSUES

If you experience any problems, please do not hesitate to contact your local dealer or our after sales service immediately. Any defect or damage caused by installation, alteration, or repair, by anyone who is not an employee of Canadian Spa Co., or authorized service technician, is not covered by the Warranty. This Warranty becomes void if the spa has been subjected to misuse, abuse, alteration, or attempted alteration, repairs or attempted repairs by anyone other than an authorized Canadian Spa Co. service technician, improper installation, improper water chemistry, improper maintenance, acts of god, or damage caused beyond the control of Canadian Spa Co. Misuse and abuse shall include any operation of the spas other than as directed in the Canadian Spa Co. Manual. Examples of misuse and abuse include, without limitation: damage of the spa liner caused by leaving the spa uncovered while the spa is empty of water or not in use. Damage to the spa surface caused by contact with unapproved cleaners or solvents. Damage caused by unapproved sanitizers such as calcium hypochlorite, tri-chlor type chlorine or any sanitizing chemical that may remain undissolved on the spa vinyl surface. This Warranty applies only to spas in single family, residential installations. This Limited Warranty becomes void if the spa is placed in commercial application or hire.

SPA ACCESSORIES (OPTIONAL):



3 Pack Filter (Buy 3 Get 1 Bonus)

3 x 15 ft² micoban slip replacement filters for Canadian Spa Co. portable spas.
This filter should be changed every 1-2 months (depending on usage).



Portable Chemical Kit:

This chemical kit is an excellent addition to any spa and provides users with all of the essential spa chemicals needed to keep a spa balanced. The following chemicals are included in the kit:
Chlorinated Granules 800g • Alkalinity Booster 800g • pH Up 1kg • pH Down 1kg • Test Strips



Booster Seat:

Water filled booster seat for added comfort and great for small children.



Cover Cap:

Waterproof, tough and durable • Prevent cover colour bleaching • Resists UV damage • Elastic sewn into 12" (30.5 cm) hemmed skirt for a snug fit • Fits most spa models and shapes • Made from durable woven polyethylene



Step:

Simple to assemble, these spa steps allow for quick and easy entry into a spa while providing a non-slip surface for safety.

• No tools required to assemble • Made of durable UV protected polypropylene



Hard Top Cover

Thick tapered cover for unparalleled heat retention • 5" skirt length • Commercial quality zipper
• Locking straps for added protection • Tough mesh bottom with rugged reinforced stitching.



Cover Lifter

Cover lifter for the portable spas, fits underneath the spa and has a gas shock for easy lifting and removing of the spa cover. This is the perfect lifter for round and octagonal spas



Aromatherapy Beads

To be placed inside the aromatherapy canister in your spa • Does not effect the chemistry of the spa water • 6 scents available: Discovery - Eucalyptus, Romantic - Rose, Spring - Green Tea, Relaxation - Lavender, Vigour - Chamomile, Time - Strawberry Champagne



Headrest & Cup Holder Set

Set of 2 headrests with built-in dual cupholders • Constructed of a durable and comfortable molded foam • Attaches to the rim of the spa

Spa Surround Rattan Furniture for Muskoka:

All items are customizable to create your own personal spa furniture configuration.

Items Include: • Sofa • Bar Table • Side Table • Planter • Step



Sofa



Planter



Bar Table



Step



Side Table





INFORMATION

For Product Support Visit:
support.canadianspacompany.com

UK Office:

Canadian Spa Company
Canada House
Salbrook Road
Salfords, Redhill
Surrey, RH1 5GL, UK
T: +44 1293 824094
F: +44 1293 824750
www.canadianspacompany.co.uk

North America Office:

Canadian Spa Company
1283 Cornwall Rd
Oakville, ON L6J 7T5
Canada
T: +1-877-347-7727
F: +1 (905) 825 2513
canadianspacompany.com
canadianspacompany.ca

German Office:

Lützerathstrasse 127
51107 Köln
T:0049-221-94655344
F:0049-221-94655342
www.canadianspacompany.com

Asia Office:

Canadian Spa Company
No.460 Lanxue Road,Huanglou,
Pudong Area Shanghai,P.R.China
Post Code 201205
Tel : +86 21 58942200
Fax: +86 21 58940305
www.canadianspacompany.com



**Do not return the product to the store.
Contact your local after sales service centre.**

Disclaimer: Canadian Spa Co. or any of its authorized service technicians shall not be held liable for injury, inconvenience, loss of use, chemical or water damage, transportation costs, continent liabilities or any other incidental or consequential costs, expenses or damage as result of any deficiency or alleged deficiency of the spa. In no event shall Canadian Spa Co. be liable, for any reason or cause, in excess of the amount paid for the product. No other warranties, expressed or implied, are valid. No agent, dealer, distributor, service company or other party is authorized to change, modify, or extend, the terms of this Limited Warranty in any manner whatsoever.

Errors and omissions excepted (E&OE). 02/03/17

canadianspacompany.com