20.1x28.5cm

DELUXE TOILET SEAT

Simple Assembly Instructions - Please keep for future reference


IMPORTANT

Check that you have all the fixing parts before proceeding.


While fitting parts take care not to allow the lid to drop as this may cause damage.

For your own safety, we advise you do not stand on the toilet seat as this could cause breakage.

When cleaning the toilet seat and fittings use a damp cloth with any non-abrasive proprietary bathroom cleaner.

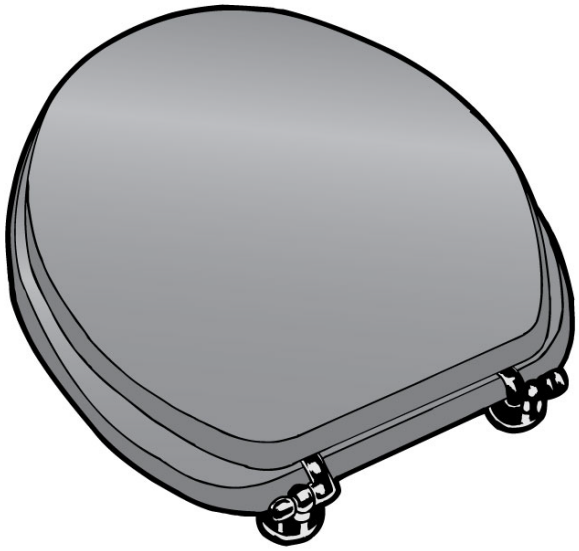

COMPONENT FITTINGS

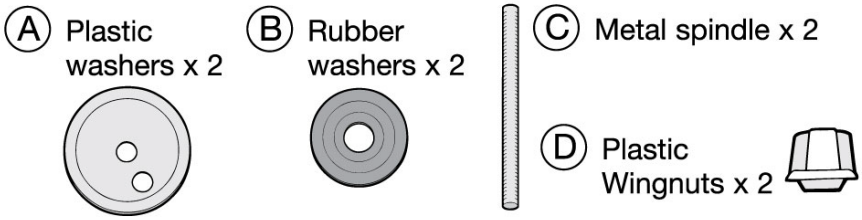

1. Slightly loosen the pre-fixed Philips screws in the metal discs. *(See fig 1).*
2. Screw the spindles (C) into the centre-threaded holes of the metal discs. *(See fig 1).* **DO NOT TIGHTEN.**
3. Place the seat on the toilet bowl ensuring the long spindles drop through the holes at the back of the bowl. *(See fig 2).*
4. The seat is centred on the toilet bowl by swivelling the metal discs. *(See fig 2).*
5. If you find the holes in the bowl are too wide apart for the spindles or the lid will not stay up, go back to no. 2 and screw the spindles into the OUTSIDE threaded holes. *(See fig 1).*
6. Having centred the seat remove it from the bowl and fully tighten the Philips screws and spindles.
7. Place the plastic washer's (A) over the spindles and replace the seat in postion on the bowl. Slide the rubber washers (B) over the spindles. Finally screw the plastic wingnuts (D) on the ends of the spindles and tighten. *(See fig 3).*

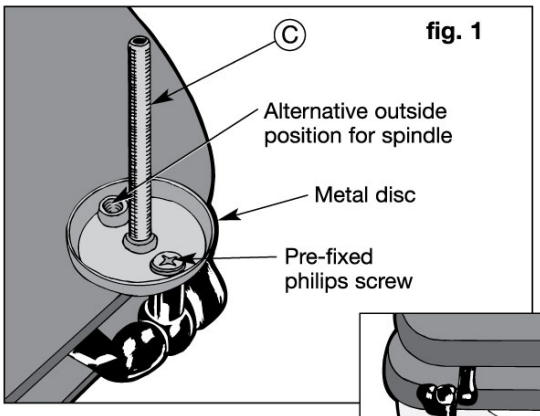


fig. 1

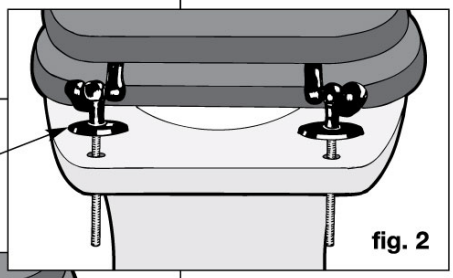


fig. 2

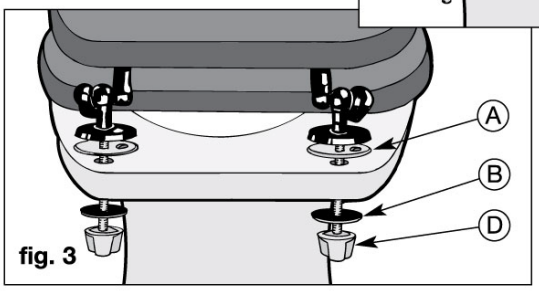


fig. 3

Deluxe_seat.qxd 12/4/01 1:48 PM Page 1

DELUXE TOILET SEAT

Simple Assembly Instructions - Please keep for future reference


IMPORTANT

Check that you have all the fixing parts before proceeding.


While fitting parts take care not to allow the lid to drop as this may cause damage.

For your own safety, we advise you do not stand on the toilet seat as this could cause breakage.

When cleaning the toilet seat and fittings use a damp cloth with any non-abrasive proprietary bathroom cleaner.

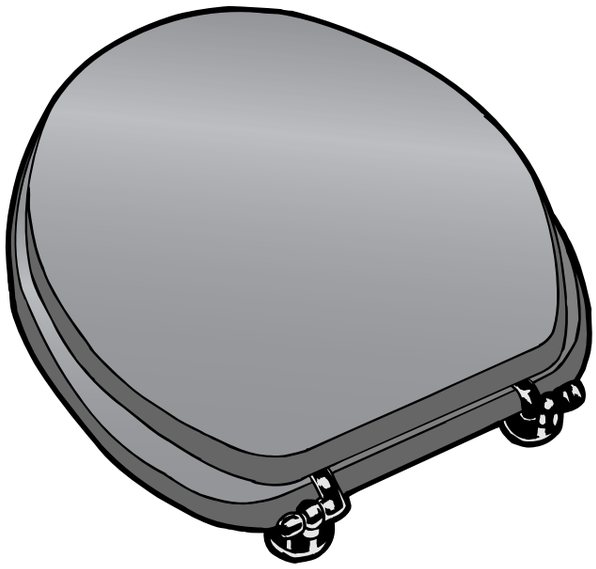

COMPONENT FITTINGS

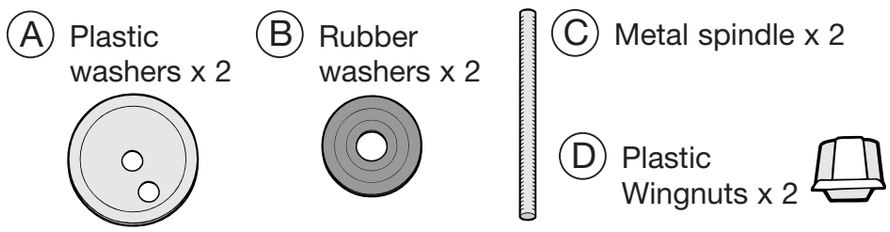

1. Slightly loosen the pre-fixed Philips screws in the metal discs. *(See fig 1).*
2. Screw the spindles (C) into the centre-threaded holes of the metal discs. *(See fig 1).* **DO NOT TIGHTEN.**
3. Place the seat on the toilet bowl ensuring the long spindles drop through the holes at the back of the bowl. *(See fig 2).*
4. The seat is centred on the toilet bowl by swivelling the metal discs. *(See fig 2).*
5. If you find the holes in the bowl are too wide apart for the spindles or the lid will not stay up, go back to no. 2 and screw the spindles into the OUTSIDE threaded holes. *(See fig 1).*
6. Having centred the seat remove it from the bowl and fully tighten the Philips screws and spindles.
7. Place the plastic washer's (A) over the spindles and replace the seat in postion on the bowl. Slide the rubber washers (B) over the spindles. Finally screw the plastic wingnuts (D) on the ends of the spindles and tighten. *(See fig 3).*

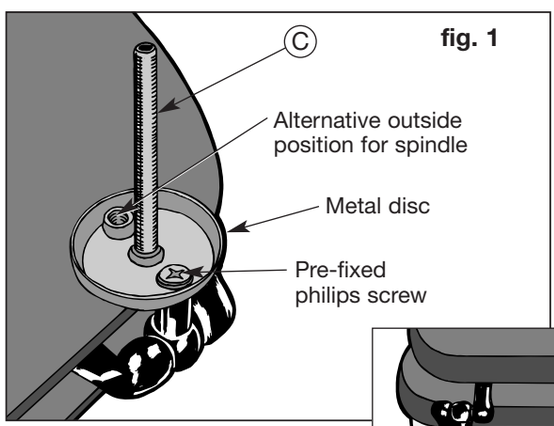


fig. 1

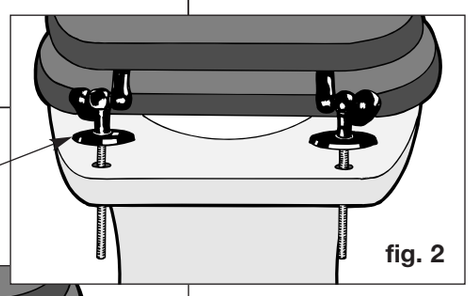


fig. 2

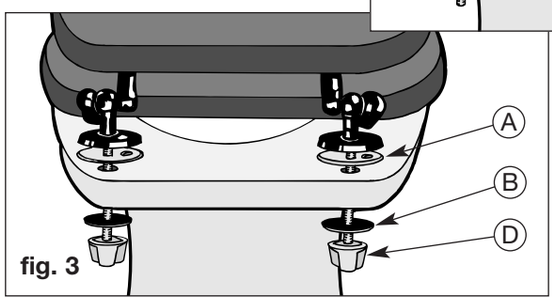


fig. 3