
White Double Mirrored Cabinet

Assembly Instructions - Please keep for future reference

833 /3559

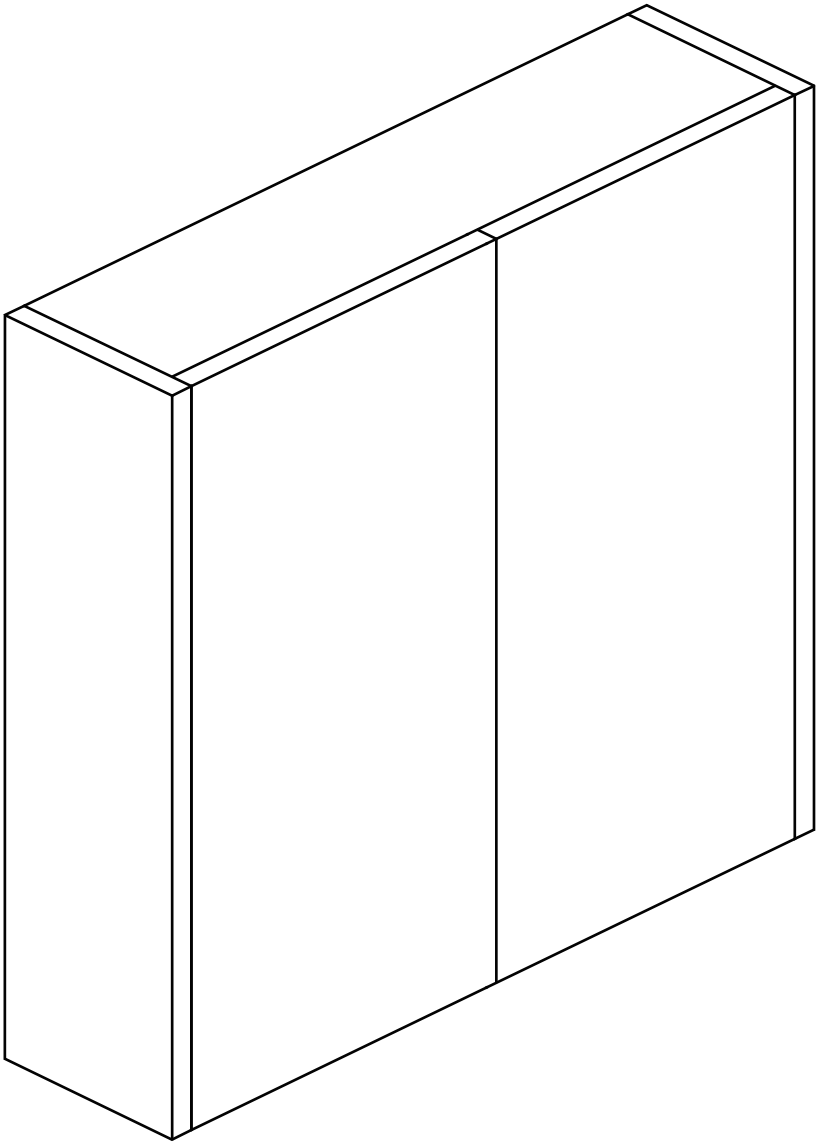

Dimensions

Width - 50cm

Depth - 13cm

Height - 60cm

Important - Please read these instructions fully before starting assembly

Issue 1 - 03/11/10

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on page 2.
- Remove all fittings from the plastic bag and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers ***for inserting screws***, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and Maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Safety Warning Information - Keep these instructions for future use

This unit complies with
BS 7449 : 1991

Catalogue Number: 833 /3559

Manufacture Date: 10.12.10

Retailer: Argos

Retailer Address:

489-499 Avebury Boulevard
Saxon Gate West
Central Milton Keynes
Bucks, MK9 2NW

This unit contains mirror of a nominal thickness of 3mm, which is not required to be classified to BS6206 Class C.


If a glass is chipped or broken replace with glass of the type described on this label. Consult the manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the model number, and batch number or date of manufacture.

Warnings


- Do not place very hot or very cold items against or in close proximity to glass surface unless an adequately thick insulating material is used to prevent such items from coming into contact with the glass.
- Do not strike the glass with hard or pointed items.
- When cleaning glass panels or mirrors use a damp cloth or leather with washing up liquid or soft soap if necessary; do not use washing powders or any other substance containing abrasives since these substances scratch glass.
- Do not sit or stand upon horizontal glass surfaces.
- It is essential that this unit is fixed to a wall with the fixings provided.
- The maximum safe load for this unit is 10kg evenly distributed.

Components - Panels


Please check you have all the components listed below




1 Left Side (60x13cm)




2 Right Side (60x13cm)

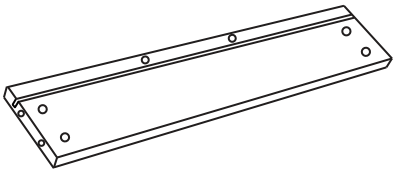


3 Top Panel (47x11cm)

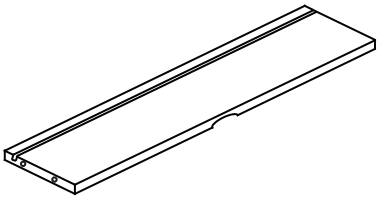


4 Bottom Panel (47x11cm)

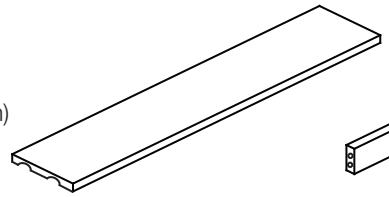


5 Shelf Panel x 2 (47x9.1cm)




6 Back Support (47x4.2cm)



7 Left Door (60x23.3cm)




8 Right Door (60x23.3cm)



9 Top Back (48x19.2cm)



10 Bottom Back x 2 (48x19.2cm)





11 Plastic Bar x 2 (47cm)


Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A  Door Hinge x 4	**B**  Locking Nut x 8	**C**  Shelf Holder x 8	**D**  Locking Pin x 8
E  Wooden Dowel x 6	**F**  11.6mm Screw x 24	**G**  45mm Screw x 2	**H**  Wall Plug x 2 (for solid walls only)

Tools required



Phillips screwdriver (medium)

6mm Suitable drill bit (for use with wall plug)



Drill

Assembly Instructions


Step 1

Attaching panels

Position Right Side Panel [2] on the floor, with holes on the top. Ensure you place on a carpet or protective surface to avoid scratching.

Screw 2 Locking Pins (D) into the holes on the Right Side Panel [2] firmly, then attach Top Panel [3] to the Locking Pins (D).

Insert 2 Locking Nuts (B) into the holes on the Top Panel [3] where shown. Use a screwdriver to turn Locking Nuts (B) clockwise to lock.

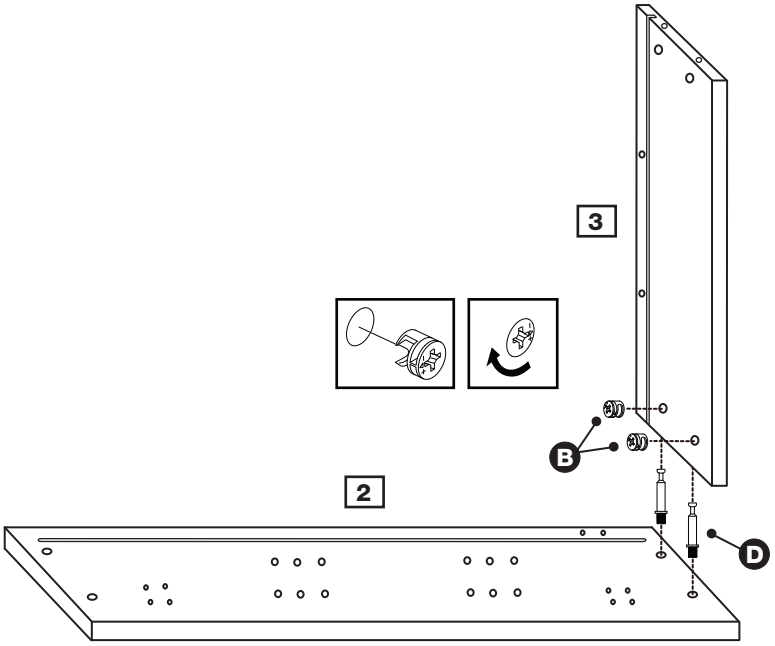

Step 2


Attaching panels


Firstly, insert 6 Wooden Dowels (E) into Back Support [6].

Attach Back Support [6] to Right Side Panel [2] and Top Panel [3] by inserting dowels into holes where shown.

Screw 2 Locking Pins (D) into the holes on the Right Side Panel [2] firmly, then attach Bottom Panel [4] to the Locking Pins (D).

Insert 2 Locking Nuts (B) into the holes on the Bottom Panel [4] where shown. Use a screwdriver to turn Locking Nuts (B) clockwise to lock.

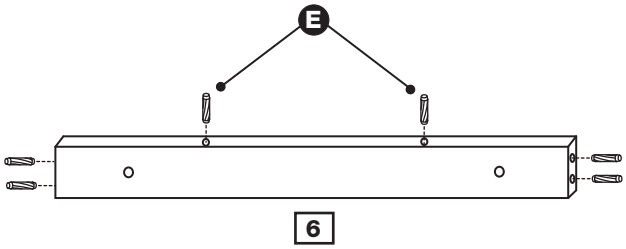

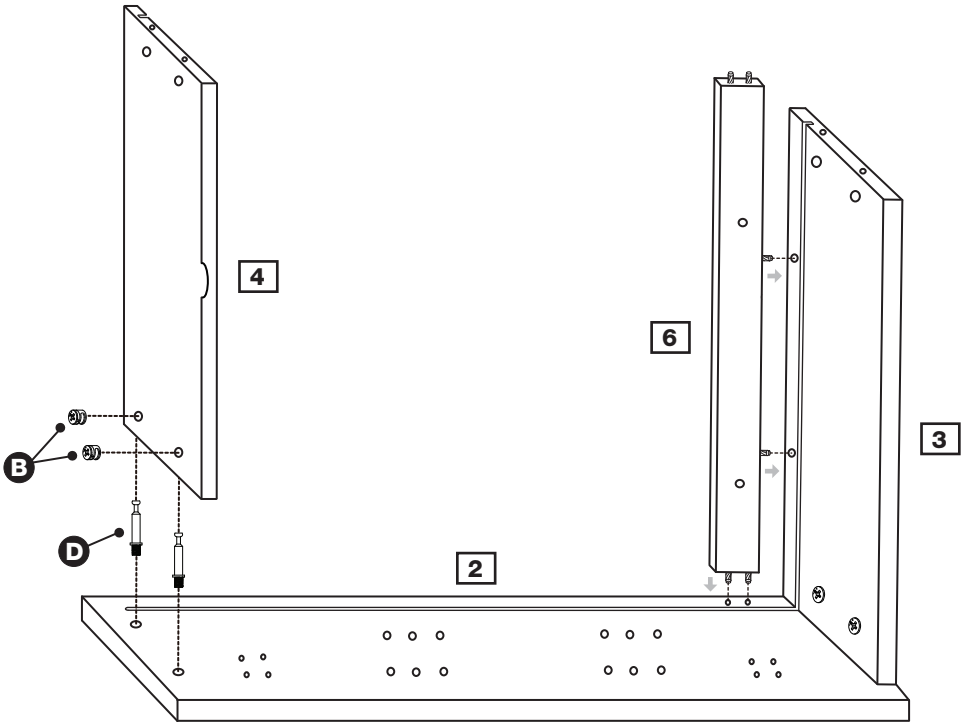


Assembly Instructions

Step 3

Attaching back panels

As per the image to insert Top Back [9], Bottom Backs [10] and Plastic Bars [11] into the slots on the top, bottom, side panels one by one. Always make sure they are firmly.

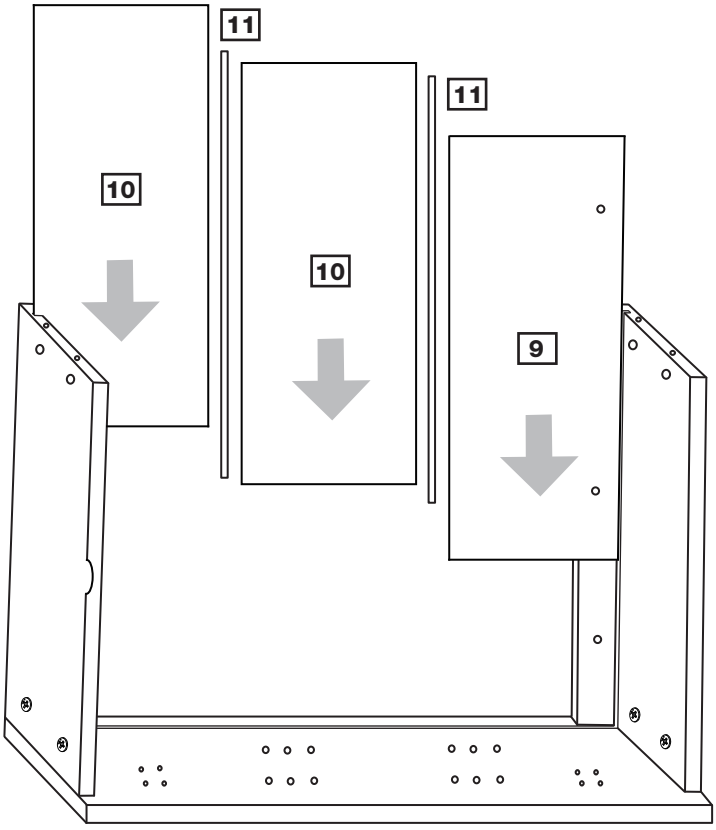


Step 4

Attaching panel

Screw 4 Locking Pins (D) into the holes on the Left Side Panel [1] firmly, then attach the panel to the Top Panel [3] and Bottom Panel [4], also ensure the Wooden Dowels (E) on the top of Back Support [6] insert into the correct holes, and the back panels inserted into the slot on the Left Side Panel [1] firmly.

Insert 4 Locking Nuts (B) into the holes on the Top Panel [3] and Bottom Panel [4] where shown. Use a screwdriver to turn Locking Nuts (B) clockwise to lock.

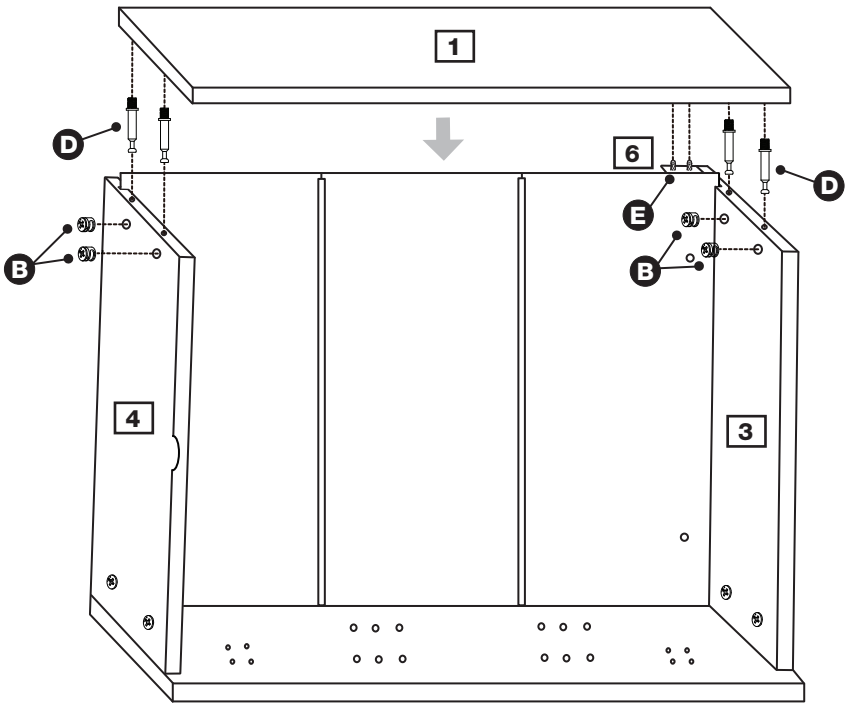

Assembly Instructions


Step 5

Attaching panels

Insert 8 Shelf Holders C into the holes on the side panels where shown.

Place 2 Shelf Panels 5 onto the assembled Shelf Holders C.

Note: There are adjustable holes on the side panels for shelf panels can adjust to any height.

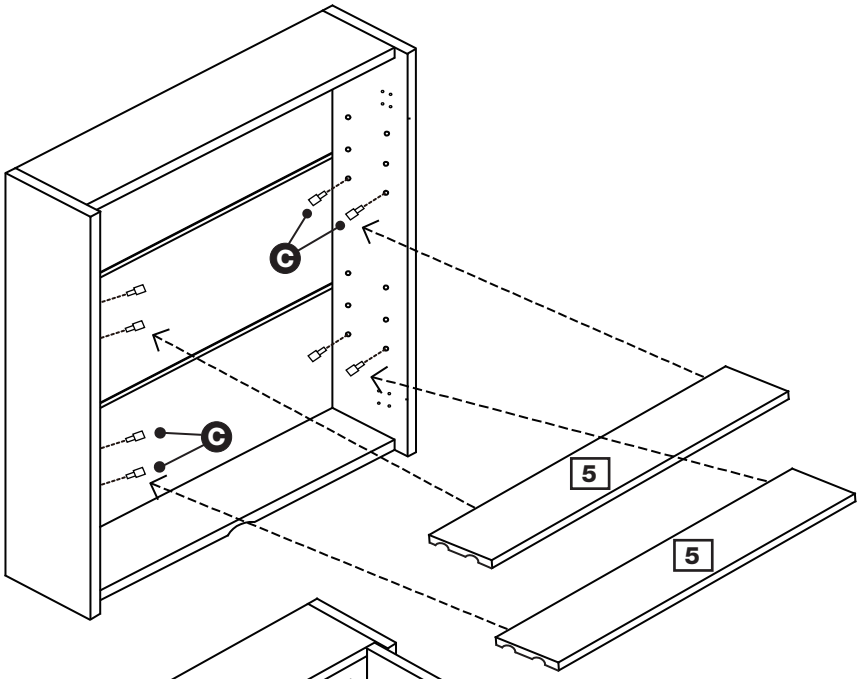

Step 6

Fitting Door Hinges


Firstly, as per image **a:** to fix one head of Door Hinges A to the Left Door 7 and Right Door 8 firmly using Screws F.


CAUTION: When handling mirror door always take extra care. Ensure no children are in the assembly area.


Use Screws F to fix the other head of Door Hinges A to the side panels firmly.


Hinge adjustment:
To move doors left or right: as per image **c:** to loose screw shown and move doors to suit.


Re-tighten screws.

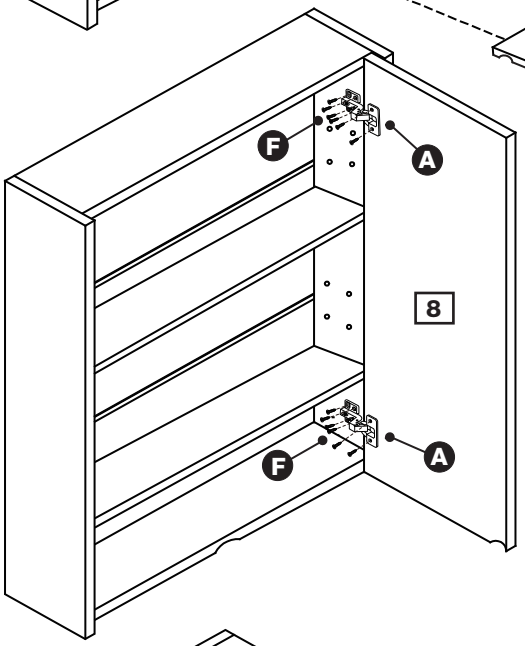



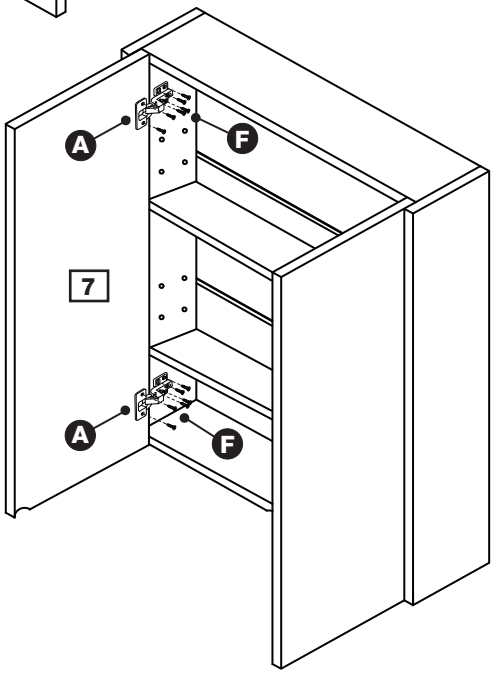

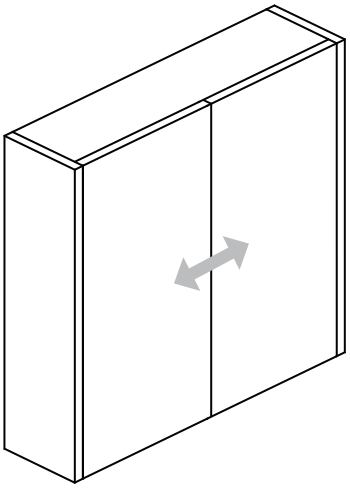



Assembly Instructions

Step 7

Fixing to wall

NOTE: It would be useful to ask someone to help you at this stage.


WALL MOUNTING: Hold the fully assembled unit against the wall in the desired location and check if it is horizontal. Mark the wall to indicate where to drill the holes. Always remember to “Measure twice,drill once”.

IMPORTANT: When drilling into walls always check that there are no hidden wires or pipes ect. Make sure that the screws and wall plugs supplied are suitable for supporting the unit. Consult a qualified tradesperson if you are not sure.

Insert Wall Plugs **H** into the holes. Then screw in the Wall Screws **G** through the holes on the Top Back **9** into the Wall Plugs to fix firmly.

NOTE: Before use always make sure the unit is secure.

Assembly is complete.

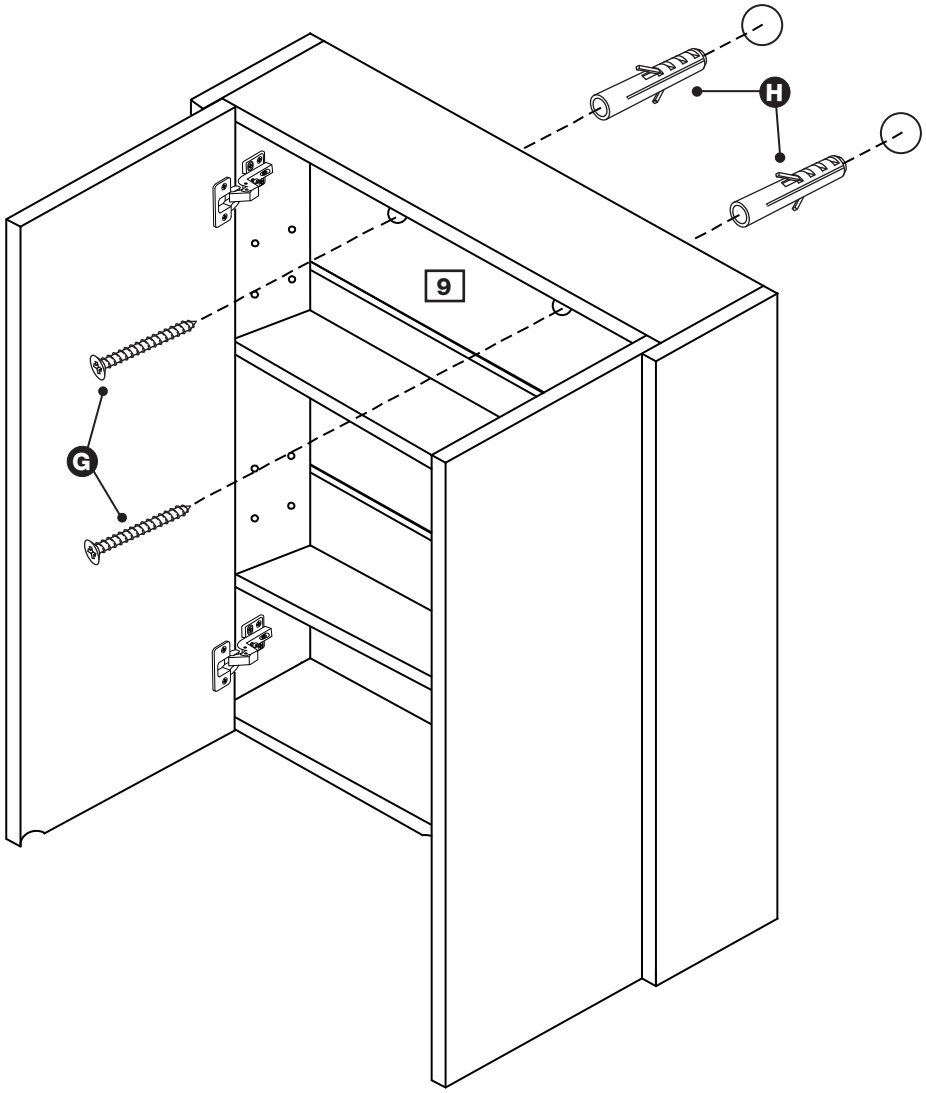

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.

Important: **When drilling into walls always check that there are no hidden wires or pipes etc.**

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.

Hints:

1: General rule: Always use a larger screw and wall plug if you are not sure.

2: Ensure you use the recommended drill bit to match the wall plug and hole size.

3: Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.


4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.

5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 **"General Purpose" wall plug**

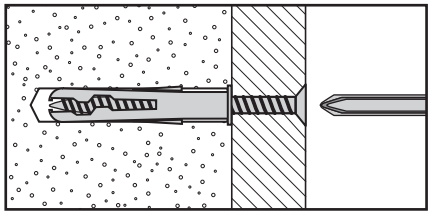


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 **"Plasterboard" wall plug**

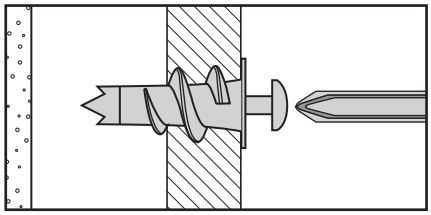


For use when attaching light loads on to plasterboard partitions.

No.3 **"Cavity Fixing" wall plug**

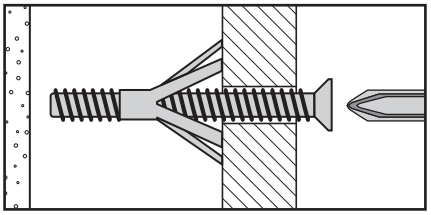


For use with plasterboard partitions or hollow wooden doors.

No.4 **"Cavity Fixing-Heavy Duty" wall plug**

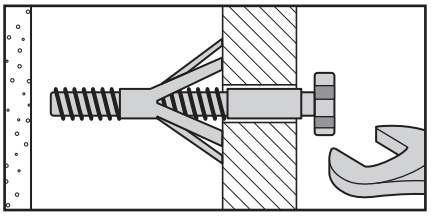


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 **"Hammer Fixing" wall plug**

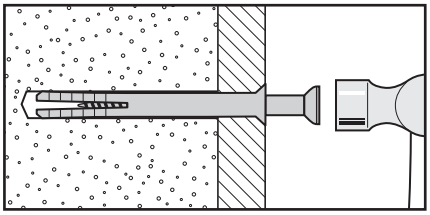

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 **"Shield Anchor" wall plug Heavy loads**

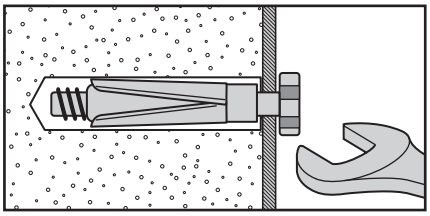

For use with heavier loads such as TV & HiFi speakers and satelite dishes etc.

Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.