
# Malibu Bathroom - Tall Unit

Assembly Instructions - Please keep for future reference

833/7115



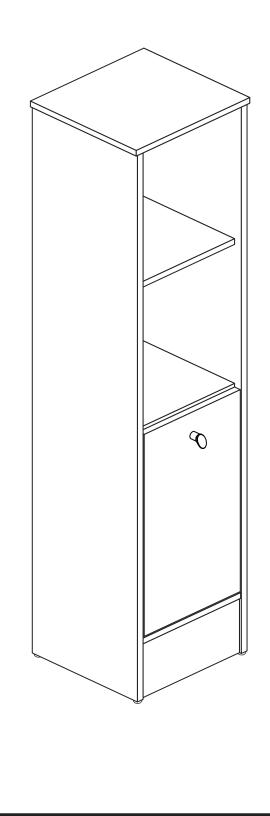

Height - 147cm



### Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800

# A Safety and Care Advice

### Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 14.5 kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: It is recommended that this unit is secured to a wall using the bracket supplied.
- Dispose of all packaging carefully and responsibly.

### Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

*Note:* If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

# Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below* 

### Please check you have all the panels listed below

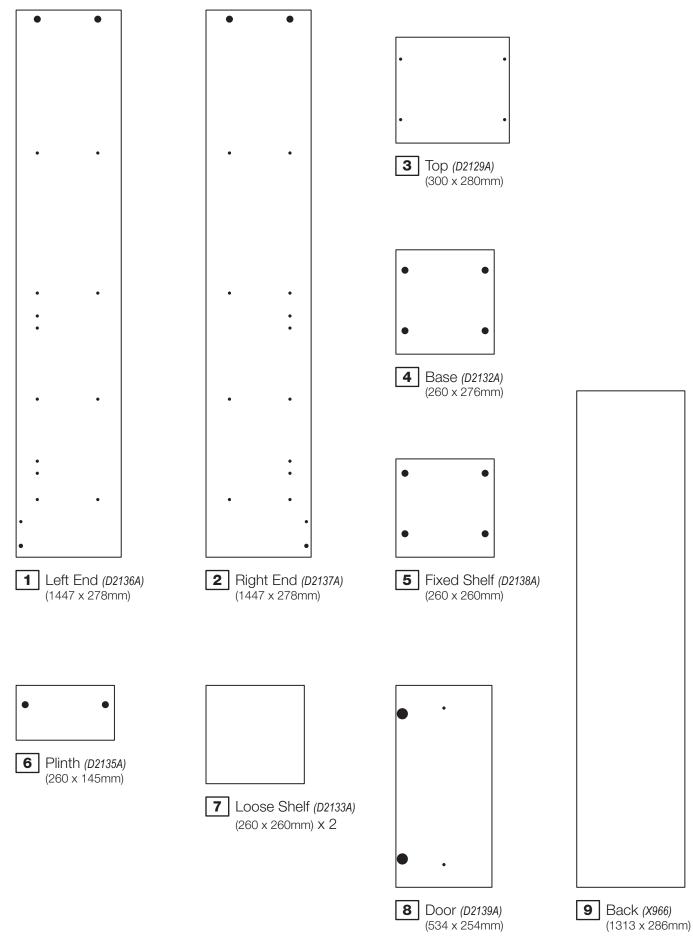



# **Components -** Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below* 

### Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

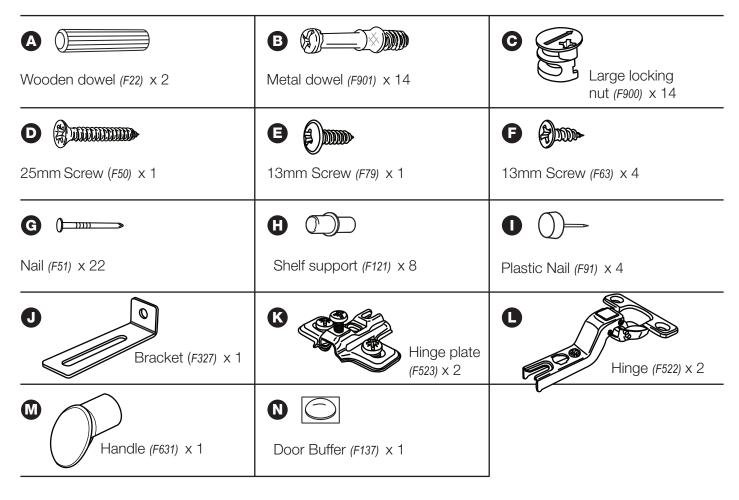



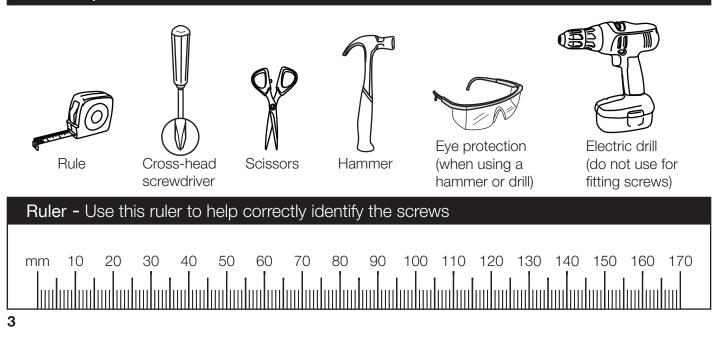


If you have damaged or missing components, call the Customer Helpline: 08456 400800 quoting the reference numbers below

### Step 1

**Choose which way** you would like the door to open

You can fit the door to the left side or right side.

If you would like your door to open this way, fit the hinge plates to the left side



If you would like your door to open this way, fit the hinge plates to the right side

### Step 2

#### Prepare the left end


Refer to step 1 and, if required, fit 2 hinge plates K onto the left end **1**, making sure that they face the same way as the diagram.

Screw 5 metal dowels B into the left end **1**.

*Note:* Tighten the metal dowels up fully against the panels.

Insert 2 large locking nuts C into the left end 1.

*Note:* The arrow on the locking nut **must** point towards the hole in the edge of the panel.

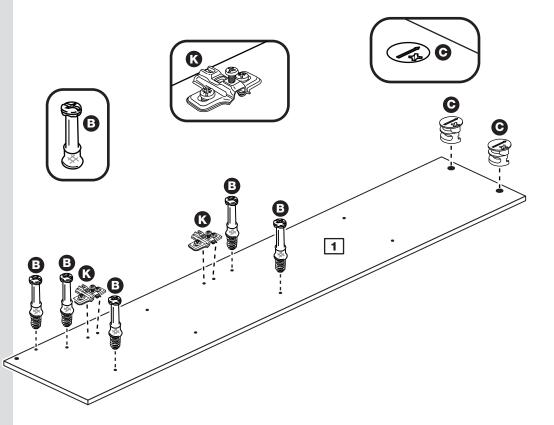


## Step 3

#### Prepare the right end

Refer to step 1 and, if **required**, fit 2 hinge plates (6) onto the right end (2), making sure that they face the same way as the diagram.

Screw 5 metal dowels **B** into the right end **2**.


Insert 2 large locking nuts **()** into the right end **(2)**.

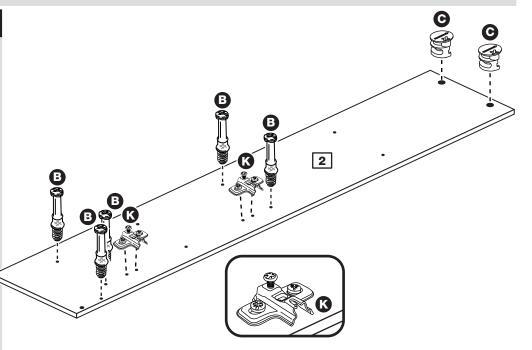

### Step 4

#### **Prepare the base**

Insert 4 large locking nuts **G** into the base **4**.



*Note:* The base is larger than the fixed shelf (refer to the components page)

### Step 5


## Join the right end and base

Push the base **4** onto the right end **2**.

*Note:* The back edges must be flush.

Use a screwdriver to tighten the 2 large locking nuts C fitted to the base 4.


*Note:* Turn the large locking nuts **O** as far as they will go - more than 1/2 a turn.

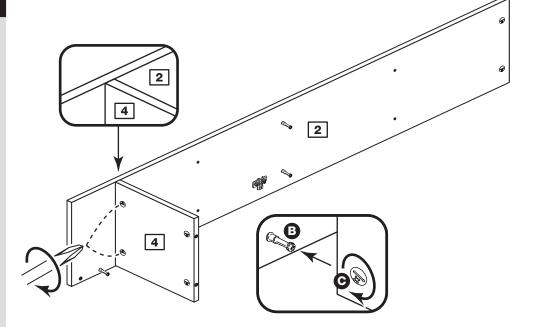

## Step 6

# Prepare the fixed shelf

Insert 4 large locking nuts () into the fixed shelf (5).




### Step 7

### Fit the fixed shelf

Push the fixed shelf **5** onto the right end **2**.

*Note:* The back edges must be flush.

Use a screwdriver to tighten the 2 large locking nuts C fitted to the fixed shelf 5.

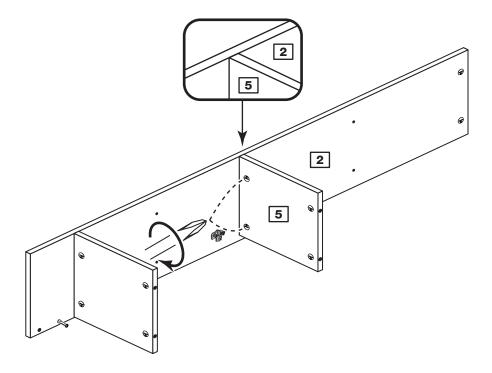


### Step 8

#### **Prepare the plinth**

Tap 2 wooden dowels (A) into the plinth [6].

*Note:* Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts () into the plinth (6).






## Step 9

### Fit the plinth

Push the plinth **6** onto the right end **2**.

Use a screwdriver to tighten the large locking nut **C** fitted to the plinth **6**.

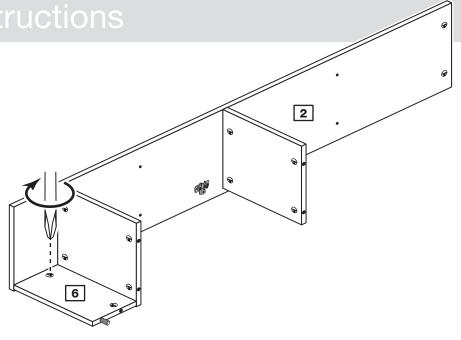


## Step 10

#### Fit the left end

Push the left end **1** onto the assembly.


Use a screwdriver to tighten the 5 large locking nuts ⓒ fitted to the base ④, fixed shelf ⑤ and plinth ⑥.

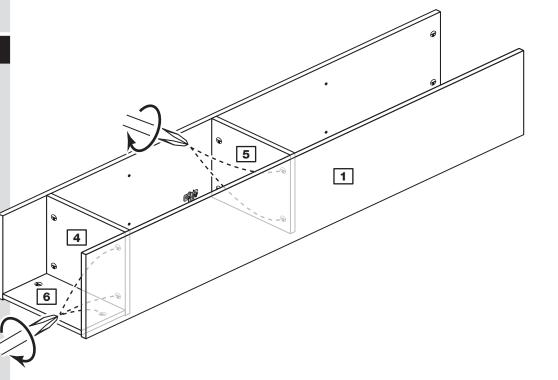

## Step 11

#### Prepare the top

Screw 4 metal dowels **B** into the top **3**.



## Step 12

#### Fit the top

Push the top **3** onto the assembly.

*Note:* The back edges must be flush.

Use a screwdriver to tighten the 4 large locking nuts **G** fitted to the left end **1** and right end **2**.




## Fit the bracket and the plastic nails

Fix the bracket **1** in the middle of the top **3**, flush to the back edge, using screw **E**.

Tap the 4 plastic nails into the bottom edge of the left end **1** and right end **2**.

00-

00

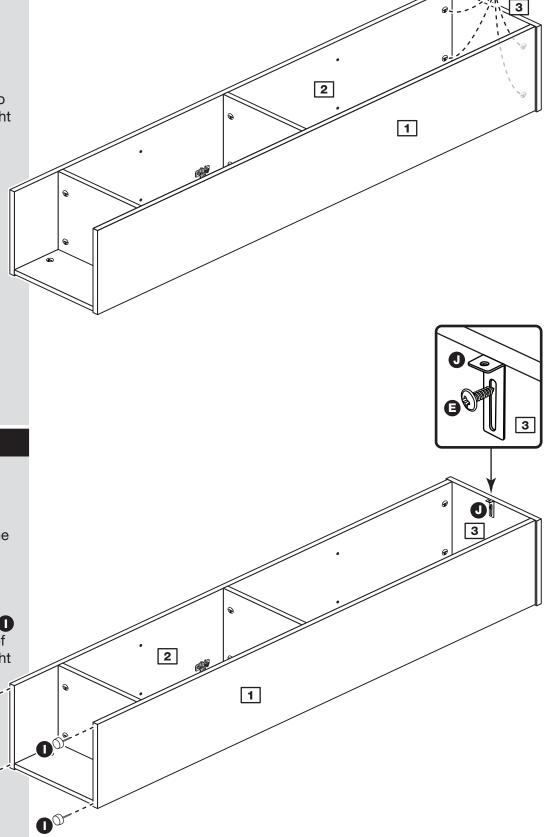

2

3

У

## Step 14

### Fit the back

**a:** Square up the unit by making sure that measurement **x to x** equals y to y.

**b:** Place the back **9** onto the unit.

Nail **G** around the outside edges of the back **9**.

*Note:* Nails should be spaced about 150mm apart.

## Stand the unit up for the next step.

Lit

*Warning:* The unit is heavy. Lift with care.


### Step 15


#### Secure unit to a wall

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by use of the metal bracket J fitted to the top 3.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the unit to the wall.

Warning: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert. **a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

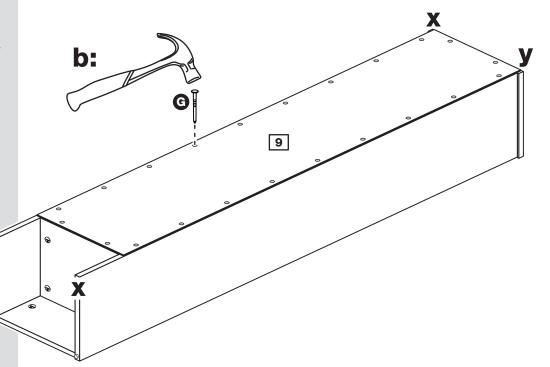

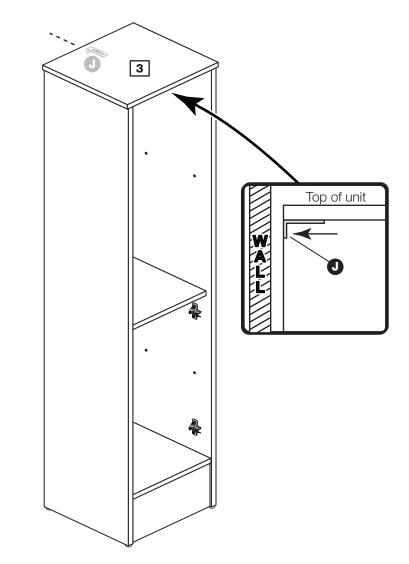


## Step 16

### Fit the shelves

Insert 8 shelf studs (f) into the holes in the end panels 1 and 2.

Lower the shelves **7** down onto the shelf studs **()**.

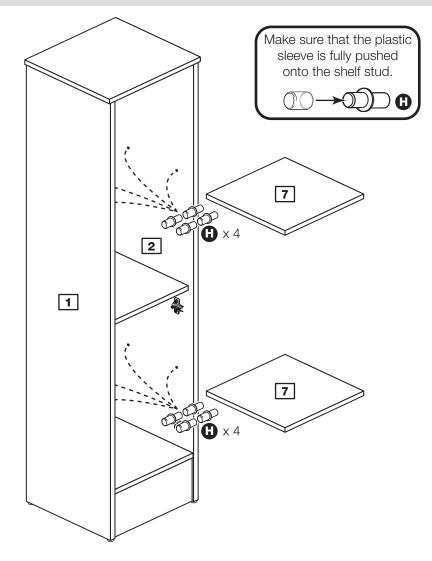


## Step 17

#### **Prepare the door**

Push fit 2 hinges **()** into the door **8**.

Secure each hinge with 2 screws **(**).

*Note:* Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

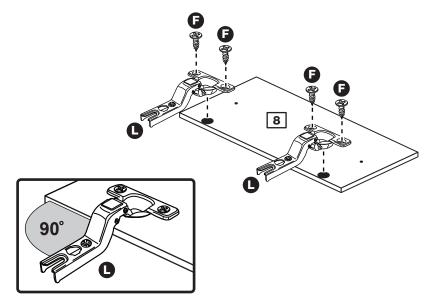

### Step 18

Drill the handle hole in the door

*Important:* Please follow these instructions carefully.

Lay the door **8** down onto a smooth surface.

*Important:* Carefully choose which hole you need to drill. This will depend on which side **1** or **2** you fitted the hinge plates **(**).

Check that the holes and hinges are in the same place as the diagrams.


*Note:* We recommend the use of a small piece of waste wood, placed behind the hole while drilling, to reduce the possibility of any breakout.

Using the pilot hole in the rear face of the door, drill through the hole indicated opposite, using a 2.5mm diameter drill.

Turn the door over and open out the 2.5mm hole that you have just drilled by drilling back through it with a 5mm drill.

*Note:* Drill bits are not provided.

### IMPORTANT Carefully choose which hole you will need to drill

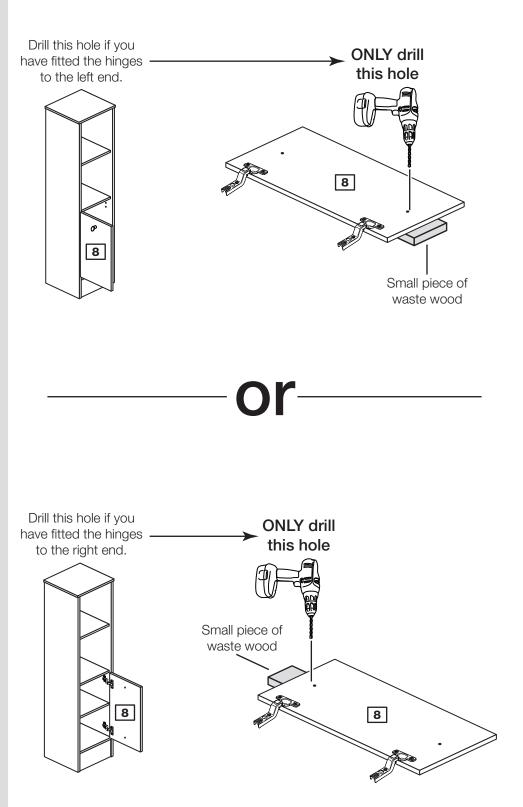

## Step 19

#### Fit door and handle

*Note:* The easiest way to attach the door **8** is to fit the top hinge first, then align and fit the other hinges.


**a:** Push the hinge **b** onto the front part of the hinge plate **b**. The recess at the bottom of screw B goes into the slot in the hinge plate.

**b:** Keep the hinge **b** FLAT against the hinge plate **(k)** as you slide it across as far as it will go. Tighten screw A.

**C:** The hinge **L** must be flat against the hinge plate **K** prior to any adjustment.

**d:** The hinge must NOT be AT AN ANGLE to the hinge plate when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

**e:** Attach a handle **(M)** to the door **(B)** using screw **(D)**.

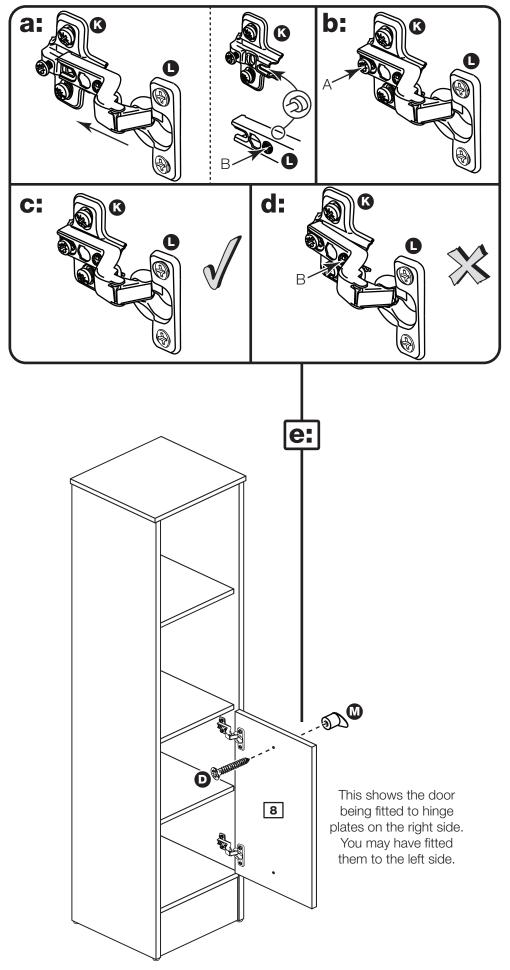

## Step 20

## Adjust the door if needed

**a:** Before adjusting the door, use a spirit level to check the top (or base) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

### **b:** Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

## **C:** Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

## **d:** Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

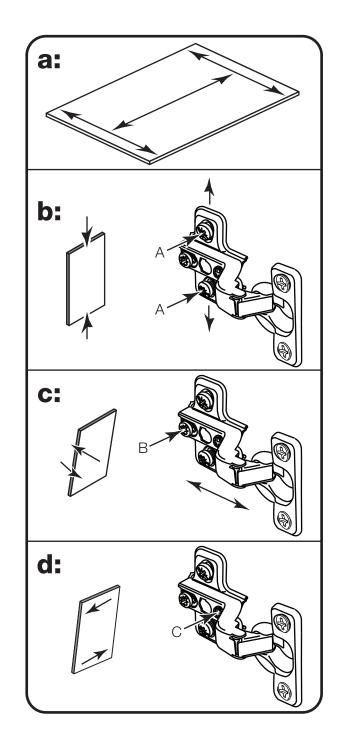

## Step 21


### Fit the door buffer

Stick the door buffer N onto the top corner of the door 8 where it will hit the fixed shelf 5.

#### Assembly is complete



*Warning:* The unit is heavy. Lift with care.

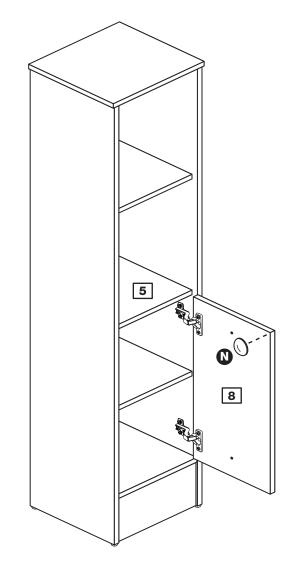


If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages. Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# Malibu Bathroom - Tall Unit

Assembly Instructions - Please keep for future reference

833/7115

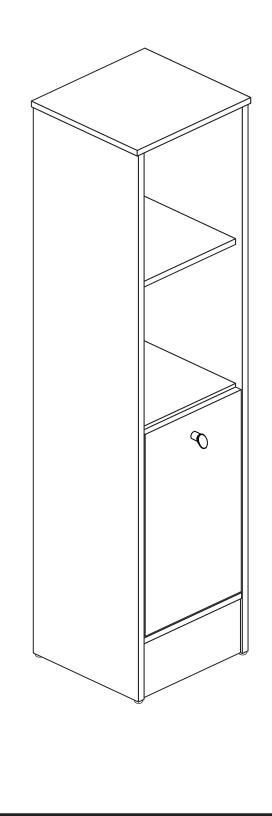



Height - 147cm



### Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800

# A Safety and Care Advice

### Important - Please read these instructions fully before starting assembly

- *Warning:* This unit weighs approximately 14.5 kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers *for inserting screws*,

as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
- Dispose of all packaging carefully and responsibly.

### Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

*Note:* If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

# Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 03456 400800** *quoting the reference numbers below* 

### Please check you have all the panels listed below

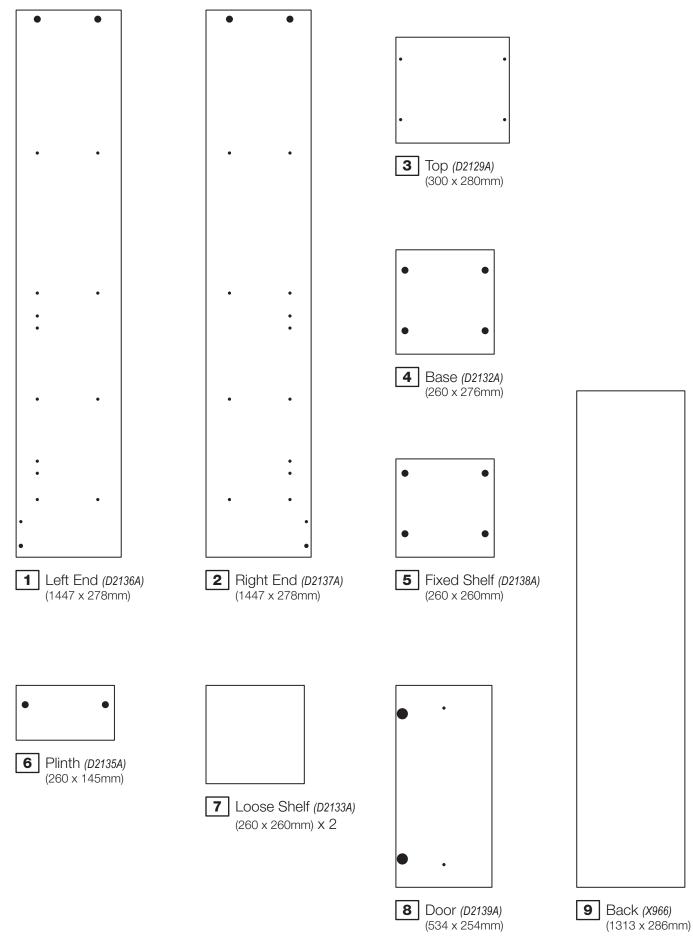


# **Components -** Fittings


If you have damaged or missing components, call the **Customer Helpline: 03456 400800** *quoting the reference numbers below* 

### Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

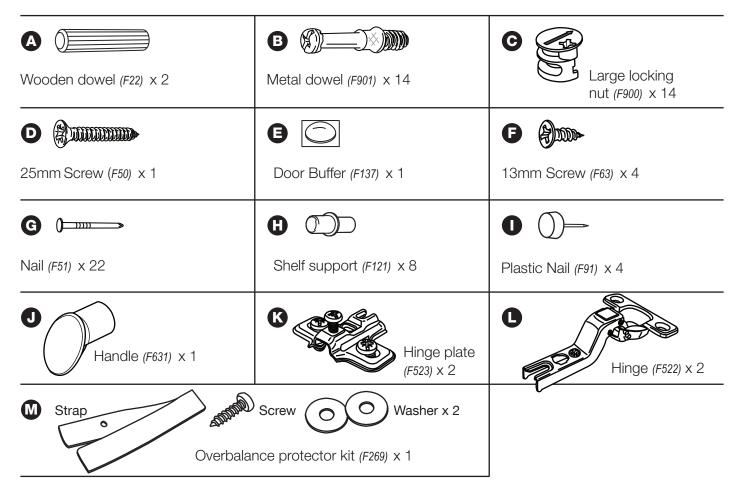

**Tools required** 

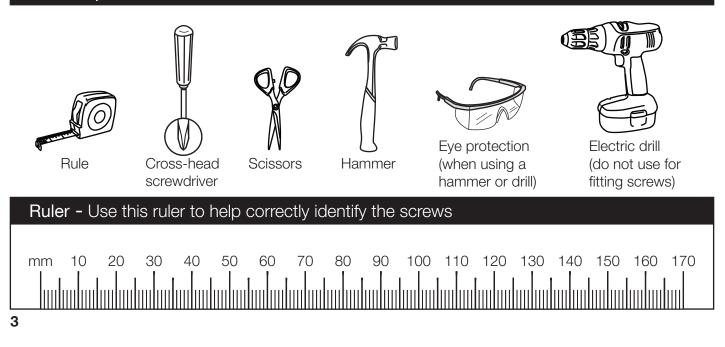


If you have damaged or missing components, call the Customer Helpline: 03456 400800 quoting the reference numbers below

### Step 1

**Choose which way** you would like the door to open

You can fit the door to the left side or right side.

If you would like your door to open this way, fit the hinge plates to the left side



If you would like your door to open this way, fit the hinge plates to the right side

### Step 2

#### Prepare the left end


Refer to step 1 and, if required, fit 2 hinge plates K onto the left end **1**, making sure that they face the same way as the diagram.

Screw 5 metal dowels B into the left end **1**.

*Note:* Tighten the metal dowels up fully against the panels.

Insert 2 large locking nuts C into the left end 1.

*Note:* The arrow on the locking nut **must** point towards the hole in the edge of the panel.

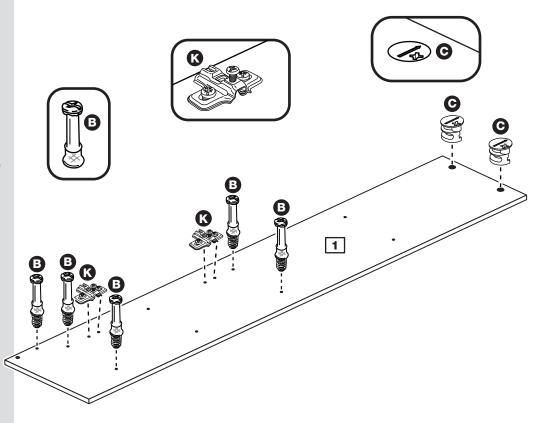


## Step 3

#### Prepare the right end

Refer to step 1 and, if **required**, fit 2 hinge plates (6) onto the right end (2), making sure that they face the same way as the diagram.

Screw 5 metal dowels **b** into the right end **2**.


Insert 2 large locking nuts **()** into the right end **(2)**.

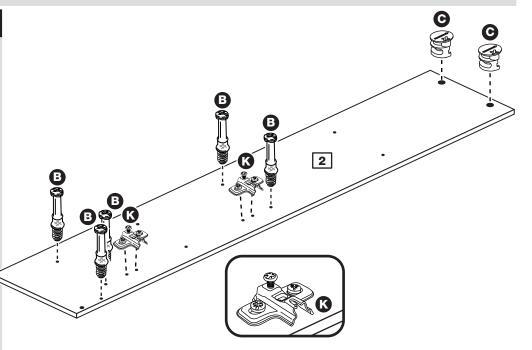

### Step 4

#### **Prepare the base**

Insert 4 large locking nuts **G** into the base **4**.



*Note:* The base is larger than the fixed shelf (refer to the components page)

### Step 5


## Join the right end and base

Push the base **4** onto the right end **2**.

*Note:* The back edges must be flush.

Use a screwdriver to tighten the 2 large locking nuts C fitted to the base 4.


*Note:* Turn the large locking nuts **O** as far as they will go - more than 1/2 a turn.

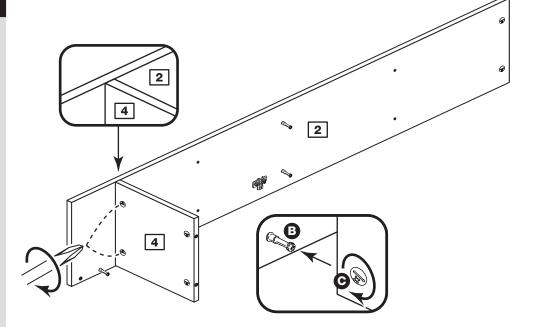

## Step 6

# Prepare the fixed shelf

Insert 4 large locking nuts () into the fixed shelf (5).




### Step 7

### Fit the fixed shelf

Push the fixed shelf **5** onto the right end **2**.

*Note:* The back edges must be flush.

Use a screwdriver to tighten the 2 large locking nuts C fitted to the fixed shelf 5.

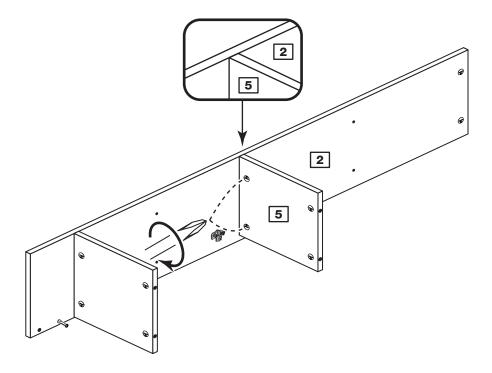


### Step 8

#### **Prepare the plinth**

Tap 2 wooden dowels (A) into the plinth [6].

*Note:* Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts () into the plinth (6).






## Step 9

### Fit the plinth

Push the plinth **6** onto the right end **2**.

Use a screwdriver to tighten the large locking nut **C** fitted to the plinth **6**.

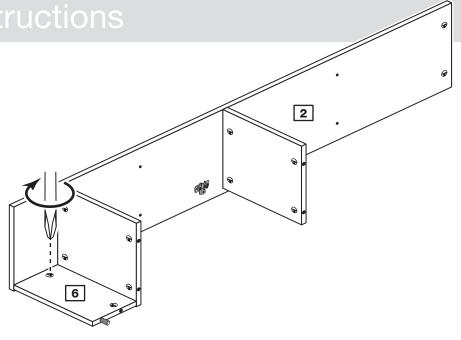


## Step 10

#### Fit the left end

Push the left end **1** onto the assembly.


Use a screwdriver to tighten the 5 large locking nuts ⓒ fitted to the base ④, fixed shelf ⑤ and plinth ⑥.

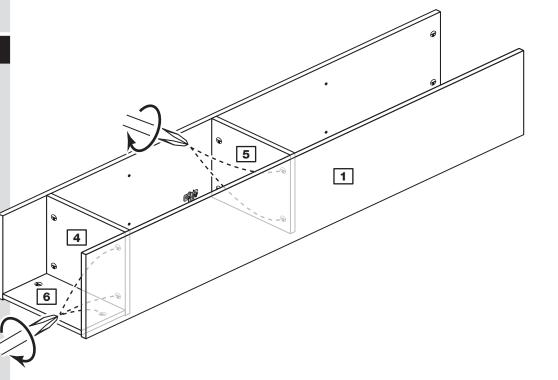

## Step 11

#### Prepare the top

Screw 4 metal dowels **B** into the top **3**.




## Step 12

### Fit the top

Push the top **3** onto the assembly.

*Note:* The back edges must be flush.


Use a screwdriver to tighten the 4 large locking nuts **(c)** fitted to the left end **1** and right end **2**.

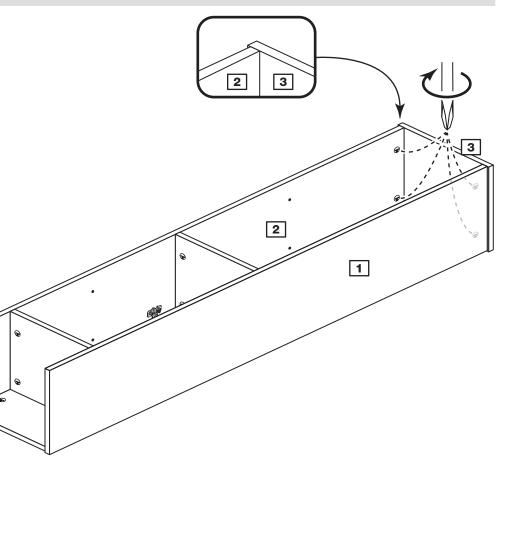

## Step 13

#### Fit the plastic nails

Tap the 4 plastic nails into the bottom edge of the left end **1** and right end **2**.

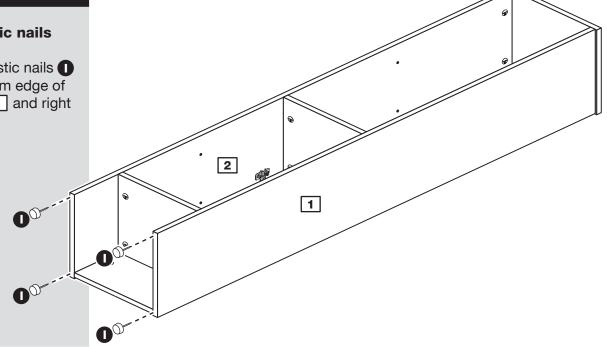

## Step 14

### Fit the back

**a:** Square up the unit by making sure that measurement **x to x** equals y to y.

**b:** Place the back **9** onto the unit.

Nail **G** around the outside edges of the back **9**.

*Note:* Nails should be spaced about 150mm apart.

## Stand the unit up for the next step.



*Warning:* The unit is heavy. Lift with care.

У

### Step 15


## Fit the overbalance protector kit

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

*Note:* Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

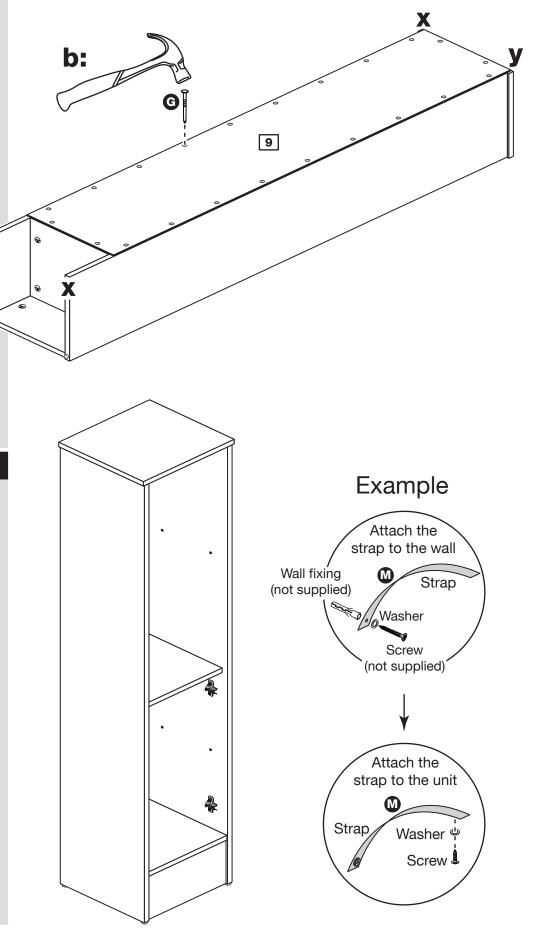


## Step 16

### Fit the shelves

Insert 8 shelf studs (f) into the holes in the end panels 1 and 2.

Lower the shelves **7** down onto the shelf studs **()**.

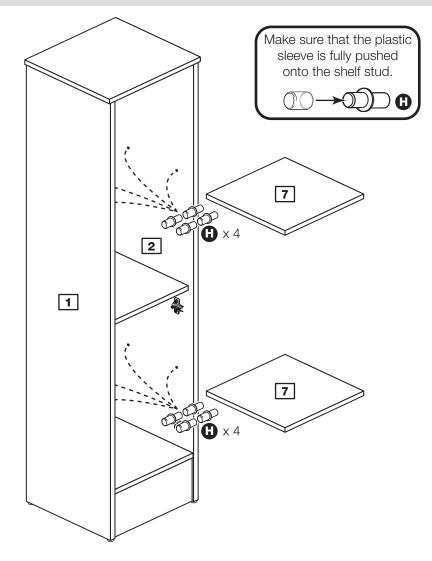


## Step 17

#### **Prepare the door**

Push fit 2 hinges **()** into the door **8**.

Secure each hinge with 2 screws **(**).

*Note:* Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

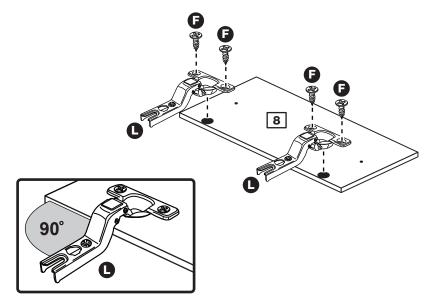

### Step 18

Drill the handle hole in the door

*Important:* Please follow these instructions carefully.

Lay the door **8** down onto a smooth surface.

*Important:* Carefully choose which hole you need to drill. This will depend on which side **1** or **2** you fitted the hinge plates **(**).

Check that the holes and hinges are in the same place as the diagrams.


*Note:* We recommend the use of a small piece of waste wood, placed behind the hole while drilling, to reduce the possibility of any breakout.

Using the pilot hole in the rear face of the door, drill through the hole indicated opposite, using a 2.5mm diameter drill.

Turn the door over and open out the 2.5mm hole that you have just drilled by drilling back through it with a 5mm drill.

*Note:* Drill bits are not provided.

### IMPORTANT Carefully choose which hole you will need to drill

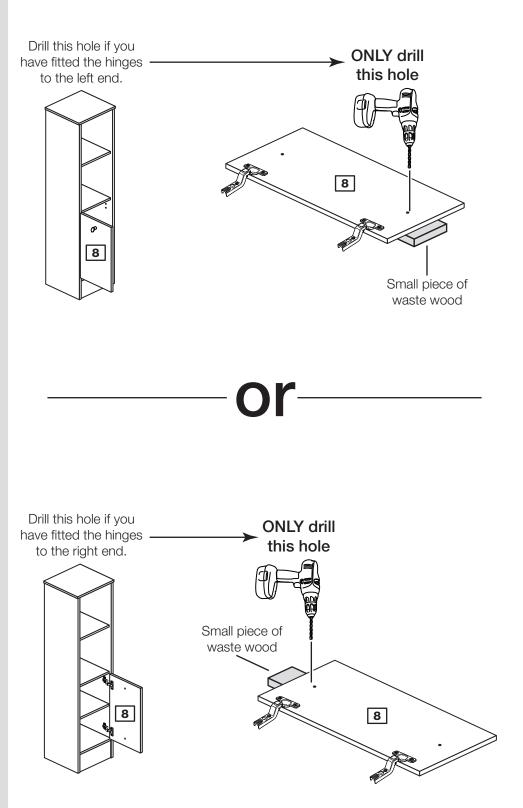

## Step 19

#### Fit door and handle

*Note:* The easiest way to attach the door **8** is to fit the top hinge first, then align and fit the other hinges.


**a:** Push the hinge **b** onto the front part of the hinge plate **b**. The recess at the bottom of screw B goes into the slot in the hinge plate.

**b:** Keep the hinge **b** FLAT against the hinge plate **(k)** as you slide it across as far as it will go. Tighten screw A.

**C:** The hinge **L** must be flat against the hinge plate **K** prior to any adjustment.

**d:** The hinge must NOT be AT AN ANGLE to the hinge plate when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

**e:** Attach a handle **J** to the door **B** using screw **D**.

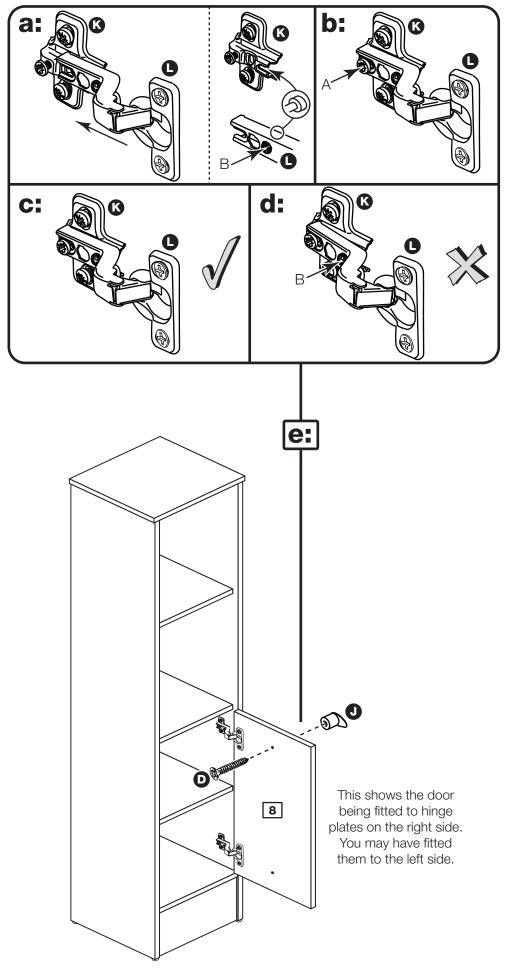

## Step 20

## Adjust the door if needed

**a:** Before adjusting the door, use a spirit level to check the top (or base) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

### **b:** Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

## **C:** Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

## **d:** Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

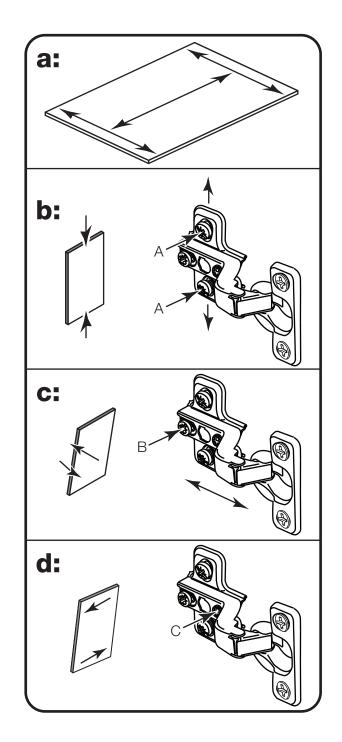

## Step 21


### Fit the door buffer

Stick the door buffer (E) onto the top corner of the door (8) where it will hit the fixed shelf (5).

#### Assembly is complete



*Warning:* The unit is heavy. Lift with care.

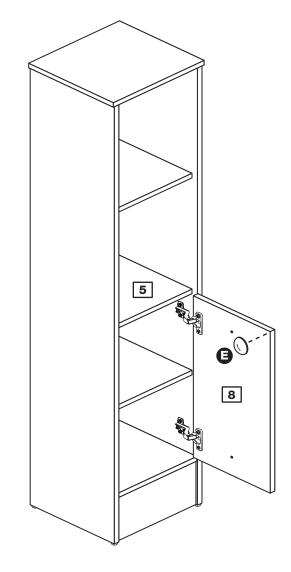

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800 and quote the reference numbers on the component pages. Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW