

habitat

AH Rayner 5 arm flush to ceiling light
1518261

Cat no/SKU no	Description	Energy level	Power
1518261	AH Rayner 5 arm flush to ceiling light	E	4 kwh/1000h

Caution: This product contains eight light source of energy efficiency class E

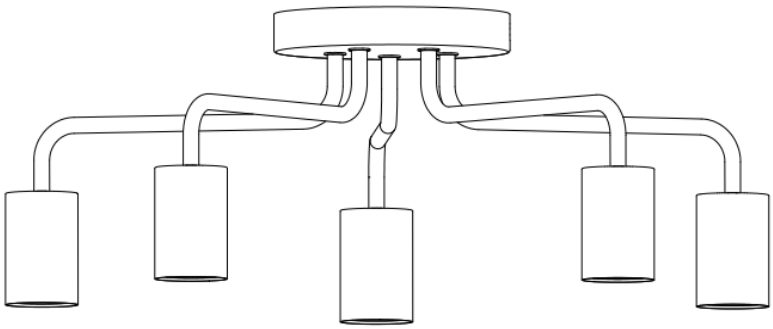




Care & Instruction Manual

For household and indoor use only
Please read and retain these instructions for future reference

IMPORTANT!-All light fittings must be fitted in accordance with wiring regulations from the Institute of Electrical Engineers (IEE) and current building regulations. We recommend you employ a qualified electrician and that manufacturer's fitting instructions are followed.

Installation

1. Remove the lamp and other parts from the package.
2. Remove the mounting bracket from the fitting, by unscrewing the retaining screws on the sides of the canopy. Using the mounting bracket as a template, mark the position of the fixing holes on the mounting surface.
3. Pre-drill fixing holes taking care not to damage any pipes or mains cables beneath the surface.
4. Securely fasten the metal mounting bracket to the ceiling using mounting screws and wall plugs, (supplied). Ensure that you do not trap or strain any cables between the mounting surface and the bracket.
5. Connect the electric power supply wire the terminal blocks of the fitting as shown below diagram.

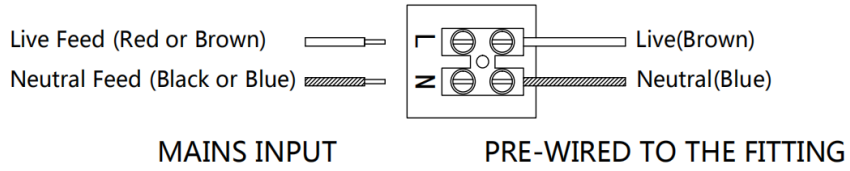


6. Ensure that the incoming mains cables correspond to the labels on the terminal block. The incoming live supply wire must connect to the terminal marked L, and the incoming neutral supply wire must connect to the terminal marked N.
7. Ensure that no loose strands of conductor are left exposed or protrude from the terminals.
8. Position the canopy of the fitting over the mounting bracket and secure back into position by replacing the two retaining screws.
9. Fit the bulbs (bulb included): 5x Max.4W ES/E27 LED bulb.
10.Installation is now complete.


REPLACEMENT LAMP

1. Switch off the mains power supply.
2. Before replacing the bulb, allow it to cool down for at least 10 minutes.
3. Never touch the bulb with your fingers directly, cover it with a cloth.
4. Loosen the bulb and remove it from the lamp.
5. Replace a new bulb with same voltage and wattage

CAUTION! Always disconnect power supply when servicing or cleaning.

Cleaning
- Use a clean dry soft or slightly damp cloth.
- Do not use abrasive cloths or polishes as this may cause damage to the product.



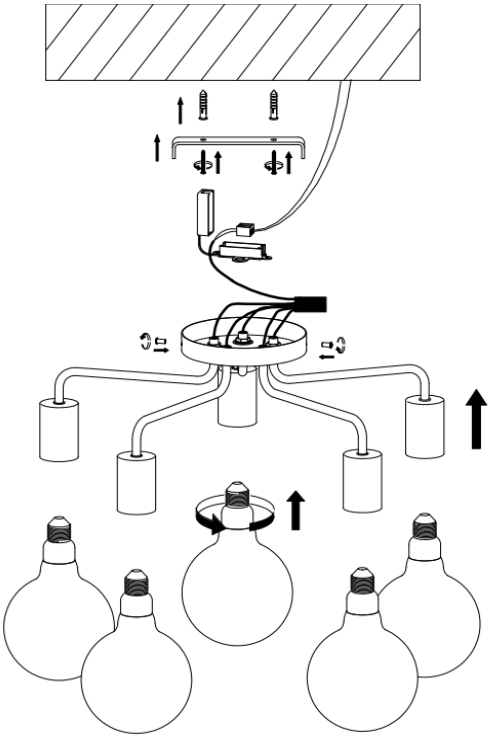

Recycling electrical products

You should now recycle your waste electrical goods and in doing so help the environment. This symbol means an electrical product should not be disposed of with normal household waste. Please ensure it is taken to a suitable facility for disposal.
Visit www.recycle-more.co.uk, click on "bank locator" and enter your postcode to find your nearest recycling site.



We care about our quality and what you think, If you have any comments, good and bad, Please call our Careline Habitat: 0345 640 2020 or visit Habitat.co.uk Your statutory rights are not affected.	Made in China for Habitat, Argos Limited, London, EC1N 2HT,UK. Argos (N.I.)Ltd, Forestside Shopping Centre, Upper Galwally, Belfast,BT8 6FX,UK.