

habitat

Cat No.	Product Description	Image reference
1979446	EXPOSED BULB 8L CEILING LIGHT	

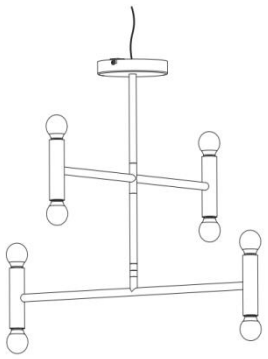

Caution: This product contains eight light source of energy efficiency class E


Care & Instruction Manual

For household and indoor use only. Please read and retain these instructions for future reference.

IMPORTANT! All light fittings must be fitted in accordance with wiring regulations from the institution of Engineering and Technology (IET) and current building regulations. We recommend you employ a qualified electrician and that manufacturer's fitting instructions are followed

Installation

1. Remove the lamp and other parts from the package.
2. Remove the mounting bracket (②) from the fitting, by unscrewing the retaining screws (④) on the sides of the canopy. Using the mounting bracket (②) as a template, mark the position of the fixing holes on the mounting surface.
3. Pre-drill fixing holes taking care not to damage any pipes or mains cables beneath the surface.
4. Securely fasten the metal mounting bracket (②) to the ceiling using mounting screws (③) and wall plugs (①), (supplied). Ensure that you do not trap or strain any cables between the mounting surface and the bracket.
5. Connect the electric power supply wire to the terminal blocks of the fitting as shown in the below diagram.

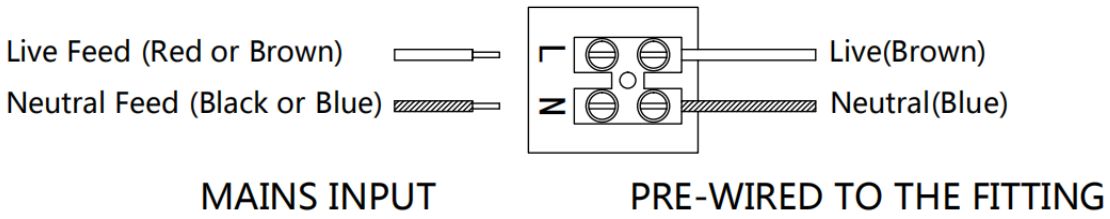

6. Place the canopy of the fitting over the mounting bracket and secure back into position by replacing the two retaining screws (④).
7 The positioning of the lower bulbs can be adjusted by rotating the lower arm (⑤).
8. Place the bulb (⑥)x8pcs (ES/E14 LED 2W bulb, bulb is included) into the lamp holder.


Replacement Lamp


1. Switch off the mains power supply.
2. Before replacing the bulb, allow it to cool down for at least 10 minutes.
3. Never touch the bulb with your fingers directly, cover it with a cloth.
4. Loosen the bulb and remove it from the lamp.
5. Replace a new bulb with same voltage and wattage

CAUTION! Always disconnect power supply when servicing or cleaning.
Cleaning
- Use a clean dry soft cloth.
- Do not use abrasive cloths or polishes as this may cause damage to the product.

Changing the bulb

IMPORTANT! Ensure that the bulb has cooled down before replacing. Ensure that the power supply has been disconnected.

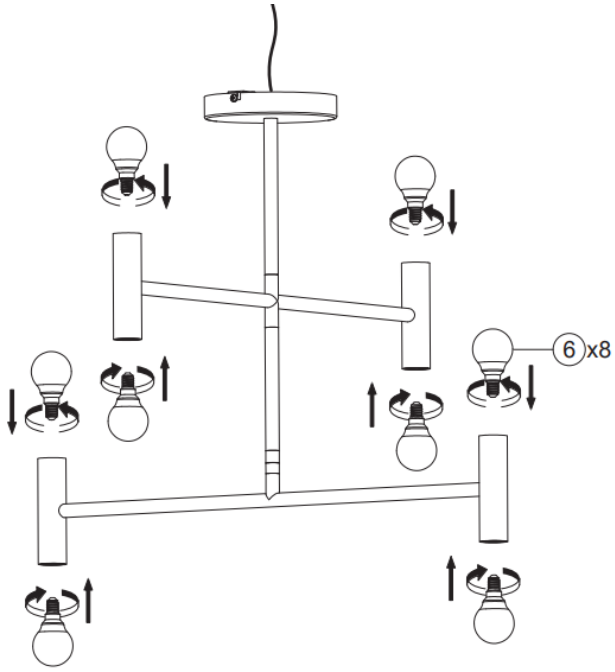

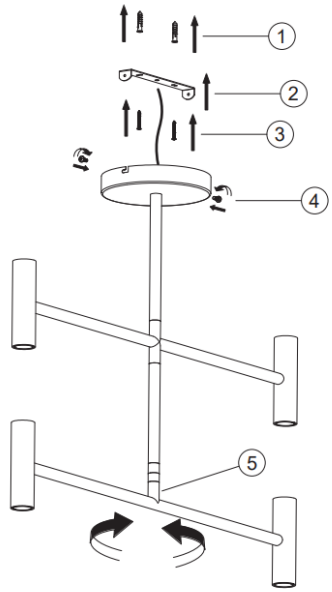

Recycling electrical products


You should now recycle your waste electrical goods and in doing so help the environment. This symbol means an electrical product should not be disposed of with normal household waste. Please ensure it is taken to a suitable facility for disposal.
Visit www.recycle-more.co.uk, click on "bank locator" and enter your postcode to find your nearest recycling site.



We care about our quality and what you think, if you have any comments, good and bad, please call our Careline Habitat: 0345 640 2020 or visit Habitat. co.uk Your statutory rights are not affected.	Made in China for Habitat. Argos Limited, 489-499 Avebury Boulevard, Milton Keynes, MK9 2NW, Argos (N.I.) Ltd, Forestside Shopping Centre, Upper Galwally, Belfast, United Kingdom, BT8 6FX, Argos Distributors (Ireland) Limited, Unit 7, Ashbourne Retail Park, Ballybin Road, Ashbourne, County Meath, Ireland.

A Guide to

Wall Mounting & Fixings

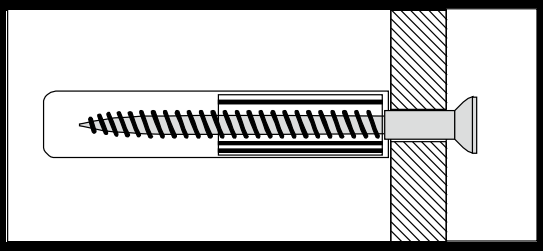

IMPORTANT:
When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


HINTS:

1) General Rule ⚠ Always use a larger screw and wall plug if you are not sure.
2) Ensure you use the recommended drill bit to match the wall plug and hole size.
3) Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
4) Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure the plug is fitting below the ceramic tile to avoid splitting or cracking.
5) Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types Of Walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone, wood or plaster board.

No.1 "Standard" Wall Plug
General Wall Materials

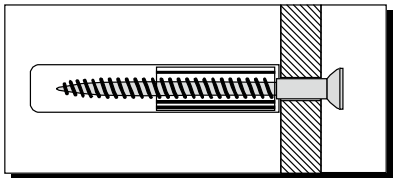


These come in various sizes and are made from plastic or sometimes wood fiber.

No.2 "General Purpose" Wall Plug
Aerated / Breeze Block

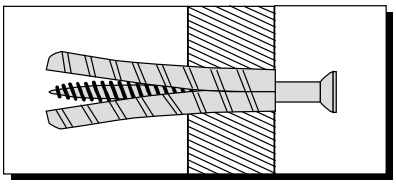


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case.
For light loads, a General Purpose Plug can be used.

No.3 "Shield Anchor" Wall Plug
Heavy Loads

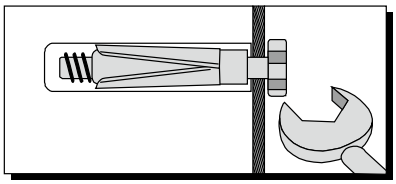


For use with heavier loads such as TV & HiFi Speakers and Satellite Dishes etc.

No.4 "Cavity Fixing" Wall Plug

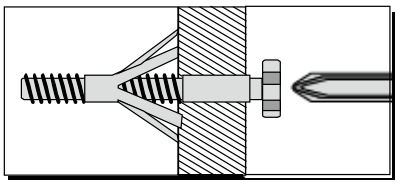


For use with plaster board partitions or hollow wooden doors.

No.5 "Cavity Fixing - Heavy Duty" Wall Plug

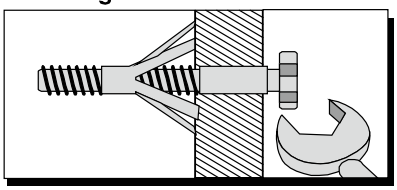

For use when fitting or supporting heavy loads such as shelving, wall cabinets, coat racks.

No.6 "Hammer Fixing" Wall Plug

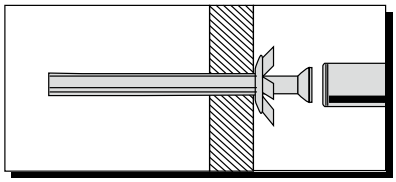

For use with walls stuck with plaster board. The hammer fixing allows it to be fixed to the wall rather than the plaster board. Always check the fixing is secure to the retaining wall.

CARE & MAINTENANCE

⚠ **SAFETY**
Always check the fitting and location to ensure your safety in and around the home.

⚠ **FITTING**
From time to time check the fitting to ensure the wall plugs or screws do not become loose.