Breville™

Turn on your creativity®



360° Autosense Air Purifier

BAP009

IMPORTANT SAFETY INFORMATION


READ CAREFULLY AND KEEP FOR FUTURE REFERENCE

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

If the supply cord or plug is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.


- ⚠ Always ensure that hands are dry before handling the plug or switching on the appliance.
- ⚠ This appliance must not be placed on or near any potentially hot surfaces (such as a gas or electric hob).
- ⚠ To protect against electrical shock, never immerse any part of the appliance or power cord and plug in water or any other liquid.
- ⚠ To avoid fire hazard, never place the cord under rugs or any parts near an open flame, cooking or other heating appliance.
- ⚠ Never let the power cord hang over the edge of a worktop, touch hot surfaces or become knotted, trapped or pinched.
- ⚠ Avoid contact with any moving parts.
- ⚠ Do not operate in the presence of explosive and/or flammable fumes.
- ⚠ Do not operate air purifier until fully assembled with all parts properly in place.
- ⚠ Do not use outdoors.
- ⚠ This product is intended for household use ONLY and not for commercial or industrial applications.
- ⚠ Always turn the appliance off before unplugging it.
- ⚠ Disconnect the appliance from the mains supply before cleaning, maintenance or replacing filters. To disconnect the unit, be sure to pull the plug and not the cord.
- ⚠ Never drop or insert any objects into the openings of the unit.
- ⚠ Do not operate any appliance with a damaged cord or plug. If the motor fan fails to operate or the unit has been dropped or damaged in any manner, return appliance to manufacturer for examination and/or repair.
- ⚠ Do not place anything on top of unit.
- ⚠ Never use detergents, glass cleaner, furniture polish, paint thinner or other household solvents to clean any part of the appliance.
- ⚠ If the filter is covered by a bag when shipped, remove plastic bag before use and keep away from children.
- ⚠ Do not place the appliance on a walkway or where someone may trip over it. Misplacement of the appliance may cause a trip and fall.

GET TO KNOW YOUR AIR PURIFIER

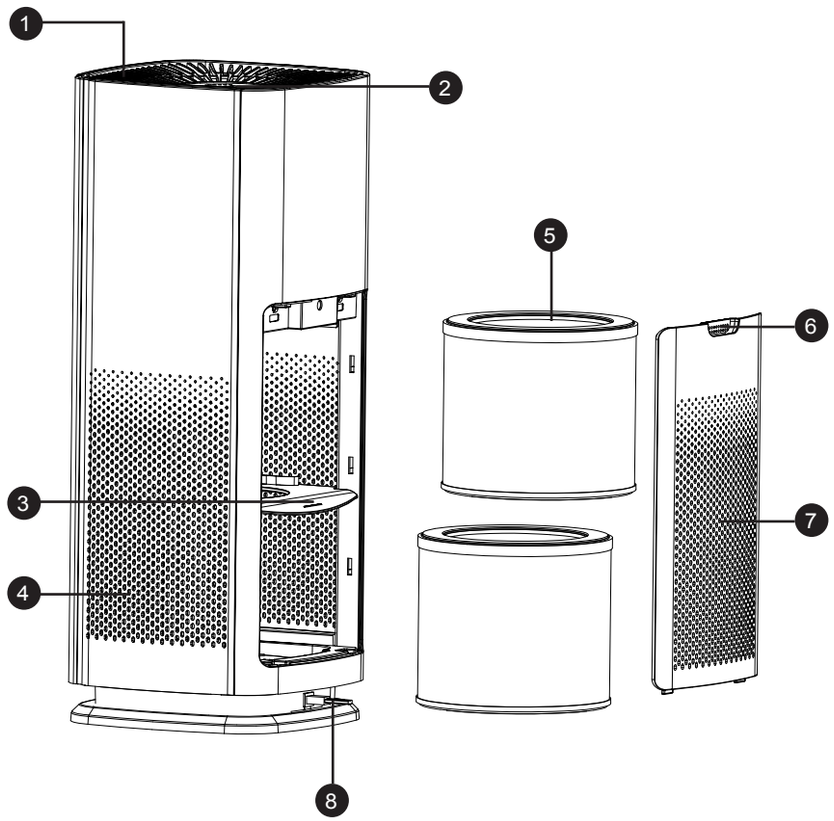

1. Filtered air outlet vent
2. Control panel
3. Filter separation plate
4. 360° air intake grille
5. 3-in-1 True HEPA filters (activated carbon filter and pre-filter included)
6. Back panel open/close lever
7. Back panel cover
8. Power cord

CONTROL PANEL AND FEATURES

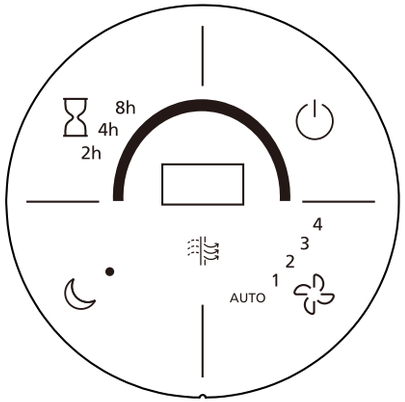

On/Off button
Turns unit on or off.

Night mode
Dims the display lights so you can sleep comfortably.

Timer
Sets a timer for 2, 4 or 8 hours

Filter replacement indicator
Illuminates in red when it's time to replace your filter.

Fan speed settings
Adjusts the speeds between Auto, 1 (Low), 2, 3, and 4 (High).

FEATURES OF YOUR AIR PURIFIER

True HEPA filter

Your air purifier features two True HEPA filters which removes up to 99.97% of airborne dust and pollen as small as 0.3 microns and helps reduce smoke, mould spores and pet dander from the air passing through the filter.

Pre-filter

The pre-filter captures large particles from dust, hair, pet dander to help extend the filter's efficiency and life.

Activated carbon filter

Designed to reduce and neutralize odors, vapors and gases from cooking, smoke, chemicals, pets, and other unwanted scents.

Ioniser

This appliance has an ioniser feature which releases negative ions into outgoing filtered air to help the air purification process.

What are ions?

Ions are tiny particles that carry a positive or negative charge. They exist naturally around us in the air, water, and ground. Both positive and negative ions are colourless, odourless, and completely harmless.

How does the ioniser work?

Negative ions help air purification by attaching themselves to very small airborne particles in the room. These particles take on a negative charge and may join with positively charged particles such as dust, pollen, smoke, and pet dander to form larger particles. The larger particles are then more easily captured by the filter system.

Important notes:

Your ioniser may produce an occasional popping or cracking sound. This is normal and occurs when a small buildup of ions is discharged.

After extended use, you may notice dust around the grilles or panels.

- This is caused by negative ions exiting the air outlet, evidence of the ioniser's air cleaning effectiveness.
- You can remove the dust with a soft brush or clean, damp cloth. Larger particles may be attracted to positively charged surfaces throughout the home, like walls or floors.
- This may occur more frequently when the filter is nearing the end of its useful product life and unable to capture as many charged particles.
- Excessive amounts of pet dander, dust, or smoke may decrease the life expectancy of the filters and interfere with the ionisation process.

AIR QUALITY DISPLAY

PM2.5 Autosense technology actively monitors the indoor air quality in the room by measuring particulate matter. It accurately detects and quickly responds to even the slightest particle change in the air and provides real-time PM2.5 feedback.

The air purifier's display will illuminate a specific color based on whether the air quality is "Good", "Moderate", or "Poor".

When the unit is in auto mode, the air purifier automatically monitors the air quality and adjusts the fan speed accordingly to ensure healthy air quality levels.

GOOD
Blue | 0 – 100

MODERATE
Yellow | 101 - 200

POOR
Red | 201 – 500



PRODUCT SPECIFICATIONS


CADR	Smoke 329m3/h/ 194 CFM Dust 339 m3/h / 200 CFM Pollen 343 m3/h / 202 CFM	**Noise level on high speed**	55 dB max
Fan speeds	4	**Power consumption**	42 W

GETTING STARTED


Installing the True HEPA filters

1. Ensure the unit is unplugged and not turned ON.
2. Pull the top part of the back panel cover towards you to release it from the appliance (Figure 1).
3. Remove the top True HEPA filters from the appliance (Figure 2).
4. Once removed the filter separation plate will spring up to give access to the lower filter. The plate can be rotated upwards for better access (Figure 3).
5. Remove the lower True HEPA filter (Figure 4).
6. Remove the plastic bag from the filters.
7. Insert True HEPA filters back into the appliance. Insert the bottom filter first, then insert the top filter (Figure 5).
8. To reattach the back panel cover, align and mount the cover into the base of the appliance first, and then push the top of the panel against the appliance (Figure 6).
9. Plug the unit in and turn ON the power.


Your unit is equipped with two 3-in-1 True HEPA filters that lasts up to 12 months depending on usage.

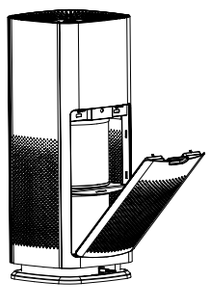


(Figure 1)

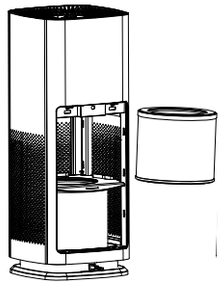


(Figure 2)

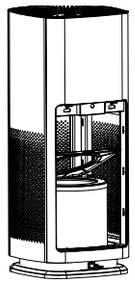


(Figure 3)

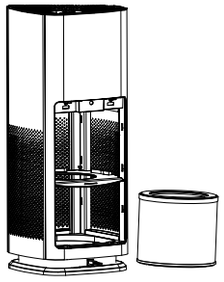

(Figure 4)

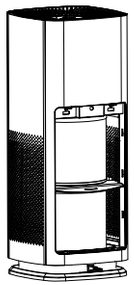

(Figure 5)

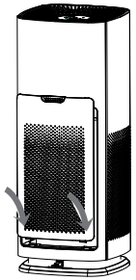

(Figure 6)

OPERATING INSTRUCTIONS

1. Place the unit on a dry, stable, and firm surface. Make sure not to block the top air outlet vent and air intake grille.
2. Plug the unit into a power supply socket.
3. Tap the power button ⏻ to turn the unit ON.
4. When the appliance is starting up, the digital displays on the screen and the air quality LED indicator will initially illuminate red and then change to yellow.
5. After measuring the particulate matter in the air for approximately 20 seconds, the appliance will display the particle count and air quality colour. The appliance will operate in auto mode by default and change the fan speed accordingly.
6. To select a desired fan speed, tap the fan button to cycle through the speeds auto, 4 (high), 3, 2, 1 (low) until the desired speed setting is illuminated. Note: Auto mode will automatically adjust the fan speed setting when a change in the room's air quality is detected.
7. To set the timer for 2, 4 or 8 hours, tap the timer button ⌛ until the desired setting is illuminated. When the set time has elapsed, the appliance will automatically switch off. To deactivate the timer, tap the timer button ⌛ repeatedly until the timer setting lights are turned off.
8. To turn night mode ON, tap the ☾ button once until the white LED light next to the button is illuminated. Tap the ☾ button again to turn night mode OFF.
   Note: Night mode will maintain your previous fan speed setting and turn the display lights OFF.
9. **Important:** Always turn OFF and unplug the unit when not in use.

CARE AND MAINTENANCE

- Before cleaning the air purifier, always turn OFF and unplug the unit.
- Clean the exterior surface with a clean, damp cloth.
- The top air outlet vent can be cleaned of dust with a small, soft brush.
- If you would like to clean the inside of your filter compartment, ONLY use a dry, soft cloth to wipe it down.

WARNING: Do not allow moisture to come into contact with the main housing of the air purifier. NEVER use detergents, glass cleaner, furniture polish, paint thinner, or other household solvents to clean any part of the appliance.

HOW TO REPLACE THE TRUE HEPA FILTER

It is recommended to replace the 3-in-1 True HEPA filters every 12 months depending on usage.

1. The filter replacement indicator light will illuminate red when it is time to replace the filter.
2. Turn the unit OFF and unplug the air purifier.
3. Pull the top part of the back panel cover towards you to release it from the appliance (Figure 1).
4. Remove and discard the top True HEPA filters from the appliance (Figure 2).
5. Once removed the filter separation plate will spring up to give access to the lower filter. The plate can be rotated upwards for better access (Figure 3).
6. Remove and discard the lower True HEPA filter (Figure 4).
7. Insert two new True HEPA filters. Insert the bottom filter first, then insert the top filter (Figure 5).
8. To reattach the back panel cover, align and mount the cover into the base of the appliance first, and then push the top of the panel against the appliance (Figure 6).
9. Plug the unit and turn the power ON.
10. To reset the filter status on the air purifier, press and hold the night mode button ☾ for 3 seconds. The air purifier will beep once. The filter replacement indicator light will flash and beep 3 times and then turn off. The air purifier is ready for use.
    (See section 'Installing the True HEPA filters' for Figures 1-6).

Warning: Only use the original Breville filter model BAPF70 specially intended for this appliance. Do not use any other filters.

Information on where to purchase replacement filters can be found on our website at www.breville.co.uk.

TROUBLESHOOTING AND SUPPORT

For troubleshooting and FAQs visit **www.breville.co.uk**.

Problem	Cause	Solution
The air purifier is not working.	The appliance is not plugged in.	Check if unit is properly plugged in and outlet is working.
	The appliance is not switched on.	Make sure unit is turned ON.
	The filters are not properly installed.	Make sure filters are properly installed.
	The panel cover is not fully assembled.	Check that the back panel cover is correctly assembled. Align and mount the cover into the base of the appliance first, and then push the top of the panel against the appliance (Figure 6).
The air flow has decreased.	The air intake grille and filtered air outlet may be obstructed.	Turn OFF and unplug the appliance. Remove any obstructions blocking the air intake grille and filtered air outlet.
	The filter is nearing the end of its useful product life.	Check the condition of the filters and replace if necessary.
	Pre-installed filters are covered by a protective plastic packaging.	Check filters to remove any plastic packaging and re-install the filters.
The air purifier is making a loud noise.	Pre-installed filters are covered by a protective plastic packaging.	Check filters to remove any plastic packaging and re-install the filters.
	The ioniser function is operating.	This is normal and occurs when a small buildup of ions is discharged.

AFTER SALES SERVICE AND REPLACEMENT PARTS

In the case the appliance does not operate but is under warranty, return the product to the place it was purchased for a replacement. Please be aware that a valid form of proof of purchase will be required. For additional support, please contact our Consumer Service Department at: **0800 028 7154.**

Alternatively, e-mail: BrevilleEurope@newellco.com.

ELECTRICAL SAFETY


If the plug is not suitable for the socket outlets in your home, it can be removed and replaced by a plug of the correct type.

If the fuse in a moulded plug needs to be changed, the fuse cover must be refitted. The appliance must not be used without the fuse cover fitted.

If the plug fuse requires replacement, a fuse of the same rating as that fitted by the manufacturer must be used. In order to prevent a hazard do not fit a fuse of a lower or higher rating.

If the terminals in the plug are not marked or if you are unsure about the installation of the plug please contact a qualified electrician.

Plug should be ASTA approved to BS1363
Fuse should be ASTA approved to BS1362

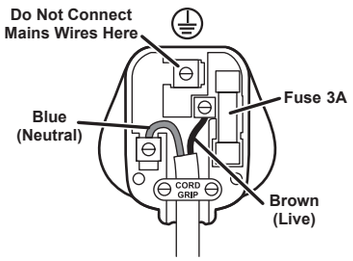

Ensure that the outer sheath of
the cable is firmly held by the cord grip

WASTE DISPOSAL

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. E-mail us at BrevilleEurope@newellco.com for further recycling and WEEE information.



Breville™

Jarden Consumer Solutions (Europe) Limited
5400 Lakeside, Cheadle Royal Business Park,
Cheadle, SK8 3GQ, United Kingdom
Newell Poland Services Sp. z o.o.,
Plac Andersa 7, Poznan, 61-894, Poland.

e-mail: BrevilleEurope@newellco.com

Telephone: 0800 028 7154

© 2022 Jarden Consumer Solutions (Europe) Limited. All rights reserved.
Jarden Consumer Solutions (Europe) Limited, 5400 Lakeside, Cheadle Royal Business Park,
Cheadle, Cheshire, SK8 3GQ, United Kingdom.
Newell Poland Services Sp. z o.o., Plac Andersa 7, Poznan, 61-894, Poland.
Jarden Consumer Solutions (Europe) Limited and Newell Poland Services Sp. z o.o. are
subsidiaries of Newell Brands Inc.
The product you buy may differ slightly from the one shown on this carton due to continuing
product development.
Printed in China.

BAP009_21EM2 (UK)
GCDS-BRE-SL

P.N: NWL0001318011 Rev A