
Pull out Desk - Star

Assembly Instructions - Please keep for future reference | 7607729

THE COLLECTION BY ARGOS

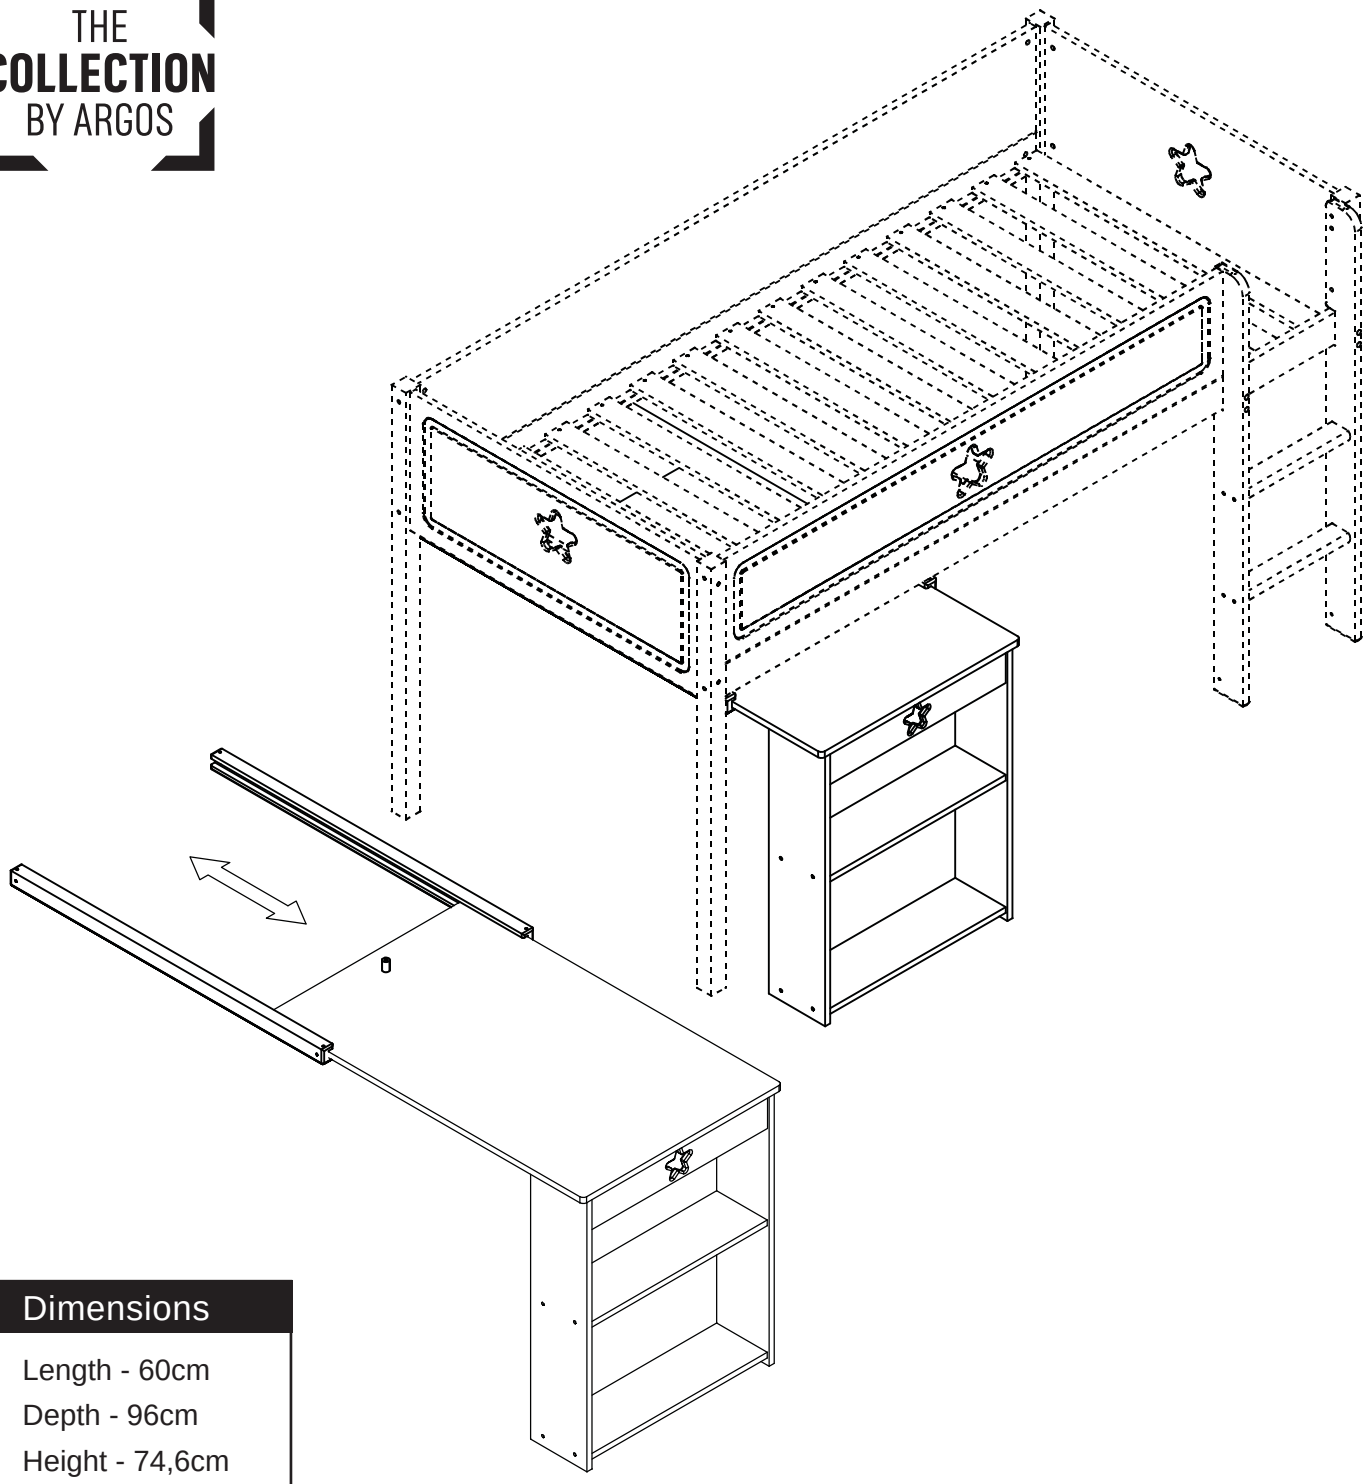

Dimensions

Length - 60cm
Depth - 96cm
Height - 74,6cm
Weight - 13,1kg

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**

0045 7668 8055 or e-mail: order@flexa.dk

Issue 2 - 10/01/18

⚠ Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• During assembly children should be kept away from the product due to possible risk of injury.

• Make sure you have enough space to layout the parts before starting.

•This product is suitable for children in the age range 3 to adult

• Do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.

• Do not use this item if any components are missing or damaged



• We do not recommend the use of power drill/drivers ***for inserting screws***, as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

• Assembly to be carried out by a competent adult only.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• Regularly check all fastenings to ensure that they properly tightened.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.


• This product is suitable for children in the age 4-12 years. Maximum load on tabletop 20 kg. Maximum load on shelf 7 kg.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 0045 7668 8055**


Please check you have all the parts listed below

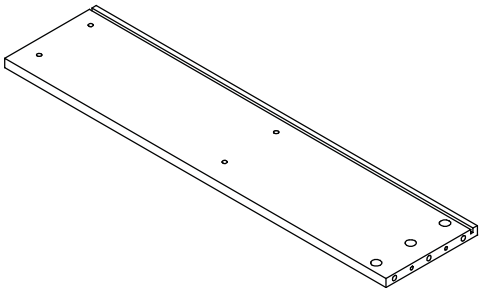


1 Side panel right x1
(70.9x17x1.5cm)
No. 15-01507091-40

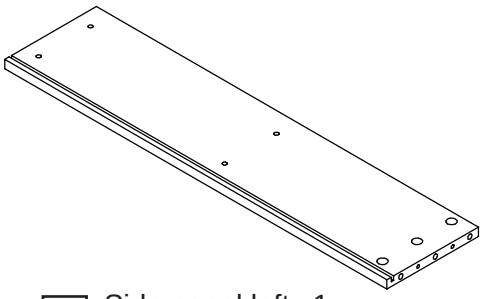


2 Side panel left x1
(70.9x17x1.5cm)
No. 15-01507093-40

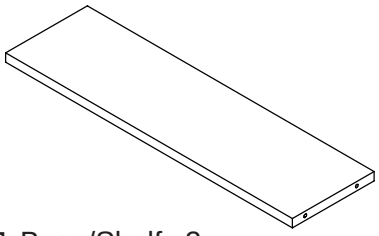


3 Base/Shelf x2
(53.4x15.2x1.5cm)
No. 15-01505341-40

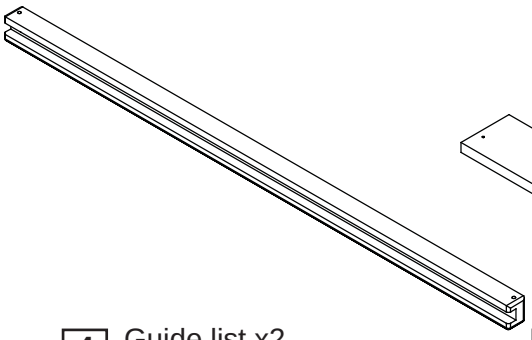


4 Guide list x2
(94.2x4.0x3.2cm)
No. 12-03209423-40



5 Front panel x1
(53.4x9x1.6cm)
No. 4301-1605342-40

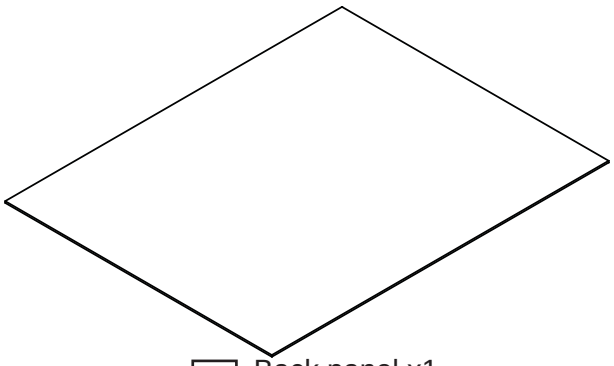

6 Back panel x1
(69x54.6x0.3cm)
No. 4309-030690






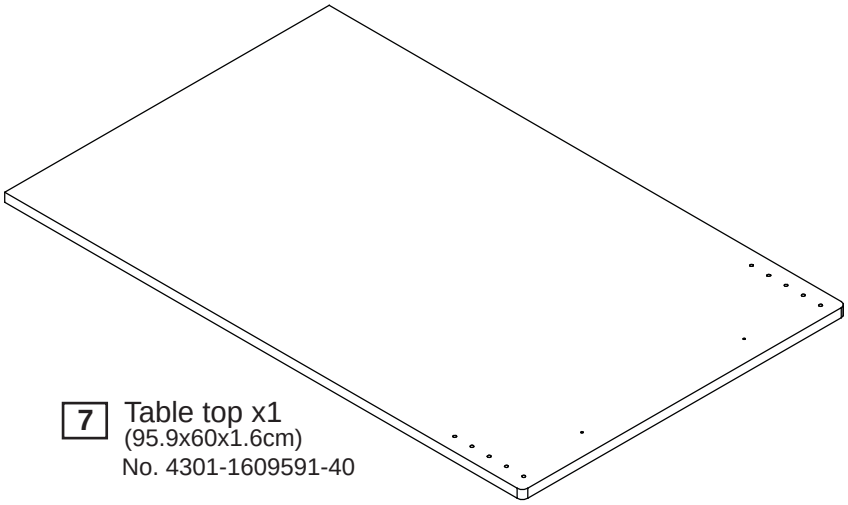


7 Table top x1
(95.9x60x1.6cm)
No. 4301-1609591-40

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A No. 4020-005  Ø7x34mm for Ø5 Minifix bolt x6	**B** No. 3933-15010  Ø15x9.5mm Minifix cam x6	**C** No. 3930-05030  Ø5x30mm Dowel x4
D No. 4003-002  Ø26x28.5mm Castor x2	**E** No. 3902-40015  4.0x15mm Chipboard screw x4	**F** No. 4022-006  1.2x20mm Nail square x25
	G No. 3908-70040  7.0x40mm Confirmat screw x8	**H** No. 3903-40040  4.0x40mm Chipboard screw x1
i No. 3901-45060  4.5x60mm Chipboard screw x2	**J** No. 3901-45040  4.5x40mm Chipboard screw x2	**K** No. 3940-000241  Ø15/Ø6.0x24mm Spacer x1
L No. 3901-40012  4.0x12mm Chipboard screw x8	**M** No. 4008-021  20x20x16x2mm Angle x4	


Tools required

Phillips screwdriver (medium)


Flatblade screwdriver (medium)

Allen key 4mm incl.
No. 4033-004

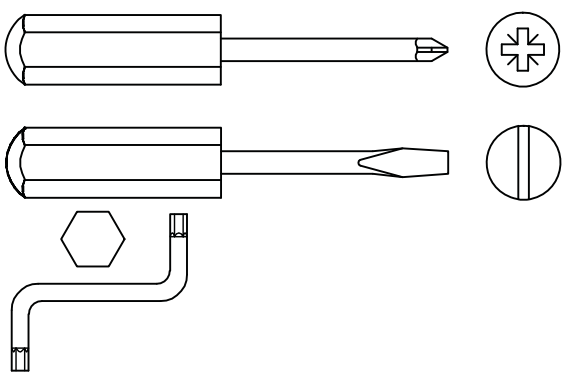




Small hammer



Ruler/tape measure




Eye protection (when using a hammer or glue)

Assembly Instructions

Step 1

Attach the minifix bolts **A** to the table top 7.


Attach two angles **M** to the front panel 5 with screws **L**.

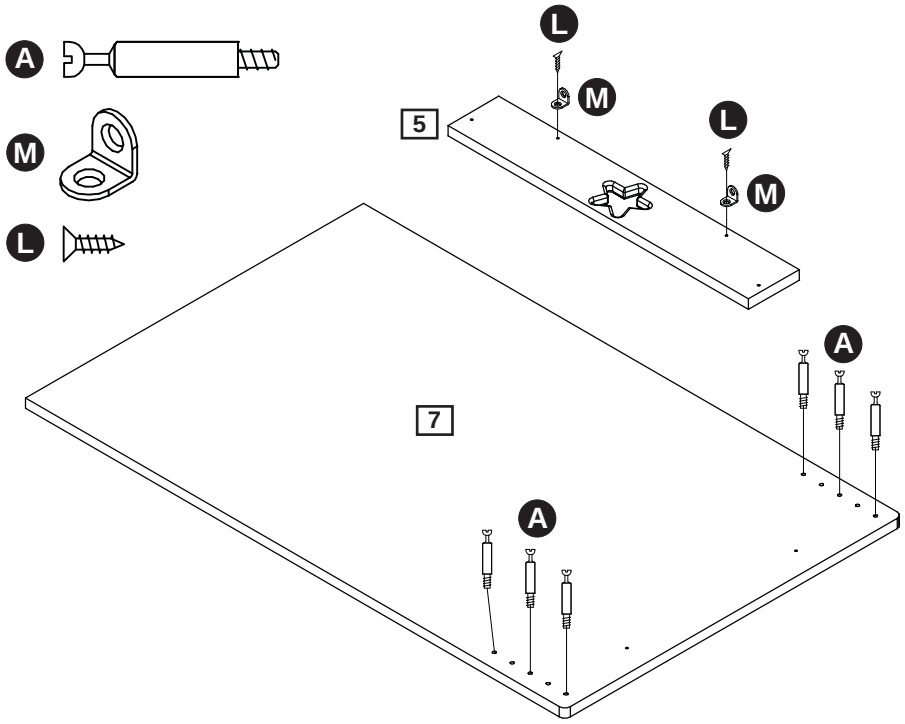

Step 2


Attach the dowels **C** to the side panels 1 and 2.

It may be necessary to tap the dowels in very gently with a small hammer.

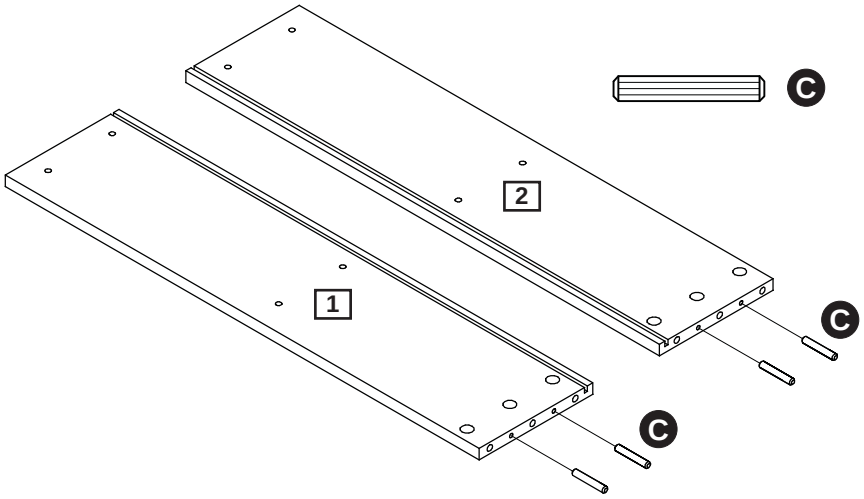

Step 3

Attach the base and shelf 3 to the side panels 1 and 2 with the screws **G**

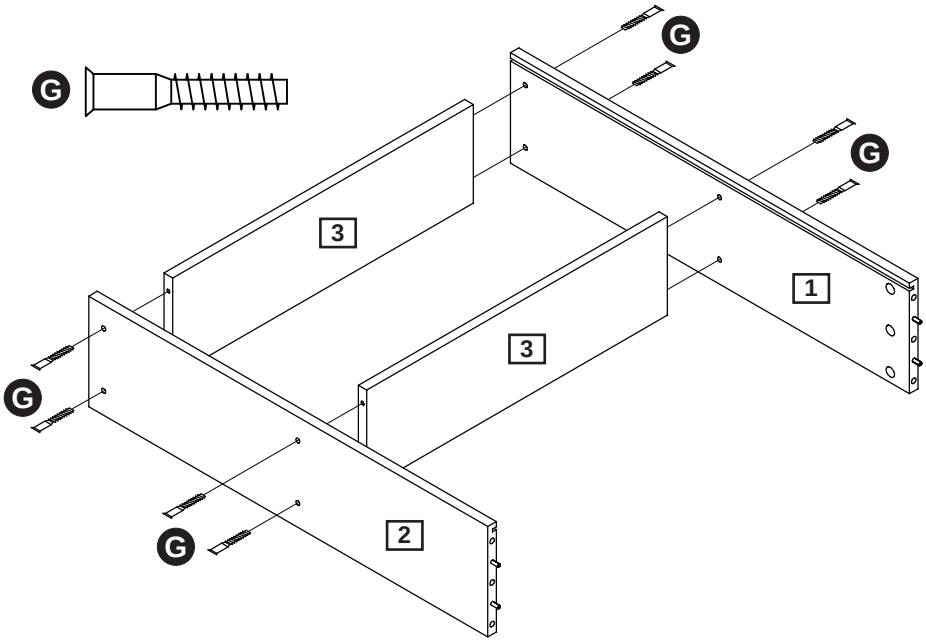

Assembly Instructions

Step 4


Attach the table top 7 to the side panels 1 and 2 with the minifix cams B.

Step 5a

Attach the front panel 5 to the table top 7 with screws L. Follow the marking holes on the table top 7 bottom side.

Step 5b


Attach the front panel 5 to the side panels 1 and 2 with angles M and screws L. Follow the marking holes on the front panel 5.

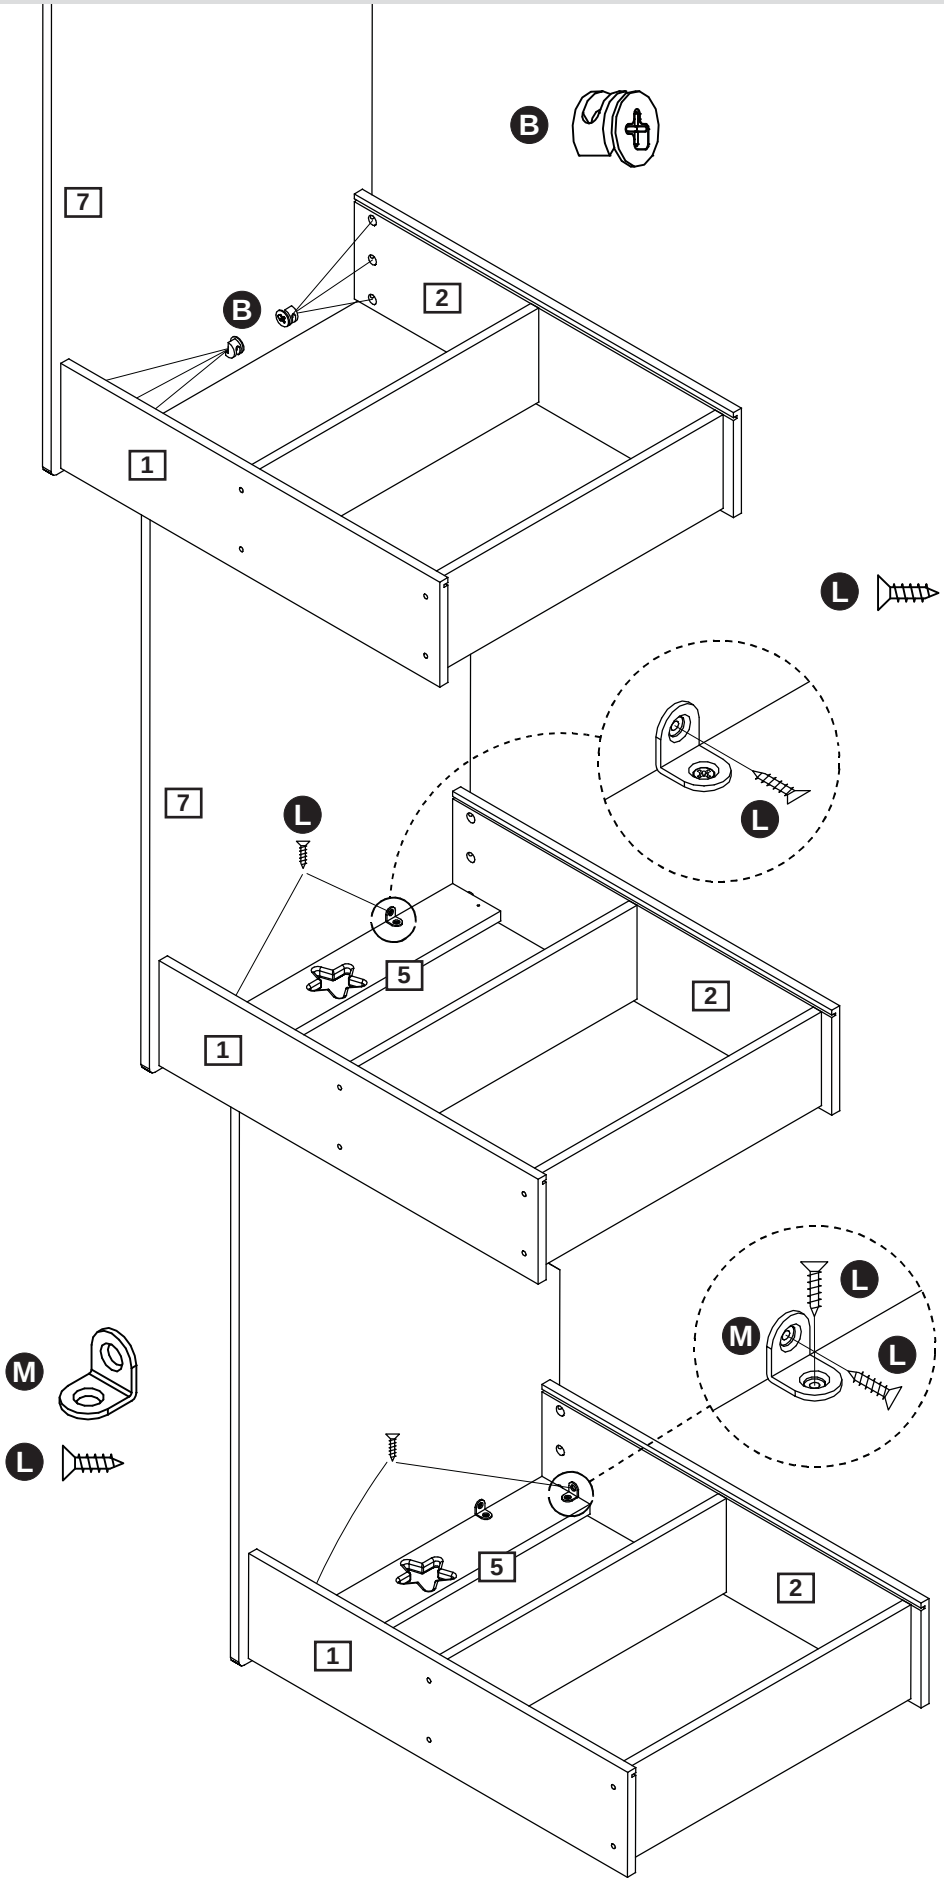

Assembly Instructions


Step 6

Attach the back panel [6] to the bottom base [3] with nails (F).

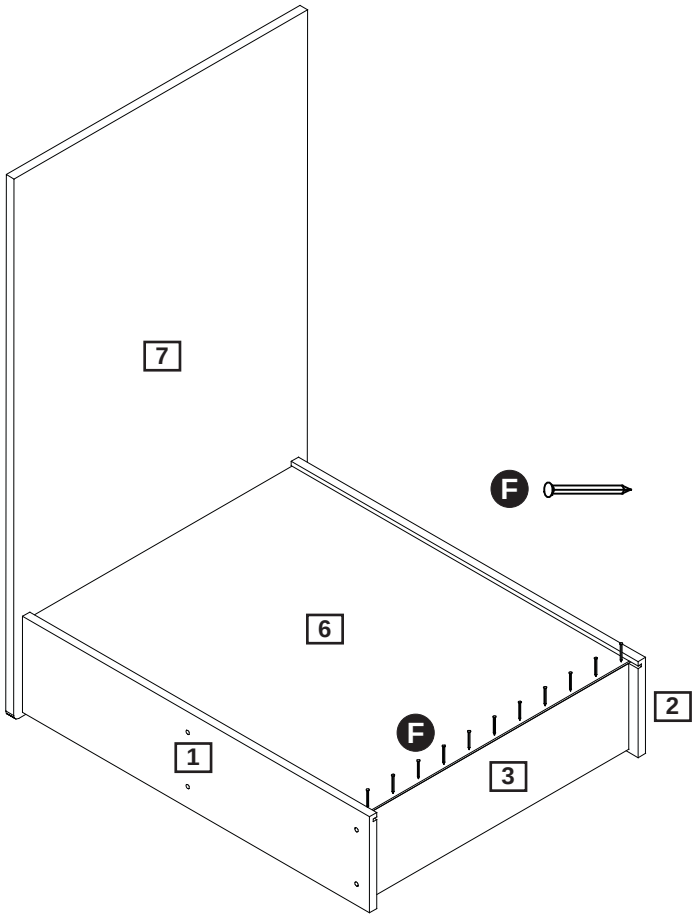

Step 7

Attach the castors (D) to the base [3] with the screws (E).

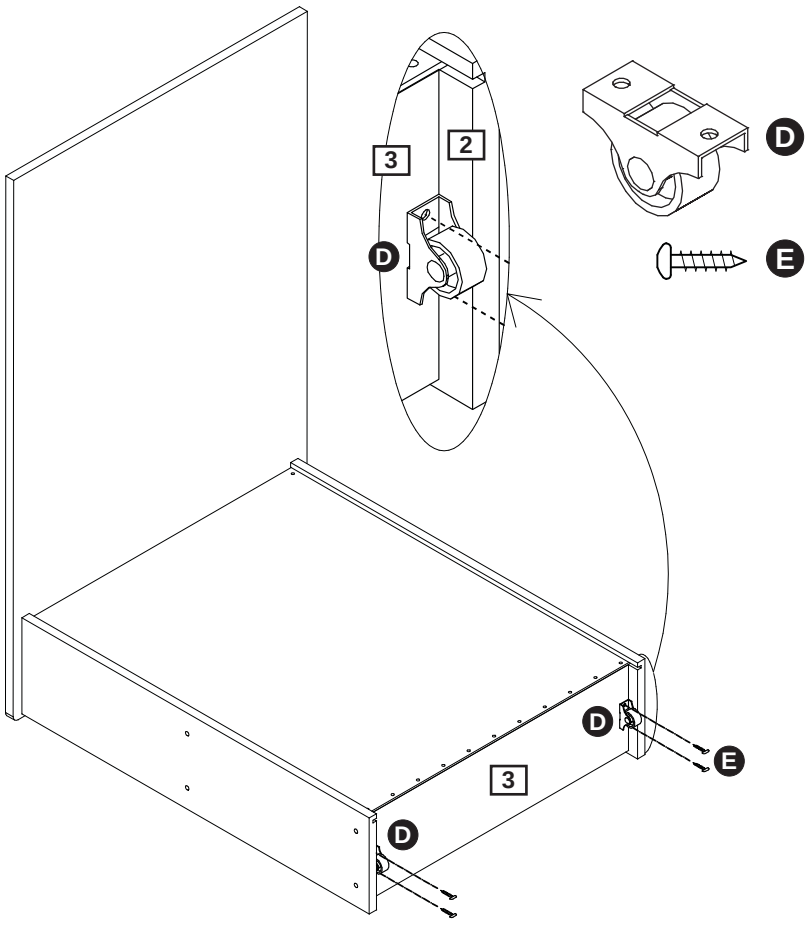


Assembly Instructions

Step 8

Attach the guide list [4] under the bedside into the legs with the screws (J).

Note: **The guide list ends should be flush with the bedside rails.**

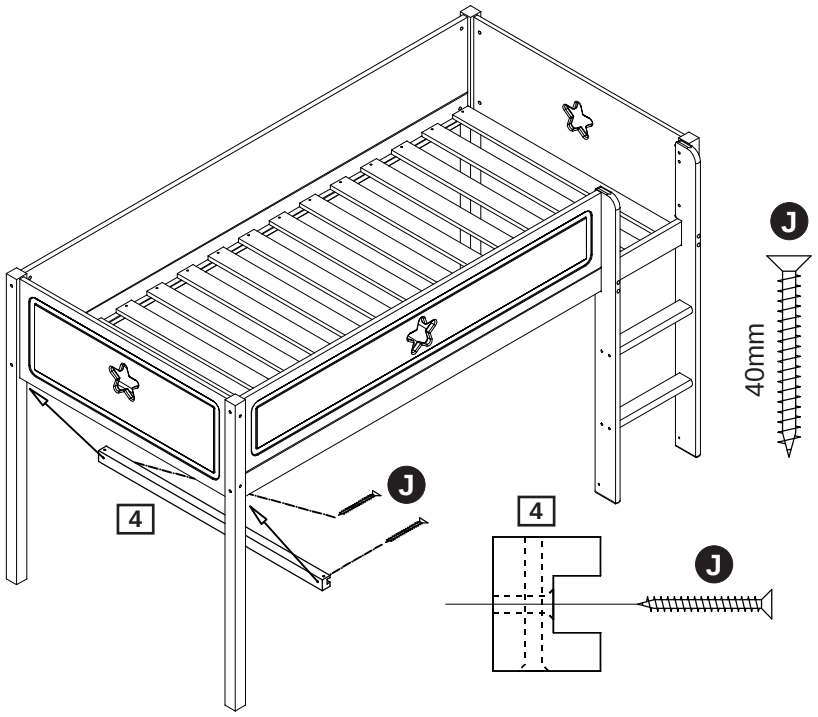


Step 9

Attach the table top [7] to the guide list [4].

Attach the other guide list [4] to the bedsides and table top [7] with the screws (i).

Attach the spacer (K) to the table top [7] with the screw (H) to prevent the table from falling out.

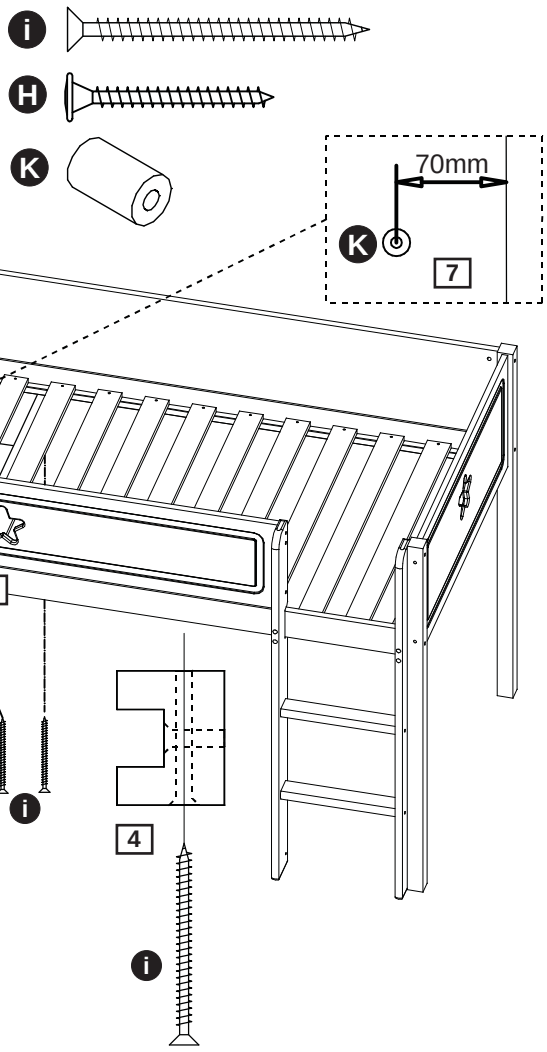

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 0045 7668 8055**
E-mail: order@flexa.dk