Available in other formats including braille, large print or audio CD. If you would like a copy, please call 0808 100 6554*.

problems caused by accidents, misuse fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than Outside of the 2 year through approved agents. guarantee period The guarantee is valid within the UK and If your product needs support after Ireland only. You're responsible for the the guarantee period has ended. cost of returns to the original retailer we recommend that you contact or repair agent. If BT needs to provide BT's recommended support agent replacement parts, these can only be

you know how to get a repair or a replacement. If you need to return your product please pack it in the original box if you still have it and make sure you include all the parts such as cables and power supplies You'll also need a fault reference number from the helpdesk. This does not affect your statutory rights.

Discount Communications on

To find out what to do if your product

is in or outside of the 2 year guarantee, please visit bt.com/producthelp

0800 980 8999.

on. Please use power supply unit item code 089010 into the mains power socket and switch the socket 1. Plug the cable into the parent unit, then plug it

888

Leave to charge for 12 hours.

diT

to fully charge. haven't used it for a long time, it'll take 12 hours The first time you use the parent unit, or if you

going to use for longer than this or throughout plugged into the mains power socket if you're hours. We recommend you keep the cable The battery life on a single charge lasts for 4

amount of time, turn it off while it's charging. short time. To charge the parent unit in the shortest minutes to charge enough for you to use it for a When the battery gets very low, it'll take about 30 the night.

Why is my parent unit beeping? The parent unit only beeps when: The baby unit is switched off and

get audio teedback sounds.

can switch it on.

there is no connection to the parent unit.

move them closer (but not closer than one metre).

- The battery on the parent unit is low, please plug into the mains
- · Interference may be causing connection issues, please ensure both devices are moved away from other electrical devices (TV's Microwaves, mobile phones etc.)

Why is the parent unit not making

- Please ensure both units are plugged into the mains or that the
- or the volume is too low to hear.
- The parent unit may be out of range of the baby unit, please move closer (but keep at least 1 In this scenario the parent unit would beep to inform you of this issue
- Large metal obstructions and other electrical devices may be both devices if possible

The units are too far apart, please

any sounds even though there's noise

from my baby's room?

- parent unit is fully charged.
- The speaker may either be on mute
- metre apart to avoid interference).
- impacting the signal. Try relocating

Max power (dBm) 19.1 **Radio Equipment Directive** Declaration of Conformity and Power Efficiency Info crossed out wheelie bin symbol on Hereby, British Telecommunications it and it's similar to the kit you don't plc declares that the radio equipment need any more, you can send us you type VBM6000 (088306) is in old kit and we'll get rid of it in an compliance with Directive 2014/53/

X

Radio transmission information Frequency range (GHz) 2.415-2.471

EU. The full text of the EU declaration

of conformity and power efficiency

This device has been evaluated for

operated with a minimum distance

of 16mm between the unit and your

The item code for both power supply

The full text of the EU declaration of

units is 089010 (BLJ06W050100P1-B).

conformity is available at the following

internet address: bt.com/producthelp

Disposing of your old electrical

legal requirement to minimise the

and electronic equipment and to maximise its separate collection and

unsorted waste disposal of electrical

environmentally sound management

product, means you shouldn't throw it

in your normal rubbish at the end of its

The symbol shown here and on the

and electronic equipment

The Government has a

working life.

Guidelines when installed and

and shown compliant with European

information is available at:

bt.com/producthelp

body.

This product may contain substances that could be harmful to people of the environment if it's not recycled correctly. Check with your retailer to find out how to recycle your old equipment, or if you've bought something from us that has the

environmentally friendly way

Back Scheme, BT Returns,

BT DF, Darlington Road,

Northallerton, DL67ZY.

Here's the address: WEEE Take

Website address: bt.com/weee

We're not responsible for the costs

of returning items. If you don't wish

to return kit to us, lots of electronics

schemes where you can recycle very

small electrical and electronic goods.

If you're a household user, you can also

take it to your local recycling centre -

go to recyclenow.com to find the one

of this carefully and help to protect

nearest to you. Please dispose

our planet.

shops have their own 'take back'

Other information

the parent unit on. Press the 🕑 button and hold for 2 seconds to turn

metre from the baby unit. Any closer and you might

6. After the parent unit has charged for 12 hours you

Troubleshooting

this bundle?

the mains

Can I add another camera unit to

will need to be purchased.

My parent unit / baby unit isn't

Please ensure the parent unit is

fully charged or plugged into

Ensure both parent unit and baby

Move the parent unit closer to the

baby unit and away from large

obstructions or other electrical

devices as these may affect the

• Switch the baby unit off, and wait

for about 15 seconds and then

Why can I hear a high-pitched noise?

units being too close to each other.

least 1 metre apart and preferably

We recommend they are kept at

• This is likely to be caused by the

signal between the two units.

working, what should I do?

unit are switched on.


switch back on again.

in different rooms.

BT currently does not sell add-on

camera units. A brand new bundle


Before you do, move the parent unit at least one



linked so they are now ready to use. The parent unit and baby unit are automatically

What's the range?

to each other. reduce the units' range and affect how they link about 50 metres indoors. Thick walls and doors baby units is about 250 metres outdoors and The maximum range between your parent and

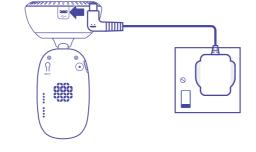

Please use power supply unit item code 089010

the mains power socket and switch the socket on.

4. Plug the cable into the baby unit, then plug it into

most of the time. It should also be at least one metre

room where you're going to be monitoring your baby

3. Place the baby unit near a power socket in the

unit up to turn it on. 5. Slide the Off Ce On button on the side of the baby

(BLJ06W050100P1-B).

away from your baby.

looping any extra length and securing it. Keep the power cord out of baby's reach by

all or part of the product if it's not working properly. If you bought the product more than Additional answers to frequently 28 days ago, we might replace it with a refurbished or repaired one. asked questions are available from bt.com/producthelp. If the helpdesk **Guarantee conditions** can't fix the problem, they'll let The guarantee only covers problems found in the 2 year guarantee period · You'll need your receipt or other proof

Within the 2 year guarantee period Before returning your product, please take a look at the Help section beginning on page 1 or contact the Baby Monitor Helpline on 0808 100 6554.

Guarantee Your VBM6000 is guaranteed for

of purchase

or Ireland.

statutory rights.

2 years from when you bought it. This

means we'll either repair it or replace

Your product is returned to BT or one of

despatched to an address within the UK

· This guarantee doesn't affect your

our partners as instructed.

This guarantee doesn't cover any

du tes pritted

(BLJ06W050100P1-B).



User guide

Video Baby Monitor 6000



$|\mathbf{I}| \forall$ Start here

Keep for future reference Important safety and care instructions

caretully before installing and using it. read the following instructions European safety standards. Please Alis manufactured to comply with Your Video Baby Monitor 6000 from

- For indoor use only in UK and Ireland. noiteool bne noitelleten
- other electrical equipment which can (e.g. away from radiators, window sill or Position all parts away from neat and un
- Keep area ventilated (e.g. don't put .(tod teg
- rnick carpets. in cupboards or back of sofas) and don't block any vents with objects or
- yud never place any parts inside a cot, Keep device and cables out of young children's reach – at least one metre away.
- I for this specific device; contact our bed or playpen. Only use power adapters provided by
- seale duep ul slandepe lawod pue sacinad helpdesk if you need a replacement. Electronic devices hate liquids; don't place
- Product may cause scratches or marks if placed on fragile surfaces (e.g. veneered or near sources of water or splashes.
- Designed for use at room temperatures vood or delicate tabrics); place on a mat
- .0°04 bns 0 neewfec
- Don't use near flammable substances or in a flammable atmosphere (e.g. warehouse
- sjetiqson ni se douz vjaga. before using or installing where restriction This device uses wireless technology; check or garage).

Sare and maintenance

- Regularly check your product for damage vipration, and don't pull or twist any cables. Treat all parts with care; no shock or
- susure small parts aren't expos
- cloth for the lens); do not use water, Dust with a soft dry cloth (a microfibre
- hemicals or solvents.

Warnings away from extreme neat of cold. When not in use, store in a dry place and Wear from out in use, store in a dry place and

any parts or any vents that could cause

Regularly check that objects don't cover

- appear damaged, discontinue use If any parts of your product or any cables
- section of the user guide. netpaesk. See terms in the Guarantee immediately. Switch off your electrical socket if it is safe to do so and contact our
- Don't try to open your devices or pow
- and you risk an electrical shock. adapters. I here are no serviceable parts
- adult supervision. eraisticulation eraisticulation eraistical eraistic This product is designed as just an aid. It
- onr property. or appropriate measures to sateguard product isn't a substitute for insurance When used to monitor property, this
- your camera in places where it may affect esu of thew uoy it you want to use You must have permission and comply
- If the temperature is not appearing or with your doctor before installation. It you've got a pacemaker please check neone else's property or privacy.
- .tinu tnemecelqer temperature sensor. Please get in touch with our helpdesk to discuss a your parent unit, it may indicate a loose shows as 0°C/32°F on the display of
- If you need repairs, get in touch with our i ne partery can t pe removed or replaced. Battery safety information
- I he battery could explode it placed in a Take care when disposing of your product. verbqezk.
- leak flammable liquid or gas air pressure as the battery may explode or fire, a hot oven or is crushed or cut. Don't subject the product to extremely low

Using your Video Baby Monitor

In this section you'll find out how to use your baby monitor to make sure you get the best possible use out of it.

To start using your baby monitor, you'll need to turn both units on. You'll see where the Power buttons are located in the diagrams.

The features outlined below are all accessible through the **MENU** which can be opened by pressing the Menul button, using the \triangleleft and \triangleright buttons to navigate, \land and \checkmark to scroll through the sub menus and $\bigcirc^{\circ \kappa}$ to select the desired option. To return to the camera feed, simply press the Menul button.

\checkmark Monitoring volume and mute \checkmark

There are 8 volume settings. The default is 4.

- 1. In monitor mode, press \bigstar or \checkmark to change the volume.
- 2. Press or to confirm.

3. To turn the sound off completely, turn the volume down to 0.
✓ will be displayed on top of the screen.

O Screen brightness

There are 8 brightness levels. The default is 4.

1. When viewing the camera feed, press \checkmark or \gt to select the brightness level.

2. Press $\bigcirc^{\circ \kappa}$ to confirm.

There are 5 lullabies to choose from or you can play all 5 in sequence.

1. Press $\overline{}_{Menu}$ and select \mathbf{J} .

2. Press \land or \checkmark to choose the lullaby 1-5 or press 3° to play all five, then press $3^{\circ\kappa}$.

3. Press \land or \checkmark to select the volume from 1-3 and press \bigcirc^{CK} to save.

4. To stop the lullaby playing, select \oslash .

Talk Talk to your baby

To give your baby some words of comfort, press and hold down $\widehat{\mathsf{Talk}}$ on the parent unit and speak into the parent unit's microphone. The $\frac{1}{2}$ icon will be displayed at the bottom right corner. Release the button when you've finished speaking.

€ Pan/tilt and Zoom in/out

• To enter/exit the pan/tilt mode, press \bigcirc . When in Pan/tilt mode, press $\langle, \rangle, \land, \lor$ to move the image.

• To enter zoom mode, press \overline{Menu} , then press > to display \bigoplus , then press > or > to select the zoom level and press $\bigcirc^{\circ \kappa}$ to exit menu.

🖸 Set a reminder

You can set an alert to remind you of something you need to do, for example when your baby's next feed is due. You can set it for 2, 4 or 6 hours.

1. Press $\overline{}_{Menu}$, then press > to display O.

2. Press \land or \checkmark to select the reminder time (**2H**, **4H** or **6H**), then press $[\circ^{\ltimes}]$ to save. The O will be displayed on the top right of the screen.

3. To cancel the alert, select \oslash .

Set the screen to turn on and off automatically

You can set the screen to turn on by pressing any button. On this setting, the screen will turn off automatically when no button is pressed during 1, 3 or 5 minutes. **1.** Press $\overline{}_{Menu}$, then press > to display $\overline{}$ but.

2. Press \land and \checkmark to select 1, 3 or 5 minutes and press $\bigcirc^{\circ \kappa}$.

(B) Turn sound activated screen mode on or off

When set to On, the screen will turn on if noise is detected from the baby unit. If it's set to Off, the screen will stay off even if noise is detected. To use this feature, you need to set the standby mode first to 1, 3 or 5 minutes as described above.

1. Press Menu, then press > to display (B).

2. Press \wedge or \vee to select \checkmark (for On) or \bigstar (for Off) and press \bigcirc^{\ltimes} .

3. To turn the screen back on at any time, press the $\lfloor \circ \rfloor$.

Temperature sensor

The reading from the temperature sensor will be displayed at the top of the parent unit screen.

To change the temperature display from C to F:

- **1.** Press $\overline{M_{enu}}$, then press > to display \mathbb{A} and press $\overline{N_{enu}}$.
- 2. Press ∧ or ∨ to select °C or °F, then press ^{⊙K}.

(Night vision


So that you can see your baby at night, the baby unit automatically uses the light from its infrared LED lights to capture images in a dark room. Because of that, it can only show images in black and white. The & icon will be displayed at the top of the screen.

Other screen icon descriptions

- $\textbf{T}_{\textbf{III}} \; \text{Signal strength} \;$
- D Baby unit switched on
- **Q**1 Camera identification number e.g. Camera 1

Get to know your Video Baby Monitor

Find out how your baby monitor works by familiarising yourself with the buttons and lights.

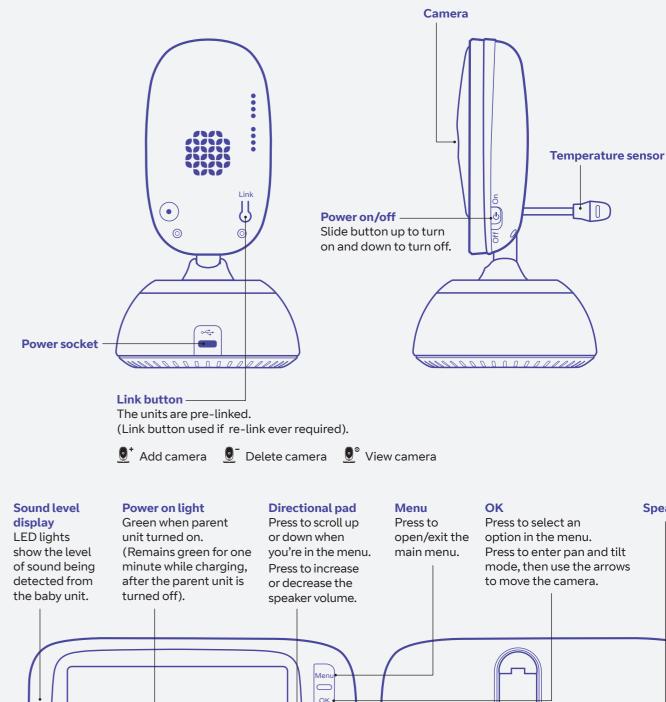

ок • -• ^ ٠ • ~ • Talk Ŷ BT **Directional pad** Charging/ Microphone battery light Press to move

left or right in the

or decrease the

brightness level.

menu or to increase

Blue when mains

power adapter is on,


red when battery low.

Microphone Po Pre the Pre to

Battery status (Full battery shown, scrolling when charging)

Sound on

🕻 Mute

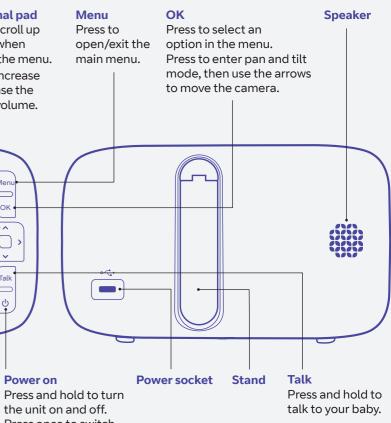

Press once to switch

to standby mode.