
Long Drawer - White

Assembly Instructions - Please keep for future reference

1911215

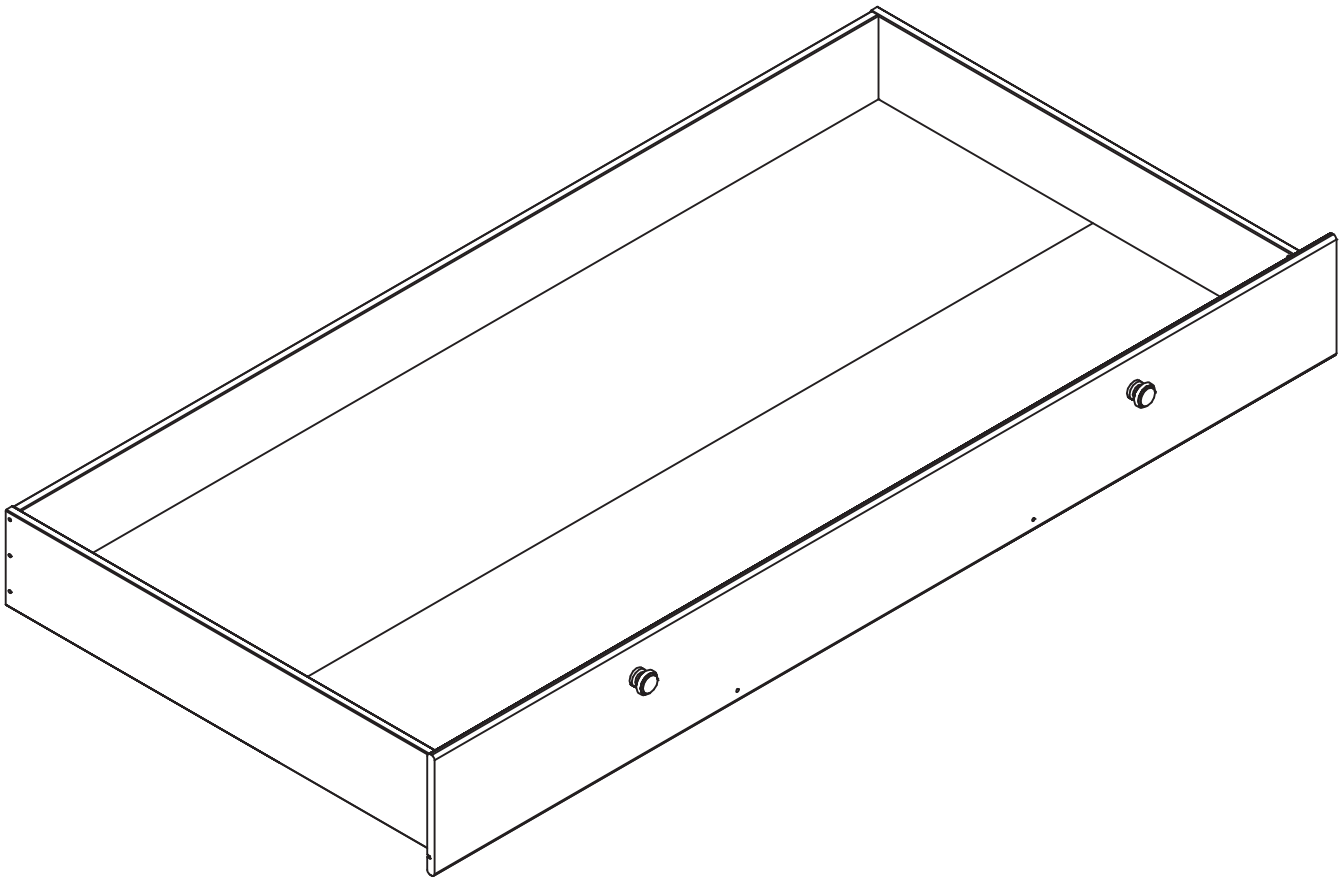

Dimensions

Length - 186cm
Depth - 91cm
Height - 21.5cm
Weight - 15kg

Important – Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:**
0045 7668 8055 or e-mail: order@flexa.dk

Issue 1 - 15/05/14

Safety and Care Advice

Important – Please read these instructions fully before starting assembly

• Check you have all the components and tools listed on pages 2 and 3.

• Remove all fittings from the plastic bags and separate them into their groups.

• Keep children and animals away from the work area, small parts could choke if swallowed.

• Make sure you have enough space to layout the parts before starting.

• Do not stand or put weight on the product, this could cause damage.

• Assemble the item as close to its final position (in the same room) as possible.

• Assemble on a soft level surface to avoid damaging the unit or your floor.

• Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.


• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Parts

If you have damaged or missing components, call the **Customer Helpline: 0045 7668 8055**


Please check you have all the parts listed below

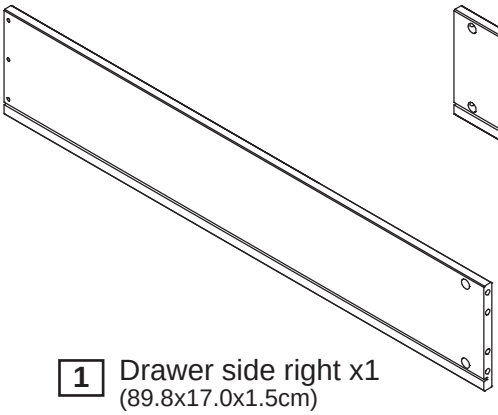


1 Drawer side right x1
(89.8x17.0x1.5cm)
No. 15-01508981-20

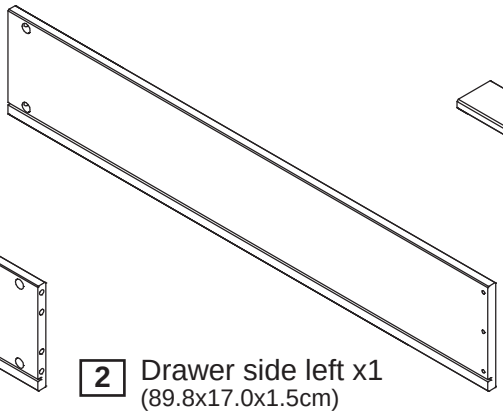


2 Drawer side left x1
(89.8x17.0x1.5cm)
No. 15-01508982-20

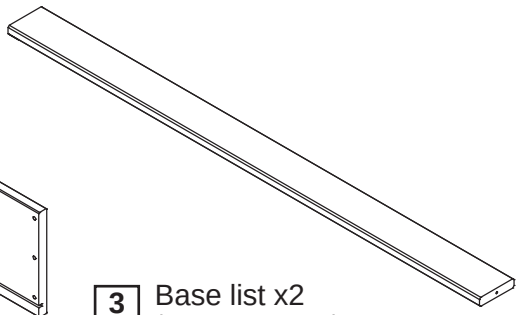


3 Base list x2
(88.2x6.5x1.5cm)
No. 12-01508821

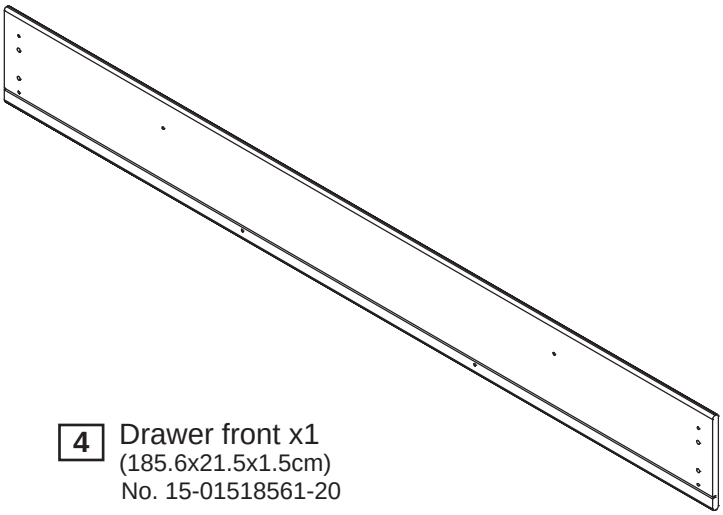

4 Drawer front x1
(185.6x21.5x1.5cm)
No. 15-01518561-20

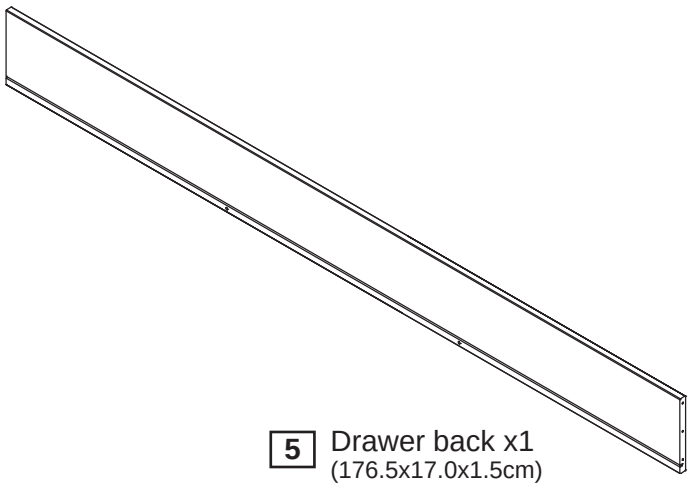

5 Drawer back x1
(176.5x17.0x1.5cm)
No. 12-01517651-20






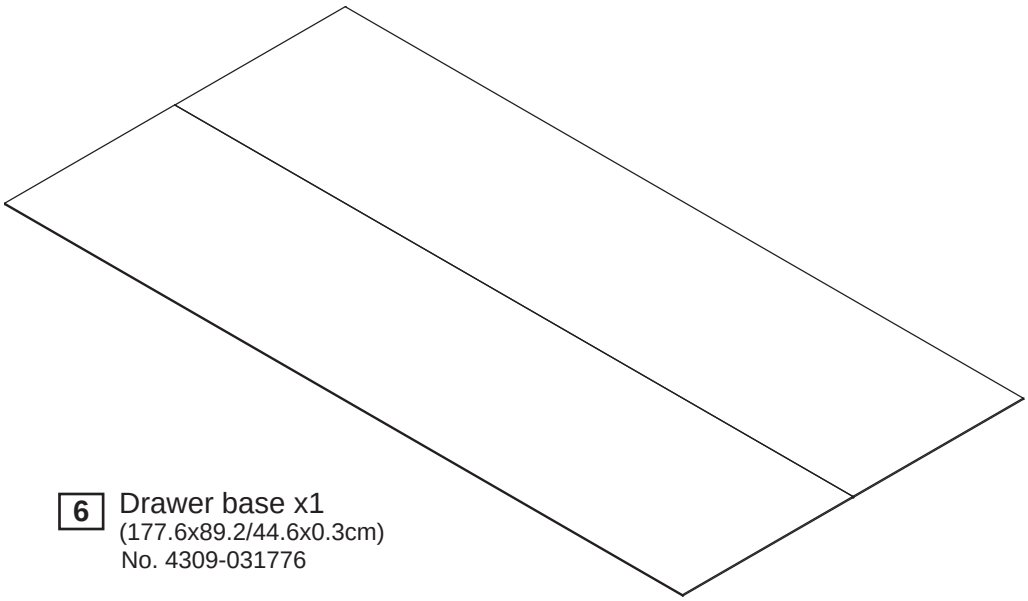


6 Drawer base x1
(177.6x89.2/44.6x0.3cm)
No. 4309-031776

Components - Fittings


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


No. 3901-40040 **A**  4,0x40mm Chipboard screw x12	No. 3902-35015 **B**  3,5x15mm Chipboard screw x8	No. 3903-40045 **C**  4,0x45mm Chipboard screw x2
No. 3930-08030 **D**  8x30mm Dowel x4	No. 3933-15010 **E**  Ø15x9,5mm Minifix cam x4	No. 3940-000241 **F**  Ø15/Ø6x24mm Spacer x2
No. 4020-005 **G**  Ø7x34mm Minifix bolt x4	No. 4003-002 **H**  Ø26x28,5mm Castor x4	No. 4001-022-20 **I**  Ø40x30mm Knob x2


Tools required

Phillips screwdriver (medium)




Flatblade screwdriver (medium)






Small hammer



Ruler/tape measure




Eye protection (when using a hammer or glue)

Assembly Instructions

Step 1


Attach dowels D to the drawer sides 1 and 2. It may be necessary to tap the dowels in very gently with small hammer.

Attach minifix bolts G to the drawer front 4.

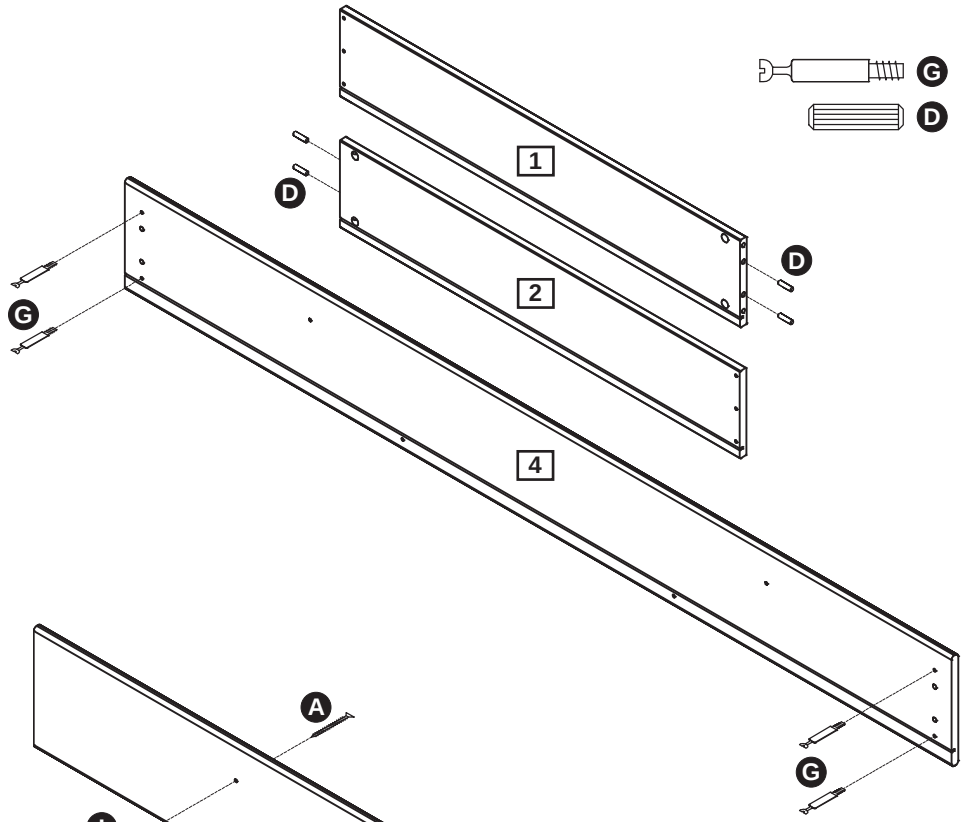


Step 2

drawer front 4 with screws A.

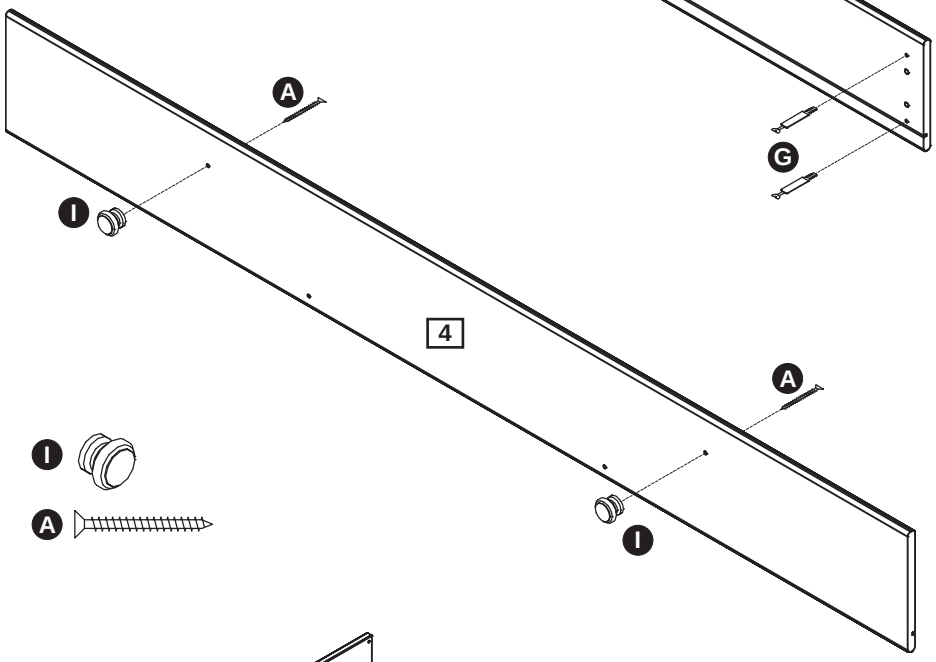

Step 3


1 and 2 to the drawer front 4 with the minifix cams E.

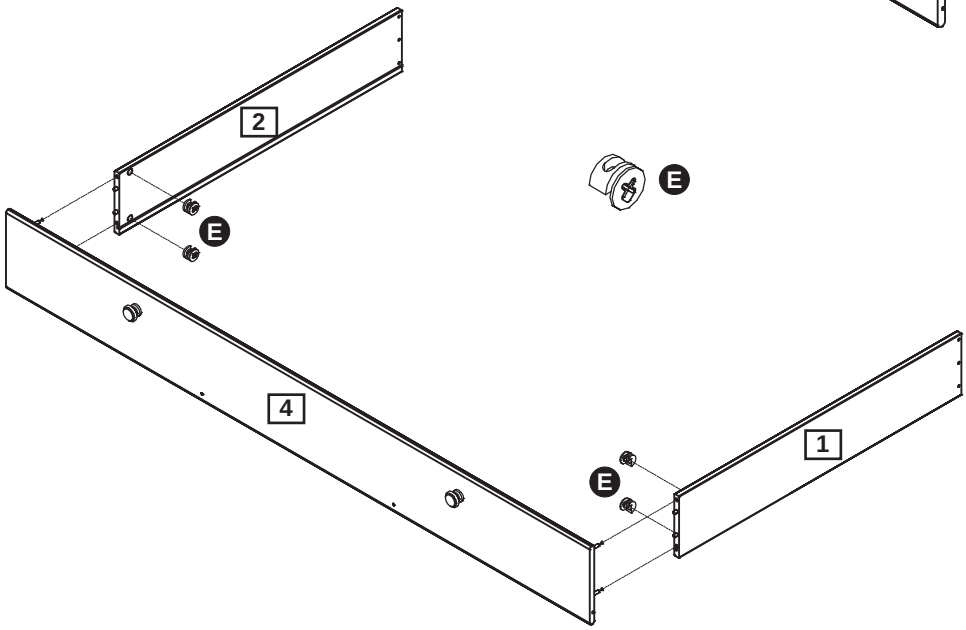

Assembly Instructions


Step 4

Push the drawer base 6 carefully into the grooves of drawer sides 1 and 2 so that it is placed into the groove on the drawer front 4.

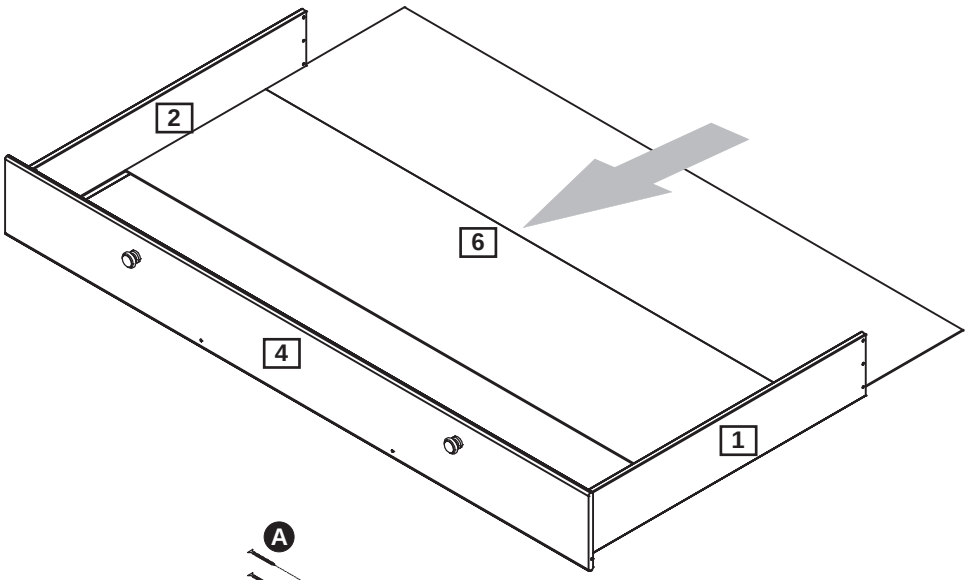

Step 5


Attach the drawer back 5 to the drawer sides 1 and 2 with the screws A.

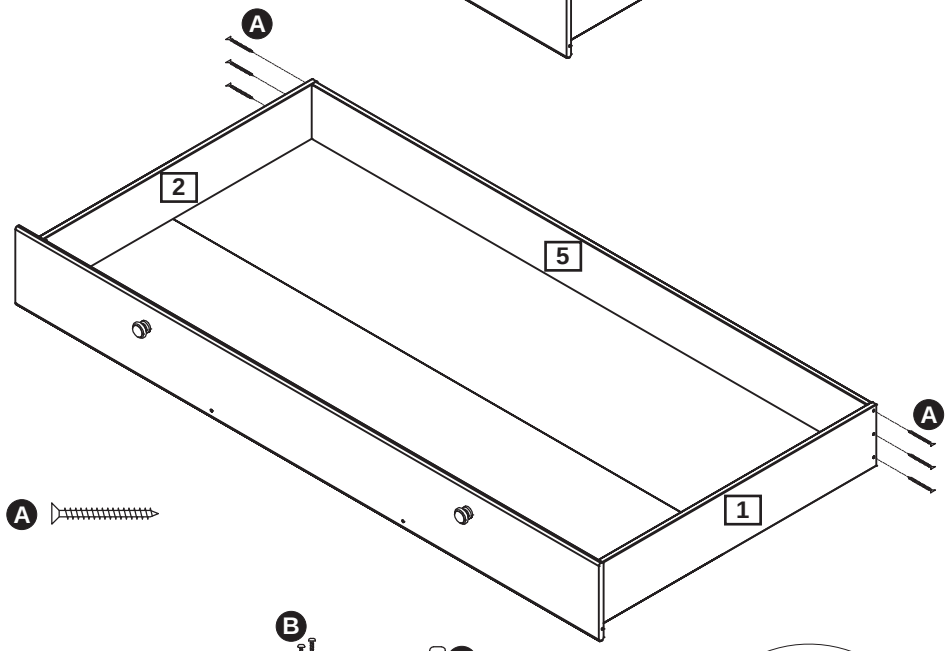

Step 6

Turn the drawer so that bottom side is up. Attach base lists 3 to the drawer front 4 and to the drawer back 5 with screws A.


Attach the castors H to the drawer sides 1 and 2 with screws B. Follow the measurements.

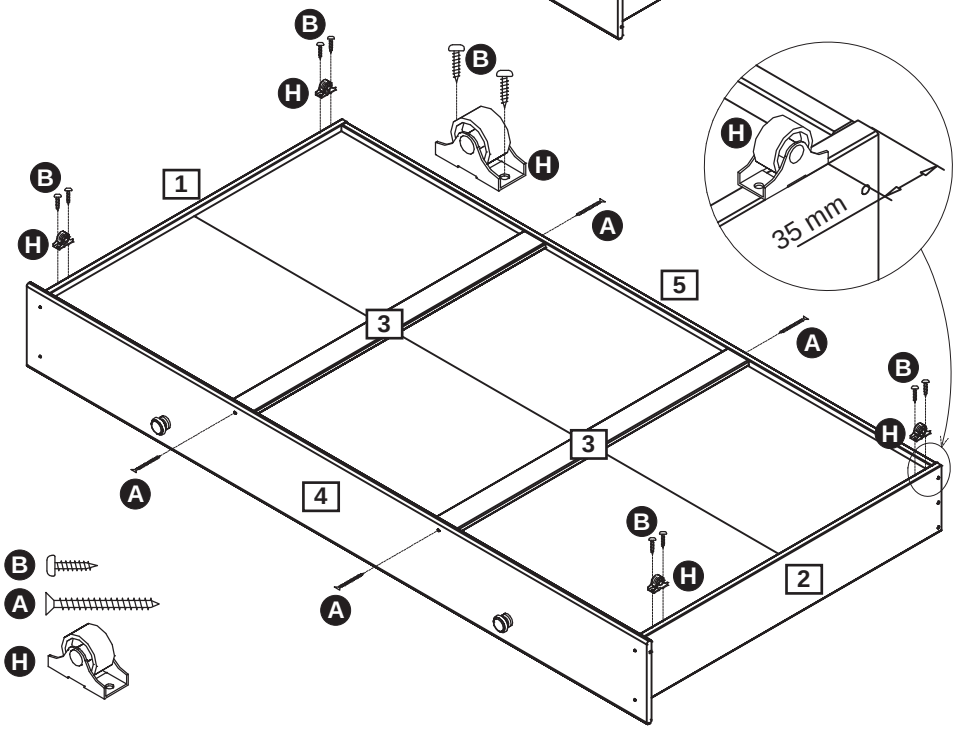


Assembly Instructions

Step 7

Attach spacers F to the front legs of your bed with screws C.
Follow the measurements.

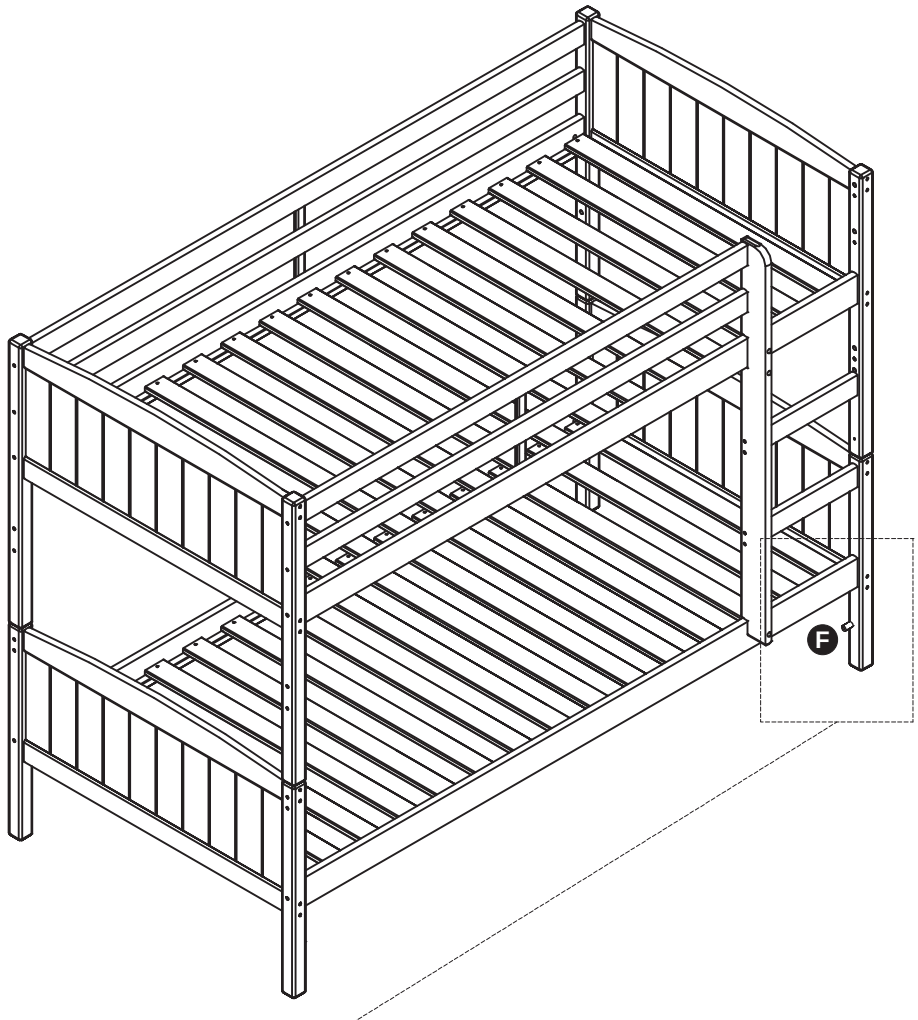

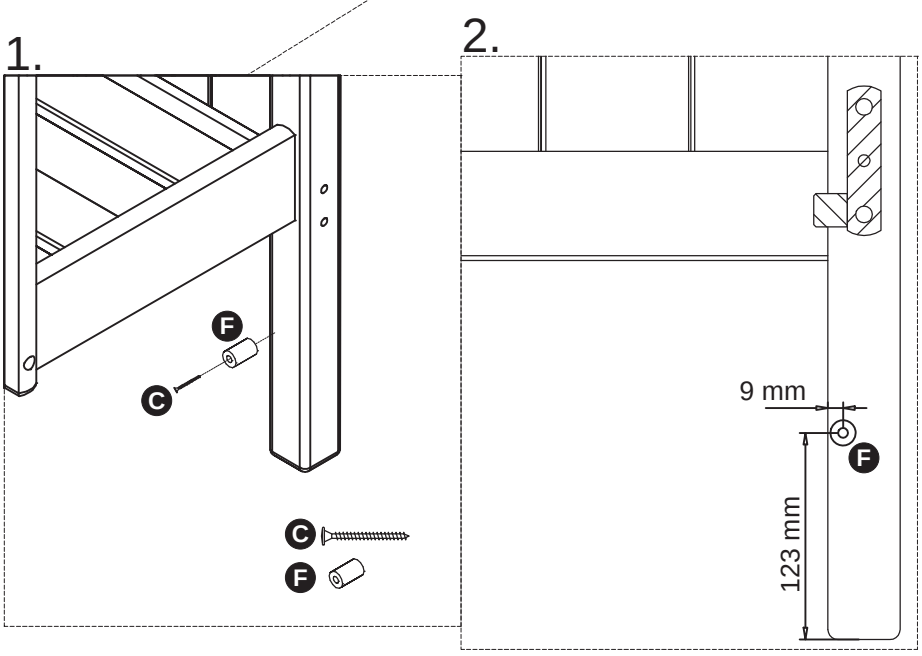

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 0045 7668 8055**
E-mail: order@flexa.dk