

# Cheval - 2 Door Mirror Robe


Assembly Instructions - Please keep for future reference

147/8985

151/3091

151/7626

147/4549

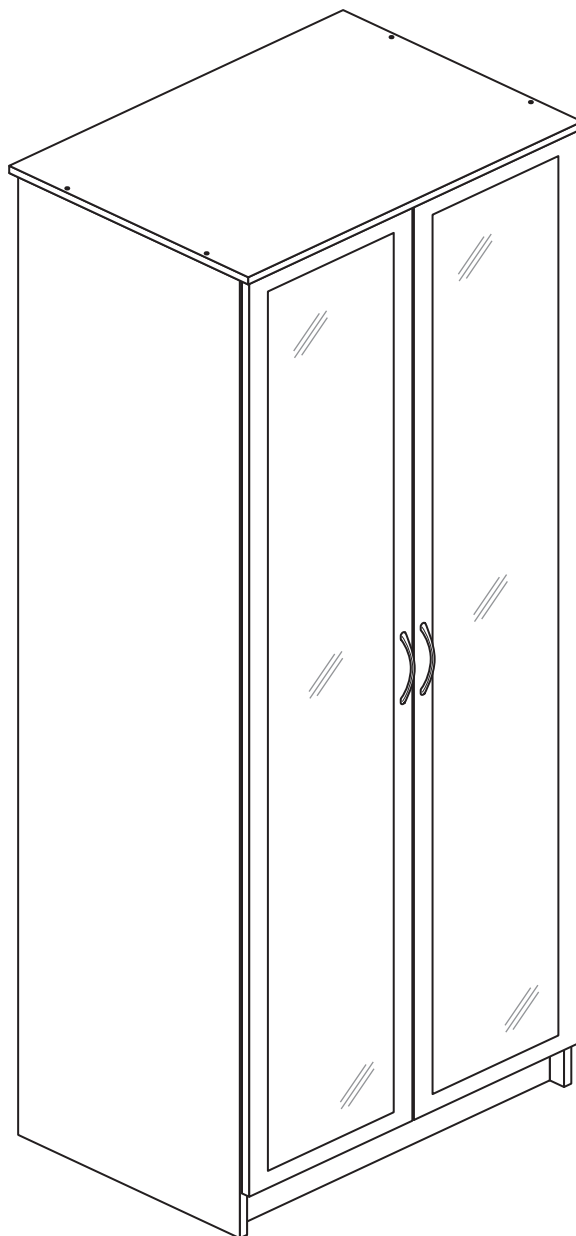

## Dimensions

Width - 69cm

Depth - 49.5cm

Height - 200cm




**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**

# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 52kgs. Please lift with care.
  - Check you have all the components and tools listed on pages 2 and 3.
  - Remove all fittings from the plastic bags and separate them into their groups.
  - Keep children and animals away from the work area, small parts could choke if swallowed.
  - Parts of the assembly will be easier with 2 people.
  - Make sure you have enough space to layout the parts before starting.
  - Do not stand or put weight on the product, this could cause damage.
  - Assemble the item as close to its final position (in the same room) as possible.
  - Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).
- 
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
  - **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.
  - Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

### IMPORTANT INFORMATION ABOUT THIS PRODUCT

This product complies with the requirements of BS 7449:1991 and has been manufactured by DECORATIVE PANELS FURNITURE LTD, TEESSIDE INDUSTRIAL ESTATE, THORNABY-ON-TEES, CLEVELAND, TS17 9LT.

The product code for this unit and the item code(s) for the glass components are listed in the Assembly Instructions along with a description of the type of glass used. All clear/tinted glass complies with the requirements of BS 6206 Class A. All mirrors comply with the requirements of BS 6206 Class C. If the glass component contained in this unit is chipped or broken consult the furniture manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the unit description and batch number or date of manufacture.

Do not place very hot or very cold items against or in close proximity to glass surface(s) unless adequately thick insulating material is used to prevent such items coming in contact with the glass.

Do not strike the glass with hard or pointed items.

Do not sit or stand upon horizontal glass surfaces.

When cleaning glass panels use a damp cloth or leather with washing up liquid or soft soap if necessary - do not use washing powders or any other substance containing abrasives since these substances scratch glass.

If stated in the instruction leaflet, it is essential that this unit is fixed to a wall.


**KEEP THESE INSTRUCTIONS FOR FUTURE USE**

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the panels listed below

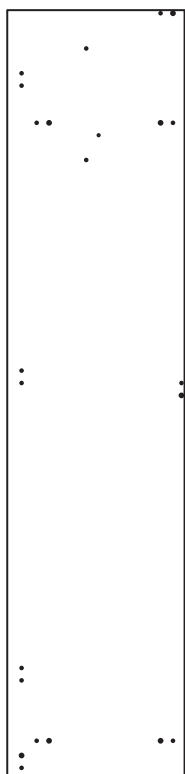


**1** Left Side (D2720A)  
(1981 x 458mm)

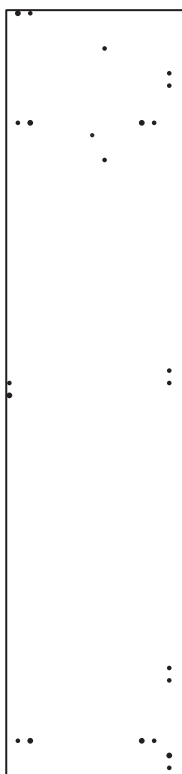

**2** Right Side (D2719A)  
(1981 x 458mm)




**3** Top (D2721A)  
(690 x 494mm)



**4** Horizontal (D2722A)  
(654 x 456mm) x 2




**5** Plinth (D2723A)  
(654 x 86mm)




**6** Rail (D2724A)  
(654 x 86mm) x 2



**7** Hanging Rail (FHR646)  
(646mm long)

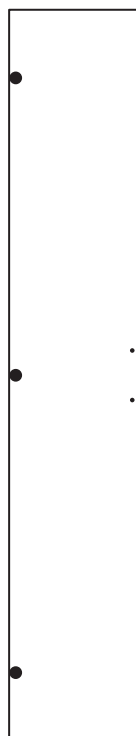

**8** Mirror Door (D2725MA)  
(1888 x 337mm) x 2  
(Mirror - SG24  
1817 x 260mm  
Safety Back SAR)

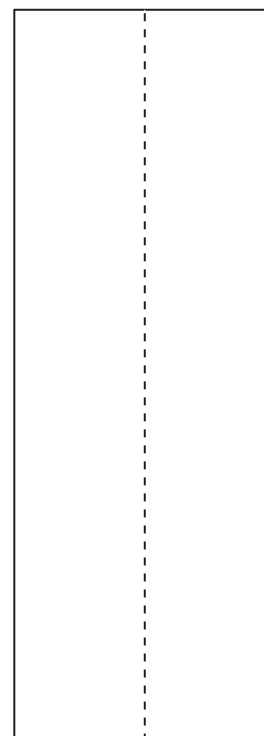

**9** Back (X1890-674)  
(1890 x 674mm)

















# Components - Fittings






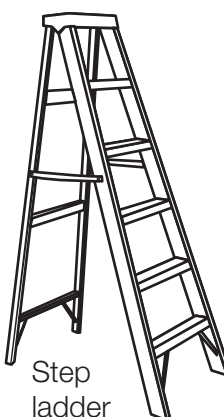




If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

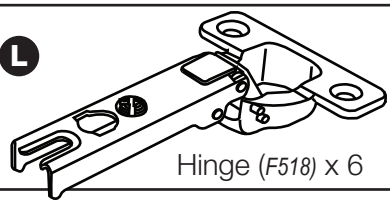
**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 18	<b>B</b>  Metal dowel (F901) x 14	<b>C</b>  Large locking nut (F900) x 14
<b>D</b>  Nail (F51) x 35	<b>E</b>  40mm Screw (F910) x 4	<b>F</b>  19mm Screw (F461) x 4
<b>G</b>  13mm Screw (F79) x 1	<b>H</b>  13mm Screw (F63) x 16	<b>I</b>  Rail Holder (F891) x 2
<b>J</b>  Bracket (F327) x 1	<b>K</b>  Hinge plate (F523) x 6	<b>L</b>  Hinge (F518) x 6
<b>M</b>  Handle (F274) x 2	<b>N</b>  Plastic Nail (F91) x 4	

## Tools required

 Rule	 Spirit level	 Eye protection (when using a hammer or drill)	 Cross-head screwdriver	 Electric drill (only use when drilling into walls)	 Step ladder
 Square	 Scissors	 Hammer	 Bradawl		

Ruler - Use this ruler to help correctly identify the screws

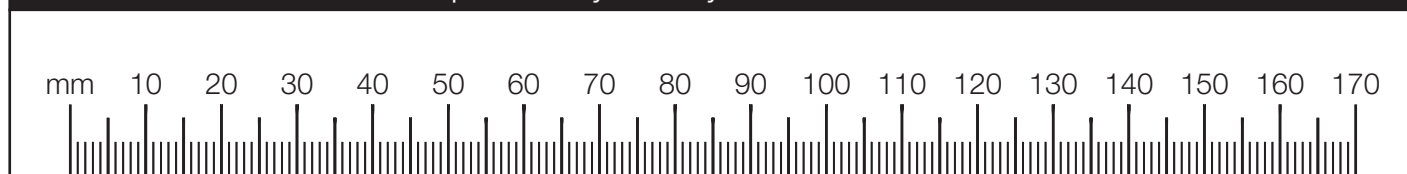

# Assembly Instructions

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
 numbers below

## Step 1

### Prepare the left side

Tap 2 wooden dowels **A** into the left side **1**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.


Screw 7 metal dowels **B** into the left side **1**.

**Note:** Tighten the metal dowels up fully against the panels.

Fit 3 hinge plates **K** onto the left side **1**, making sure that the slot is facing towards the finished front edge.

Fit the rail holder **I** to the left side **1** using 2 screws **H**.

To fit the rail holder, screw through its top hole and into the shallow mark hole drilled in the panel. Make sure that it is fitted straight, in line with the panel edges and then fit another screw using the lower hole.

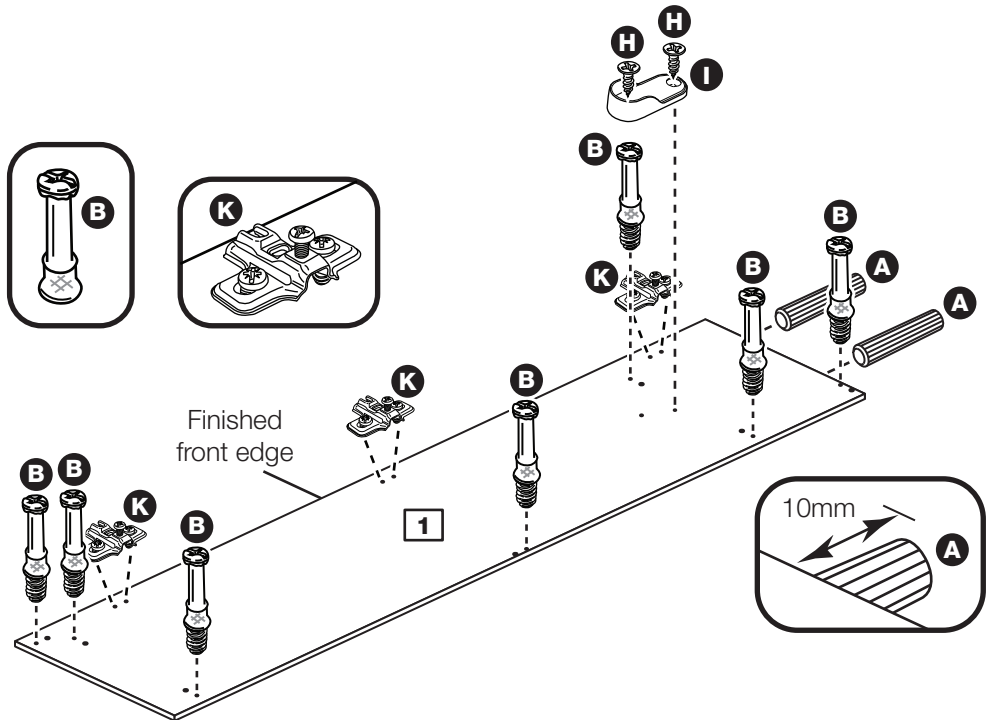

## Step 2


### Prepare the right side

Tap 2 wooden dowels **A** into the right side **2**.

Screw 7 metal dowels **B** into the right side **2**.

Fit 3 hinge plates **K** onto the right side **2**, making sure that the slot is facing towards the finished front edge.

Fit the rail holder **I** to the right side **2** using 2 screws **H**.

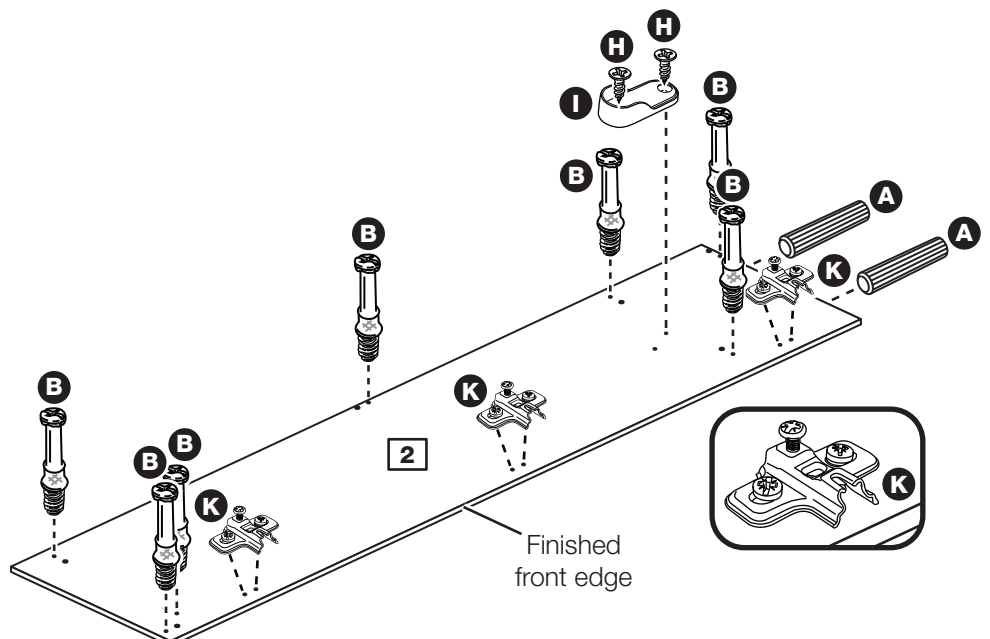

# Assembly Instructions


## Step 3

### Prepare the 2 horizontals

Tap 4 wooden dowels **A** into each horizontal **4**.

Insert 4 large locking nuts **C** into each horizontal **4**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

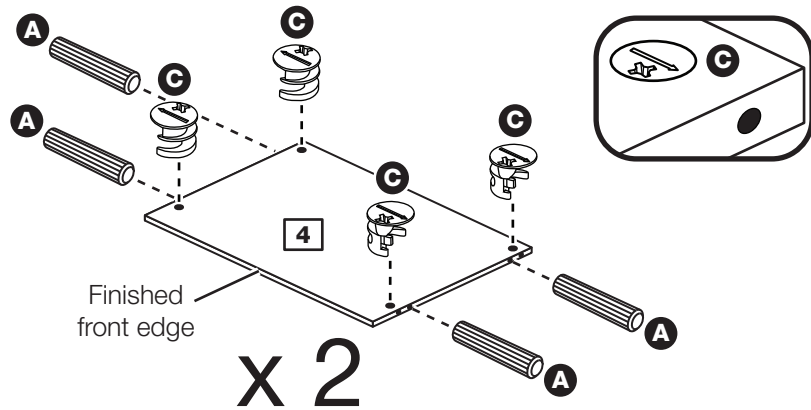


## Step 4

### Fit the 2 horizontals to the right side

Push the 2 horizontals **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted each horizontal **4**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

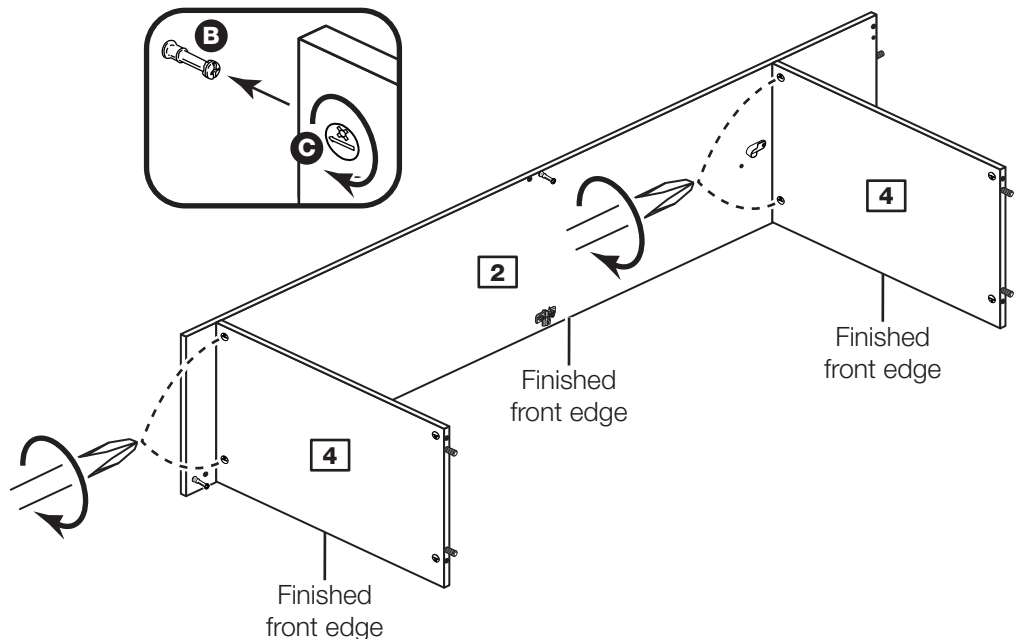


## Step 5

### Prepare the plinth and the 2 rails

Tap 2 wooden dowels **A** into the plinth **5** and each of the 2 rails **6**.

Insert 2 large locking nuts **C** into the plinth **5** and each of the 2 rails **6**.

**Note:** The plinth and the 2 rails can have a plain chipboard surface.

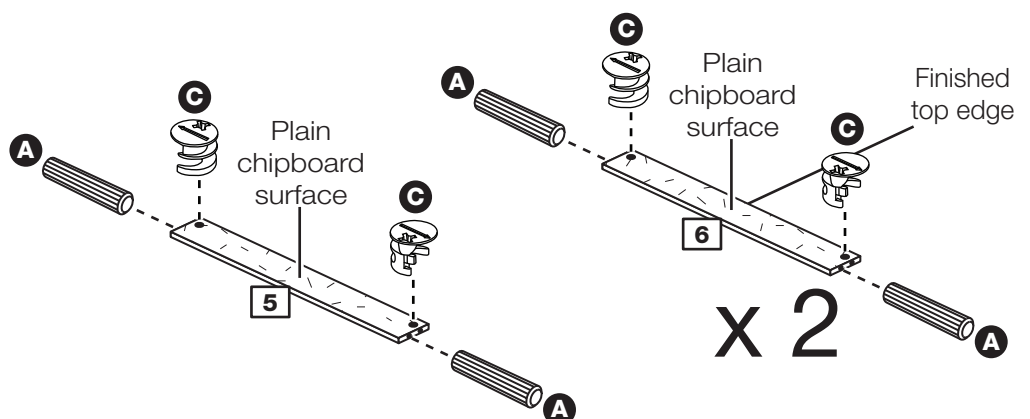

**Note:** The rails have a finished top edge.

# Assembly Instructions

## Step 6

### Fit the plinth and rails


Push the plinth **5** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **C** fitted to the plinth **5**.

Push the 2 rails **6** onto the right side **2**.

Use a screwdriver to tighten the large locking nuts **C** fitted to the 2 rails **6**.

**Note:** The 2 rails have a finished top edge.

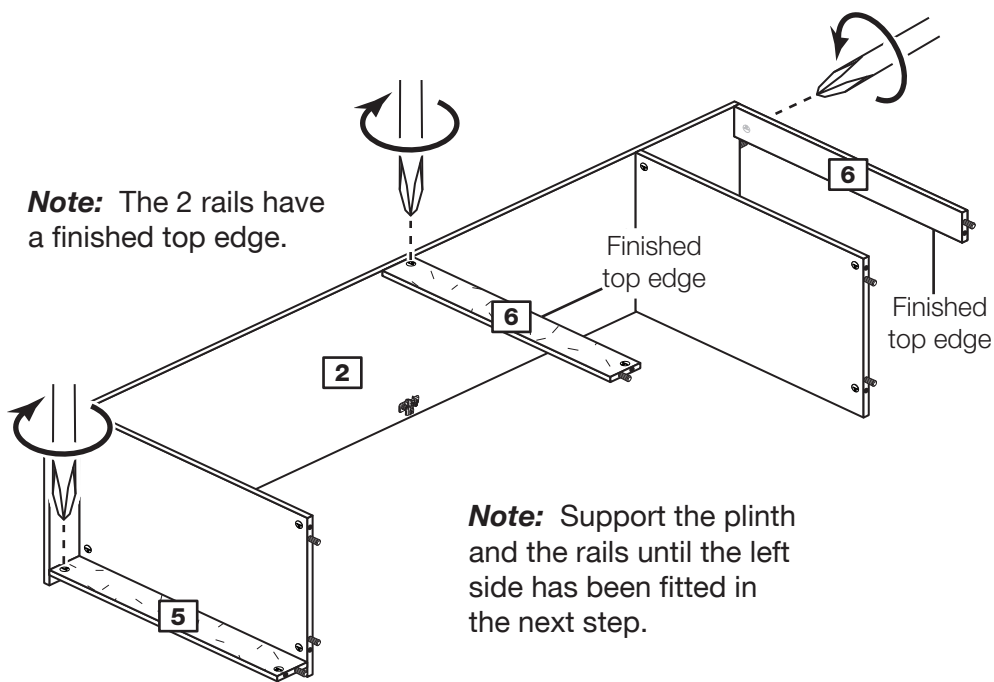


## Step 7

### Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 7 large locking nuts **C** fitted to the horizontals **4**, the plinth **5** and the 2 rails **6**.

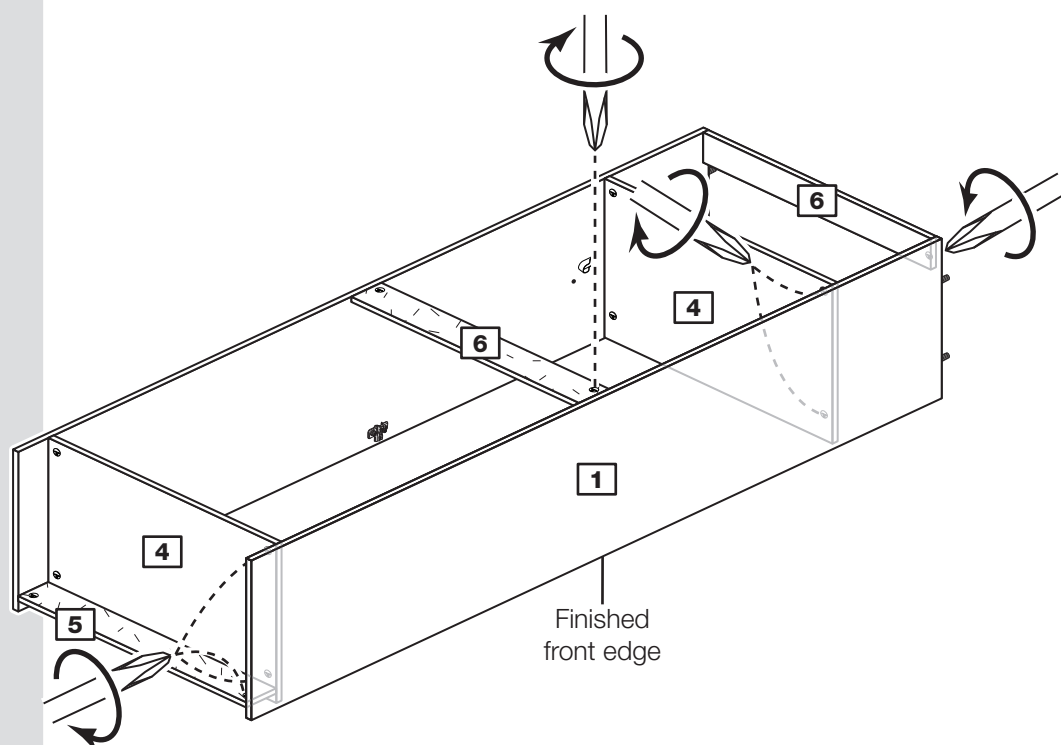


# Assembly Instructions

## Step 8

### Fit the top and the plastic nails

Push the top **3** onto the assembly and secure it to the sides **1** and **2** using 4 screws **E**.

Tap 2 plastic nails **N** into the bottom edge of each of the sides **1** and **2** as shown.

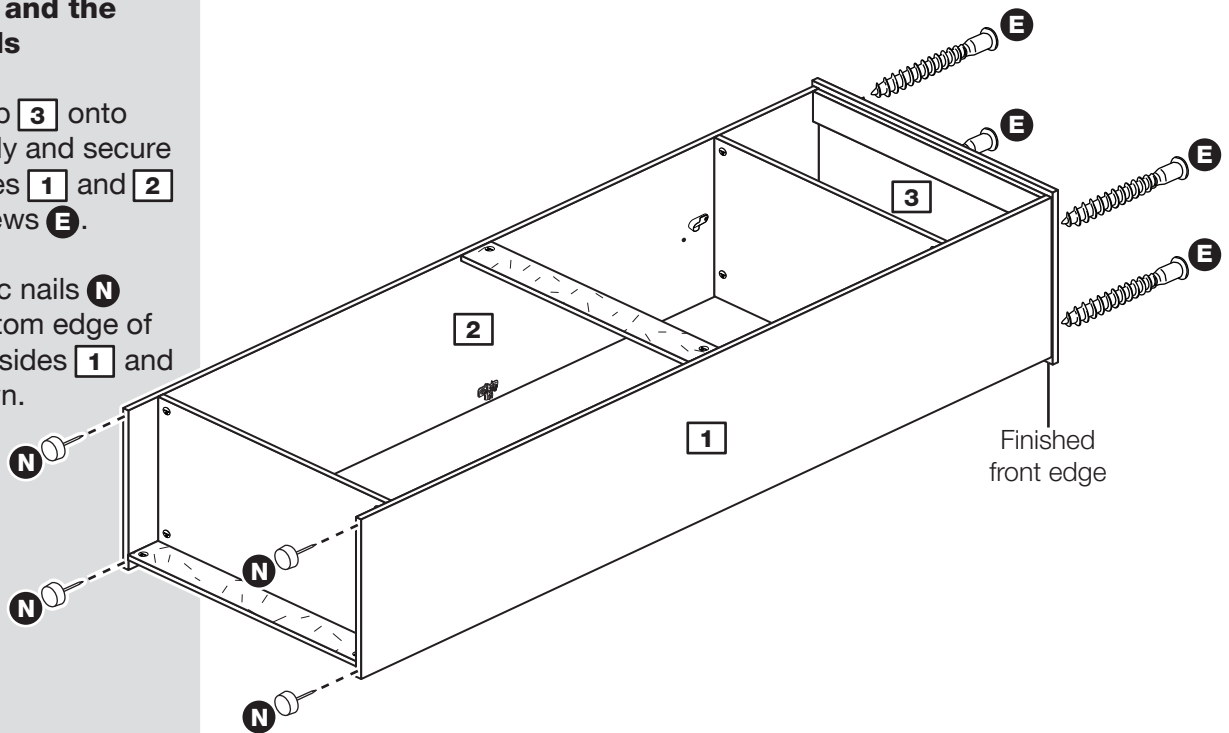

## Step 9

### Fit the back

**a:** Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.


**b:** Place the back **9** onto the unit, making sure it is pushed up against the top **3**.

Nail **D** around the outside edges of the back **9**.

**Note:** Nails should be spaced about 150mm apart.

**Stand the unit up for the next step.**

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

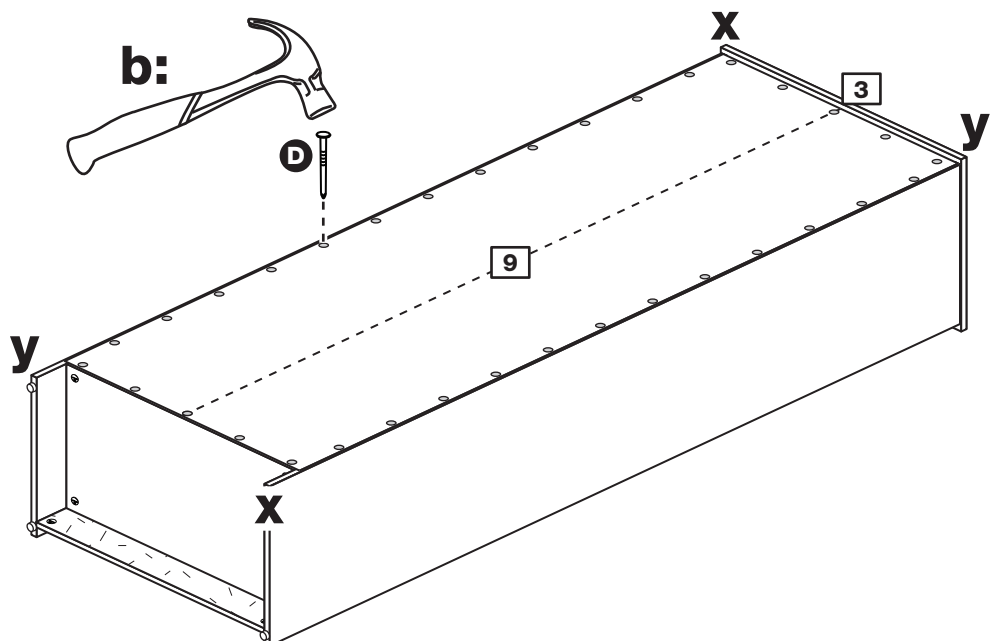



**Warning:** The unit is heavy. Lift with care.

# Assembly Instructions

## Step 10

### Fit the hanging rail

Push the hanging rail **7** into the rail holders **I** fitted to the side panels.

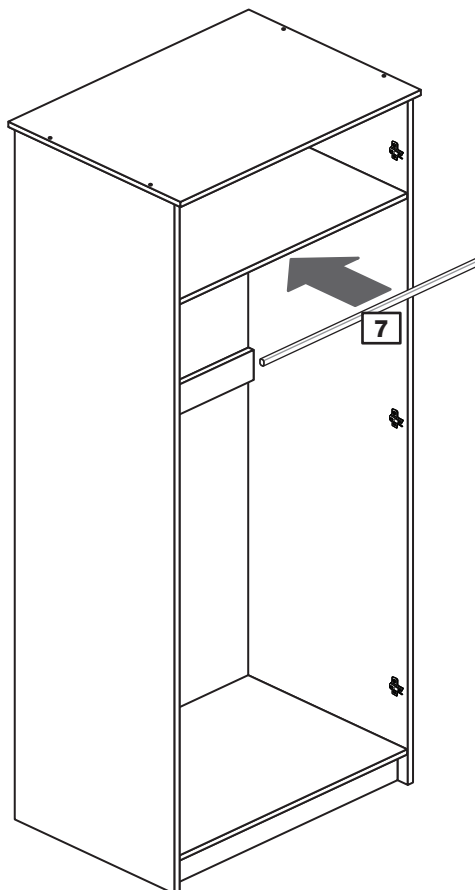

## Step 11

### Prepare the 2 doors



Push fit 3 hinges **L** into each of the doors **8**.

Secure each hinge with 2 screws **H**.

**Note:** Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.



**Warning:**  
Glass! Handle  
with care

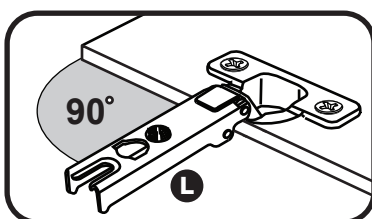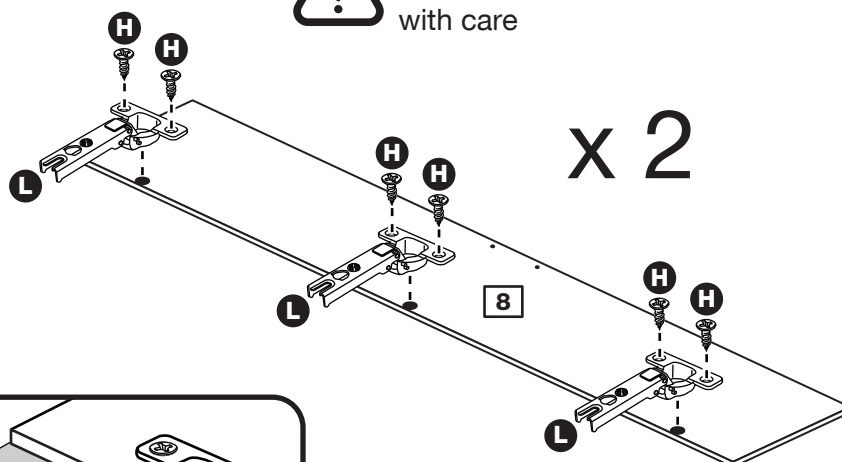

# Assembly Instructions

## Step 12

### Fit doors and handles

**Note:** The easiest way to attach each door **8** is to fit the top hinge first, then align and fit the other hinges.


**a:** Push the hinge **L** onto the front part of the hinge plate **K**. The recess at the bottom of screw B goes into the slot in the hinge plate.

**b:** Keep the hinge **L** FLAT against the hinge plate **K** as you slide it across as far as it will go. Tighten screw A.

**c:** The hinge **L** must be flat against the hinge plate **K** prior to any adjustment.


**d:** The hinge **L** must NOT be AT AN ANGLE to the hinge plate **K** when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

**e:** Attach a handle **M** to each door **8** using 2 screws **F**.

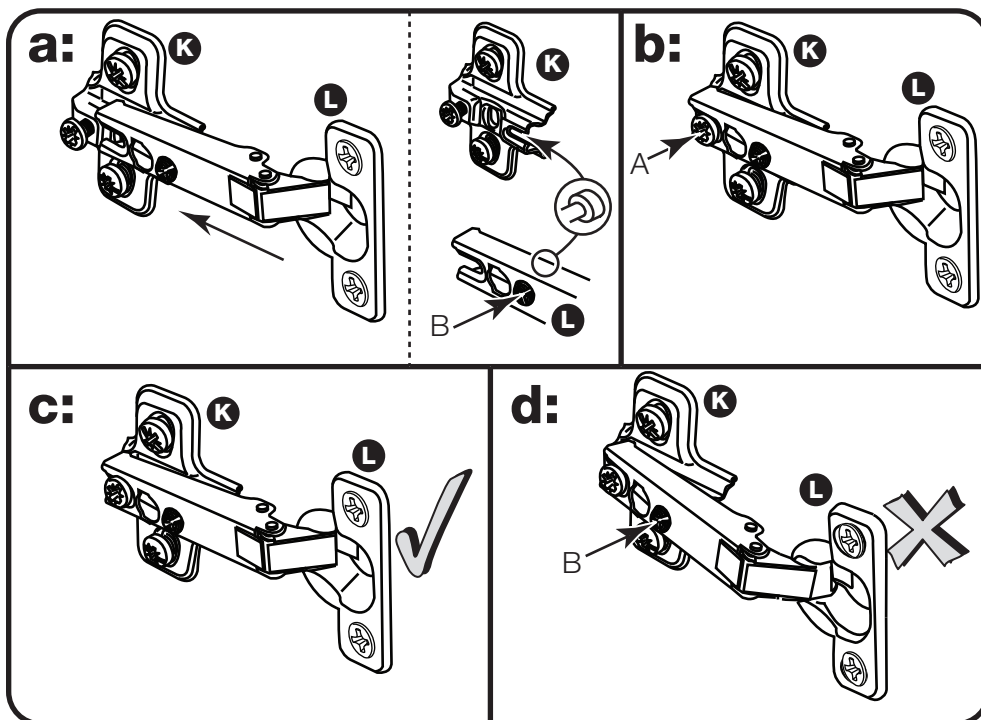

**Warning:**  
Glass! Handle  
with care

**e:**

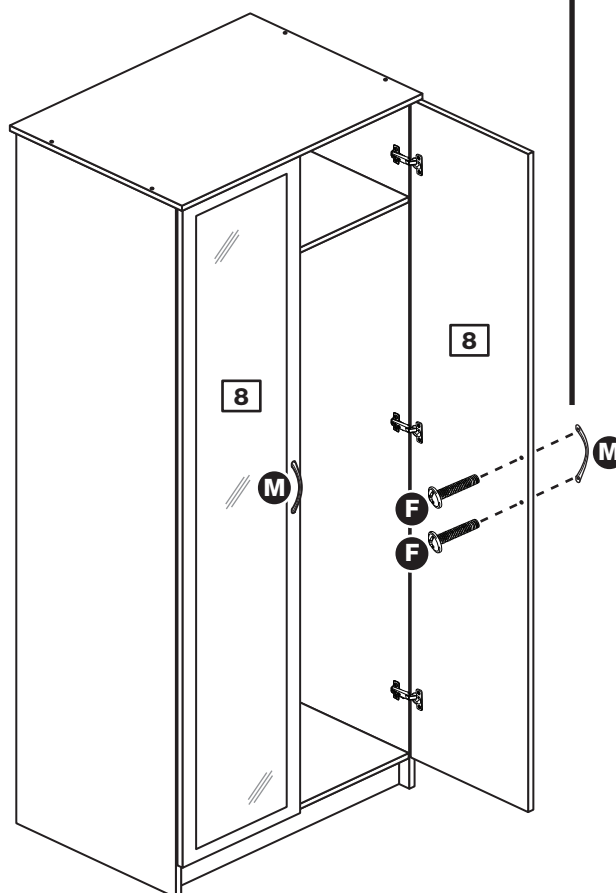

# Assembly Instructions

## Step 13

### Adjust the doors if needed

**a:** Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

### **b:** Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

### **c:** Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

### **d:** Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

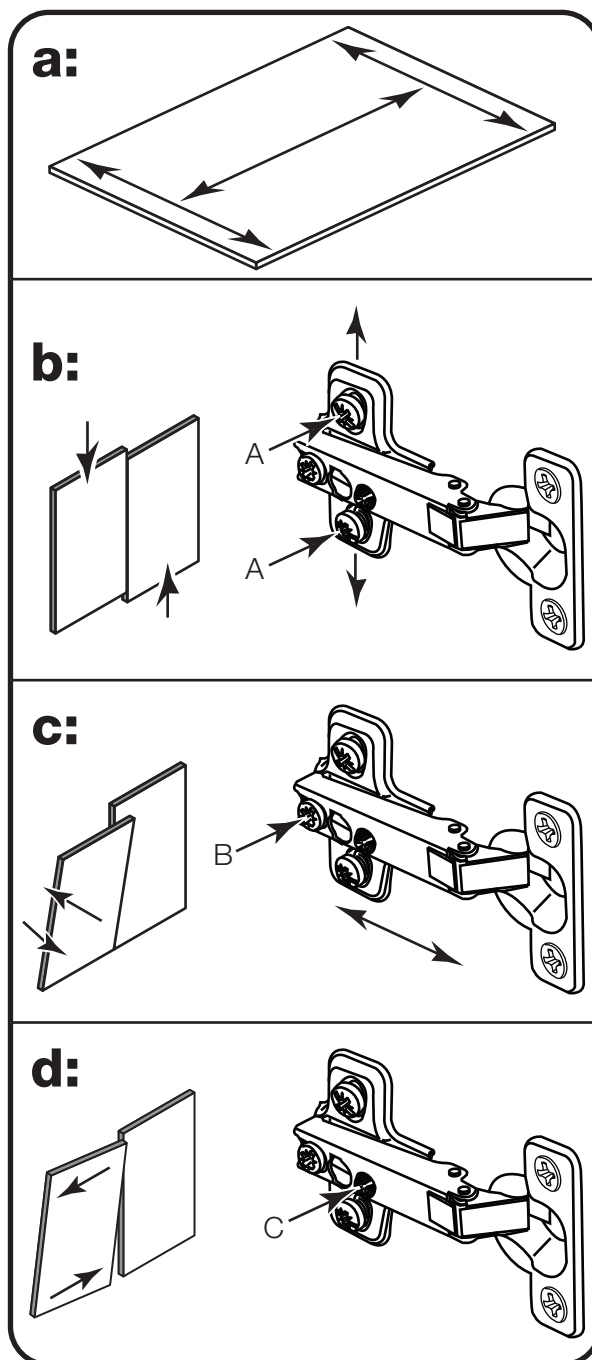

# Assembly Instructions

## Step 14

### Fit the bracket

To prevent possible overbalancing, we recommend that this unit is secured to a suitable wall by use of the bracket **J** fitted to the top of the unit.

Fixings are not supplied, as they will need to suit the wall type and the length of screw will depend on the distance from the back of the unit to the wall.

Fix the bracket **J** loosely onto the top of the unit using screw **G** and mark the wall for the wall fixing.

Swivel the bracket **J** away from the wall and drill a hole in the wall using a suitable drill bit and fit your wall fixing.

Swivel the bracket **J** back and fix the bracket to the wall, then tighten screw **G**.

**Note:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.




**Warning:** The unit is heavy. Lift with care.

**Assembly is complete**

## IMPORTANT

If you have purchased the Cheval Overbed Cupboards, you will need to fix them to the wall **BEFORE** you fix the Robe to the wall.

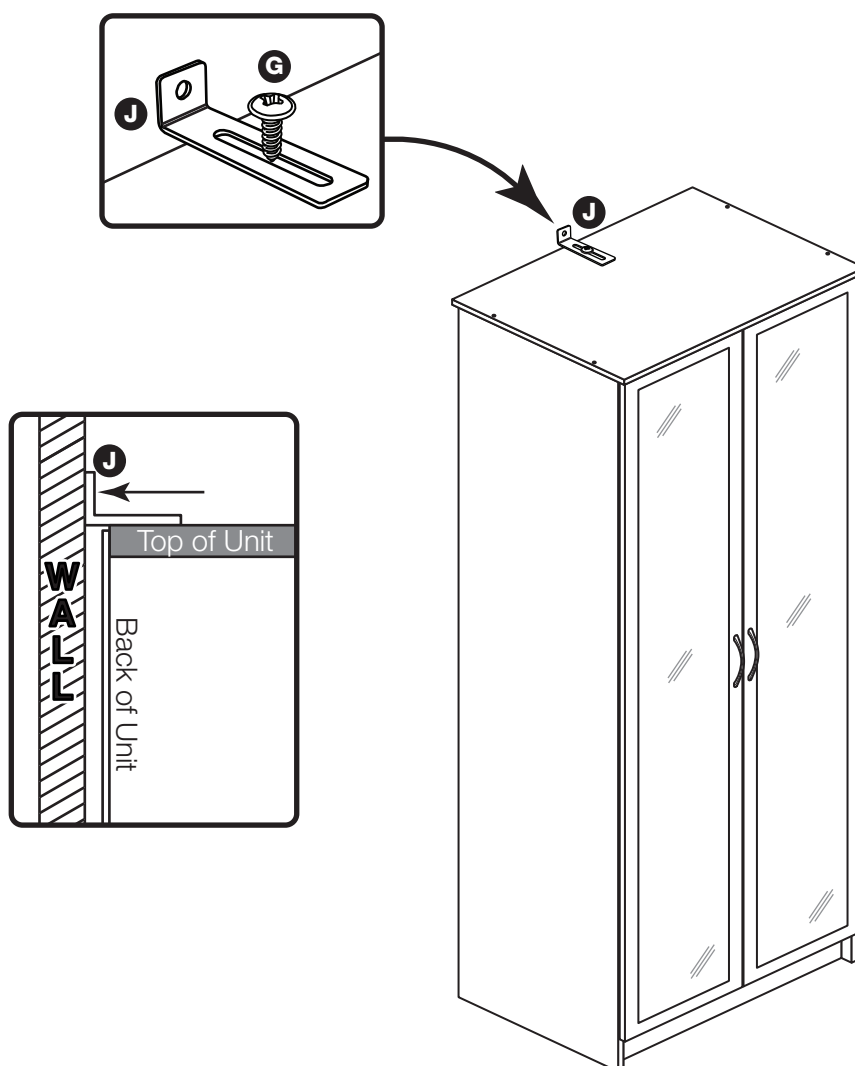

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# Cheval - Bedside


Assembly Instructions - Please keep for future reference

147/3100

152/8794

152/7939

146/1480

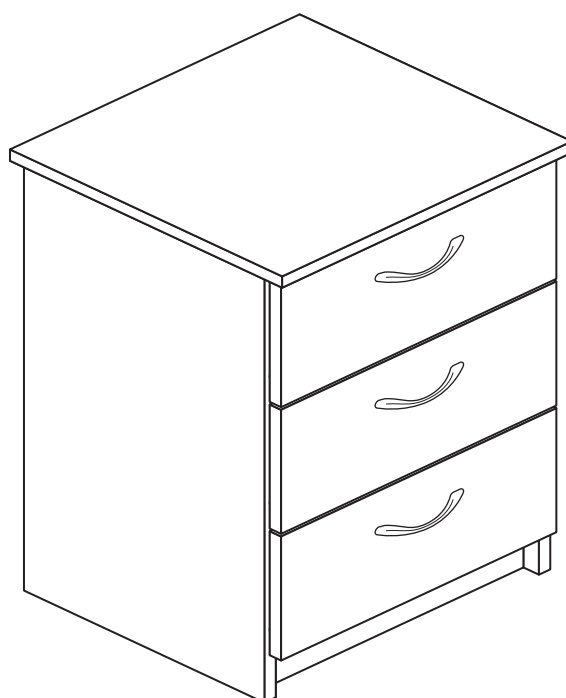

## Dimensions

Width - 38.5cm

Depth - 36cm

Height - 58cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 12kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below


Please check you have all the panels listed below

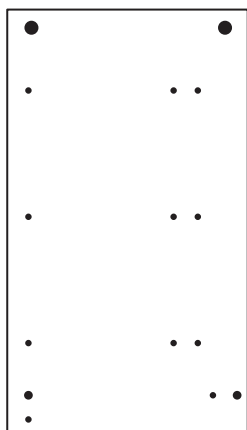


**1** Left Side (D2736A)  
(562 x 318mm)

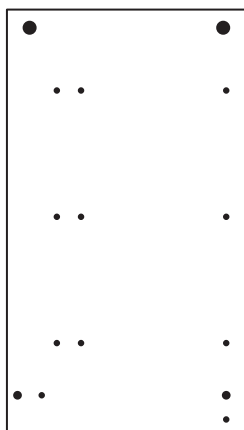


**2** Right Side (D2735A)  
(562 x 318mm)



**3** Top (D2734A)  
(383 x 360mm)




**4** Rail (D2737A)  
(348 x 66mm) x 2




**5** Drawer Front (D2738A)  
(364 x 164mm) x 3




**6** Drawer Back (W311-124)  
(311 x 124mm) x 3




**7** Left Drawer Side (W300-124LH)  
(300 x 124mm) x 3



**8** Right Drawer Side (W300-124RH)  
(300 x 124mm) x 3



**9** Drawer Base (T322-297)  
(322 x 297mm) x 3

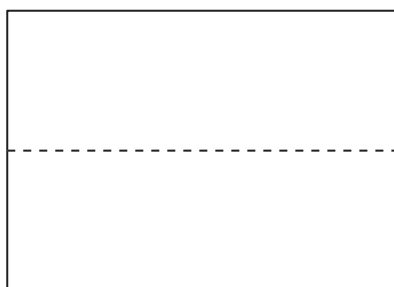

**10** Back (X515-370)  
(515 x 370mm)
















# Components - Fittings


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 4	<b>B</b>  Metal dowel (F901) x 14	<b>C</b>  Nail (F51) x 12
<b>D</b>  Large locking nut (F900) x 8	<b>E</b>  Small locking nut (F3) x 6	<b>F</b>  Plastic Nail (F91) x 4
<b>G</b>  19mm Screw (F461) x 6	<b>H</b>  9mm Screw (F74) x 6	<b>I</b>  9mm Screw (F73) x 12
<b>J</b>  Drawer runner (F1004) x 6		<b>K</b>  Knock-in Peg (F171) x 12
<b>L</b>  Handle (F273) x 3	<b>M</b>  Wedgefix (F639) x 6	

## Tools required



Rule



Cross-head  
screwdriver



Scissors




Hammer



Eye protection  
(when using a  
hammer or drill)

**Ruler** - Use this ruler to help correctly identify the screws

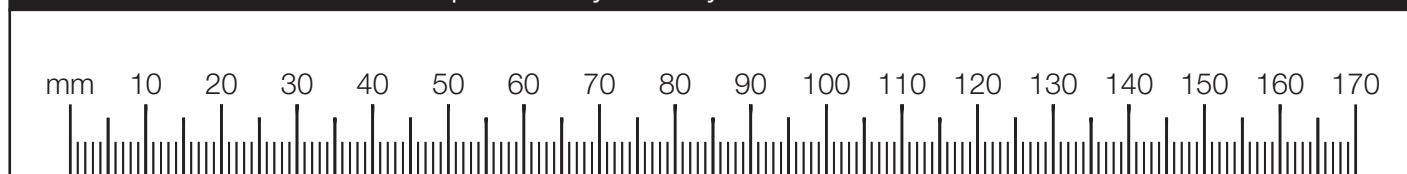

# Assembly Instructions


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

## Step 1

### Prepare the 3 drawer fronts

Screw 2 metal dowels **B** into each of the 3 drawer fronts **5**.

**Note:** Tighten the metal dowels up fully against the panels.

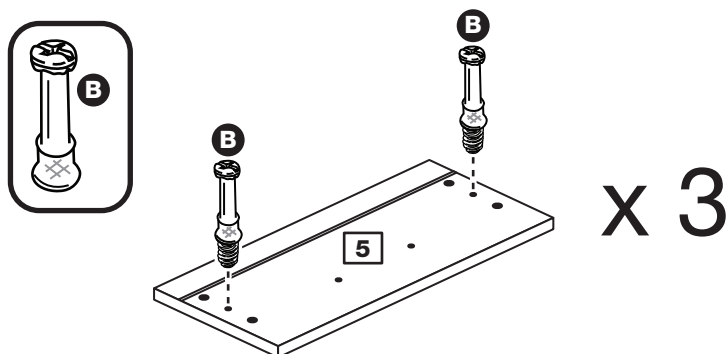


## Step 2

### Prepare the drawer sides

Insert a small locking nut **E** into the hole shown on the left drawer side **7** and the right drawer side **8**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

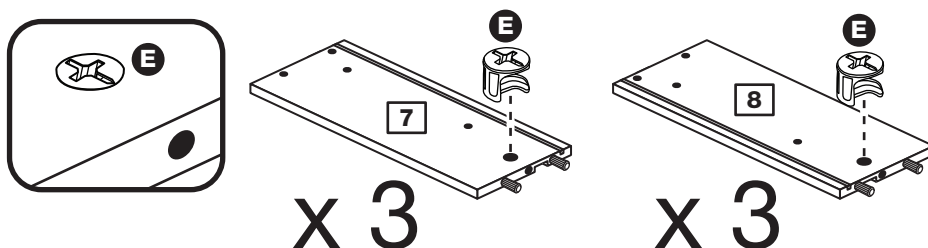


## Step 3

### Attach the drawer sides to the drawer front

Push the left drawer side **7** and right drawer side **8** onto the back of the drawer front **5**.

Turn the small locking nuts **E** on the left drawer side **7** and right drawer side **8**.

**Note:** Turn the locking nuts **E** clockwise to secure panels - more than 1/2 a turn.

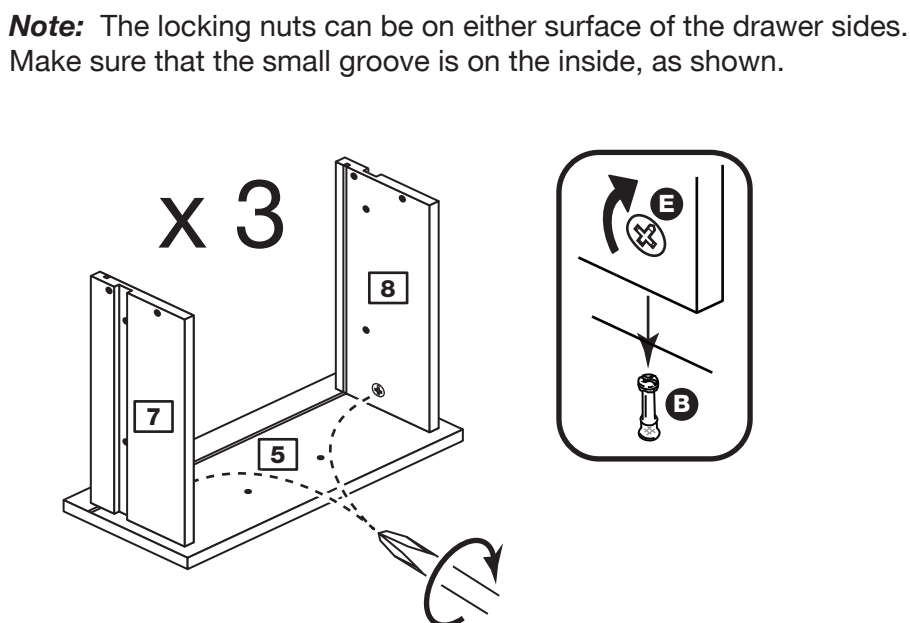


# Assembly Instructions

## Step 4

### Fit the drawer base

Slide the drawer base **9** down the grooves in the drawer sides **7** and **8** and down into the groove in the drawer front **5**.

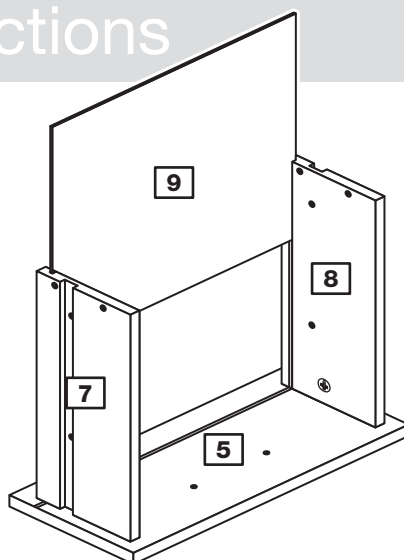

x 3


## Step 5

### Fit the drawer back

Fit the drawer back **6** between the drawer sides **7** and **8**.

Make sure that the drawer base **9** fits into the groove in the drawer back **6**.

Hold the drawer back **6** in position and tap the knock-in pegs **K** through the holes in the drawer sides **7** and **8**.

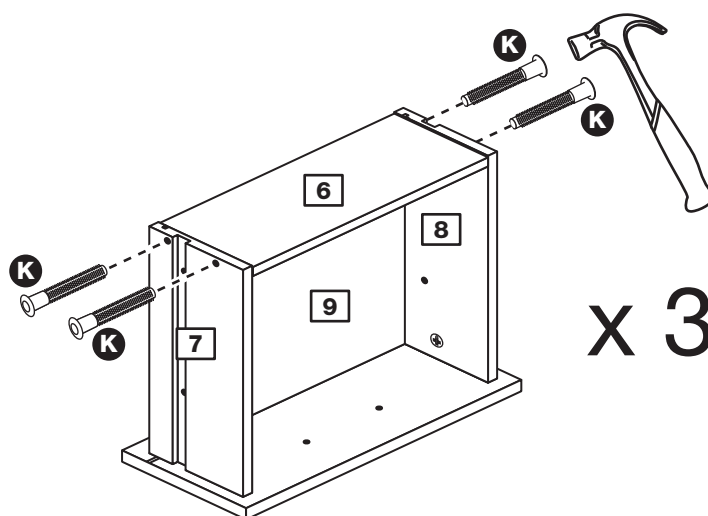


x 3

## Step 6

### Attach the handle

Attach a handle **L** to each drawer front **5** using 2 screws **G**.

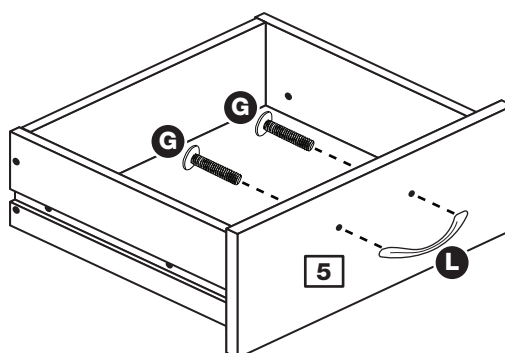


x 3


## Step 7

### Fit the wedgfixes

Turn the drawer assemblies over and slide 2 wedgfixes **M** into the front and back grooves, as shown, and tighten up the screws.

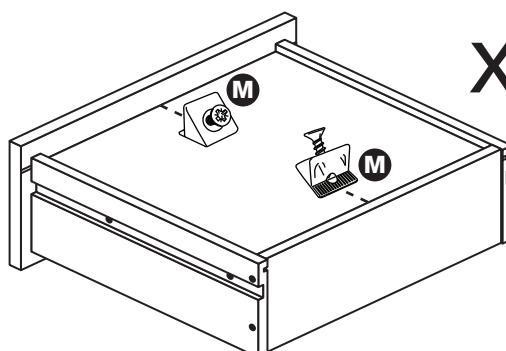

x 3



# Assembly Instructions

## Step 8

### Prepare the left side





**a:** Place 3 runners **J** on the left side **1** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the left side **1**.

**c:** Screw 2 metal dowels **B** into the left side **1**.

Insert 2 large locking nuts **D** into the left side **1**.

**Note:** The arrow on the locking nuts **must** point towards the hole in the edge of the panel.

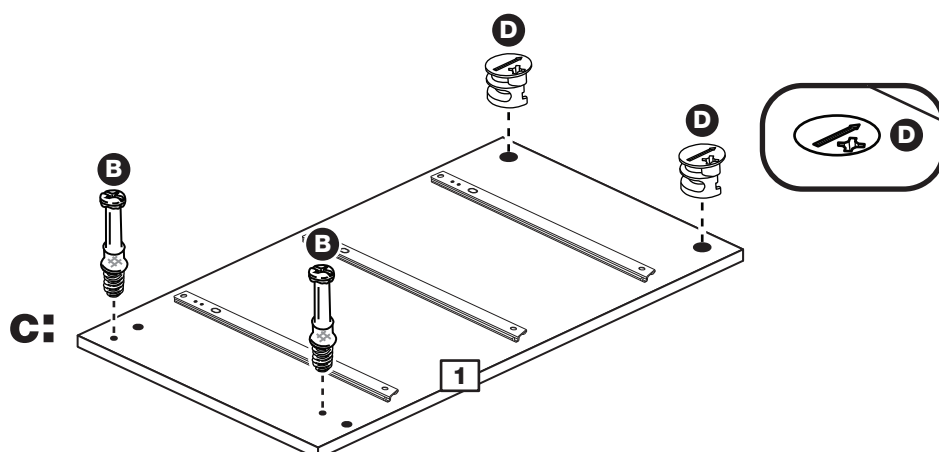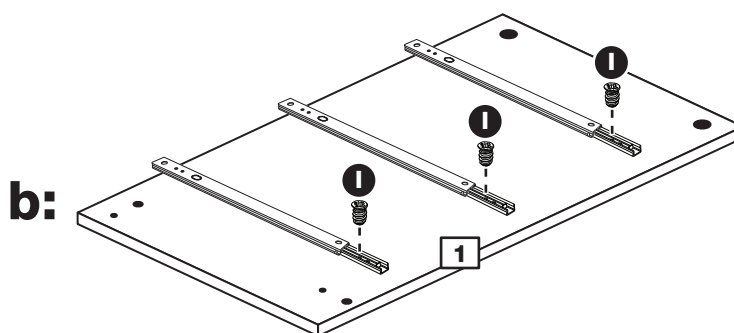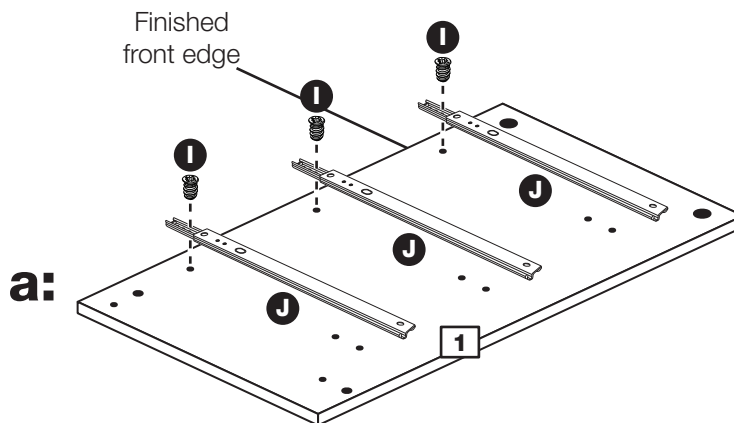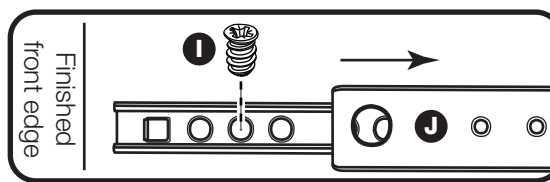

# Assembly Instructions

## Step 9





### Prepare the right side

**a:** Place 3 runners **J** on the right side **2** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the right side **2**.

**c:** Screw 2 metal dowels **B** into the right side **2**.

Insert 2 large locking nuts **D** into the right side **2**.

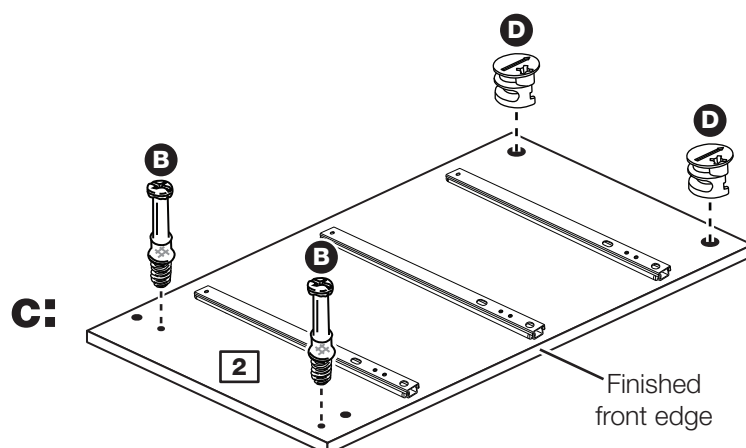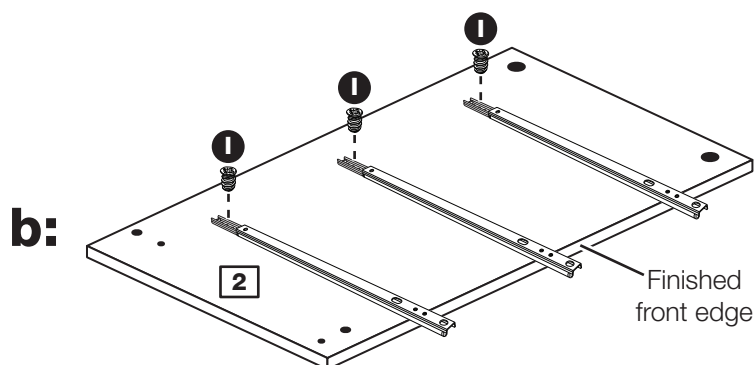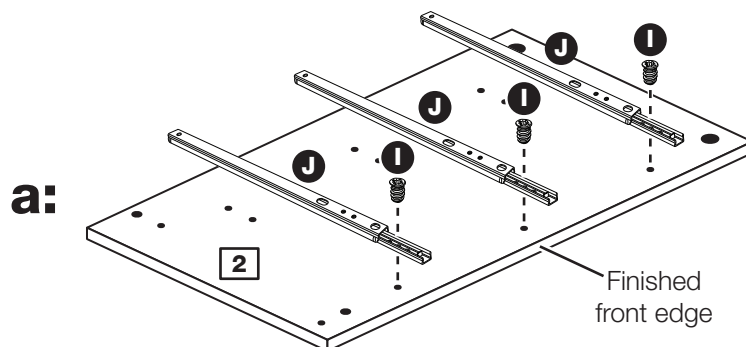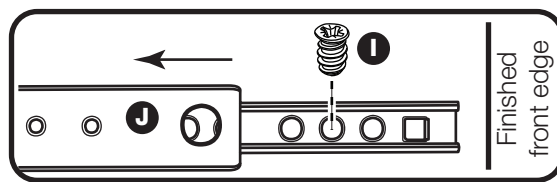

# Assembly Instructions


## Step 10

### Prepare the 2 rails


Tap 2 wooden dowels **A** into each rail **4**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts **D** into each rail **4**.

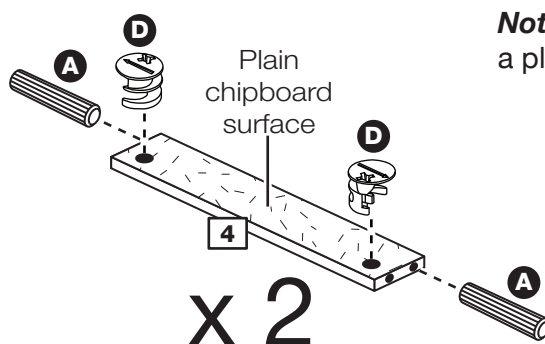

**Note:** The 2 rails can have a plain chipboard surface.




## Step 11

### Fit the 2 rails


Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **4**.

**Note:** Turn the large locking nuts **D** as far as they will go - more than 1/2 a turn.

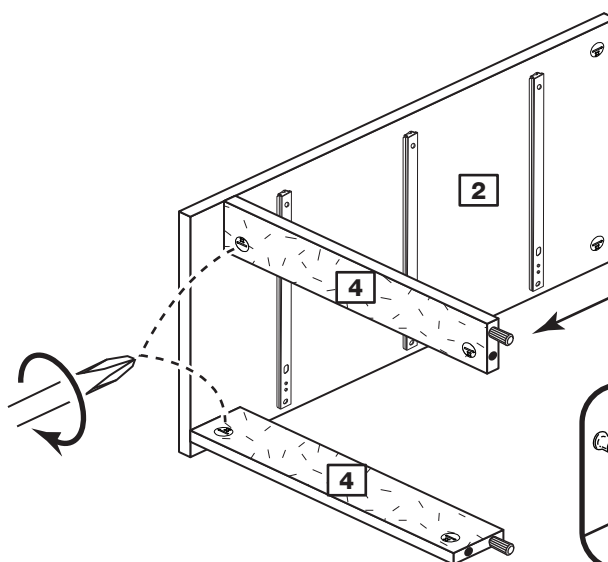

**Note:** Support this rail until the left side has been fitted in the next step.




## Step 12

### Fit the left side

Push the left side **1** onto the 2 rails **4**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **4**.

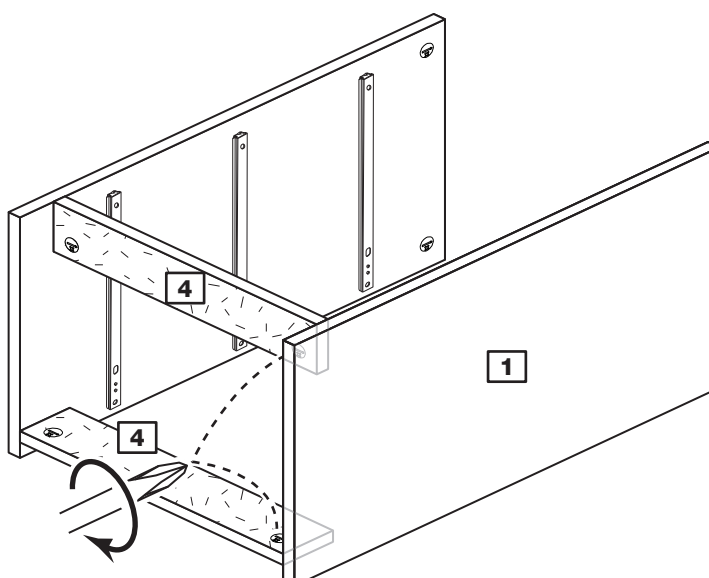


# Assembly Instructions

## Step 13

### Prepare the top

Screw 4 metal dowels **B** into the top **3**.

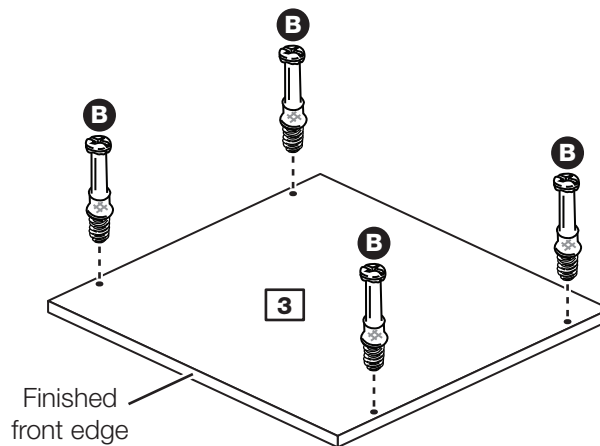


## Step 14

### Fit the top

Push the top **3** onto the sides **1** and **2**.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to each side **1** and **2**.

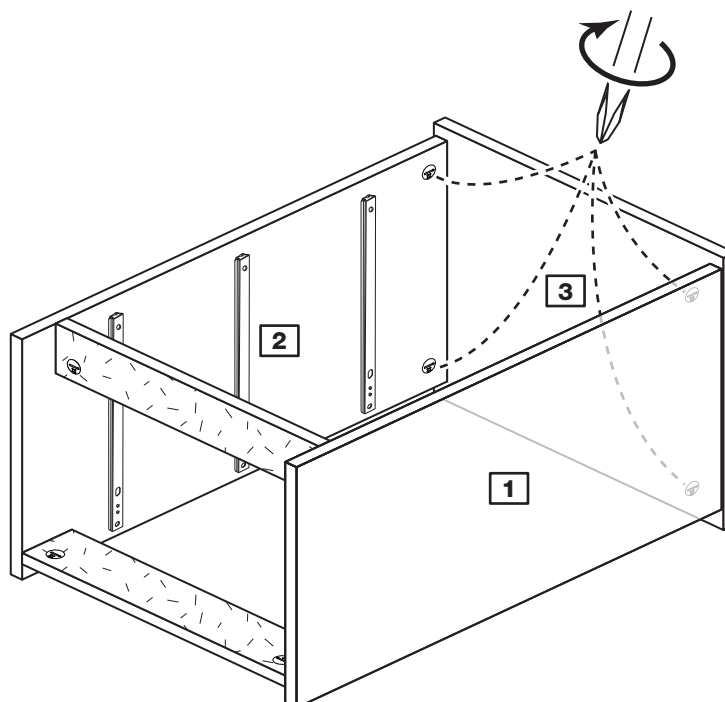

# Assembly Instructions

## Step 15

### Fit the back


**a:** Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

**b:** Place the back **10** onto the unit, making sure it is pushed up against the top **3**.

Nail **C** along the side edges and the bottom edge of the back **10**.

**Note:** Nails should be spaced out evenly.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

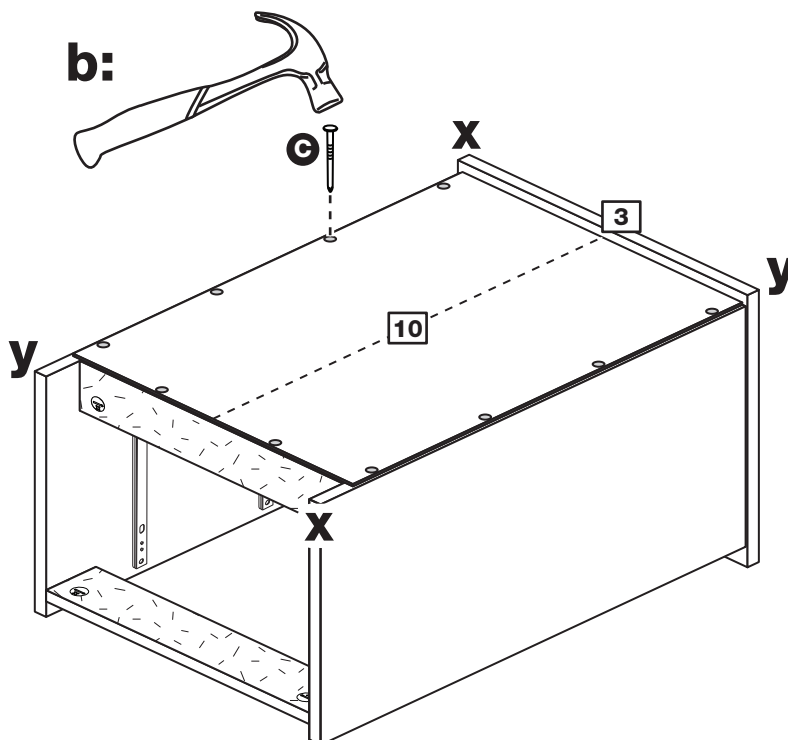


## Step 16

### Fit the plastic nails

Tap 2 plastic nails **F** into the bottom edge of each of the sides **1** and **2** as shown.

**Carefully stand the unit up for the next step.**

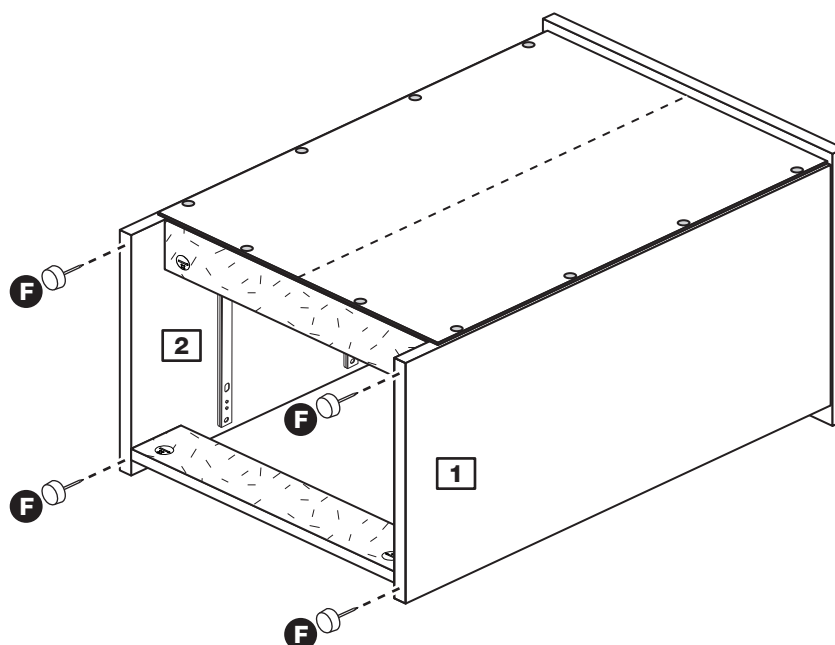

# Assembly Instructions

## Step 17



### Fit the drawers

Starting with the bottom drawer, slide both the runners **J** forward and locate the drawer sides **7** and **8** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **H**.

Working from the inside of the drawer, insert 2 screws **H** through the drawer sides and out into the 2nd threaded hole in the runner.

**Note:** Do not overtighten the screws **H**. If they catch on the runner you may need to loosen them slightly.

**Assembly is complete**

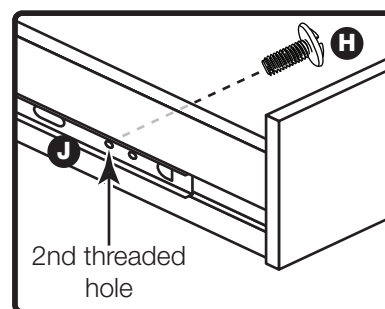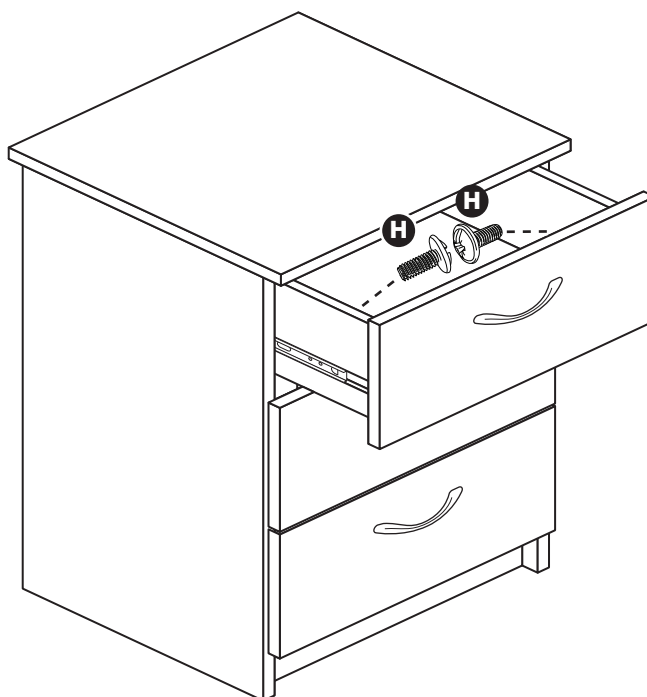

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# Cheval - Bedside


Assembly Instructions - Please keep for future reference

147/3100

152/8794

152/7939

146/1480

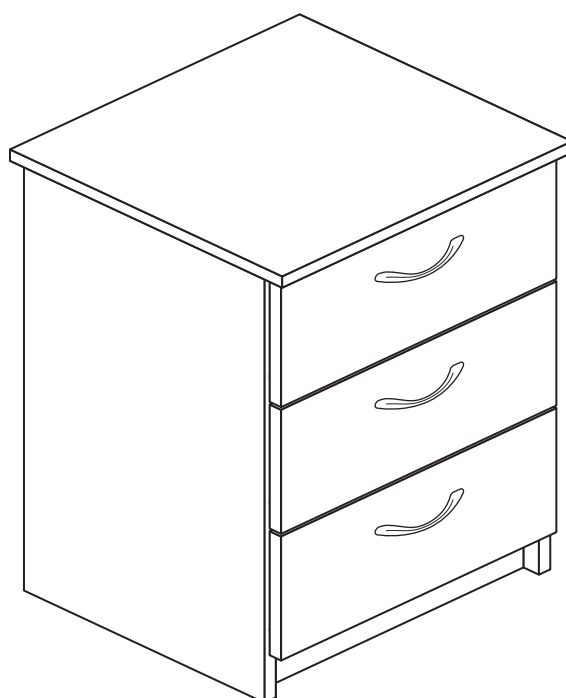

## Dimensions

Width - 38.5cm

Depth - 36cm

Height - 58cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 12kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**,

as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below


Please check you have all the panels listed below

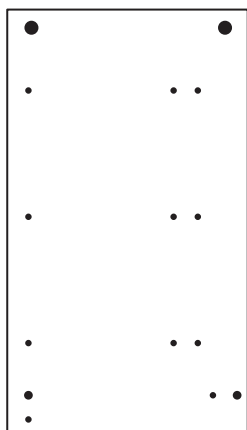


**1** Left Side (D2736A)  
(562 x 318mm)

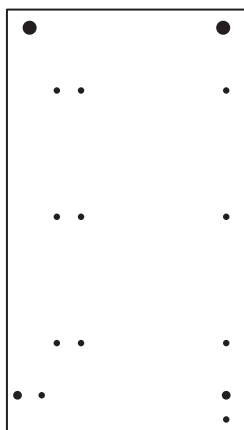


**2** Right Side (D2735A)  
(562 x 318mm)



**3** Top (D2734A)  
(383 x 360mm)




**4** Rail (D2737A)  
(348 x 66mm) x 2




**5** Drawer Front (D2738B)  
(364 x 164mm) x 3




**6** Drawer Back (W314-124)  
(314 x 124mm) x 3




**7** Left Drawer Side (W300-124LH)  
(300 x 124mm) x 3



**8** Right Drawer Side (W300-124RH)  
(300 x 124mm) x 3



**9** Drawer Base (T325-297)  
(325 x 297mm) x 3

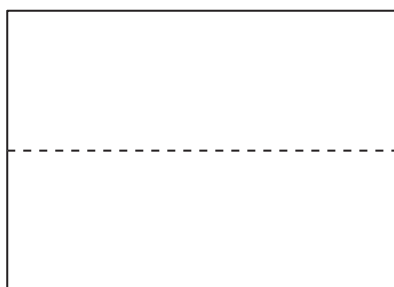

**10** Back (X515-370)  
(515 x 370mm)
















# Components - Fittings


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 4	<b>B</b>  Metal dowel (F901) x 14	<b>C</b>  Nail (F51) x 12
<b>D</b>  Large locking nut (F900) x 8	<b>E</b>  Small locking nut (F3) x 6	<b>F</b>  Plastic Nail (F91) x 4
<b>G</b>  19mm Screw (F461) x 6	<b>H</b>  9mm Screw (F74) x 6	<b>I</b>  9mm Screw (F73) x 12
<b>J</b>  Drawer runner (F1004) x 6		<b>K</b>  Knock-in Peg (F171) x 12
<b>L</b>  Handle (F273) x 3	<b>M</b>  Wedgefix (F639) x 6	

## Tools required



Rule



Cross-head  
screwdriver



Scissors




Hammer



Eye protection  
(when using a  
hammer or drill)

**Ruler** - Use this ruler to help correctly identify the screws

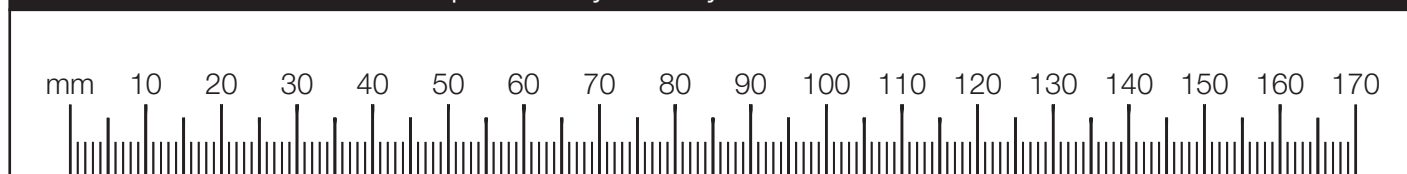

# Assembly Instructions


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

## Step 1

### Prepare the 3 drawer fronts

Screw 2 metal dowels **B** into each of the 3 drawer fronts **5**.

**Note:** Tighten the metal dowels up fully against the panels.

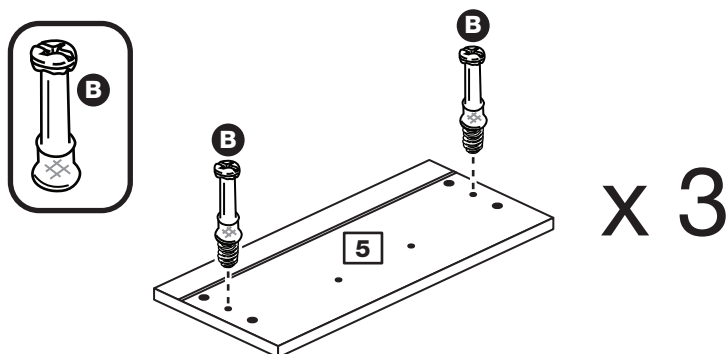


## Step 2

### Prepare the drawer sides

Insert a small locking nut **E** into the hole shown on the left drawer side **7** and the right drawer side **8**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

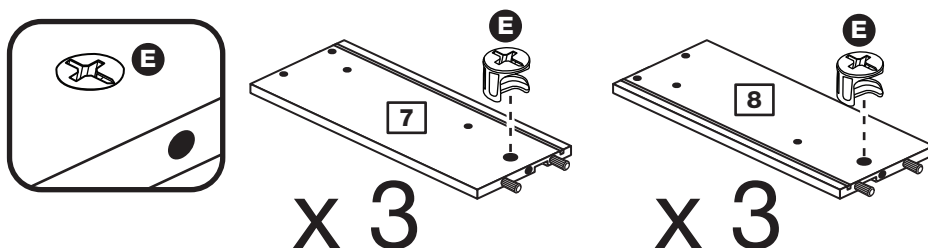


## Step 3

### Attach the drawer sides to the drawer front

Push the left drawer side **7** and right drawer side **8** onto the back of the drawer front **5**.

Turn the small locking nuts **E** on the left drawer side **7** and right drawer side **8**.

**Note:** Turn the locking nuts **E** clockwise to secure panels - more than 1/2 a turn.

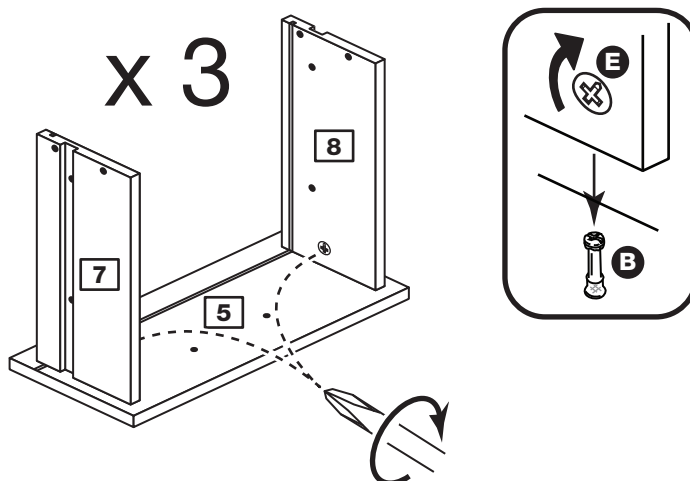


# Assembly Instructions

## Step 4

### Fit the drawer base

Slide the drawer base **9** down the grooves in the drawer sides **7** and **8** and down into the groove in the drawer front **5**.

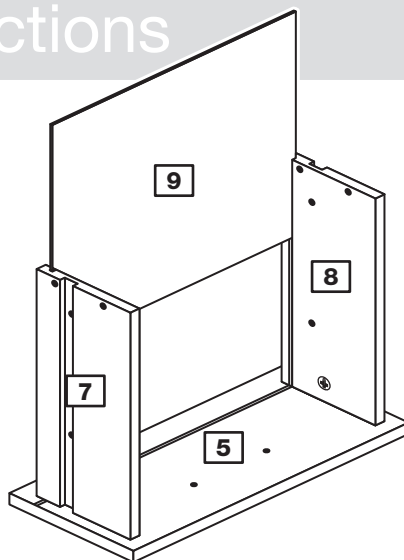

x 3


## Step 5

### Fit the drawer back

Fit the drawer back **6** between the drawer sides **7** and **8**.

Make sure that the drawer base **9** fits into the groove in the drawer back **6**.

Hold the drawer back **6** in position and tap the knock-in pegs **K** through the holes in the drawer sides **7** and **8**.

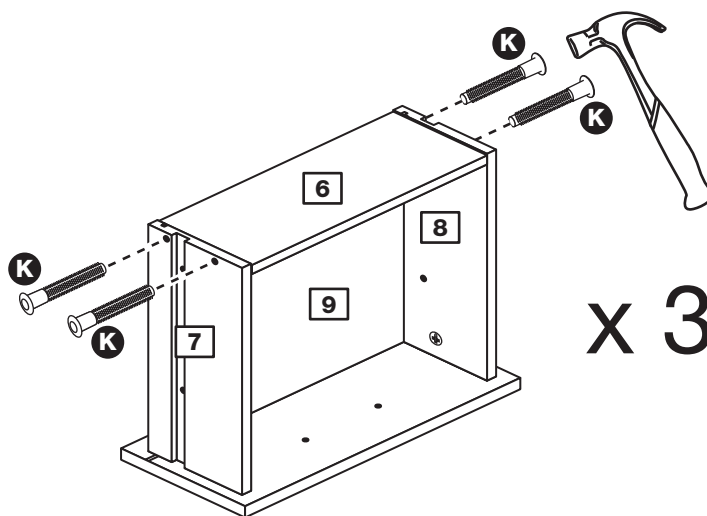


x 3

## Step 6

### Attach the handle

Attach a handle **L** to each drawer front **5** using 2 screws **G**.

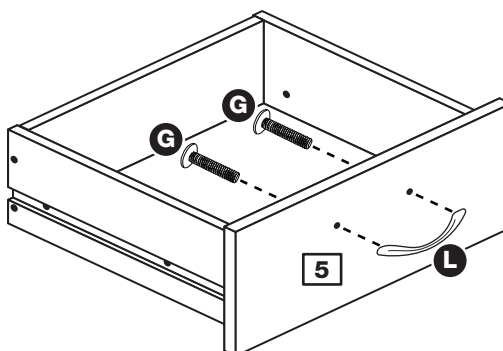


x 3


## Step 7

### Fit the wedgexes

Turn the drawer assemblies over and slide 2 wedgexes **M** into the front and back grooves, as shown, and tighten up the screws.

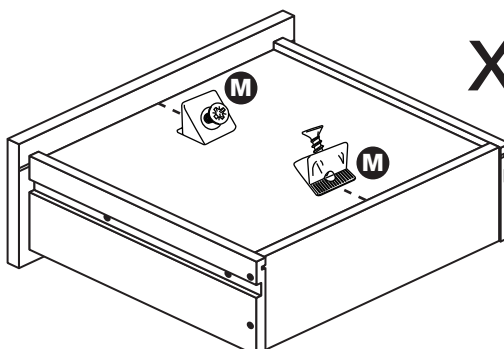

x 3



# Assembly Instructions

## Step 8

### Prepare the left side





**a:** Place 3 runners **J** on the left side **1** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the left side **1**.

**c:** Screw 2 metal dowels **B** into the left side **1**.

Insert 2 large locking nuts **D** into the left side **1**.

**Note:** The arrow on the locking nuts **must** point towards the hole in the edge of the panel.

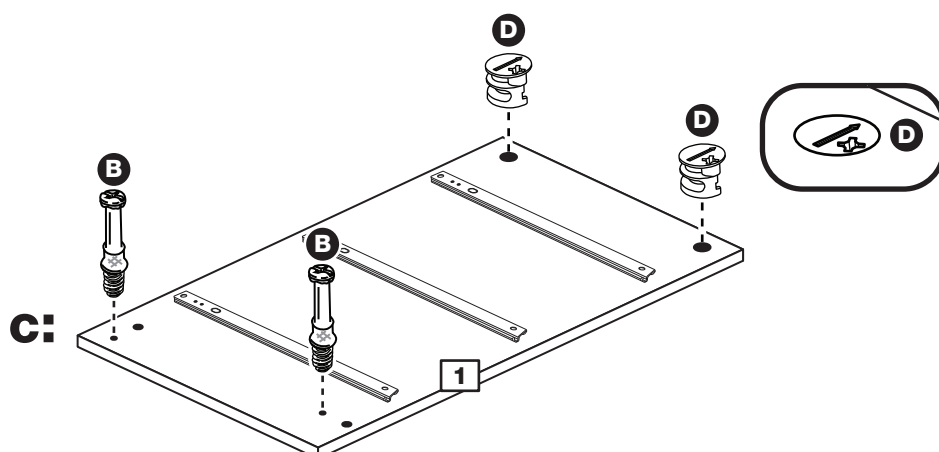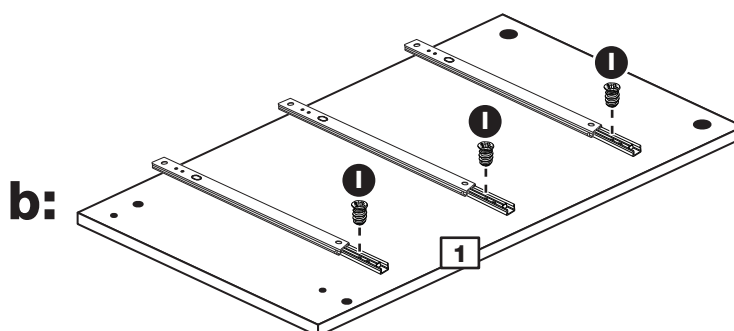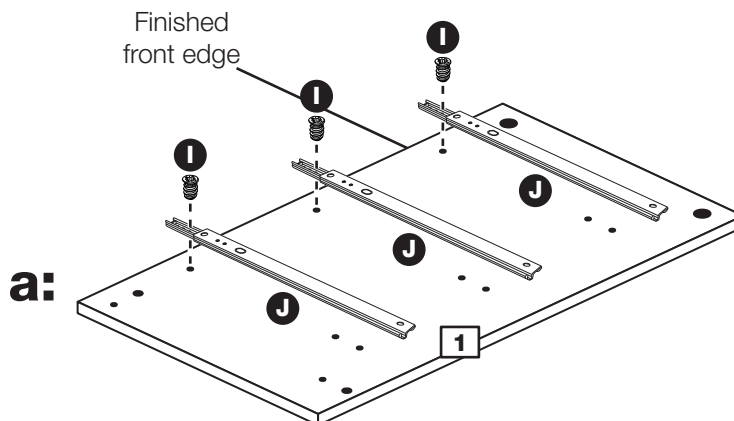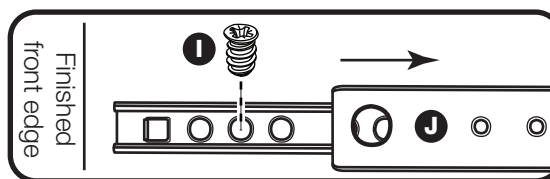

# Assembly Instructions

## Step 9





### Prepare the right side

**a:** Place 3 runners **J** on the right side **2** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the right side **2**.

**c:** Screw 2 metal dowels **B** into the right side **2**.

Insert 2 large locking nuts **D** into the right side **2**.

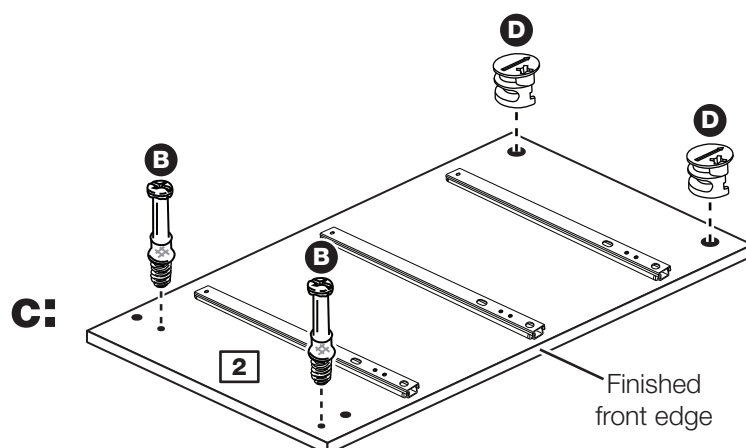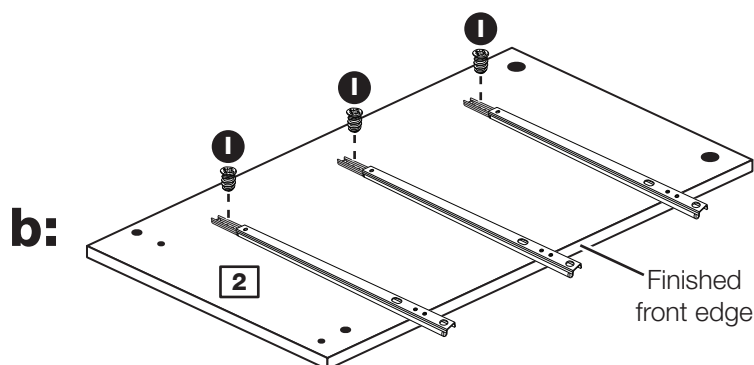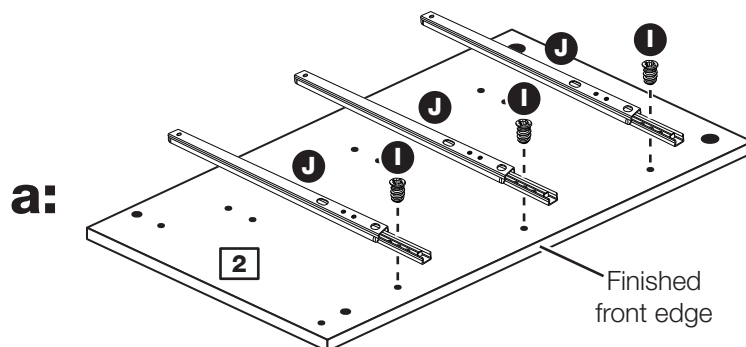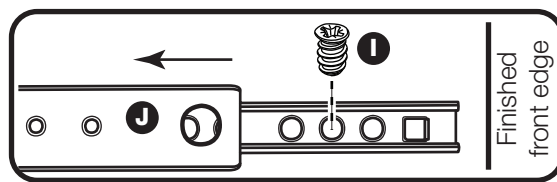

# Assembly Instructions


## Step 10

### Prepare the 2 rails


Tap 2 wooden dowels **A** into each rail **4**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts **D** into each rail **4**.

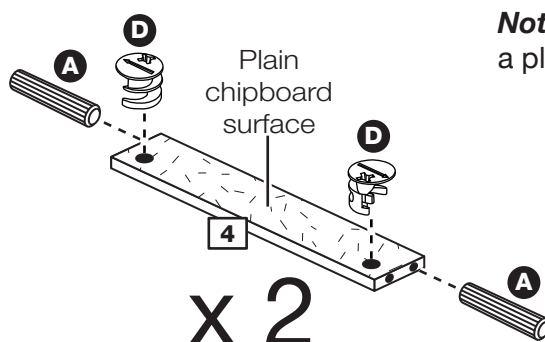

**Note:** The 2 rails can have a plain chipboard surface.




## Step 11

### Fit the 2 rails


Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **4**.

**Note:** Turn the large locking nuts **D** as far as they will go - more than 1/2 a turn.

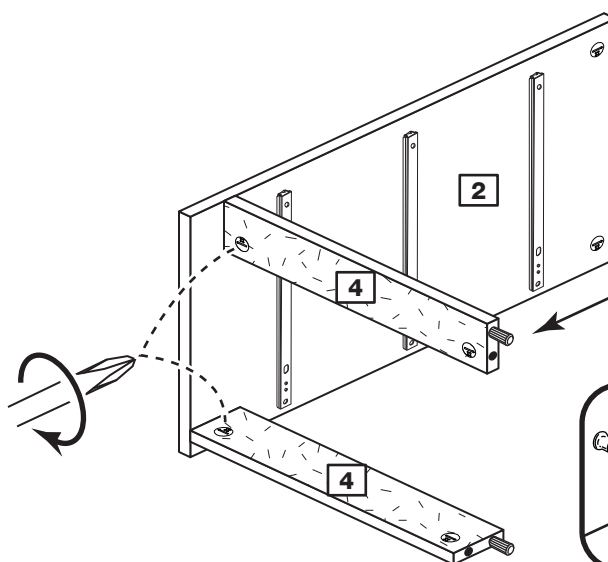

**Note:** Support this rail until the left side has been fitted in the next step.




## Step 12

### Fit the left side

Push the left side **1** onto the 2 rails **4**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **4**.

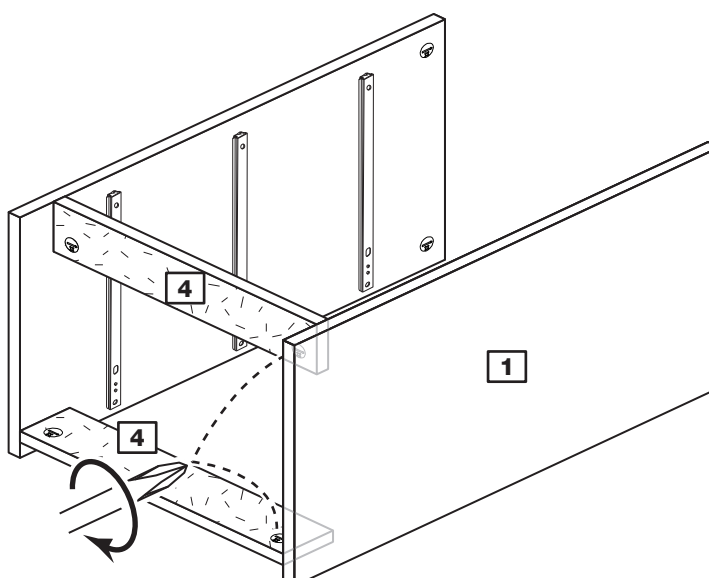


# Assembly Instructions

## Step 13

### Prepare the top

Screw 4 metal dowels **B** into the top **3**.

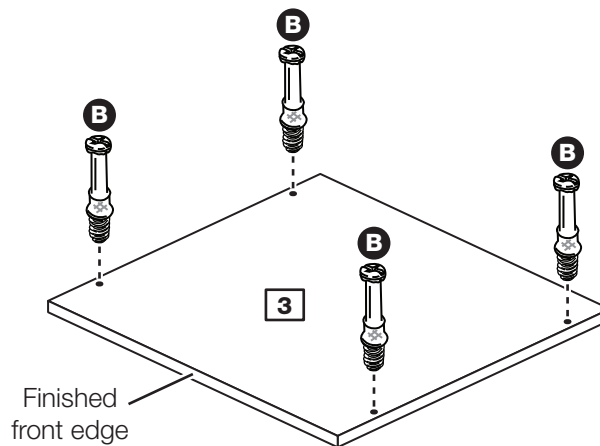


## Step 14

### Fit the top

Push the top **3** onto the sides **1** and **2**.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to each side **1** and **2**.

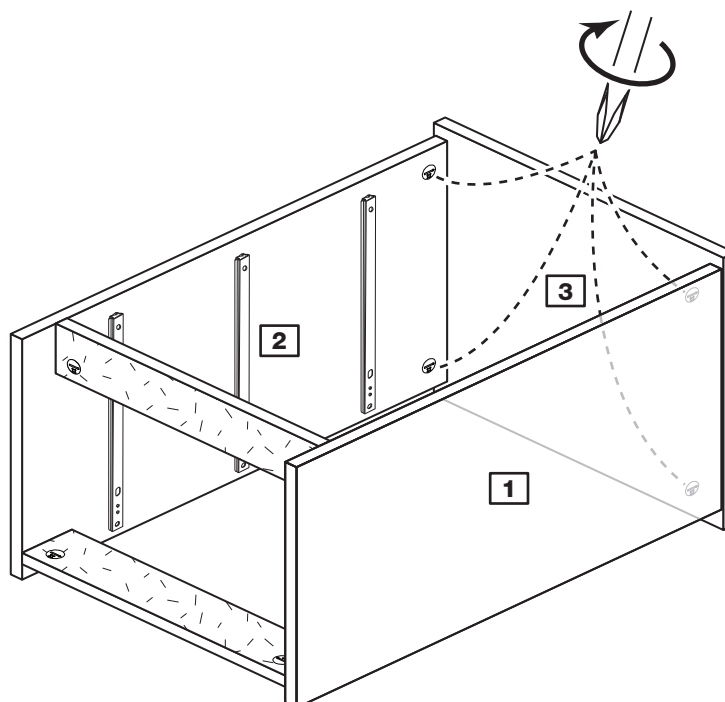

# Assembly Instructions

## Step 15

### Fit the back


**a:** Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

**b:** Place the back **10** onto the unit, making sure it is pushed up against the top **3**.

Nail **C** along the side edges and the bottom edge of the back **10**.

**Note:** Nails should be spaced out evenly.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

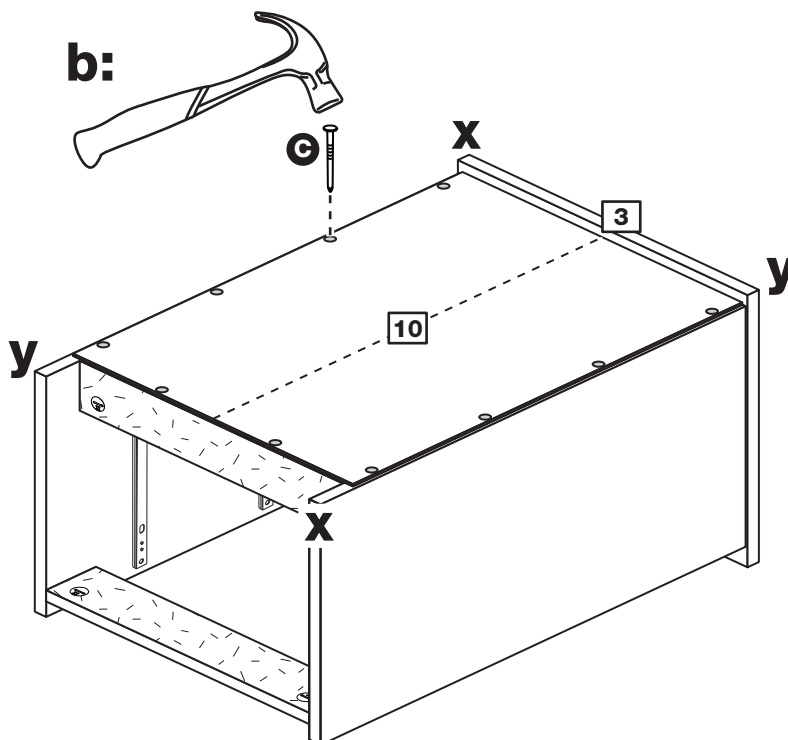


## Step 16

### Fit the plastic nails

Tap 2 plastic nails **F** into the bottom edge of each of the sides **1** and **2** as shown.

**Carefully stand the unit up for the next step.**

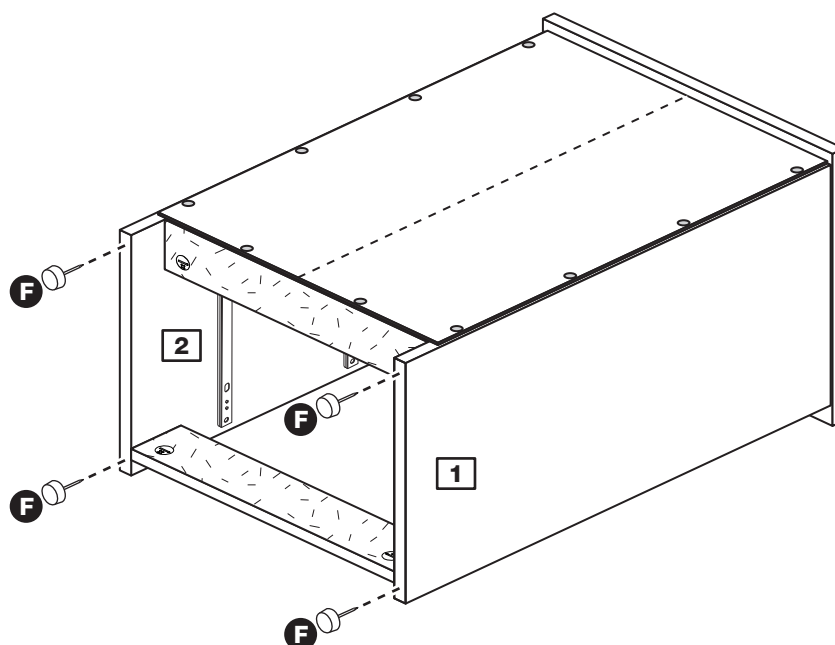

# Assembly Instructions

## Step 17



### Fit the drawers

Starting with the bottom drawer, slide both the runners **J** forward and locate the drawer sides **7** and **8** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **H**.

Working from the inside of the drawer, insert 2 screws **H** through the drawer sides and out into the 2nd threaded hole in the runner.

**Note:** Do not overtighten the screws **H**. If they catch on the runner you may need to loosen them slightly.

**Assembly is complete**

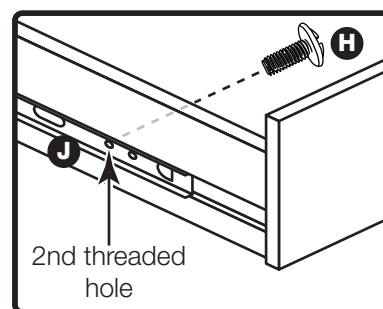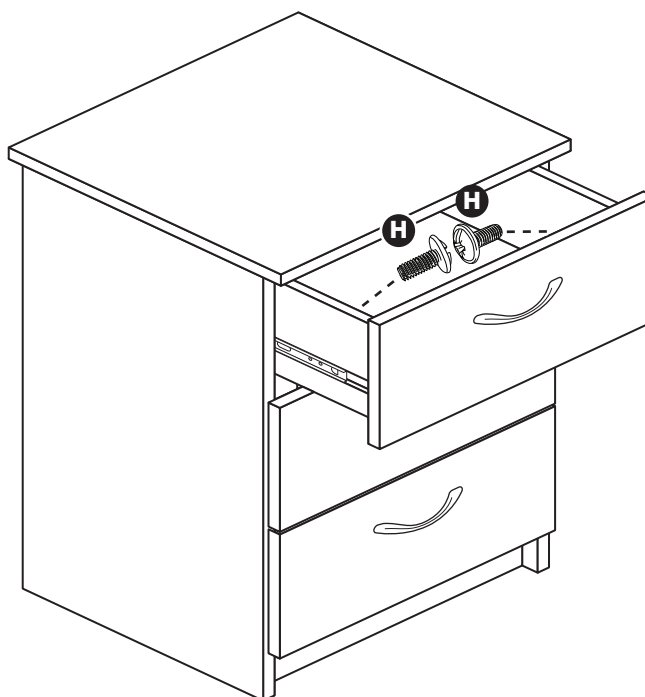

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# Cheval - 5+2 Chest


Assembly Instructions - Please keep for future reference

146/3093

147/2558

151/4186

145/2561

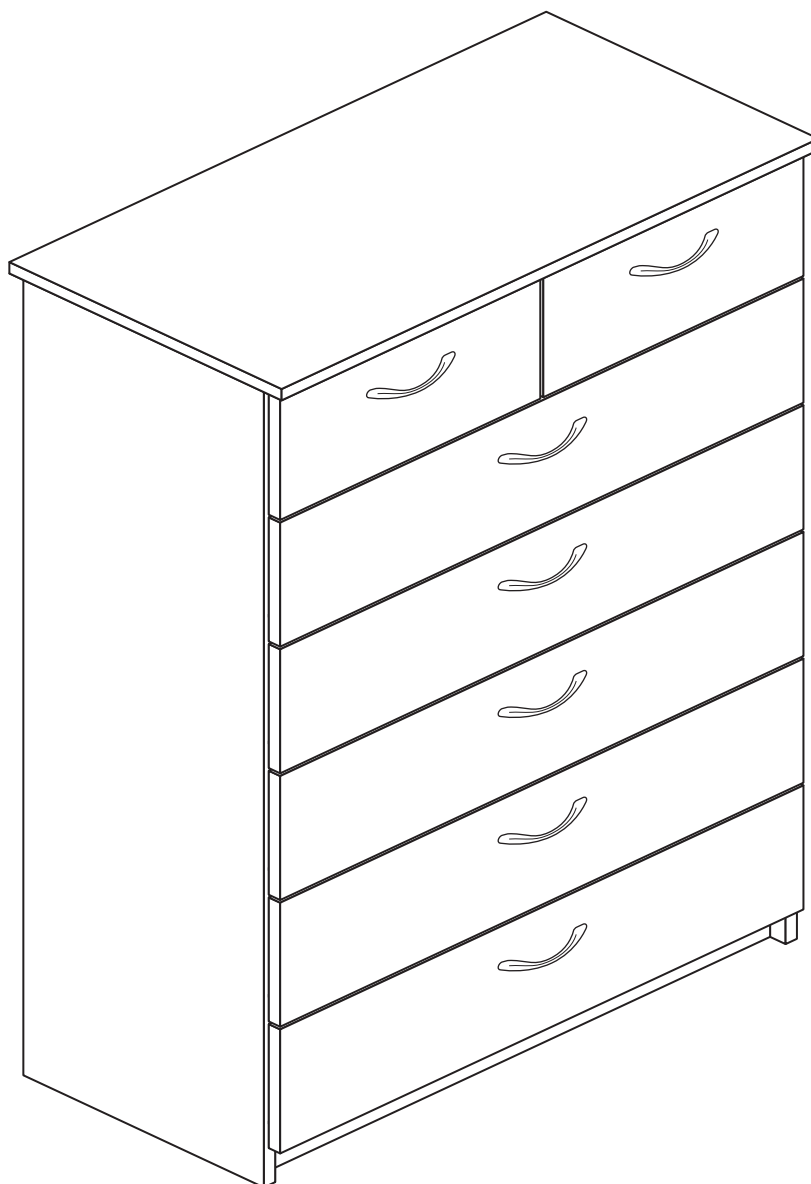

## Dimensions

Width - 71cm

Depth - 36cm

Height - 107cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 31kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.

- Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below


Please check you have all the panels listed below

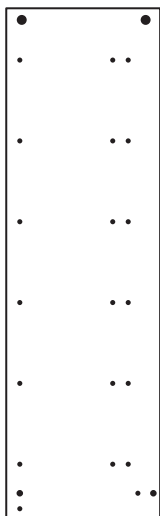


**1** Left Side (D2749A)  
(1054 x 318mm)

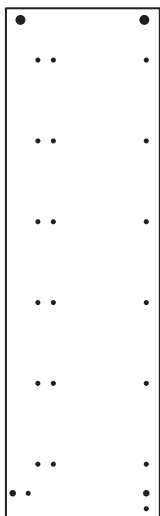


**2** Right Side (D2750A)  
(1054 x 318mm)



**3** Top (D2751A)  
(710 x 360mm)



**4** Upright (D2752A)  
(167 x 318mm)




**5** Rail (D2755A)  
(675 x 66mm) x 2




**6** Left Drawer Side (W300-124LH)  
(300 x 124mm) x 7




**7** Right Drawer Side (W300-124RH)  
(300 x 124mm) x 7



**8** Large Drawer Front (D2753A)  
(692 x 164mm) x 5



**9** Small Left  
Drawer Front (D2754A)  
(344 x 164mm)



**10** Small Right  
Drawer Front (D2770A)  
(344 x 164mm)




**11** Large Drawer Back (W639-124)  
(639 x 124mm) x 5




**12** Small Drawer Back (W293-124)  
(293 x 124mm) x 2



**13** Small Drawer Base (T304-297)  
(304 x 297mm) x 2



**14** Large Drawer Base (T650-297)  
(650 x 297mm) x 5



**15** Back (X1007-700)  
(1007 x 700mm)


















# Components - Fittings

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 4	<b>B</b>  Metal dowel (F901) x 24	<b>C</b>  Nail (F51) x 23
<b>D</b>  Large locking nut (F900) x 10	<b>E</b>  Small locking nut (F3) x 14	<b>F</b>  Plastic Nail (F91) x 4
<b>G</b>  19mm Screw (F461) x 14	<b>H</b>  9mm Screw (F74) x 14	<b>I</b>  9mm Screw (F73) x 28
<b>J</b>  Drawer runner (F1004) x 14		<b>K</b>  13mm Screw (F79) x 1
<b>L</b>  Handle (F273) x 7	<b>M</b>  Wedgefix (F639) x 24	<b>N</b>  Knock-in Peg (F171) x 28
<b>O</b>  Bracket (F327) x 1		

## Tools required



Rule



Cross-head  
screwdriver



Scissors



Hammer




Eye protection  
(when using a  
hammer or drill)



Electric drill  
(do not use for  
fitting screws)

**Ruler** - Use this ruler to help correctly identify the screws



# Assembly Instructions


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

## Step 1

### Prepare the small left and right drawer fronts

Screw 2 metal dowels **B** into the small left drawer front **9** and the small right drawer front **10**.

**Note:** Tighten the metal dowels up fully against the panels.

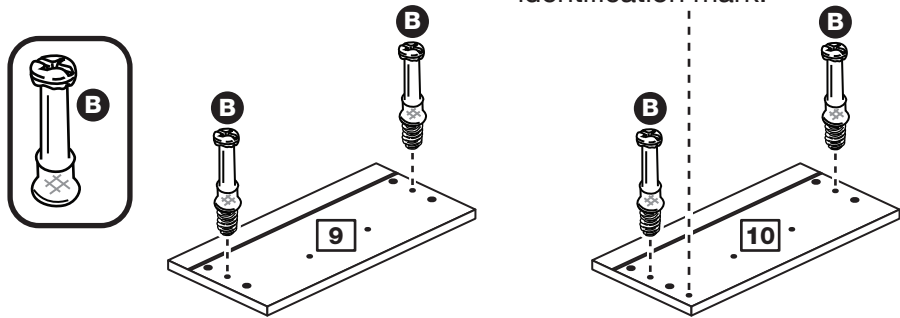


**Note:** The small right drawer front has a shallow identification mark.

## Step 2

### Prepare 2 pairs of drawer sides

Insert a small locking nut **E** into the hole shown on the left drawer side **6** and the right drawer side **7**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

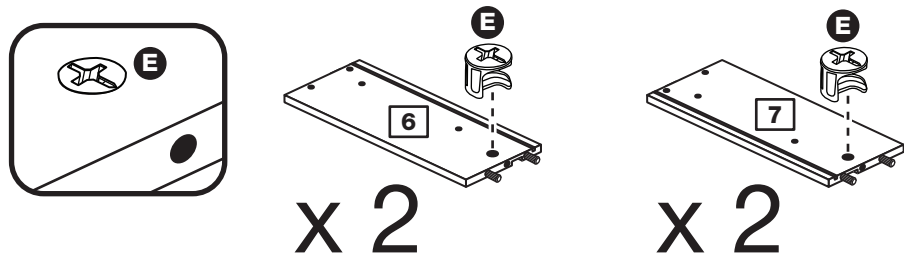

## Step 3


### Attach the drawer sides to the small drawer fronts

Push the left drawer side **6** and right drawer side **7** onto the back of the 2 small drawer fronts **9** and **10**.

Turn the small locking nuts **E** on the left drawer side **6** and right drawer side **7**.

**Note:** Turn the locking nuts **E** clockwise to secure panels - more than 1/2 a turn.

**Note:** The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

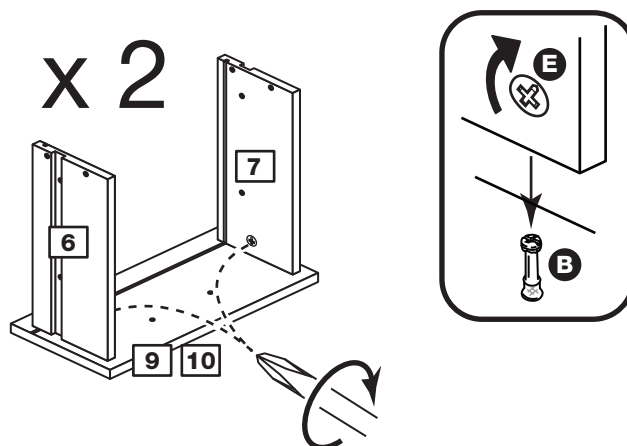


# Assembly Instructions

## Step 4

### Fit the small drawer base

Slide the small drawer base **13** down the grooves in the drawer sides **6** and **7** and down into the groove in the small drawer fronts **9** and **10**.

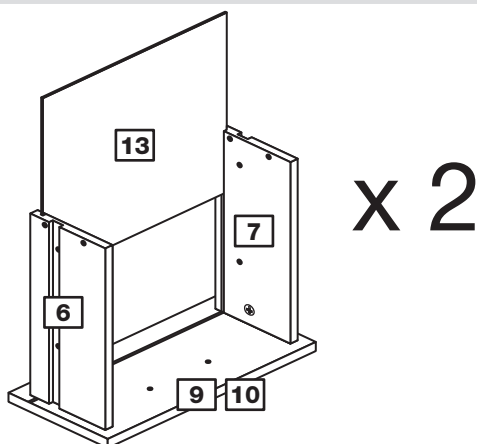


## Step 5

### Fit the small drawer back

Fit the small drawer back **12** between the drawer sides **6** and **7**.

Make sure that the small drawer base **13** fits into the groove in the small drawer back **12**.


Hold the small drawer back **12** in position and tap the knock-in pegs **N** through the holes in the drawer sides **6** and **7**.

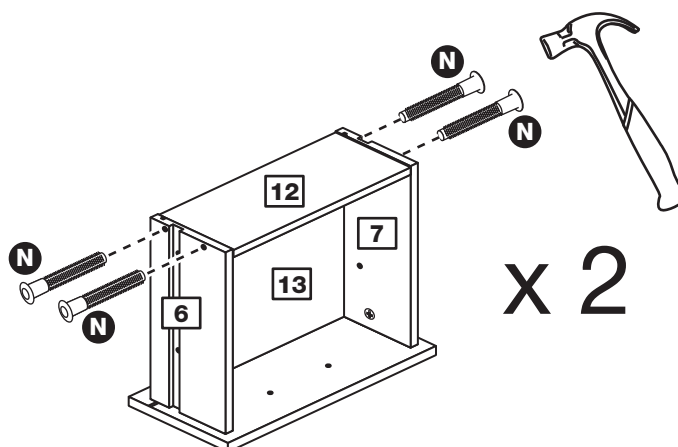

## Step 6

### Attach the handle



Attach a handle **L** to each small drawer front **9** and **10** using 2 screws **G**.

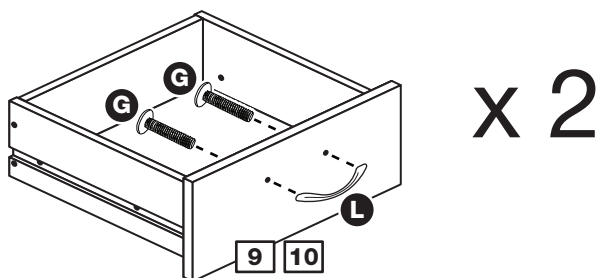

## Step 7

### Fit the wedgfixes

Turn the 2 small drawer assemblies over and slide 2 wedgfixes **M** into the front and back grooves, as shown, and tighten up the screws.

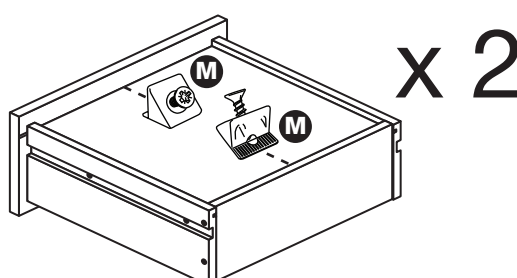


# Assembly Instructions

## Step 8

### Prepare the 5 large drawer fronts

Screw 2 metal dowels **B** into each of the large drawer fronts **8**.

**Note:** Tighten the metal dowels up fully against the panels.

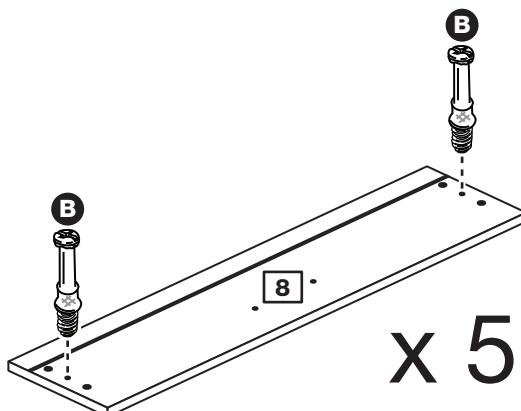


## Step 9

### Prepare 5 pairs of drawer sides

Insert a small locking nut **E** into the hole shown on the left drawer side **6** and the right drawer side **7**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

**Note:** Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.

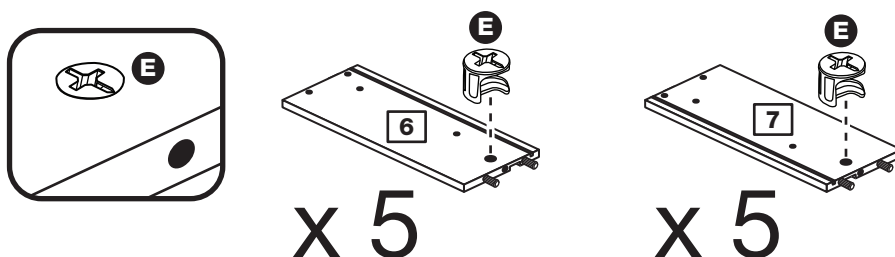

## Step 10


### Attach the drawer sides to the large drawer fronts

Push the left drawer side **6** and right drawer side **7** onto the back of the 5 large drawer fronts **8**.

Turn the small locking nuts **E** on the left drawer side **6** and right drawer side **7**.

**Note:** Turn the locking nuts **E** clockwise to secure panels - more than 1/2 a turn.

**Note:** The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

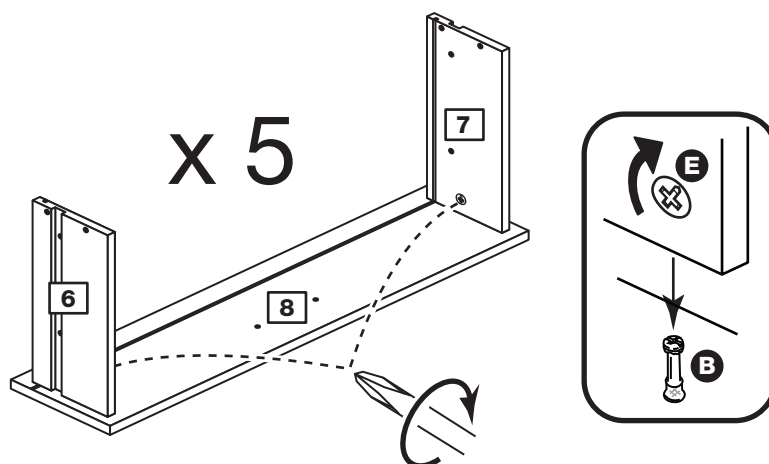


# Assembly Instructions

## Step 11

### Fit the large drawer base

Slide the large drawer base **14** down the grooves in the drawer sides **6** and **7** and down into the groove in the large drawer front **8**.

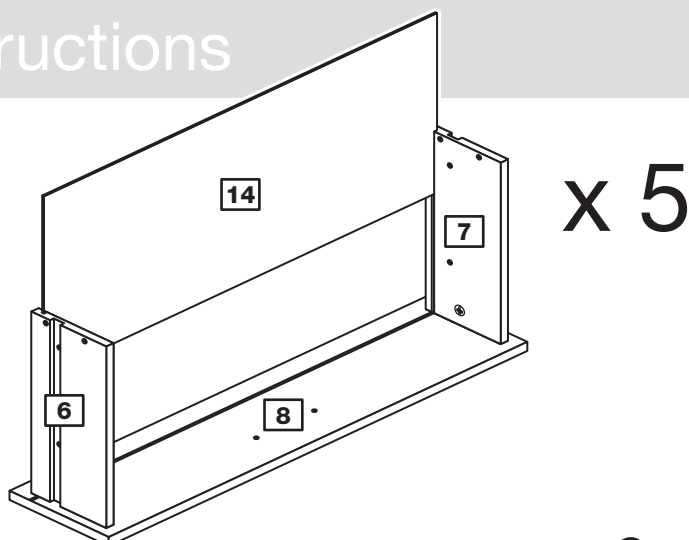


## Step 12

### Fit the large drawer back

Fit the large drawer back **11** between the drawer sides **6** and **7**.

Make sure that the large drawer base **14** fits into the groove in the large drawer back **11**.


Hold the large drawer back **11** in position and tap the knock-in pegs **N** through the holes in the drawer sides **6** and **7**.

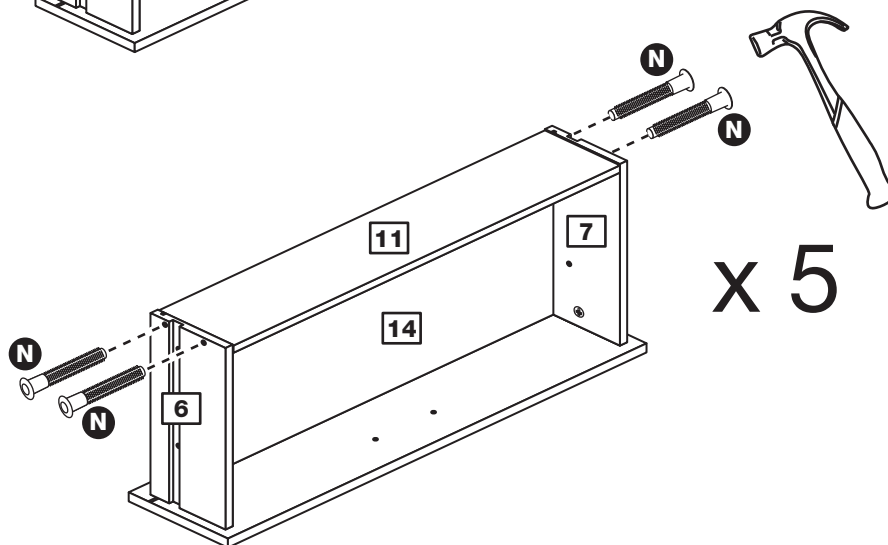

## Step 13

### Attach the handle


Attach a handle **L** to each large drawer front **8** using 2 screws **G**.

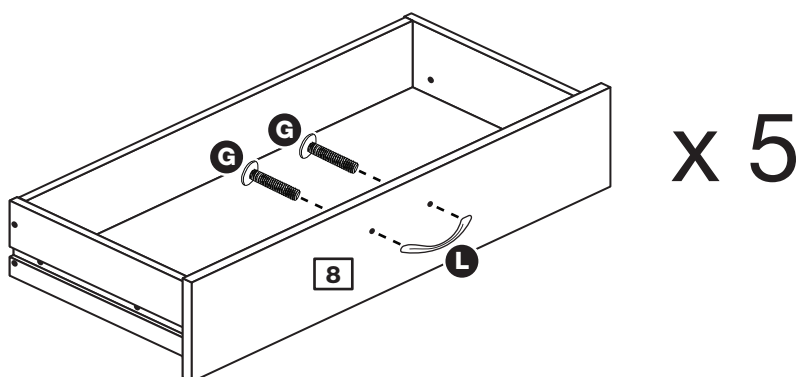

## Step 14

### Fit the wedgefixes

Turn the large drawer assemblies over and slide 4 wedgefixes **M** into the front and back grooves, as shown, and tighten up the screws.

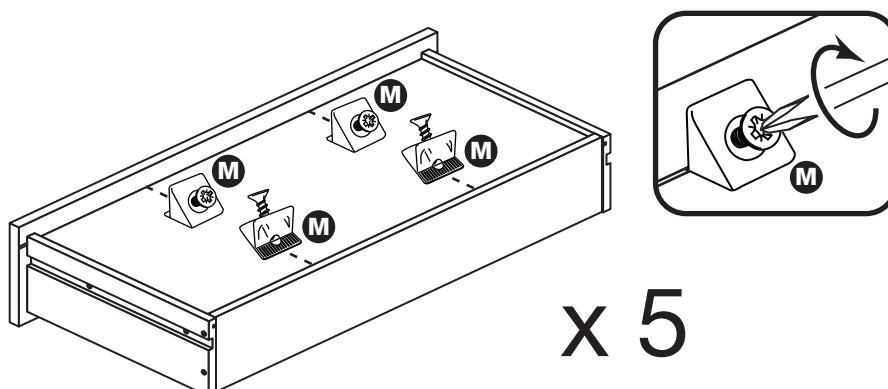

# Assembly Instructions

## Step 15

### Prepare the left side





**a:** Place 6 runners **J** on the left side **1** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the left side **1**.

**c:** Screw 2 metal dowels **B** into the left side **1**.

Insert 2 large locking nuts **D** into the left side **1**.

**Note:** The arrow on the locking nuts **must** point towards the hole in the edge of the panel.

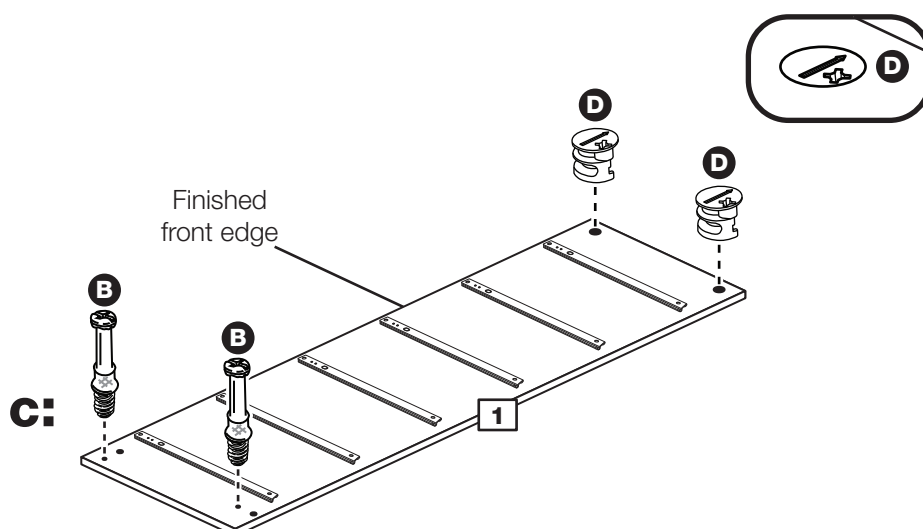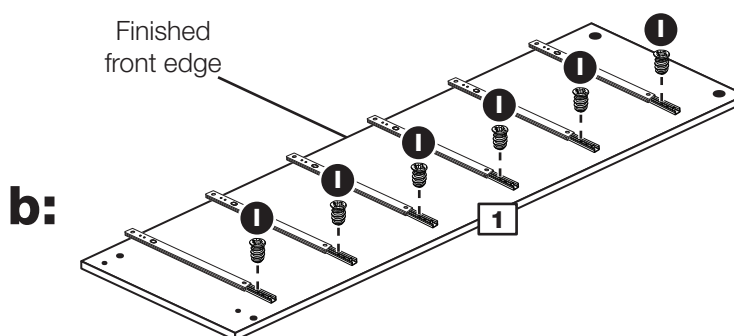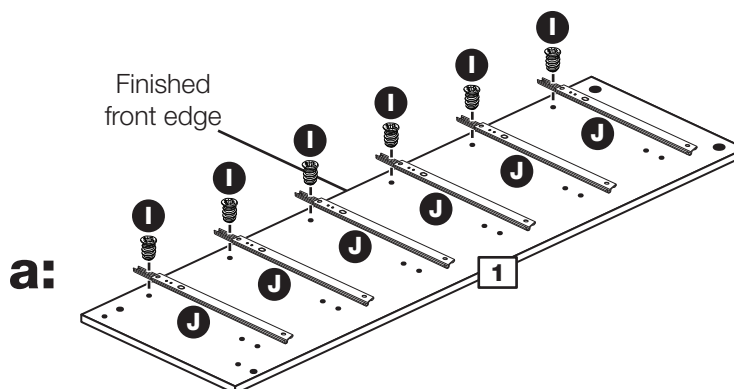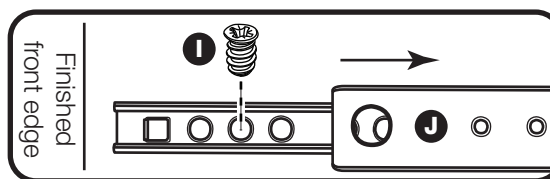

# Assembly Instructions

## Step 16


### Prepare the right side

**a:** Place 6 runners **J** on the right side **2** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the right side **2**.

**c:** Screw 2 metal dowels **B** into the right side **2**.

Insert 2 large locking nuts **D** into the right side **2**.

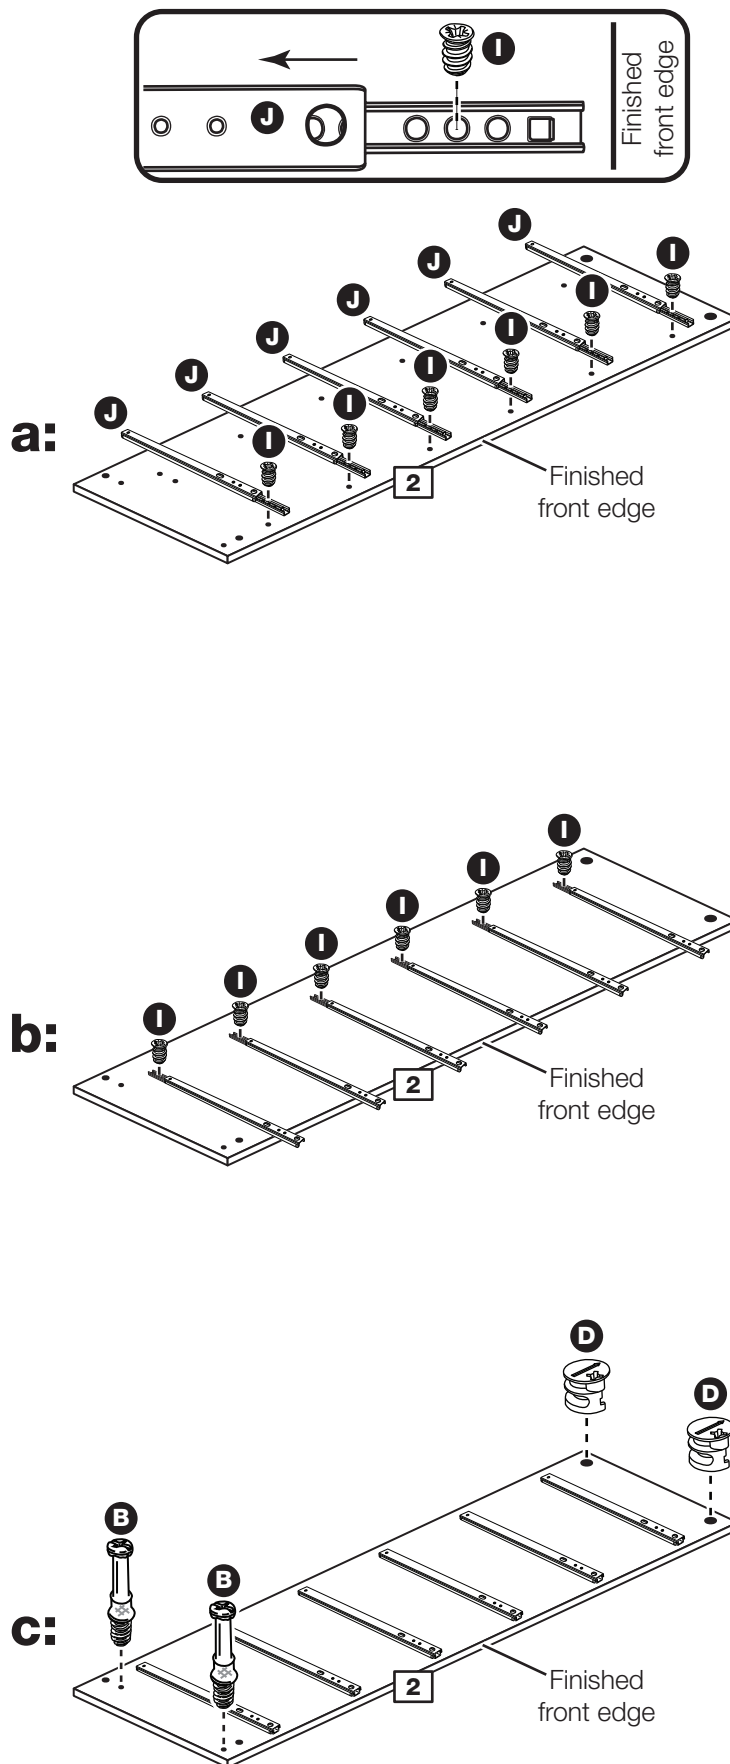

# Assembly Instructions


## Step 17

### Prepare the 2 rails

Tap 2 wooden dowels **A** into each rail **5**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts **D** into each rail **5**.

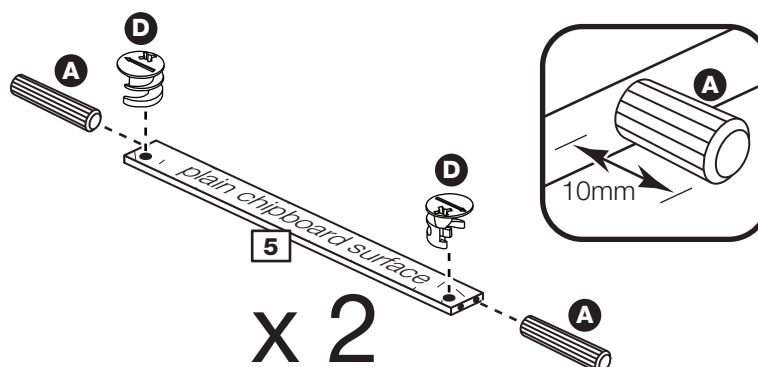


## Step 18

### Fit the 2 rails

Push the 2 rails **5** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **5**.

**Note:** Turn the large locking nuts **D** as far as they will go - more than 1/2 a turn.

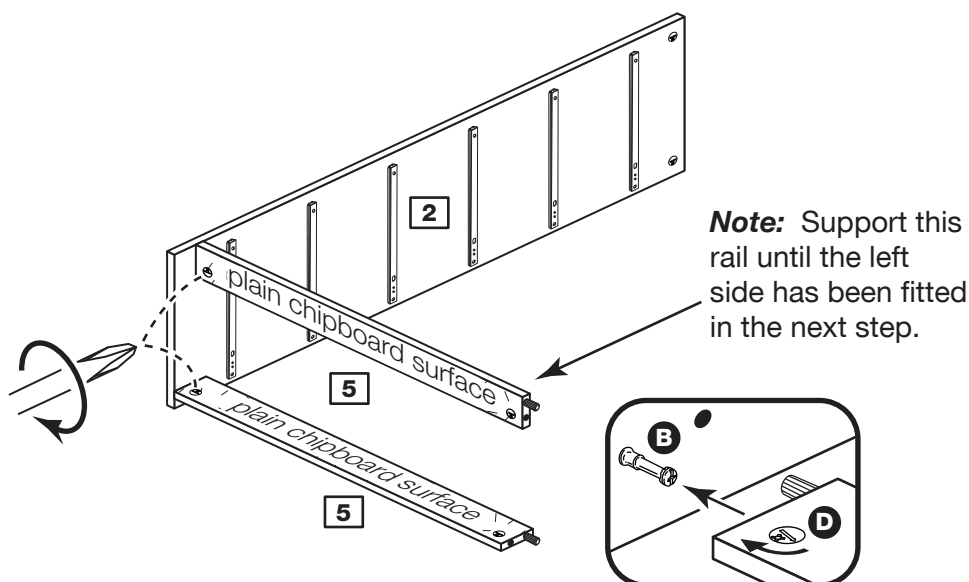


## Step 19

### Fit the left side

Push the left side **1** onto the 2 rails **5**.

Use a screwdriver to tighten the large locking nut **D** fitted to each rail **5**.

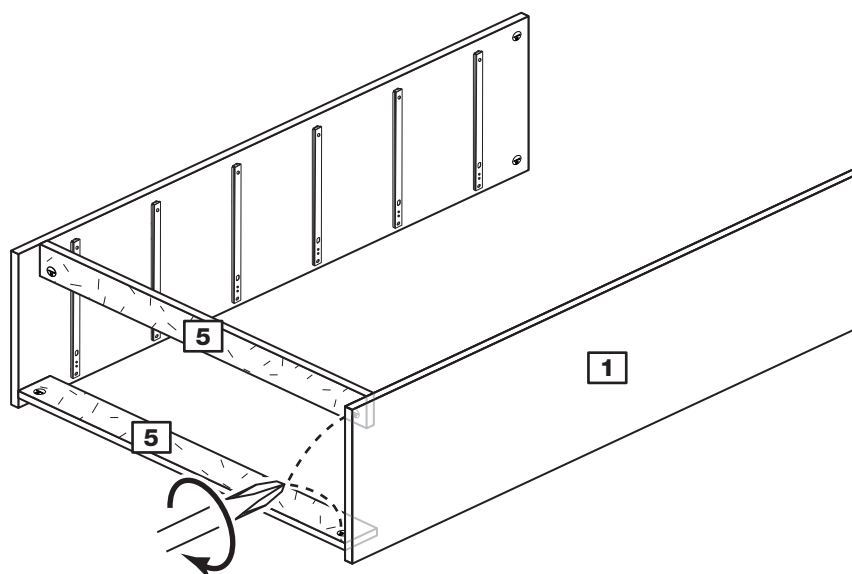

# Assembly Instructions

## Step 20

### Prepare the upright

**Note:** The colour of the upright may differ from the main unit colour or may be plain chipboard.

**a:** Place a runner **J** on the upright **4** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.



Insert 2 large locking nuts **D** into the upright **4**.

**b:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the upright **4**.


### Turn the upright over

**c:** Place a runner **J** on the upright **4** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **I**.




**d:** Slide the runner **J** back the other way and fit the 2nd screw **I** into the corresponding hole in the upright **4**.

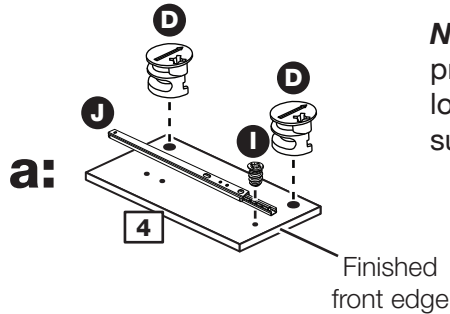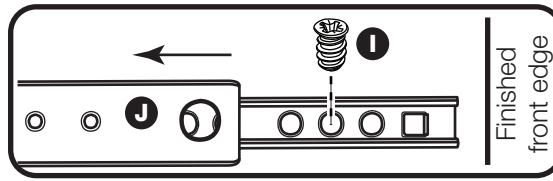

**Note:** Due to the manufacturing process, the 2 holes for the large locking nuts can be on either surface of the upright.

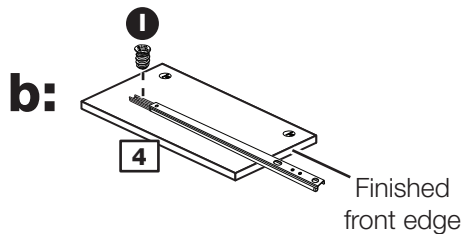

### Turn the upright over

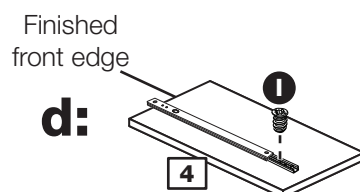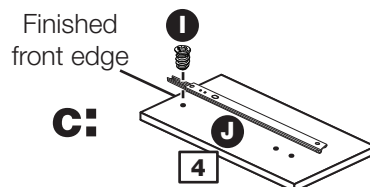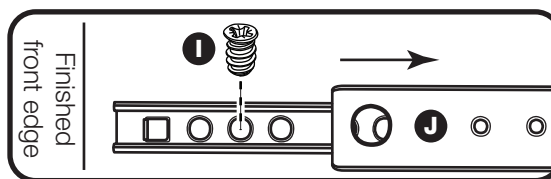


# Assembly Instructions

## Step 21

### Prepare the top

Screw 6 metal dowels **B** into the top **3**.

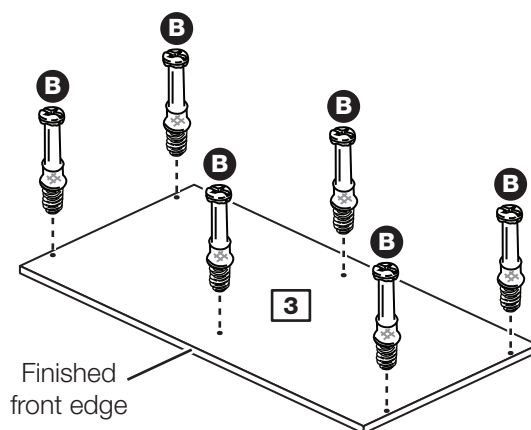


## Step 22

### Fit the upright and bracket to the top

Push the upright **4** down onto the top **3**.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to the upright **4**.

Fix the bracket **O** to the top **3**, 175mm in from the side and flush to the back edge, using screw **K**.

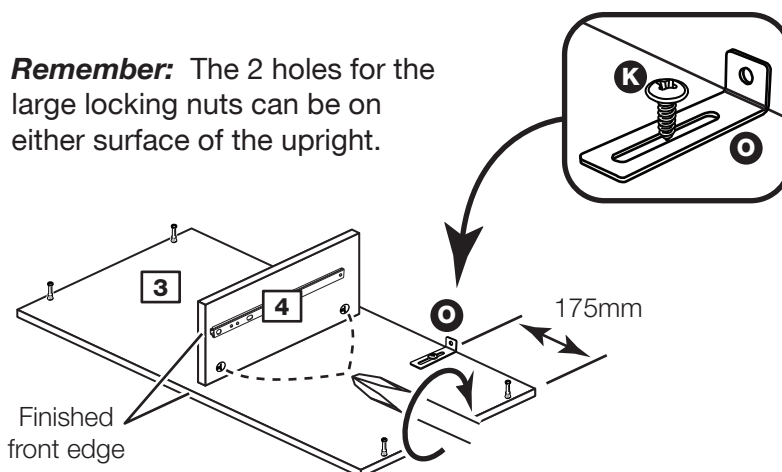


## Step 23

### Fit the top

Push the top **3** onto the sides **1** and **2**.

Use a screwdriver to tighten the 2 large locking nuts **D** fitted to each side **1** and **2**.

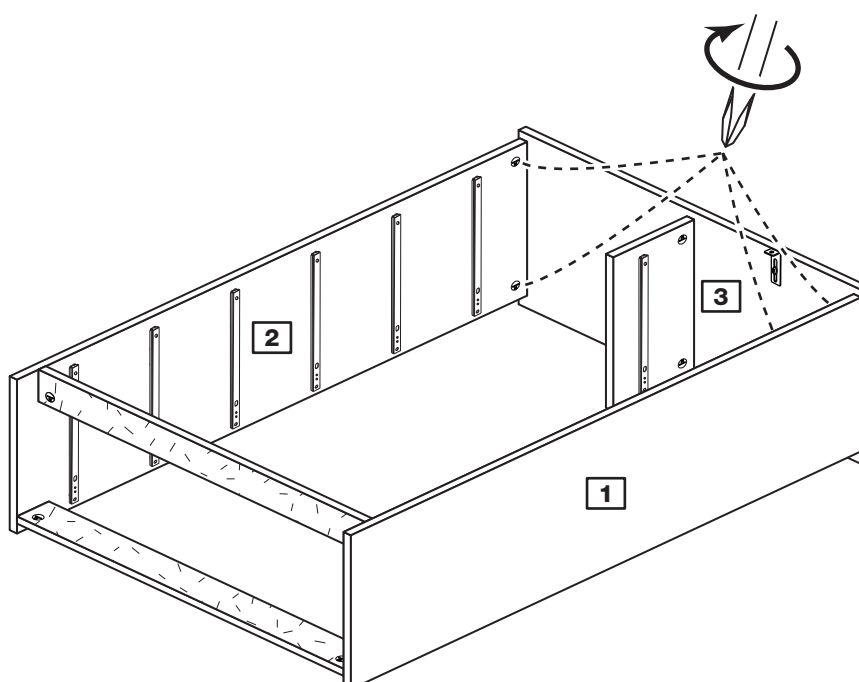

# Assembly Instructions

## Step 24

### Fit the back

**a:** Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.


**b:** Place the back **15** onto the unit.

Nail **C** around the outside edges of the back **15**.

**Note:** Nails should be spaced about 150mm apart.

**Stand the unit up for the next step.**

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

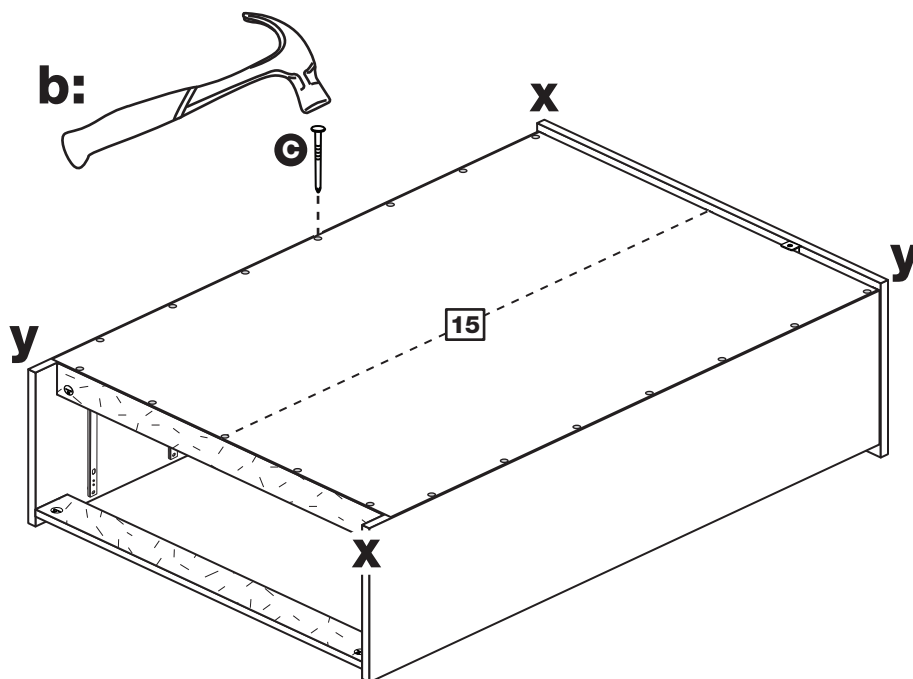


## Step 25

### Fit the plastic nails

Tap 2 plastic nails **F** into the bottom edge of each of the sides **1** and **2** as shown.

**Carefully stand the unit up for the next step.**

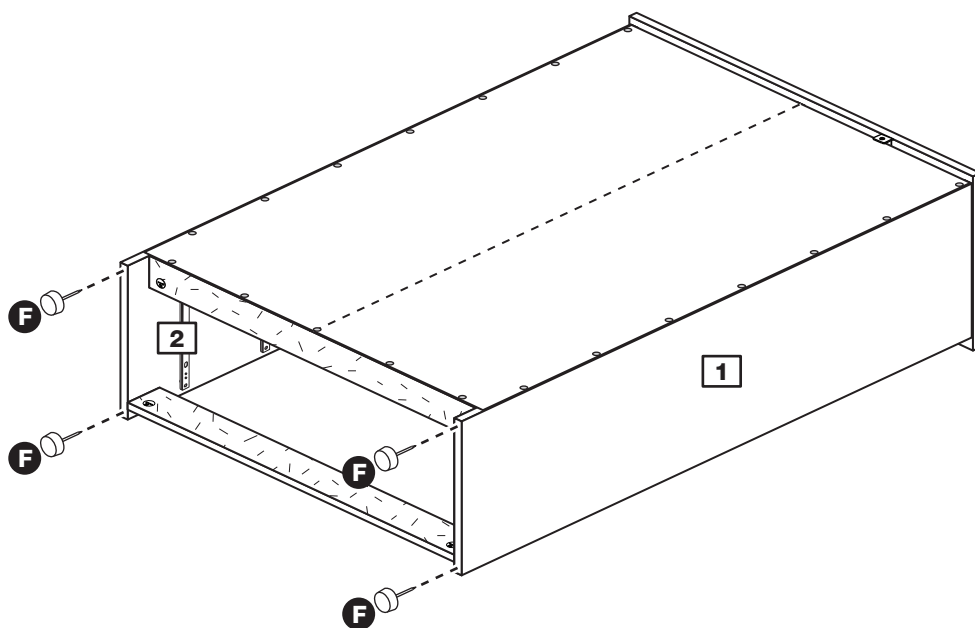



# Assembly Instructions

## Step 26

### Secure unit to a wall

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by use of the metal bracket **O** fitted to the top **3**.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the unit to the wall.

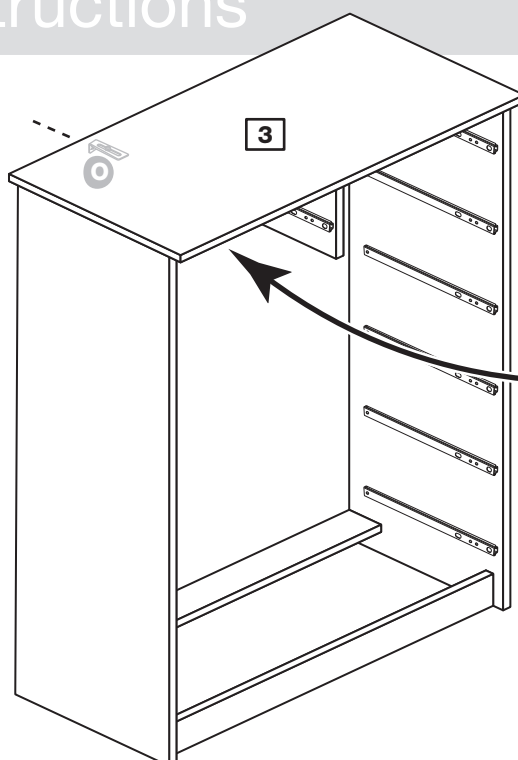

**Warning:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

## Step 27

### Fit the drawers



Starting with the bottom drawer, slide both the runners **J** forward and locate the drawer sides **7** and **8** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **H**.

Working from the inside of the drawer, insert 2 screws **H** through the drawer sides and out into the 2nd threaded hole in the runner.

**Note:** Do not overtighten the screws **H**.

If they catch on the runner you may need to loosen them slightly.

**Assembly is complete**

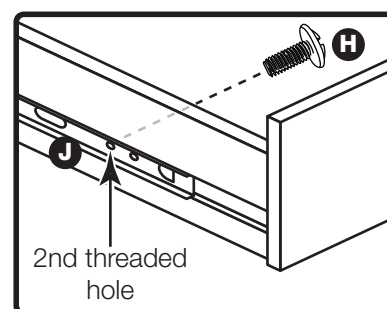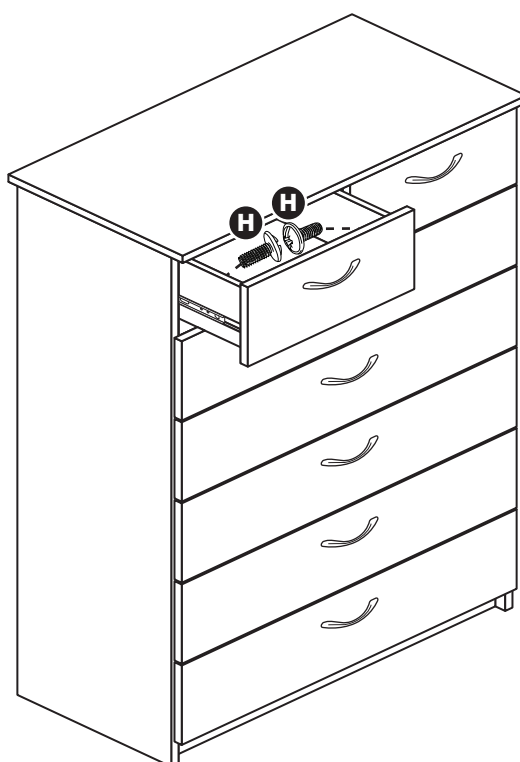

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

