New Sywell - 2 Drawer Bedside


Assembly Instructions - Please keep for future reference

282/8417

268/4792

281/2612

279/9618

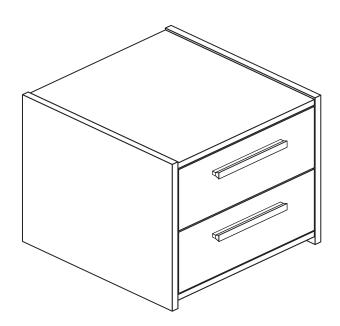

Dimensions

Width - 39.5cm

Depth - 40cm

Height - 39cm



Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Warning: This unit weighs approximately 10kgs.
 Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



 We do not recommend the use of power drill/drivers for inserting screws,

as this could damage the unit. Only use hand screwdrivers.

- Safety note: If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).
- Dispose of all packaging carefully and responsibly.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** *quoting the reference numbers below*

Please check you have all the panels listed below




Left Side (D2542A) (388 x 396mm)




4 Rail (D2544A) (363 x 78mm) x 2



7 Left Drawer Side (W370-124LH) (370 x 124mm) x 2




9 Drawer Base (T342-367) (342 x 367mm) x 2



Right Side (D2543A) (388 x 396mm)




5 Drawer Front (D2545A) (359 x 162mm) x 2




3 Top (D2541A) (363 x 394mm)



6 Drawer Back (W330-124) (330 x 124mm) x 2



8 Right Drawer Side (W370-124RH) (370 x 124mm) x 2



Back (X389-359) (389 x 359mm)




Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

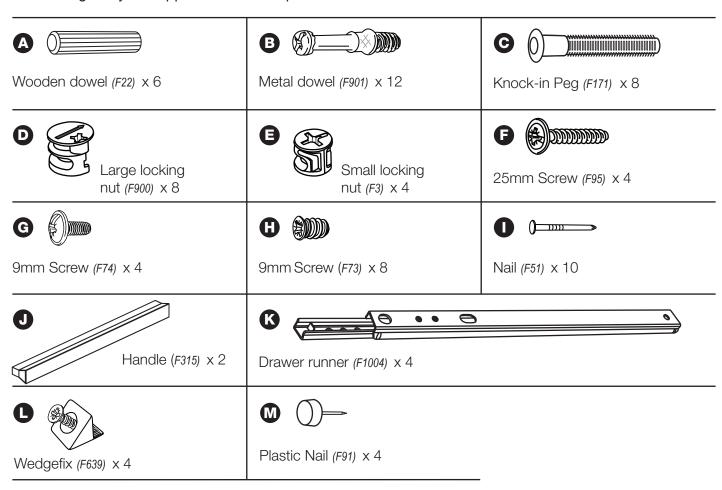

Tools required

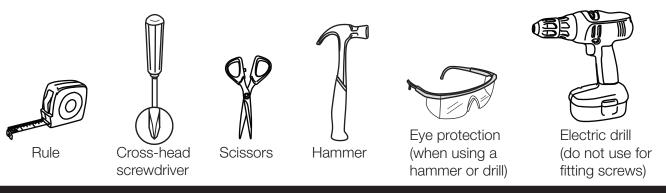

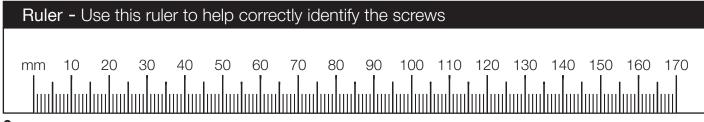


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Step 1

Prepare the drawer fronts

Screw 2 metal dowels **B** into the holes shown on the back of each drawer front **5**.

Note: Tighten the metal dowels up fully against the panels.

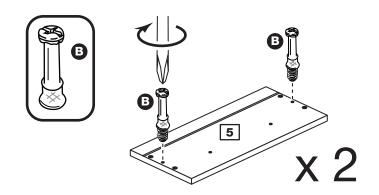


Step 2

Prepare the drawer sides

Insert a small locking nut into the hole shown on the left drawer side into the hole side into the left drawer side into the left drawer side into the locking into the hole shown on the locking into the hole shown on the left drawer side into the locking into the hole shown on the left drawer side into the locking into the locking into the hole shown on the left drawer side into the locking int

Note: Arrow on locking nut **must** point towards hole in edge of panel.

Note: Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.

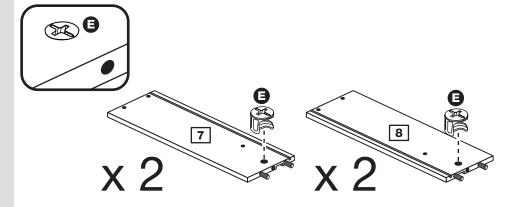


Step 3

Attach the drawer sides to the drawer front


Push the left drawer side
7 and right drawer side
8 onto the back of the drawer front 5.

Turn the small locking nuts (a) on the left drawer side (7) and right drawer side (8).

Note: Turn the locking nuts clockwise to secure panels - more than 1/2 a turn.

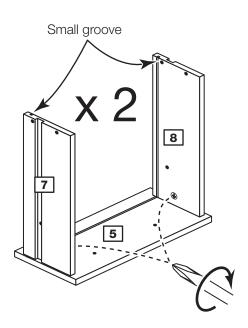

Note: The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.



Step 4

Fit the drawer base

Slide the drawer base 9 down the grooves in the drawer sides 7 and 8 and down into the groove in the drawer front 5.

Step 5

Fit the drawer back

Fit the drawer back 6 down onto the drawer base 9.

Make sure that the drawer base 9 fits into the groove in the drawer back 6.

Hold the drawer back 6 in position and tap the knock-in pegs 6 through the holes in the drawer sides 7 and 8.

Step 6


Attach the handle


Attach a handle **1** to each drawer front **5** using 2 screws **7**.


Step 7


Fit the wedgefixes

Turn the drawer assemblies over and slide 2 wedgefixes into the front and back grooves, as shown, and tighten up the screws.

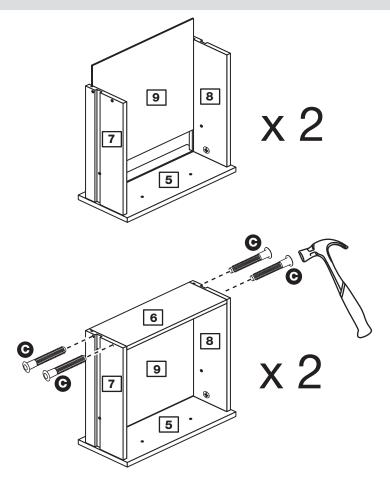

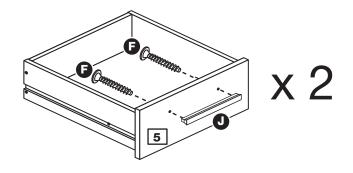

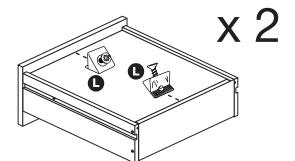




Step 7

Prepare the left side

a: Place 2 runners **(C)** on the left side **(1)**. Slide back the top of the runner and use the 2nd hole from the front to fit the 1st screw **(1)**.

Screw 4 metal dowels **B** into the left side **1**.

b: Slide the runner to back the other way and fit the 2nd screw into the corresponding hole in the left side 1.

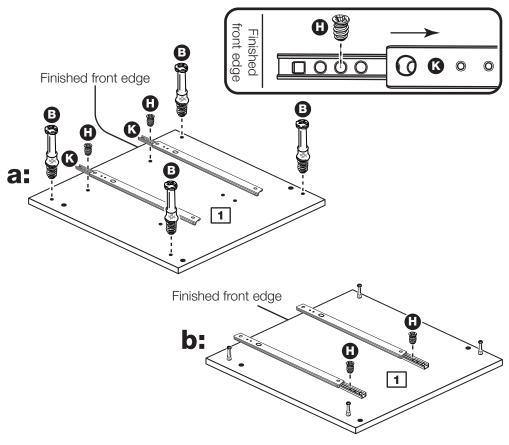


Step 8

Prepare the right side

a: Place 2 runners (c) on the right side 2. Slide back the top of the runner and use the 2nd hole from the front to fit the 1st screw (d).

Screw 4 metal dowels **B** into the right side **2**.

b: Slide the runner kback the other way and fit the 2nd screw into the corresponding hole in the right side 2.

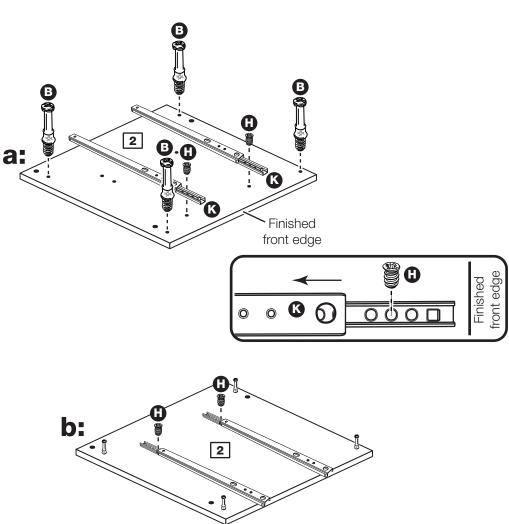

Step 9


Prepare the top

Tap 2 wooden dowels (A) into the top [3].

Note: Wooden dowels must not stick out from the edge by more than 10mm or they may damage other panels.

Insert 4 large locking nuts **D** into the top **3**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

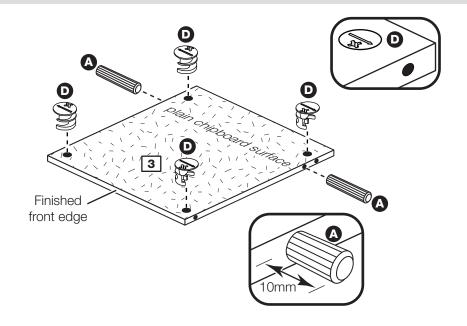


Step 10


Fit the top to the right side

Push the top 3 onto the right side 2.

Use a screwdriver to tighten the 2 large locking nuts **①** fitted to the top **③**.

Note: Turn the large locking nuts **①** as far as they will go - more than 1/2 a turn.

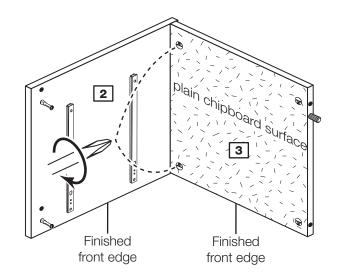




Step 11

Prepare the 2 rails

Tap 2 wooden dowels **A** into each of the 2 rails **4**.

Insert 2 large locking nuts **①** into each of the 2 rails **4**.

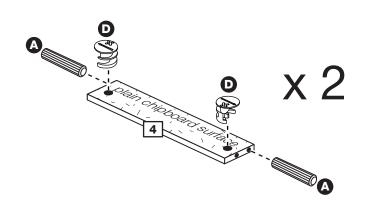


Step 12

Fit the 2 rails

Push the 2 rails 4 onto the right side 2.

Use a screwdriver to tighten the large locking nut **①** fitted to each of the 2 rails **4**.

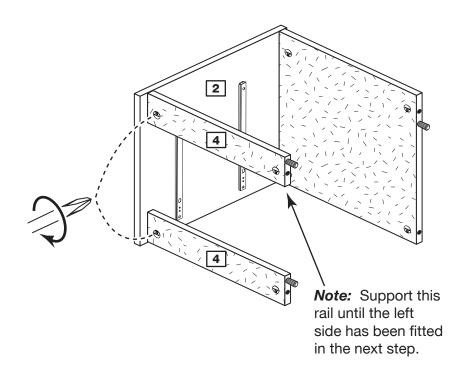


Step 13

Fit the left side

Push the left side 1 onto the assembly.

Use a screwdriver to tighten the 4 large locking nuts **D** fitted to the top **3** and the 2 rails **4**.

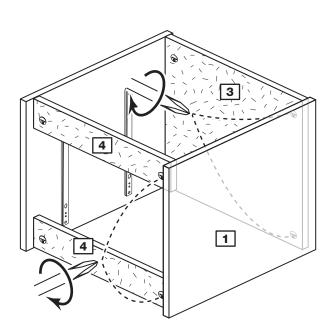

Step 14

Fit the back and plastic nails

a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Place the back 10 onto the unit.


Nail 1 around the outside edges of the back 10.

Note: Nails should be spaced about 150mm apart.

Tap 2 plastic nails **M** into the bottom edge of each of the sides **1** and **2**.

Stand the unit up for the next step.

The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

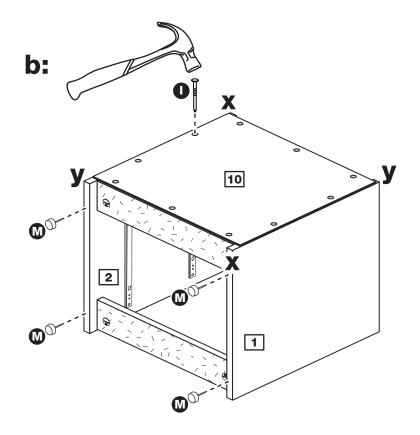


Step 15

Fit the drawers


Working from the inside of the drawer, insert 2 screws **(G)** through the sides and out into the 2nd threaded hole in the runner.

Note: Do not overtighten the screws **G**. If they catch on the runner you may need to loosen them slightly.

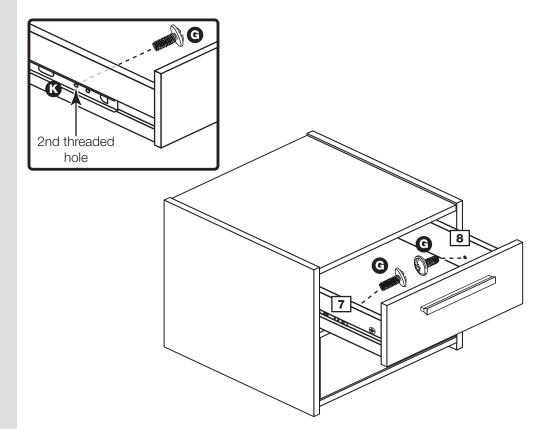

Step 16

Assembly is complete

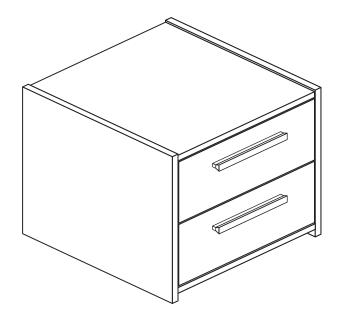

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW