


Venice - Corner TV Unit

Assembly Instructions - Please keep for future reference

360/1396

379/7248

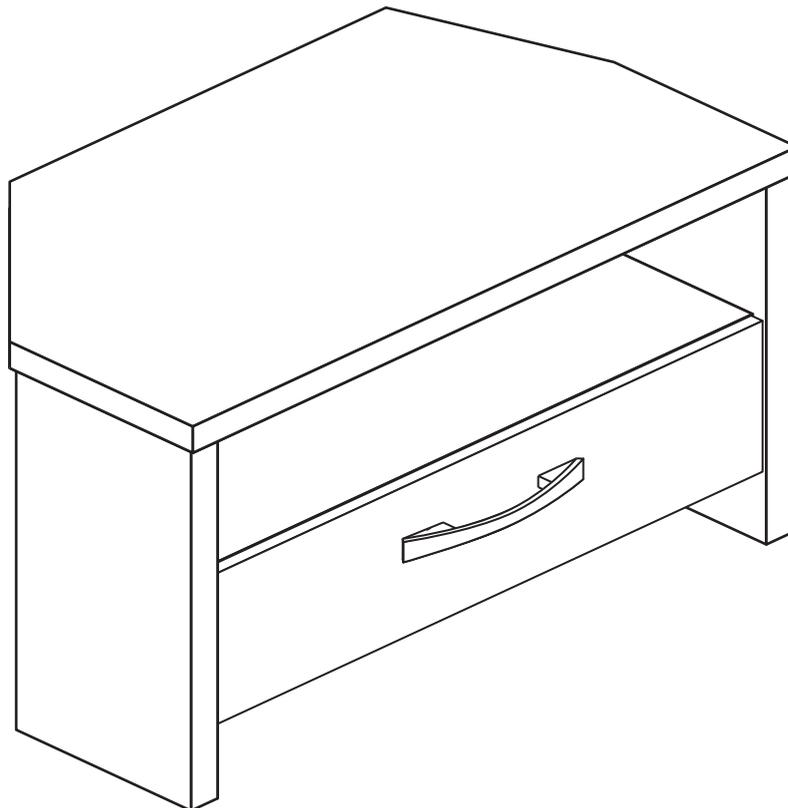

Dimensions

Width - 79.5cm

Depth - 39cm

Height - 51cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 16kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below


Please check you have all the panels listed below

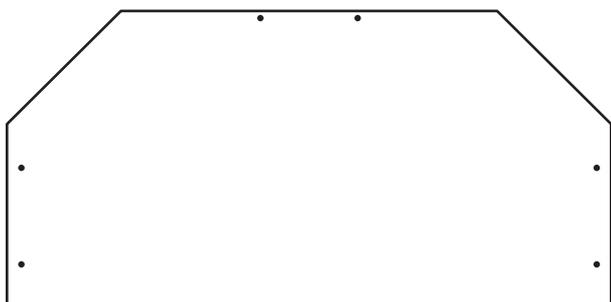


1 Top (D1315A)
(795 x 391mm)

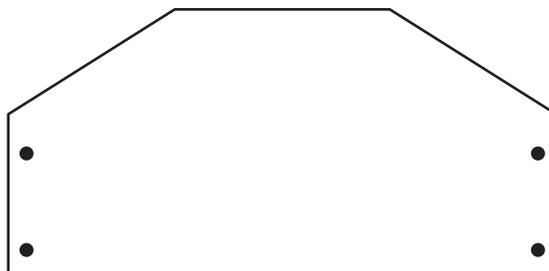

2 Horizontal (D1318A)
(721 x 352mm) x 2

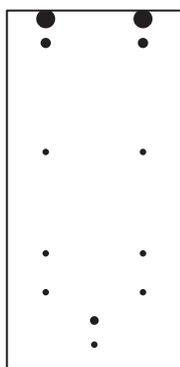


3 Side (D1912A)
(477 x 230mm) x 2

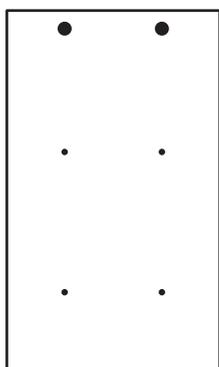


4 Upright (D1319A)
(477 x 280mm)




5 Plinth (D1320A)
(721 x 96mm)

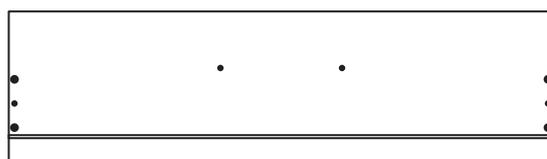


6 Drawer Front (D3076A)
(717 x 200mm)



7 Left Drawer Side (W454LH)
(200 x 115mm)



9 Drawer Back (W454)
(689 x 115mm)



8 Right Drawer Side (W454RH)
(200 x 115mm)



10 Drawer Base (T454)
(700 x 197mm)








Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.
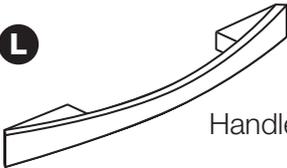
<p>A </p> <p>Wooden dowel (F22) x 2</p>	<p>B </p> <p>Metal dowel (F901) x 14</p>	<p>C </p> <p>Large locking nut (F900) x 12</p>
<p>D </p> <p>Hollow core locking nut (F892) x 4</p>	<p>E </p> <p>Small metal dowel (F893) x 4</p>	<p>F </p> <p>45mm Screw (F65) x 4</p>
<p>G </p> <p>Small locking nut (F3) x 2</p>	<p>H </p> <p>Knock-in Peg (F171GY) x 4</p>	<p>I </p> <p>19mm Screw (F461) x 2</p>
<p>J </p> <p>9mm Screw (F74) x 2</p>	<p>K </p> <p>9mm Screw (F73) x 4</p>	<p>L </p> <p>Handle (FBARH128)</p>
<p>M </p> <p>Drawer runner (F307) x 2</p>		

Tools required



Rule



Cross-head screwdriver



Scissors




Hammer



Eye protection (when using a hammer or drill)

Ruler - Use this ruler to help correctly identify the screws

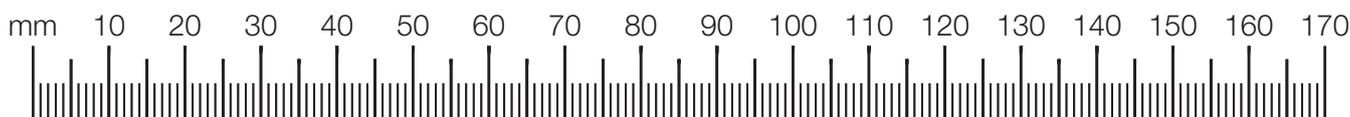

Assembly Instructions


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Step 1

Prepare the drawer front

Screw 2 metal dowels **B** into the holes shown on the back of the drawer front **6**.

Note: Tighten metal dowels up fully against the panel.

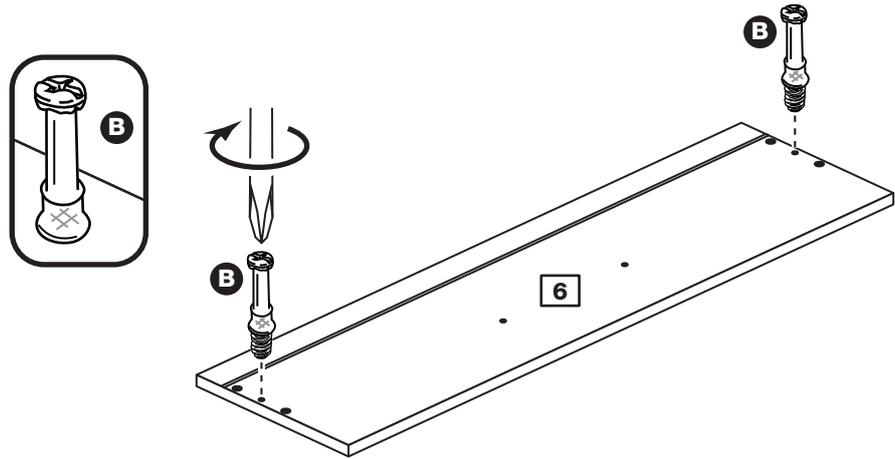


Step 2

Prepare the drawer sides

Insert a small locking nut **G** into the hole shown on the left drawer side **7** and right drawer side **8**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

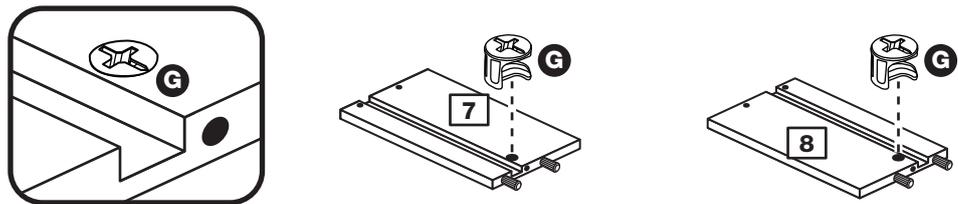

Note: Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.


Step 3

Attach the drawer sides to the drawer front

Push the left drawer side **7** and right drawer side **8** onto the back of the drawer front **6**.

Turn the small locking nuts **G** on the left drawer side **7** and right drawer side **8**.

Note: Turn the locking nuts **G** clockwise to secure panels - more than 1/2 a turn.

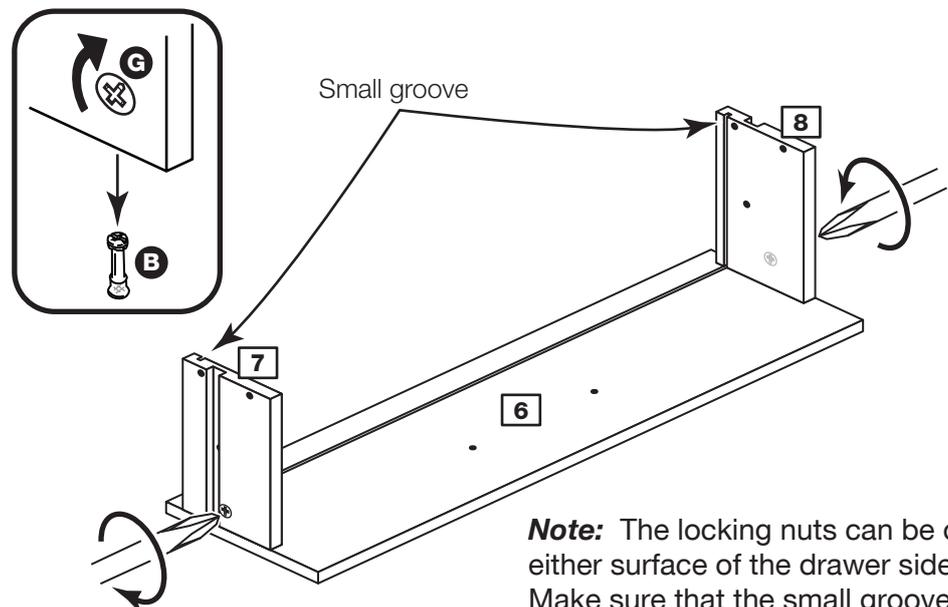


Note: The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **10** down the grooves in the drawer sides **7** and **8** and down into the groove in the drawer front **6**.

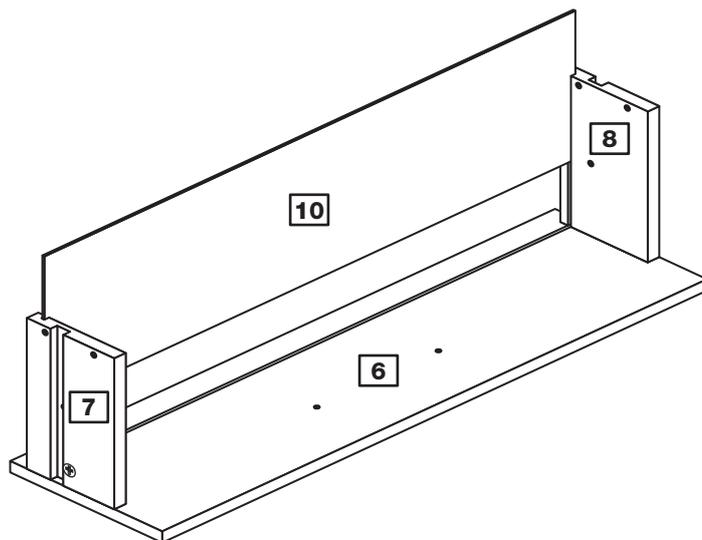


Step 5

Fit the drawer back

Fit the drawer back **9** between the drawer sides **7** and **8**.

Make sure that the drawer base **10** fits into the groove in the drawer back **9**.


Hold the drawer back **9** in position and tap the knock-in pegs **H** through the holes in the drawer sides **7** and **8**.

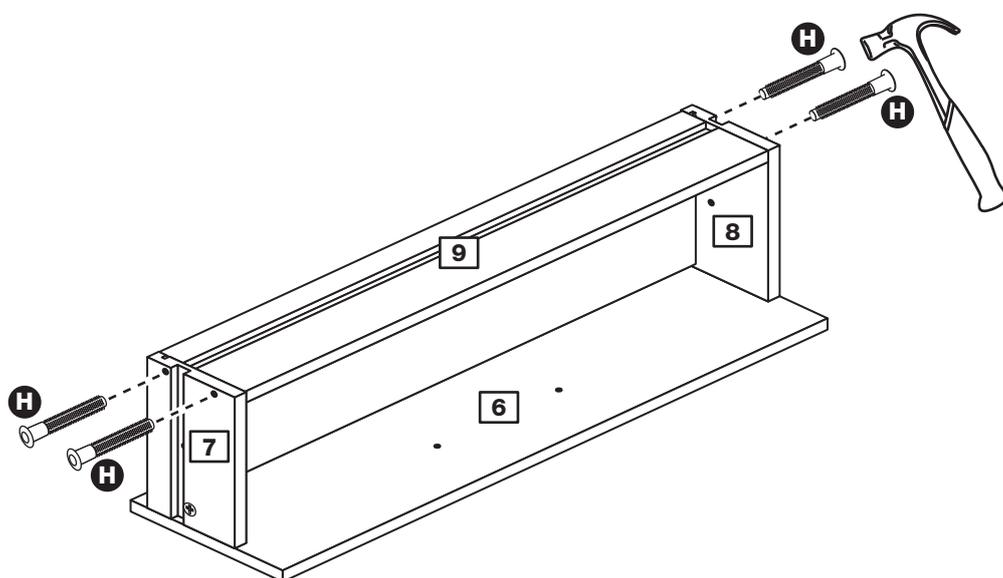

Step 6

Attach the handle

Attach the handle **L** to the drawer front **6** using 2 screws **I**.

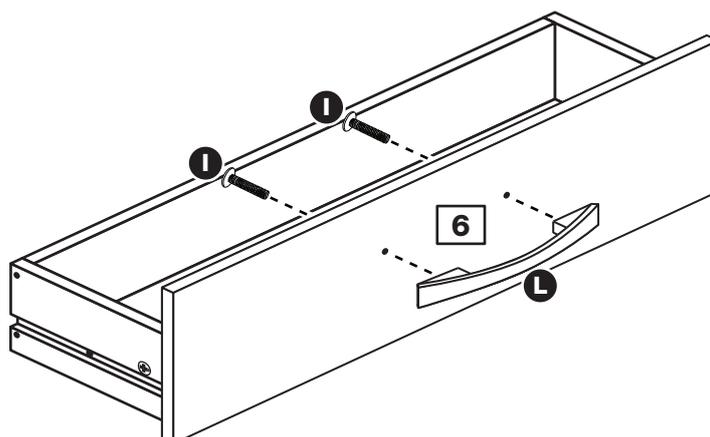

Assembly Instructions

Step 7

Prepare the left side

a: Place a runner **M** onto one of the sides **3**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **K**.







b: Slide the runner **M** back the other way and fit the 2nd screw **K** into the corresponding hole in the side **3**.

c: Screw 5 metal dowels **B** into the side **3**.

Push 2 hollow core locking nuts **D** into the side **3**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **D**.

Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **D**.

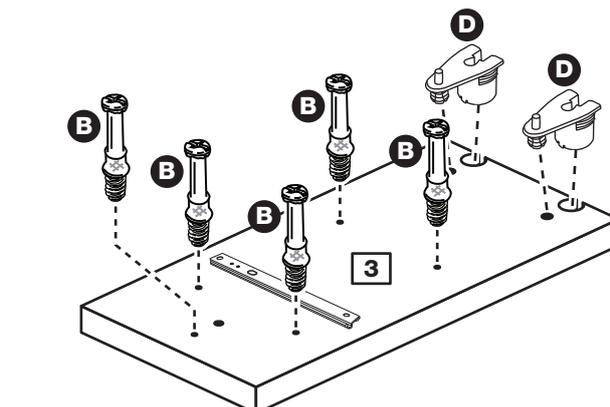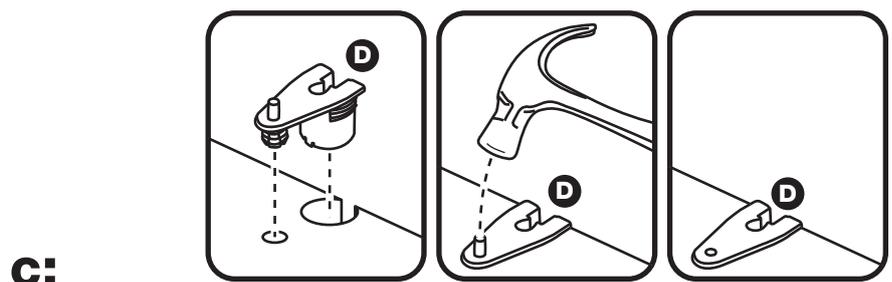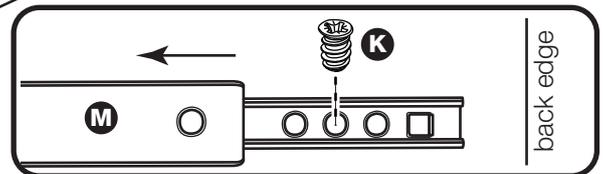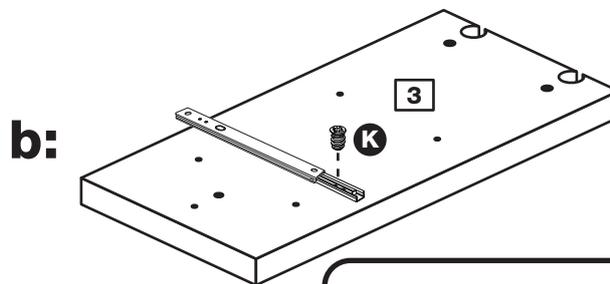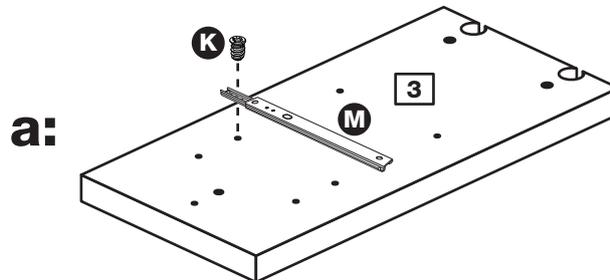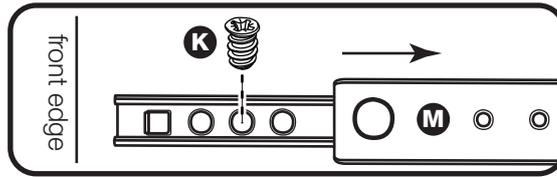


Assembly Instructions


Step 8

Prepare the right side

a: Place a runner **M** onto one of the sides **3**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **K**.

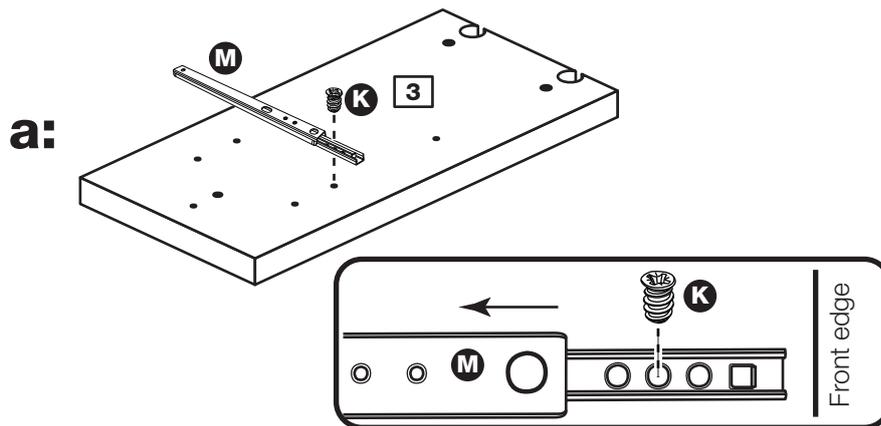

b: Slide the runner **M** back the other way and fit the 2nd screw **K** into the corresponding hole in the side **3**.

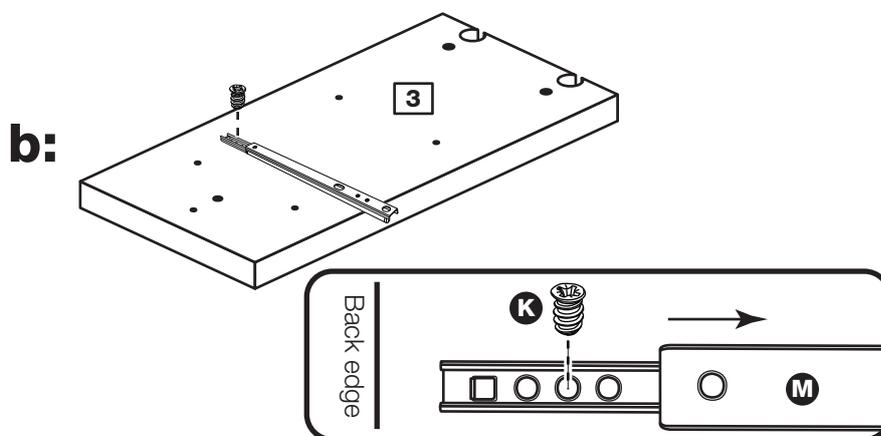


c: Screw 5 metal dowels **B** into the side **3**.

Push 2 hollow core locking nuts **D** into the side **3**, making sure that they are flush against the panel's surface.

Using a hammer, tap in the pin on the hollow core locking nut **D**.

Note: The pin should be tapped in flush with the top surface of the hollow core locking nut **D**.

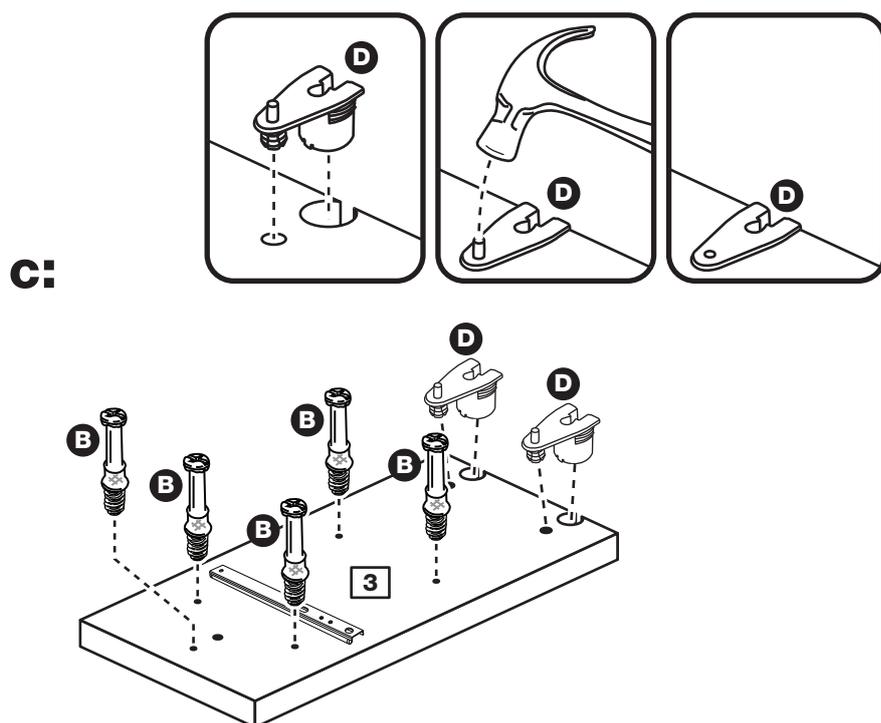

Assembly Instructions


Step 9

Prepare the top

Screw 2 metal dowels **B** into the top **1**.

Screw 4 small metal dowels **E** into the holes on the top **1**.

Note: Tighten metal dowels up fully against the panels.

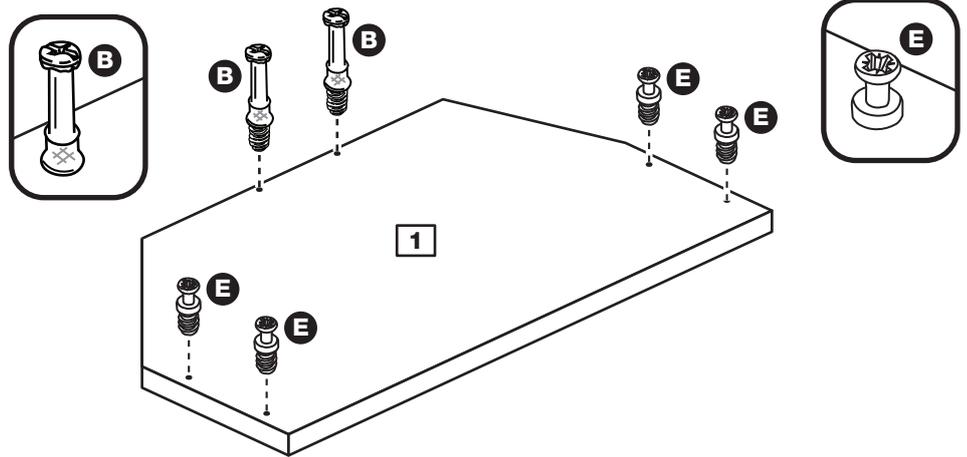


Step 10

Join the top to a side

Attach the top **1** to the right side **3**.

Note: You will need to slide the 2 small metal dowels **E** into the top of the 2 hollow core locking nuts **D**.

Insert a screwdriver into the 2 hollow core locking nuts **D** and turn the nuts inside as far as they will go.

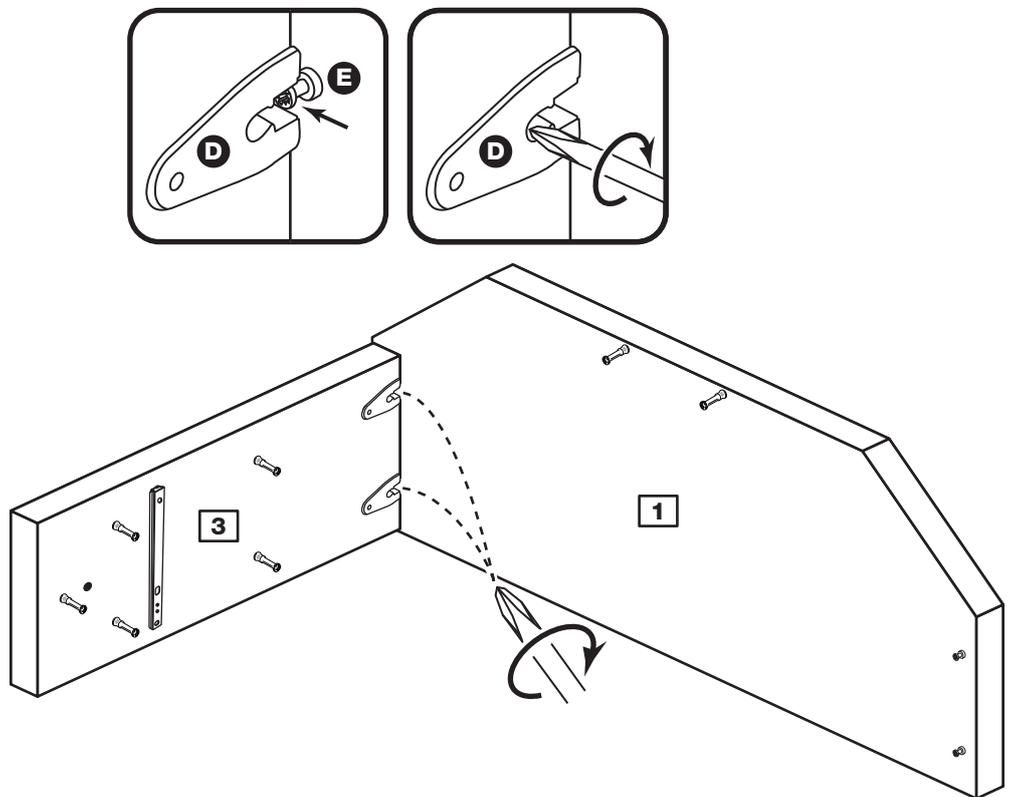


Step 11

Prepare the 2 horizontals

Insert 4 large locking nuts **C** into each horizontal **2**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

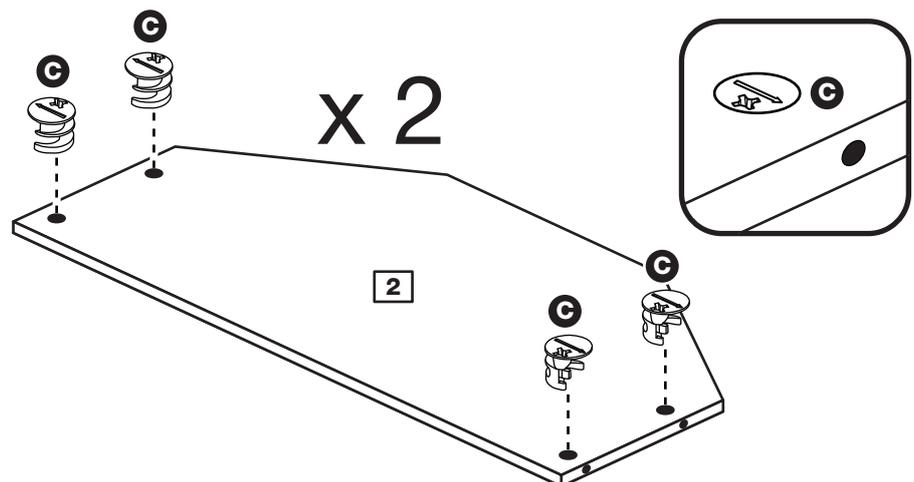

Assembly Instructions


Step 12

Fit a horizontal

Push a horizontal **2** onto the right side **3**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the horizontal **2**.

Note: Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

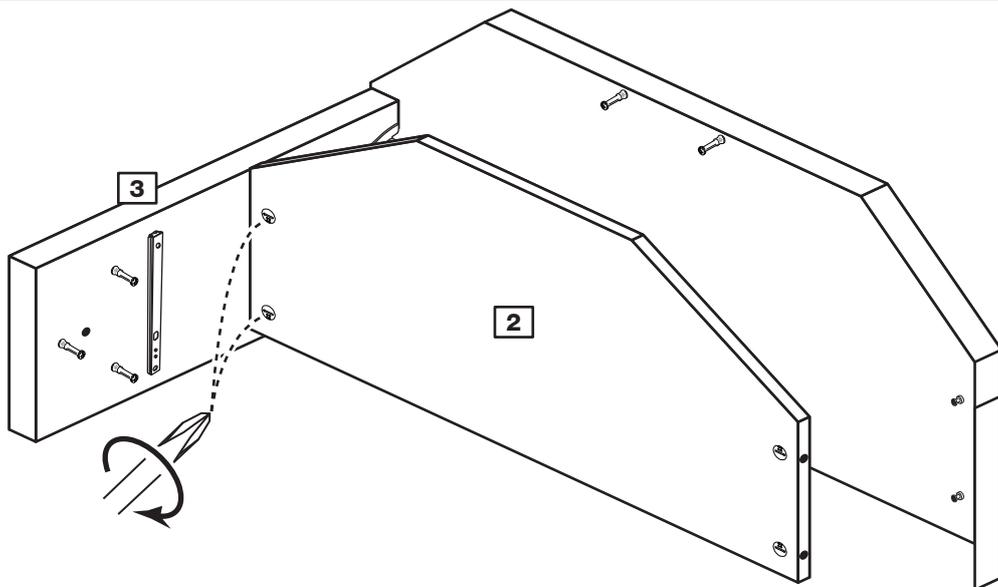


Step 13

Fit the other horizontal

Push the other horizontal **2** onto the right side **3**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the horizontal **2**.

Note: Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

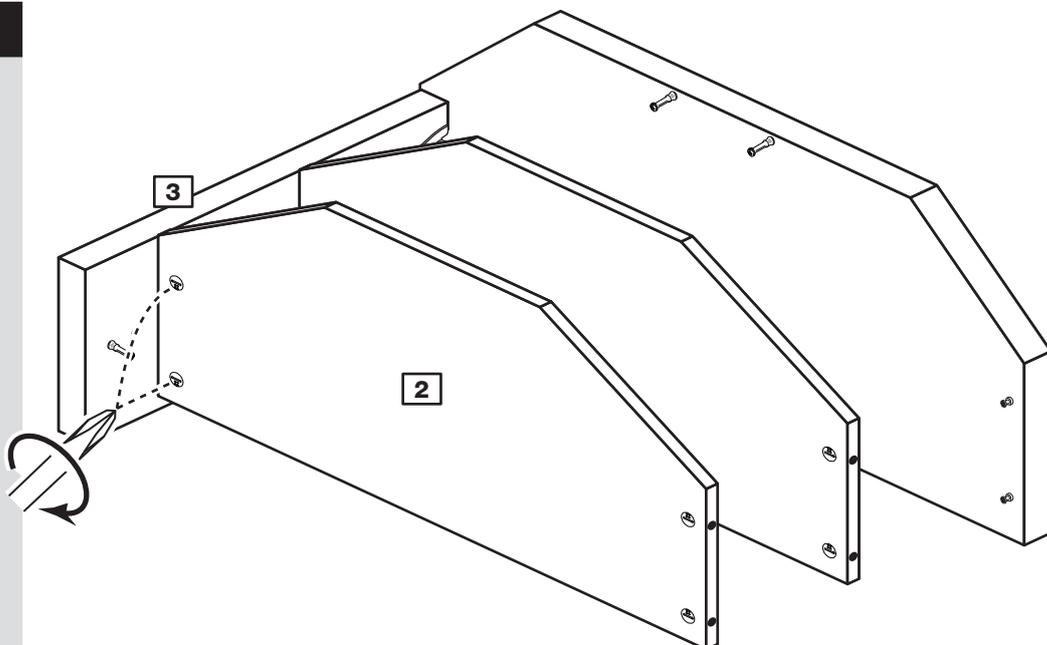


Step 14

Prepare the plinth

Tap 2 wooden dowels **A** into the plinth **5**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Insert 2 large locking nuts **C** into the plinth **5**.

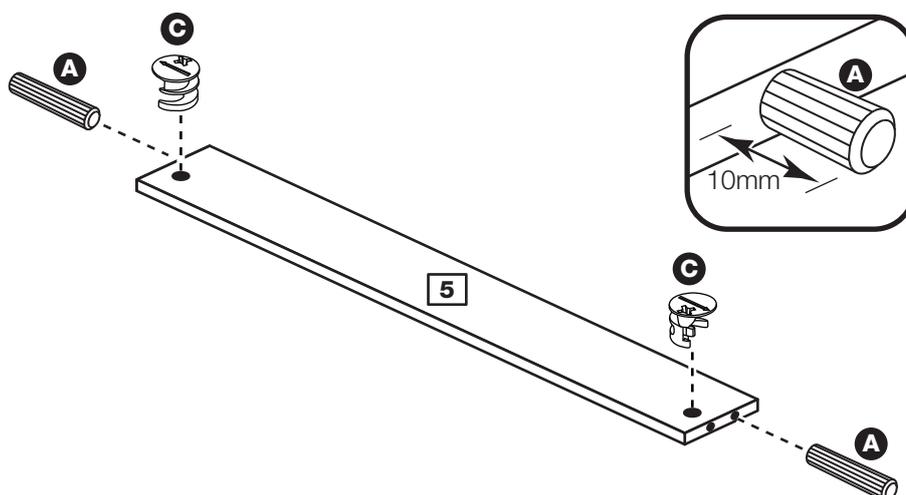

Assembly Instructions


Step 15

Fit the plinth

Push the plinth **5** onto the right side **3**.

Use a screwdriver to tighten the large locking nut **C** fitted to the plinth **5**.

Note: Turn the large locking nut **C** as far as it will go - more than 1/2 a turn.

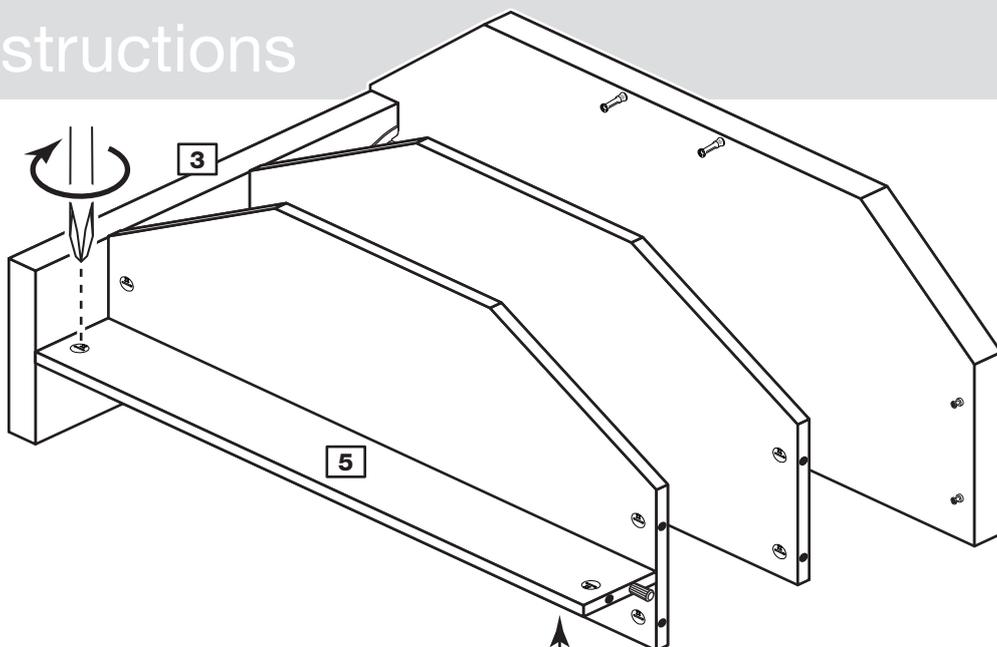

Note: Support the plinth until the side has been fitted in the next step.


Step 16

Fit the other side

Push the left side **3** onto the assembly.

Insert a screwdriver into the 2 hollow core locking nuts **D** and turn the nuts inside as far as they will go.

Use a screwdriver to tighten the 5 large locking nuts **C** fitted to the 2 horizontals **2** and the plinth **5**.

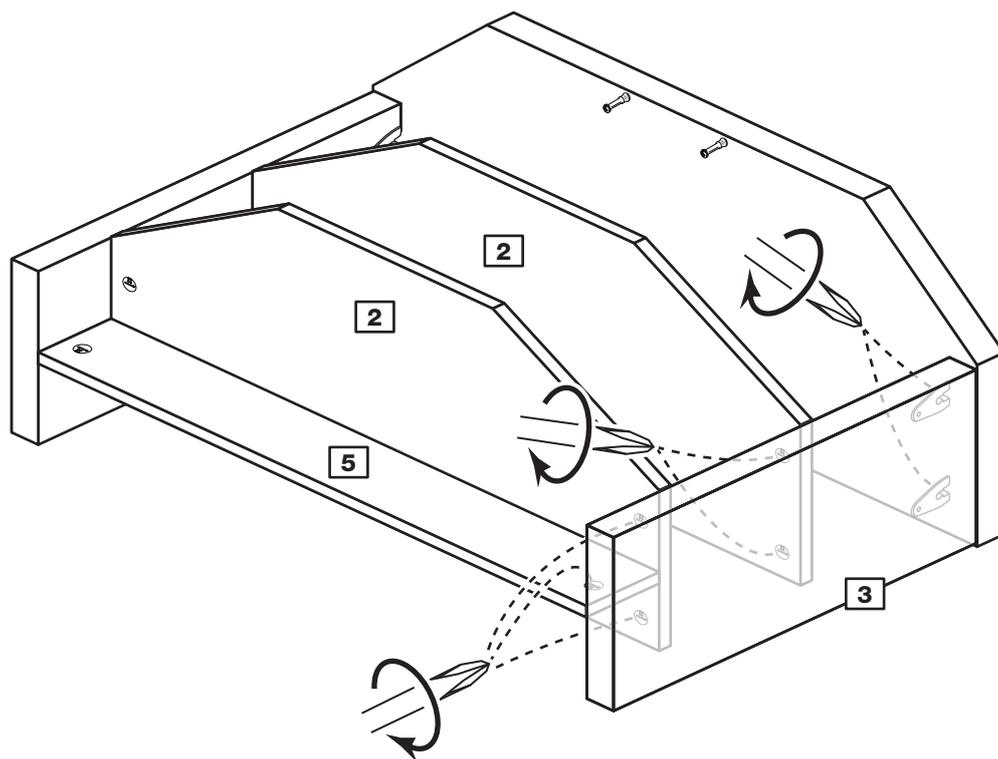


Step 17

Prepare the upright

Insert 2 large locking nuts **C** into the upright **4**.

Note: The arrow on the locking nuts **must** point towards the hole in the edge of the panel.

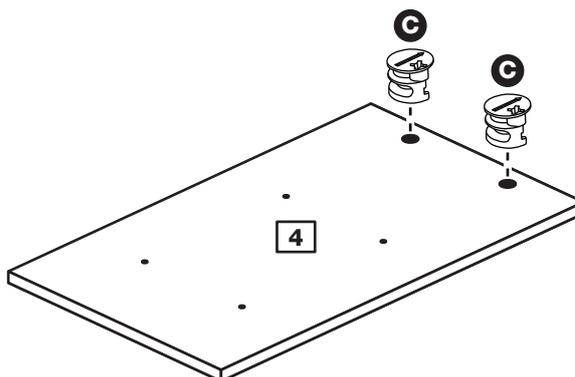

Assembly Instructions

Step 18

Fit the upright


Push the upright **4** onto the top **1**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the upright **4**.

Note: Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

Screw through the 4 holes in the upright **4** and into the back edge of the 2 horizontals **2** using screws **F**.

Stand the unit up.

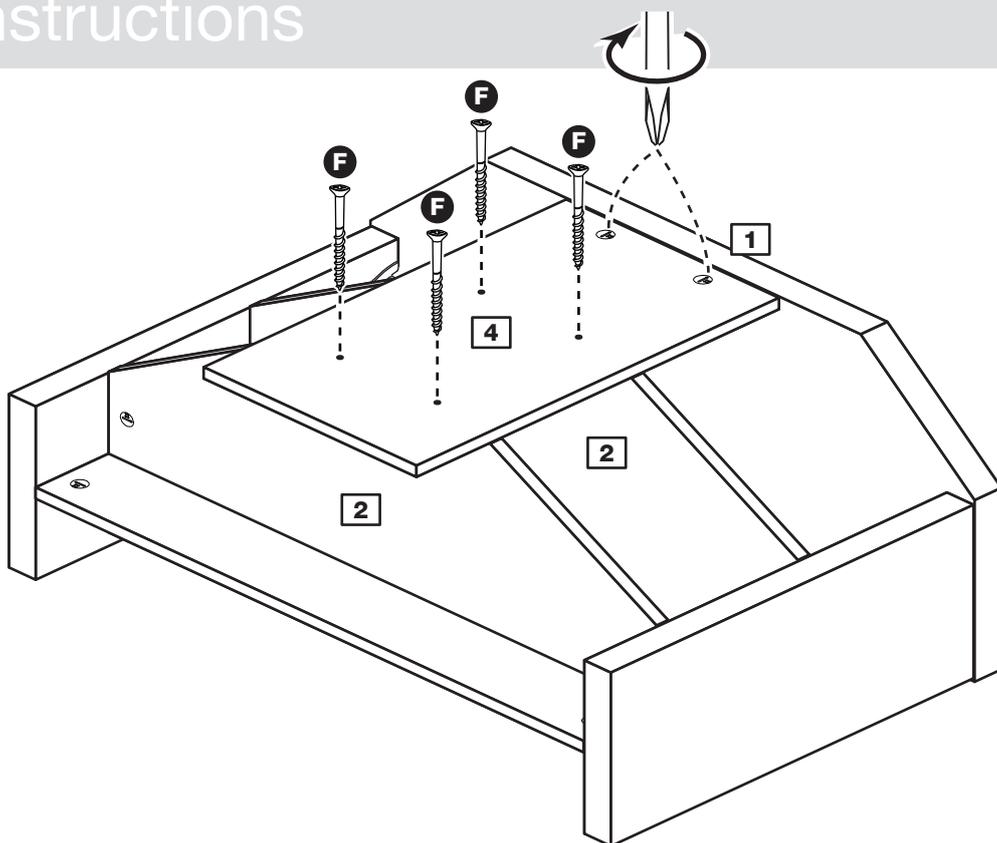


Step 19

Fit the drawer


Slide both of the runners **M** forward and locate the drawer sides **7** and **8** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **M**.

Working from the inside of the drawer, insert 2 screws **J** through the drawer sides and out into the 2nd threaded hole in the runner.

Assembly is complete

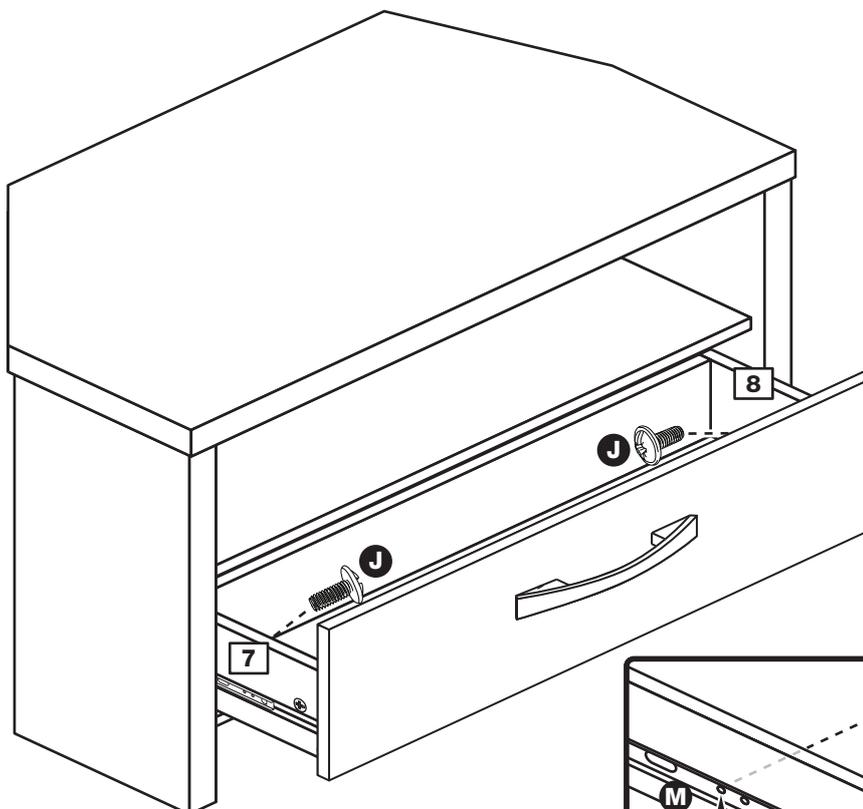

Note: Do not overtighten the screws. If they catch on the runner you may need to loosen them slightly.

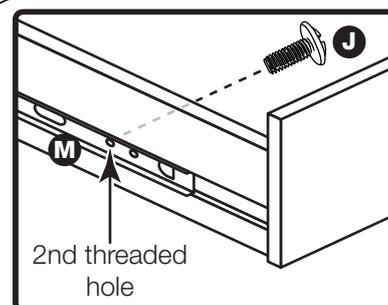

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW