


Hertford - 3 Door Mirrored Robe

Assembly Instructions - Please keep for future reference

359/5354

355/6214

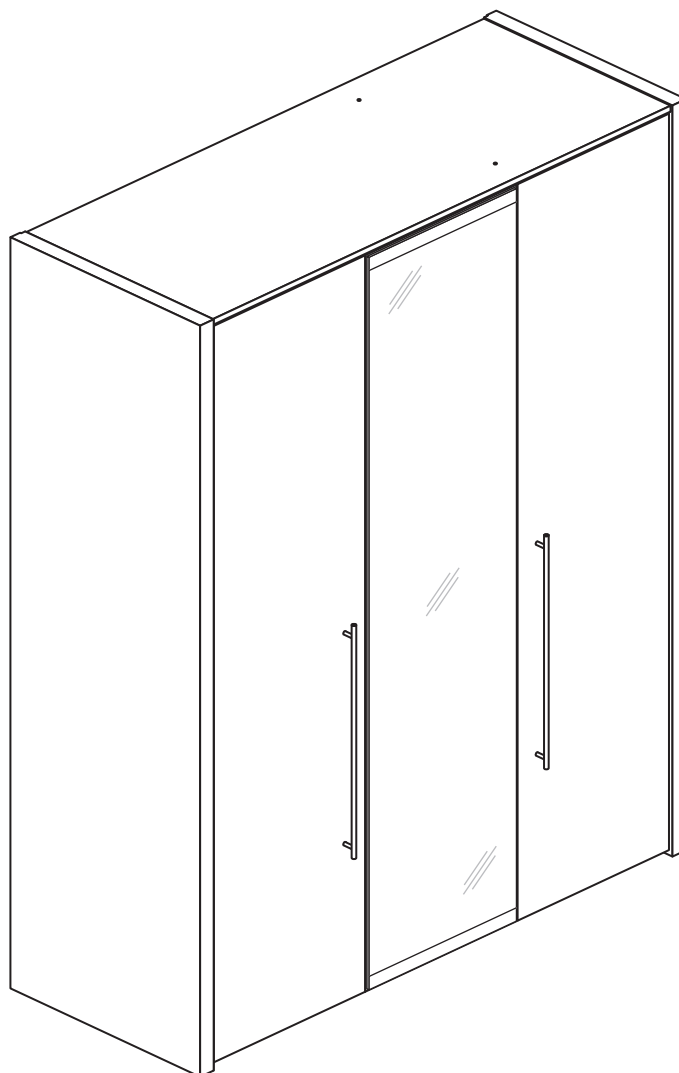

Dimensions

Width - 125.5cm

Depth - 49cm

Height - 194cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 83kgs. Please lift with care.
- Check you have all the components and tools listed on pages 1, 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).













- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Tools required

 Rule	 Spirit level	 Eye protection (when using a hammer or drill)	 Cross-head screwdriver	 Electric drill (only use when drilling into walls)	 Step ladder
 Square	 Scissors	 Hammer	 Bradawl		

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: 0370 112 1928.

For any other queries please contact the Customer Helpline on: 0345 640 2020


Please check you have all the panels listed below

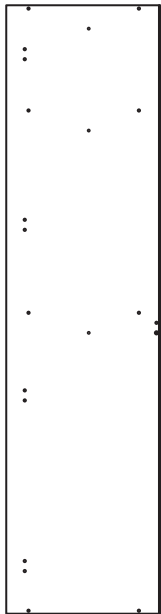


1 Left Side (DF368)
(1940 x 490mm)




2 Right Side (DF2025)
(1940 x 490mm)

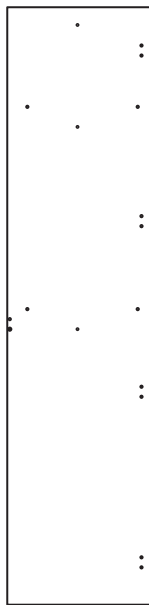


3 Divider (DF377)
(1905 x 462mm)

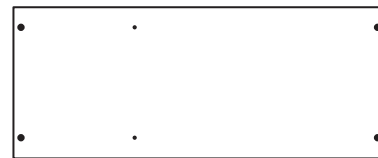

4 Top (DF370)
(1185 x 482mm)

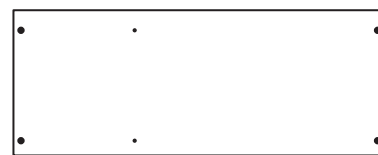

5 Base (DF371)
(1185 x 463mm)



6 Rail (DF372)
(791 x 78mm)



7 Large Shelf (DF375)
(791 x 461mm)




8 Small Shelf (DF376)
(378 x 461mm)




9 Hanging Rail (FHR373)
(373mm long)



10 Hanging Rail (FHR785)
(785mm long) x 2

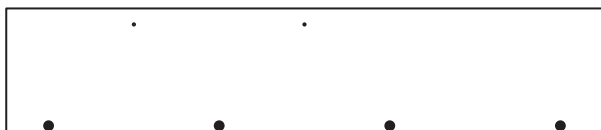

11 Left Door (DF373)
(1902 x 391mm)

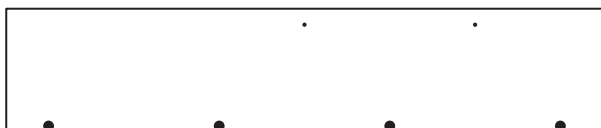


12 Right Door (DF3136)
(1902 x 391mm) x 2



13 Mirror Door (DF3137)
(1902 x 391mm)



14 Small Back (X1931-394)
(1931 x 394mm)

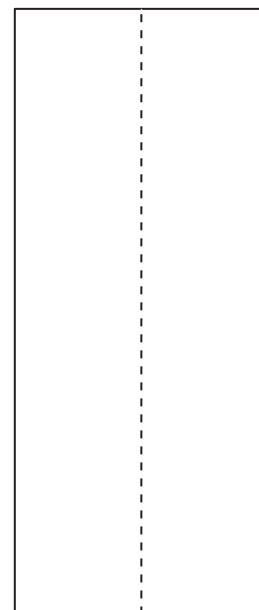

15 Large Back (X1931-809)
(1931 x 809mm)









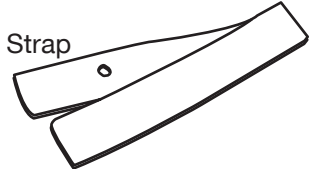

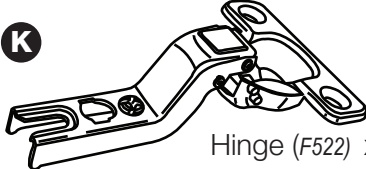




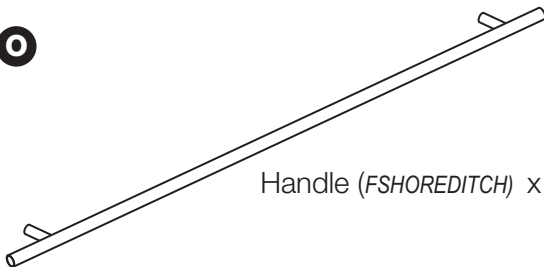


Components - Fittings


If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)
Alternatively, call the Spares Helpline on: 0370 112 1928.
For any other queries please contact the Customer Helpline on: 0345 640 2020

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<p>A </p> <p>Metal dowel (F901) x 10</p>	<p>B </p> <p>Large locking nut (F900) x 10</p>	<p>C </p> <p>Wooden dowel (F22) x 2</p>
<p>D </p> <p>19mm Screw (F461) x 4</p>	<p>E </p> <p>13mm Screw (F63) x 36</p>	<p>F </p> <p>40mm Screw (F910) x 4</p>
<p>G </p> <p>Nail (F51) x 42</p>	<p>H </p> <p>Rail Holder (F891) x 6</p>	<p>I </p> <p>Strap</p>
<p>J </p> <p>Hinge plate (F523) x 12</p>	<p>K </p> <p>Hinge (F522) x 12</p>	<p> Screw Washer x 2</p> <p>Overbalance protector kit (F269) x 1</p>
<p>Important: Always pair up the hinges with the hinge plates from the same bag. DO NOT mix them up.</p>		
<p>L </p> <p>Nail screw (F277) x 6</p>	<p>M </p> <p>Back holder (F276) x 6</p> <p>*These can also be round</p>	<p>N </p> <p>Shelf stud (F110) x 8</p>
<p>O </p> <p>Handle (FSHOREDITCH) x 2</p>		

Ruler - Use this ruler to help correctly identify the screws

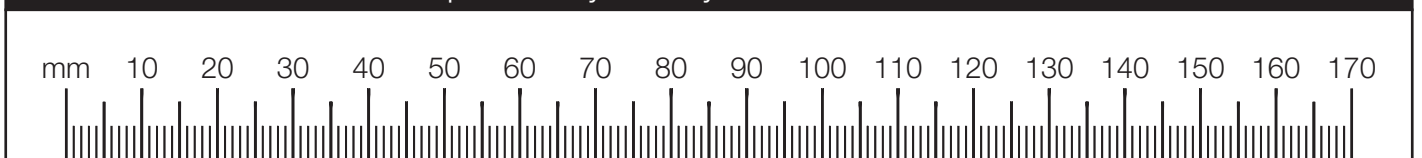



Assembly Instructions

Step 1

Start preparing the divider


Please refer to the drawings opposite. You have a choice of 2 positions to fit the large shelf. This will then determine whether you need to fit 1 or 2 hanging rails in the positions shown.

To fit a rail holder **H** screw through the top hole with screw **E** and into the mark hole drilled in the divider **3**. Make sure that it is fitted straight, in line with the panel edges and then fit another screw **E** using the lower hole.

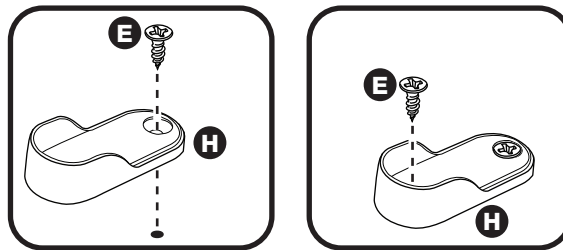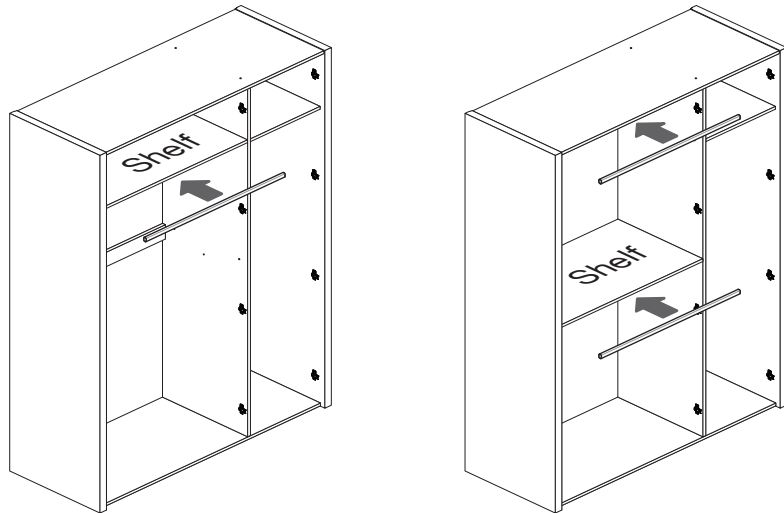

Fit 1 rail holder here if you are going to have the large shelf near the top of your unit.

Fit 2 rail holders here if you are going to have the large shelf in the middle of your unit.

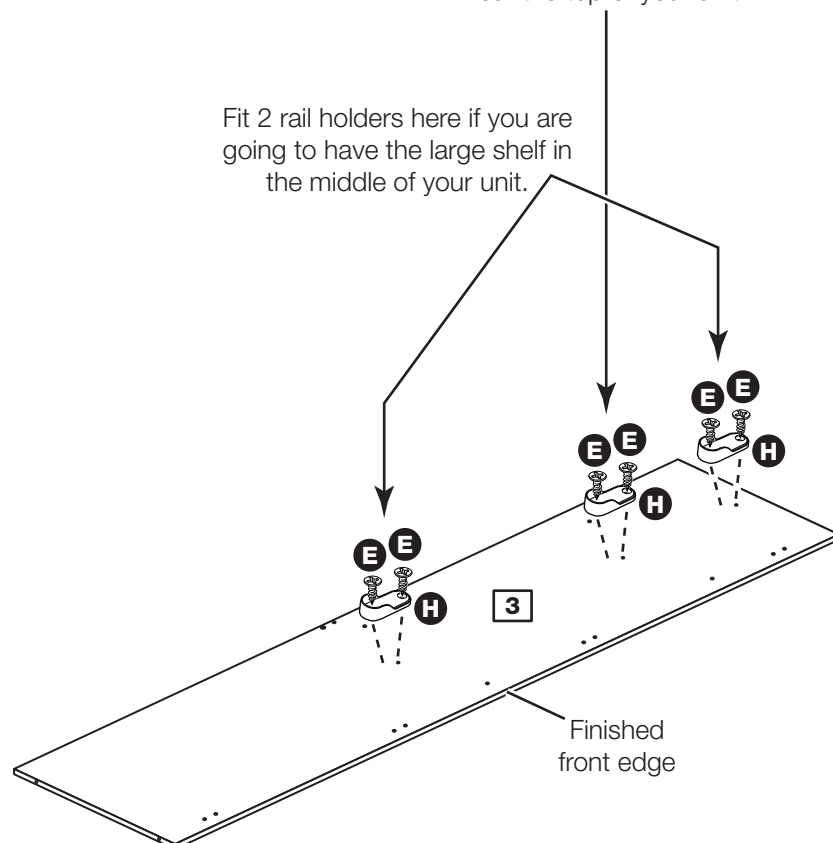

Assembly Instructions

Step 2

Finish preparing the divider


a: Screw a metal dowel **A** into the divider **3**.

Note: Tighten the metal dowels up fully against the panels.


Fit 4 hinge plates **J** onto the divider **3**, making sure that the slot is facing towards the finished front edge.

Turn the divider over

b: To fit the rail holder **H** screw through the top hole with screw **E** and into the mark hole drilled in the divider **3**. Make sure that it is fitted straight, in line with the panel edges and then fit another screw **E** using the lower hole.

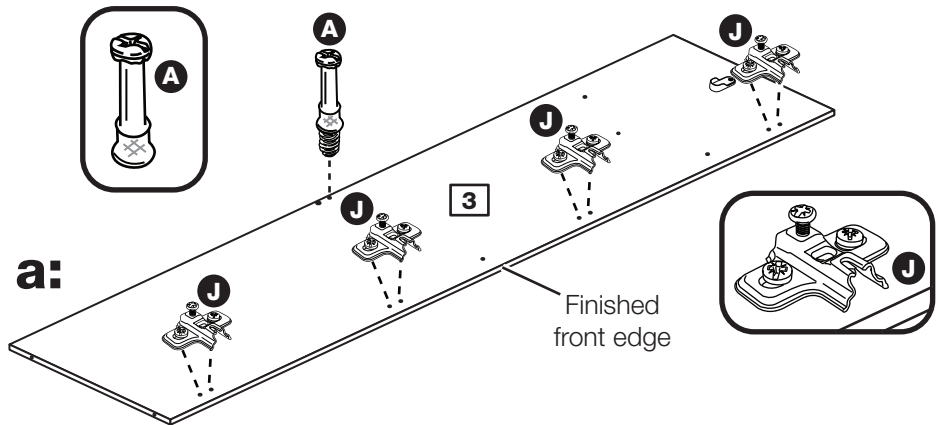

Turn the divider over

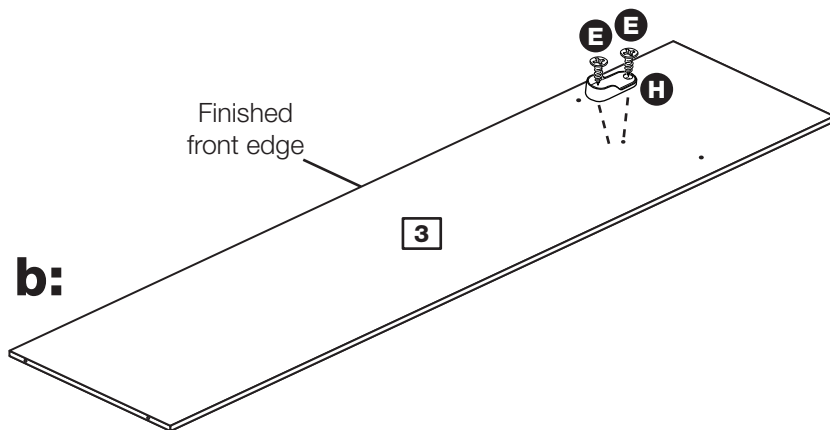


Step 3

Prepare the top and base

Insert 4 large locking nuts **B** into the top **4**.

Insert 4 large locking nuts **B** into the base **5**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

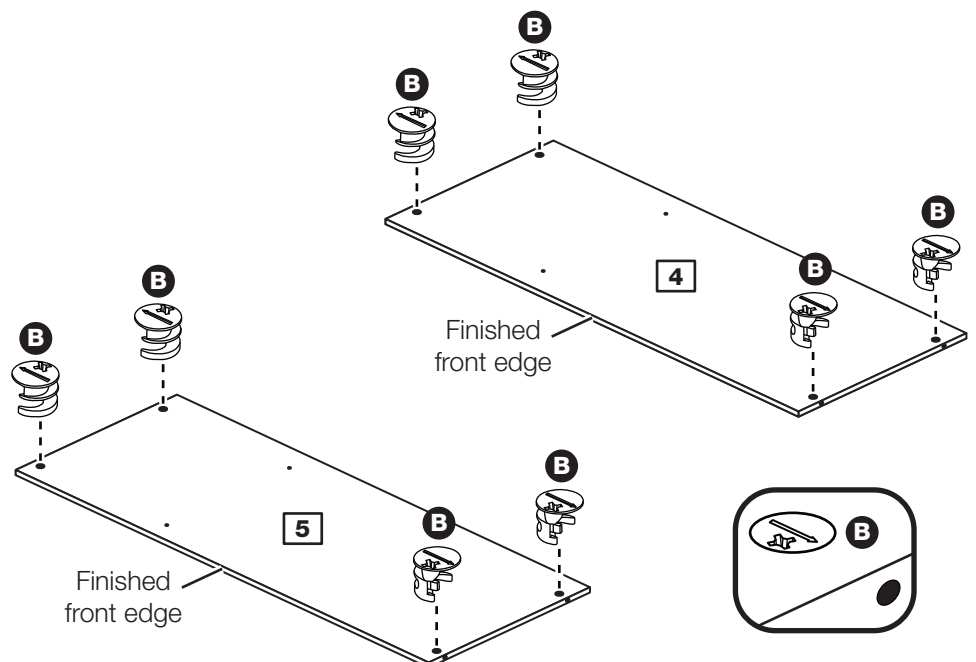


Assembly Instructions

Step 4

Fit top and base to the right side

Attach the top **4** to the divider **3** using 2 screws **F**.

Attach the base **5** to the divider **3** using 2 screws **F**.

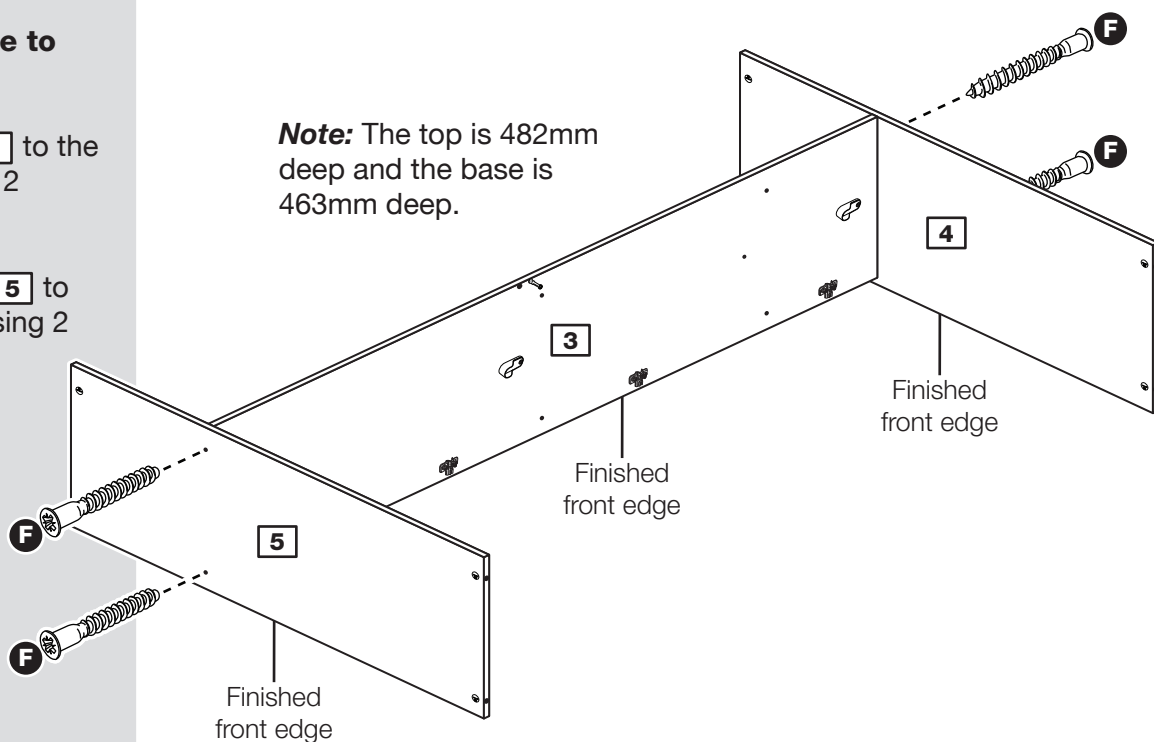


Step 5

Prepare the right side

Screw 4 metal dowels **A** into the right side **2**.

Fit 4 hinge plates **J** onto the right side **2**, making sure that the slot is facing towards the finished front edge.

To fit the rail holder **H** screw through the top hole with screw **E** and into the mark hole drilled in the right side **2**. Make sure that it is fitted straight, in line with the panel edges and then fit another screw **E** using the lower hole.

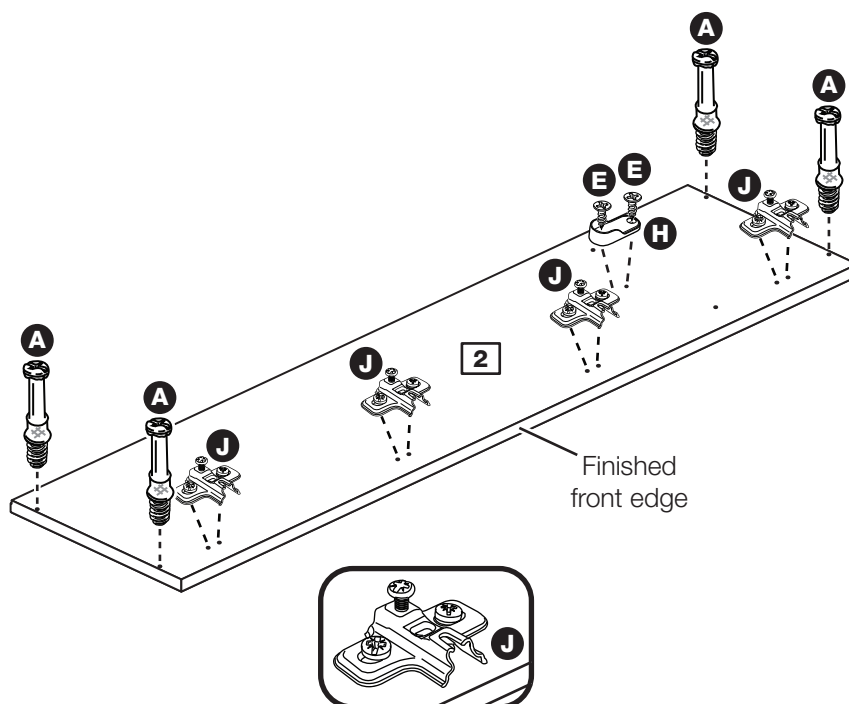


Assembly Instructions

Step 6

Fit the right side

Push the right side **2** onto the top **4** and base **5**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the top **4** and the 2 fitted to the base **5**.

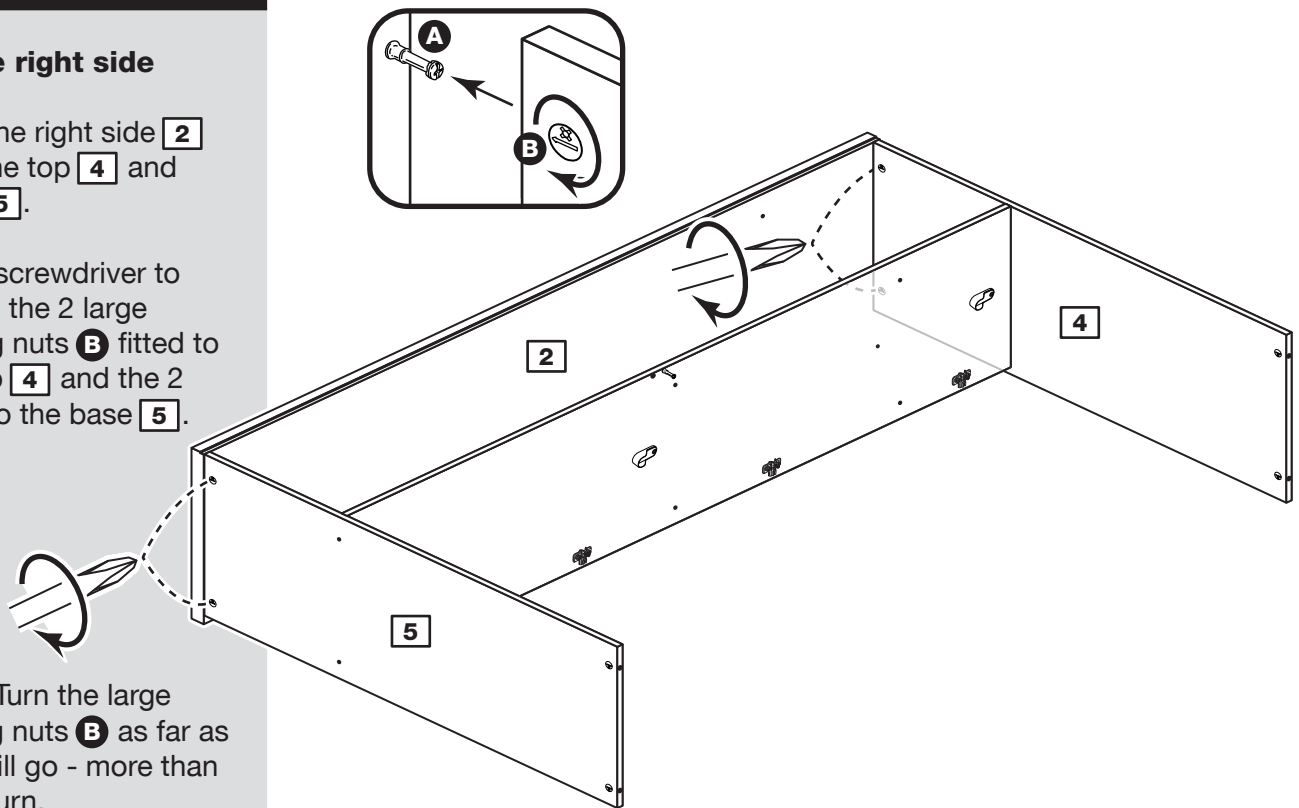

Note: Turn the large locking nuts **B** as far as they will go - more than 1/2 a turn.


Step 7

Prepare the rail

Insert 2 large locking nuts **B** into the rail **6**.

Tap 2 wooden dowels **C** into the rail **6**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

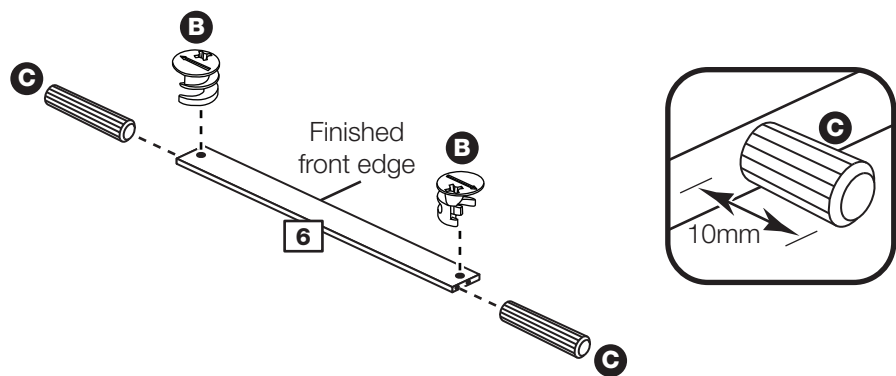

Assembly Instructions

Step 8



Prepare the left side

a: Fit 1 or 2 rail holders into the same position as you did in step 1 for the divider.

To fit the rail holder **H**, screw through the top hole with screw **E** and into the mark hole drilled in the left side **1**. Make sure that it is fitted straight, in line with the panel edges and then fit another screw **E** using the lower hole.

b: Screw 5 metal dowels **A** into the left side **1**.

Fit 4 hinge plates **J** onto the left side **1**, making sure that the slot is facing towards the finished front edge.

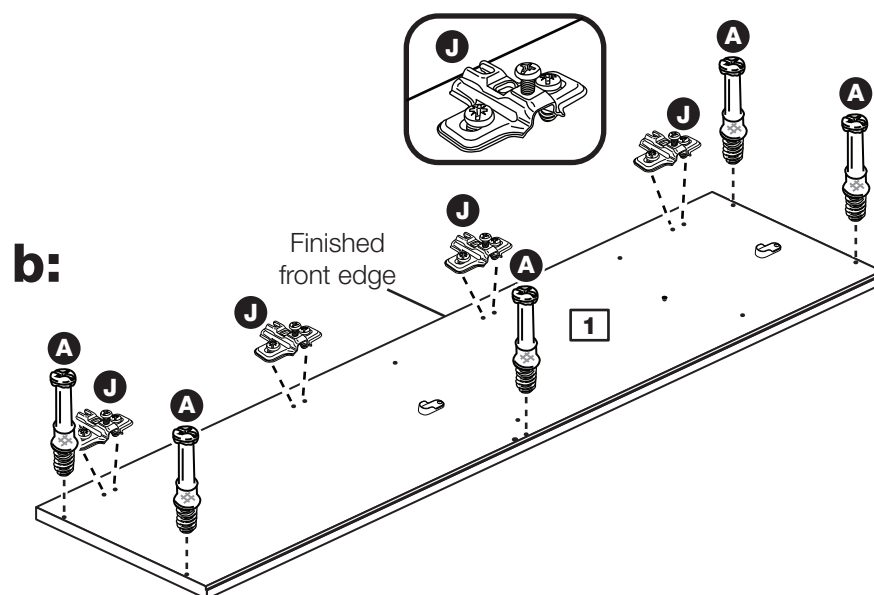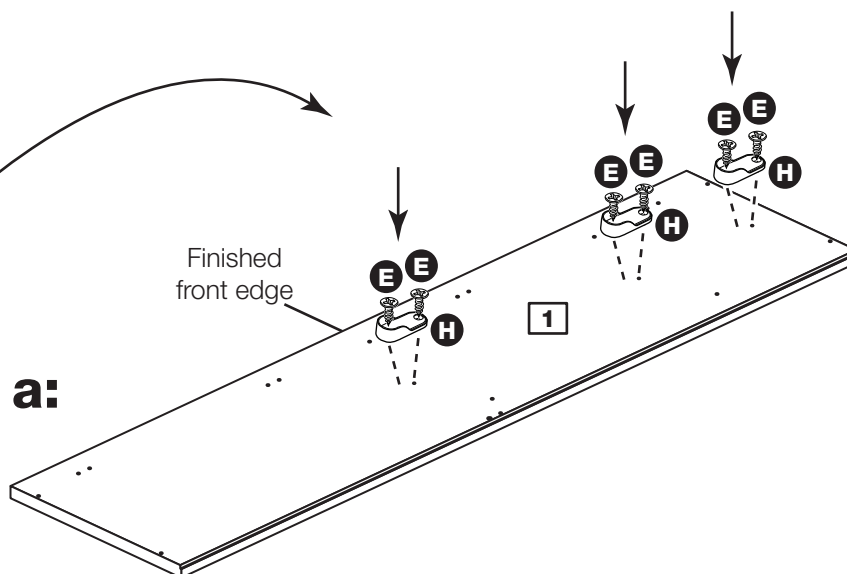


Assembly Instructions

Step 9

Fit the rail

Push the rail **6** onto the divider **3**.

Use a screwdriver to tighten the large locking nut **B** fitted to the rail **6**.

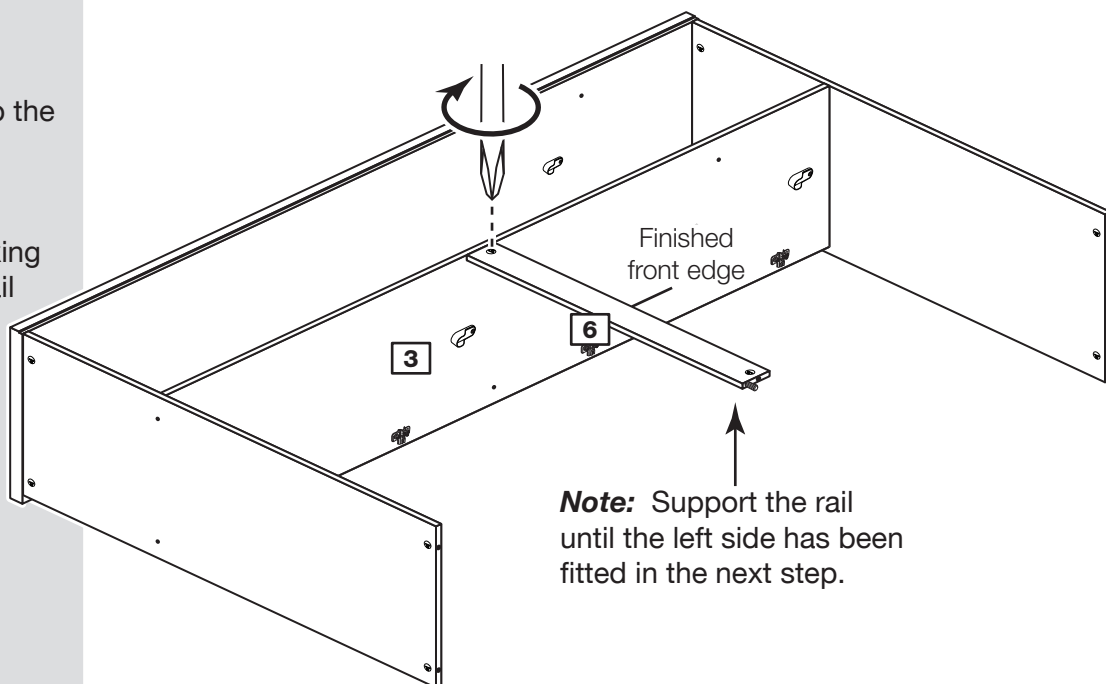


Step 10

Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **B** fitted to the top **4**, base **5** and rail **6**.

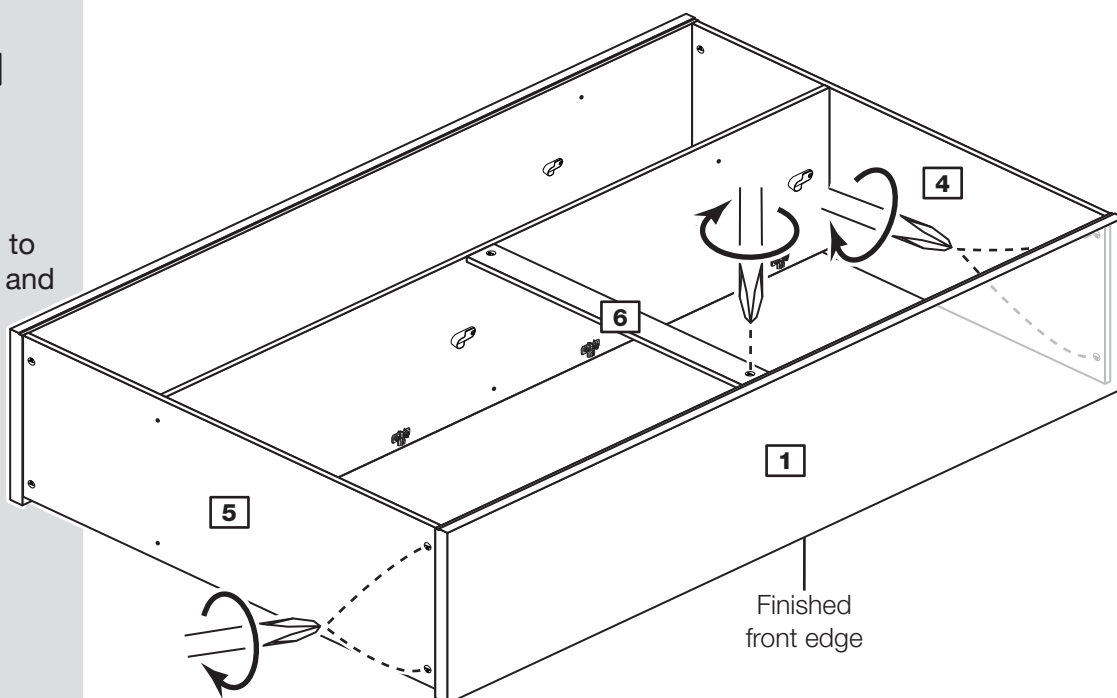

Assembly Instructions

Step 11

Fit the back panels

a: Square up the unit by making sure that measurement **x:x equals y:y**.

Place the small back **14** and large back **15** down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the upright's back edge.

b: Nail **G** around the outside edges of the 2 backs.


Note: Do not nail where the 2 backs meet and nails should be spaced about 150mm apart.

c: Push the 5 nail screws **L** through the 5 back holders **M** and tap them down between the small back **14** and large back **15** and into the back edge of the divider **3**.


Keep tapping the nail screws **L** in until the back holders **M** dig into the small and large back.

Carefully stand the unit up for the next step.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

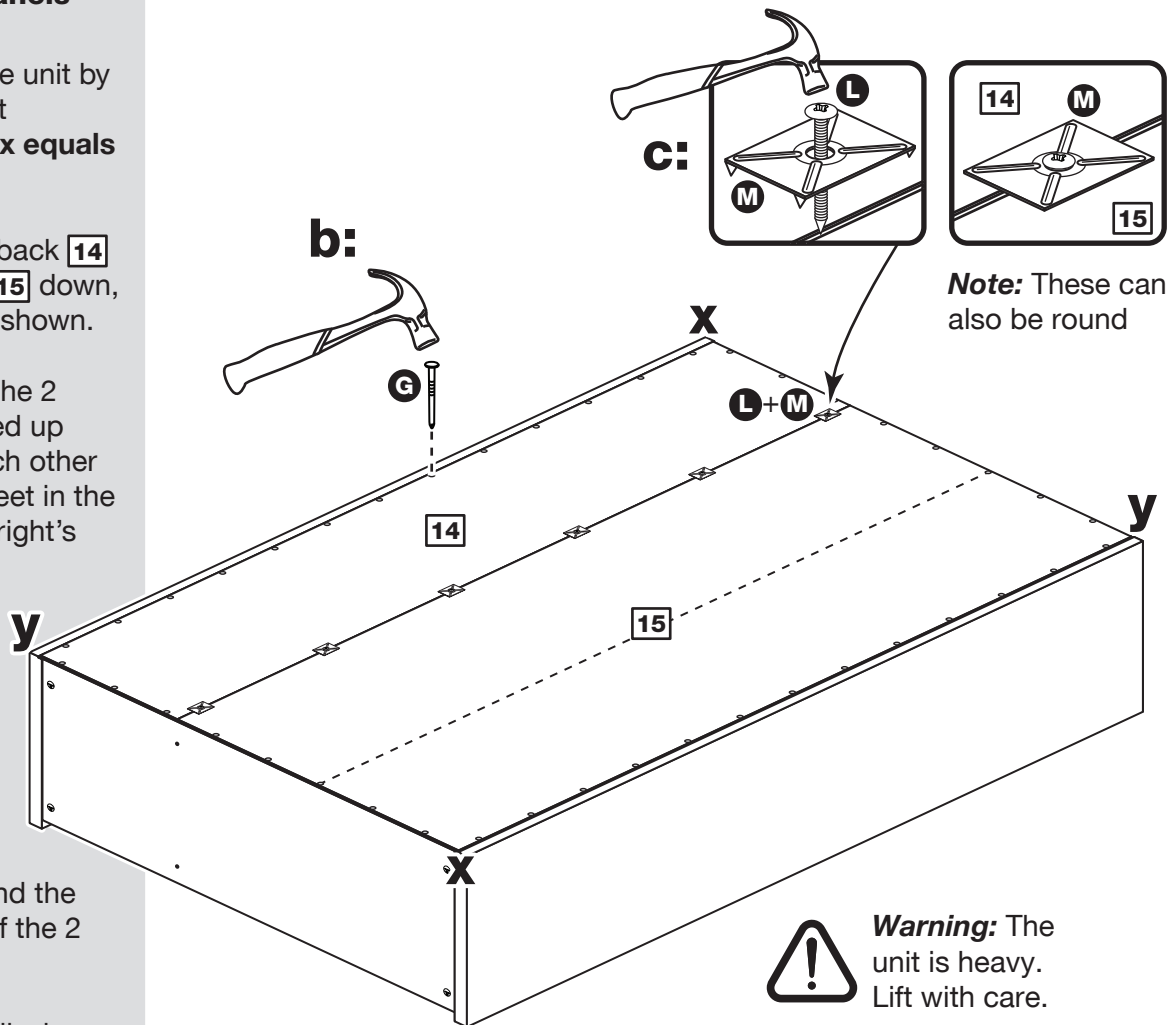

Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.




Assembly Instructions

Step 12

Fit the hanging rails

Push the small hanging rail **9** and large hanging rail(s) **10** into the rail holders **H** fitted to the panels.

Note: You may have chosen different large hanging rail positions to the ones shown.

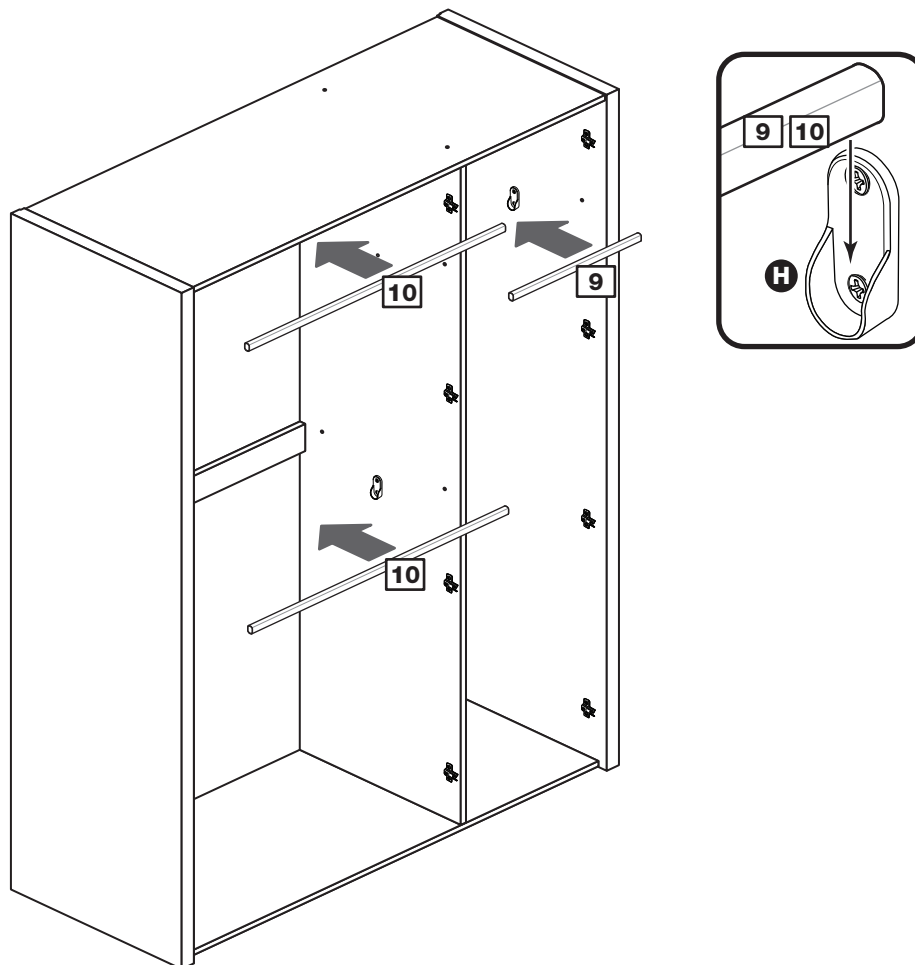


Step 13

Fit the shelf studs

Insert 4 shelf studs **N** for each shelf.

Note: You may have chosen a different position for the large shelf to the one shown.

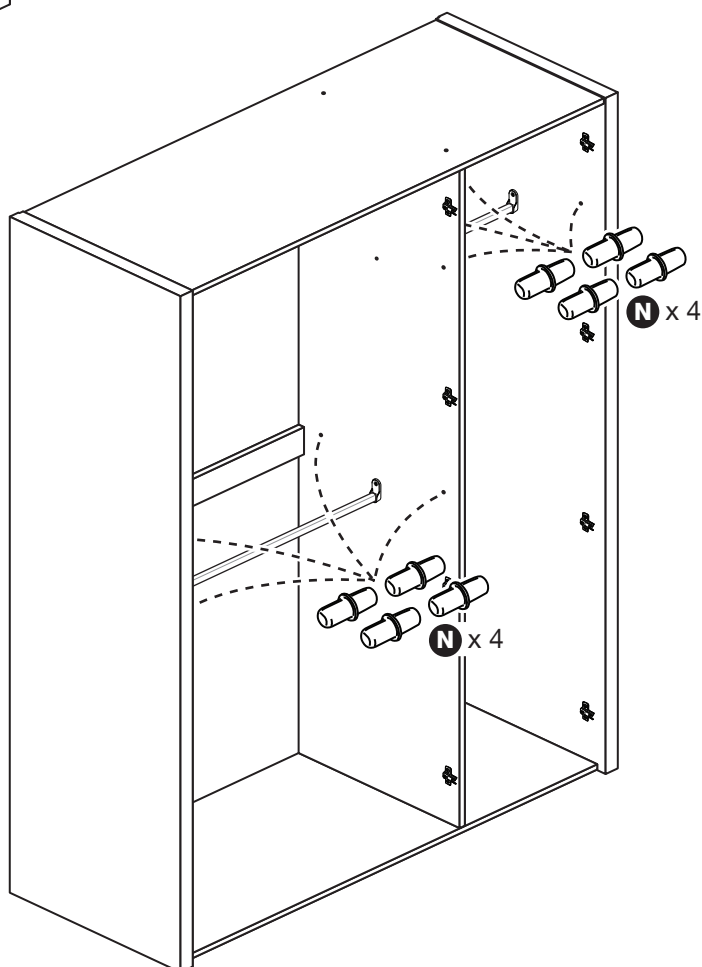


Assembly Instructions

Step 14

Fit the shelves

Lower the large shelf **7** and small shelf **8** down onto the shelf studs **N**.

Note: You may have chosen a different position for the large shelf to the one shown.

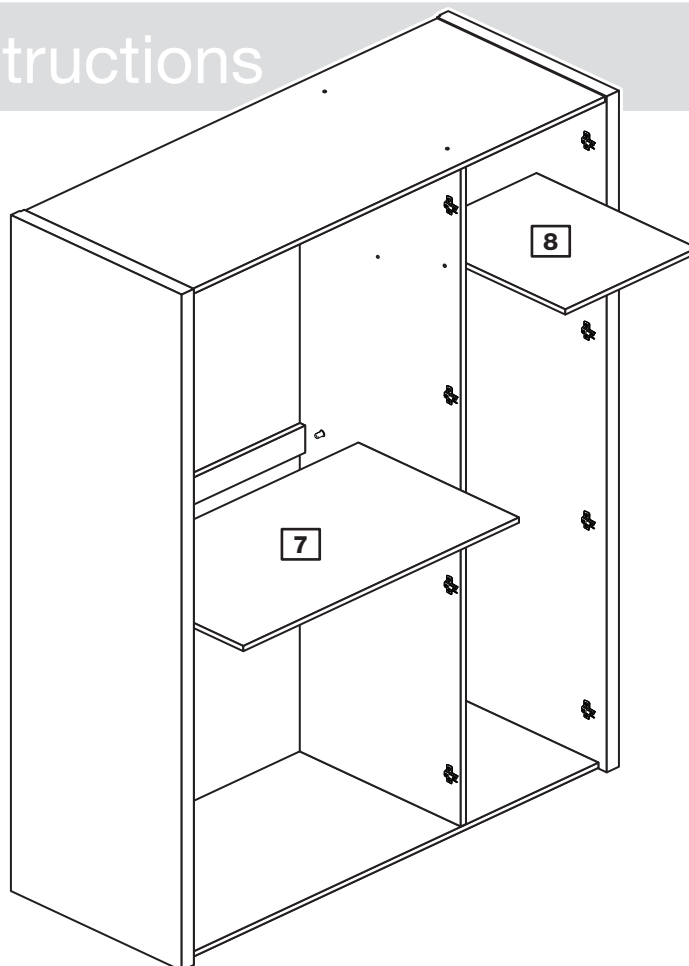


Step 15

Prepare the 3 doors

Push fit 4 hinges **K** into each of the 3 doors **11**, **12** and **13**.

Secure each hinge with 2 screws **E**.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

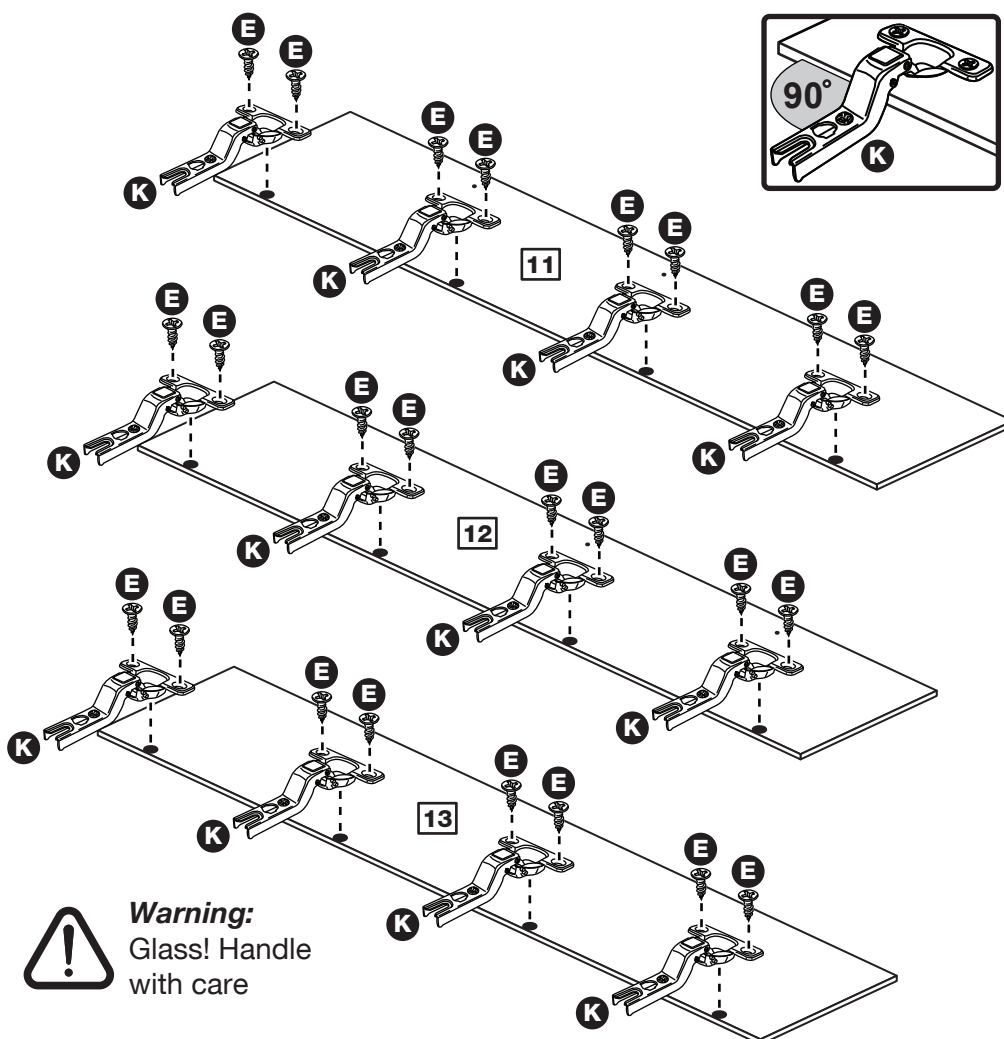

Assembly Instructions

Step 16

Fit doors and handles

Note: The easiest way to attach each door **11**, **12** and **13** is to fit the top hinge first, then align and fit the other hinges.


a: Push the hinge **K** onto the front part of the hinge plate **J**. The recess at the bottom of screw **B** goes into the slot in the hinge plate.

b: Keep the hinge **K** FLAT against the hinge plate **J** as you slide it across as far as it will go. Tighten screw **A**.


c: The hinge **K** must be flat against the hinge plate **J** prior to any adjustment.

d: The hinge **K** must NOT be AT AN ANGLE to the hinge plate **J** when assembled. This would indicate that the recess at the bottom of screw **B** had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

e: Attach a handle **O** to doors **11** and **12** using screws **D**.

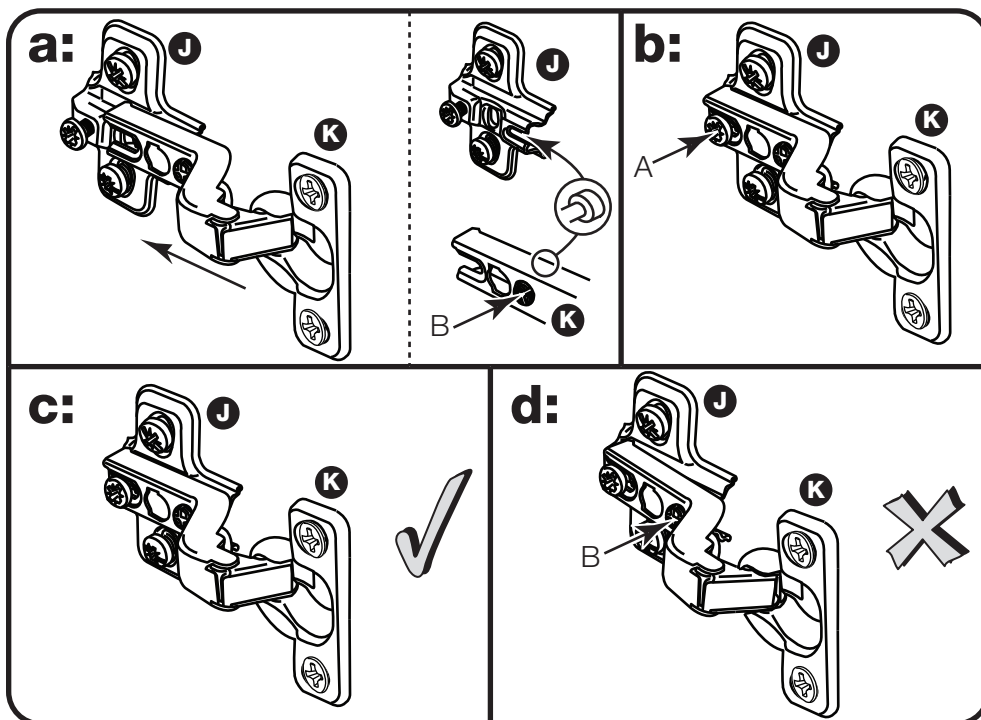

Warning: The doors are heavy. Lift with care.

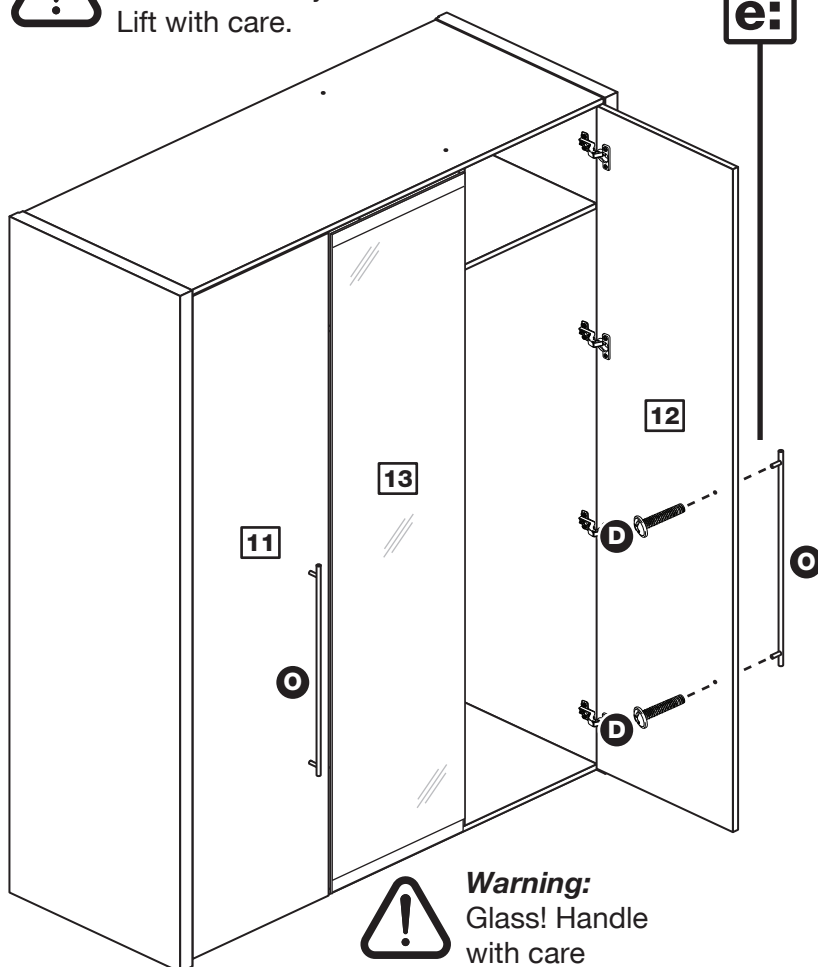

Warning: Glass! Handle with care

Assembly Instructions

Step 17

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

c: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

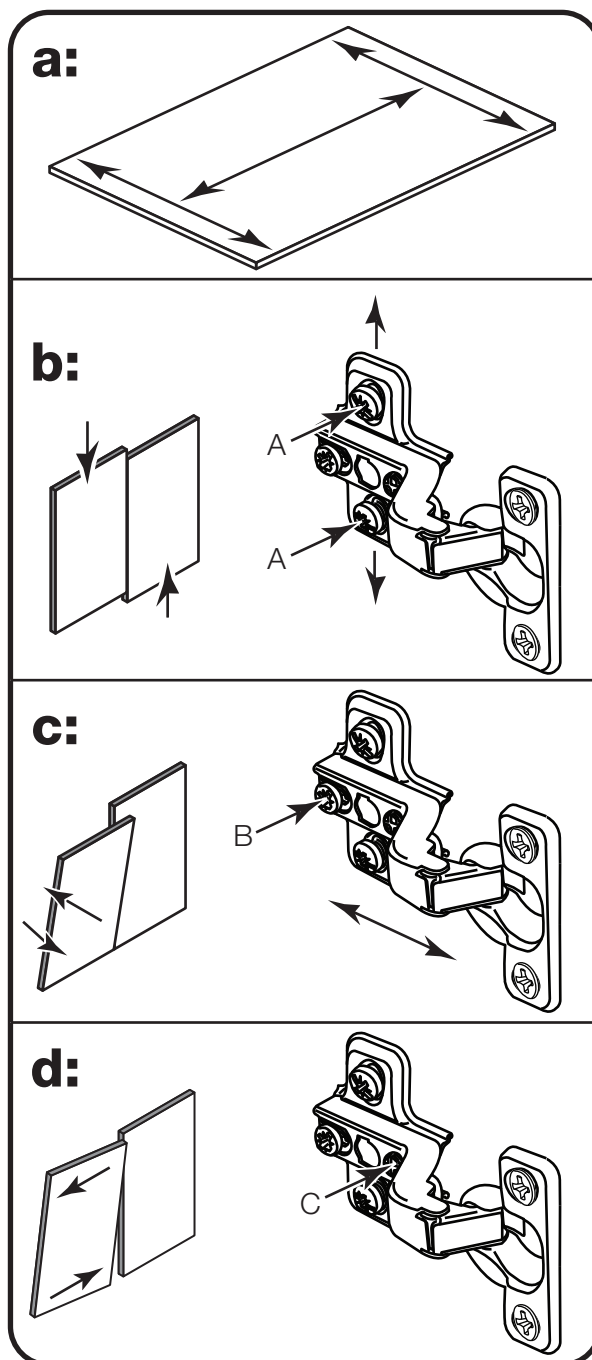

Assembly Instructions

Step 18


Fit the overbalance protector

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit ❶ to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete

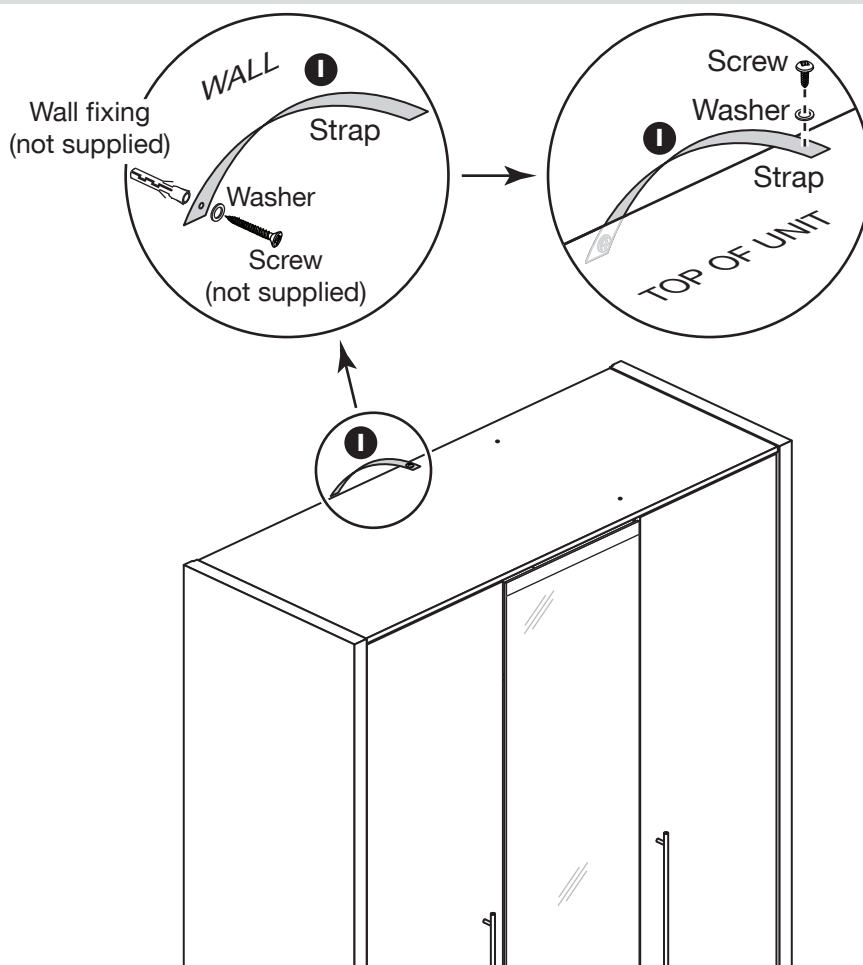

Note: Now the assembly has finished you can remove any protective film from the doors.

IMPORTANT INFORMATION ABOUT THIS PRODUCT

This product complies with the requirements of BS 7449:1991 and has been manufactured by DECORATIVE PANELS FURNITURE LTD, TEESIDE INDUSTRIAL ESTATE, THORNABY-ON-TEES, CLEVELAND, TS17 9LT.

The product code for this unit and the item code(s) for the glass components are listed in the Assembly Instructions along with a description of the type of glass used. All clear/tinted glass complies with the requirements of BS 6206 Class A. All mirrors comply with the requirements of BS 6206 Class C. If the glass component contained in this unit is chipped or broken consult the furniture manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the unit description and batch number or date of manufacture.

Do not place very hot or very cold items against or in close proximity to glass surface(s) unless adequately thick insulating material is used to prevent such items coming in contact with the glass.

Do not strike the glass with hard or pointed items.

Do not sit or stand upon horizontal glass surfaces.

When cleaning glass panels use a damp cloth or leather with washing up liquid or soft soap if necessary - do not use washing powders or any other substance containing abrasives since these substances scratch glass.

If stated in the instruction leaflet, it is essential that this unit is fixed to a wall.

KEEP THESE INSTRUCTIONS FOR FUTURE USE

If you need help or have damaged or missing parts, please visit www.argos-support.co.uk or email: Help@ClickSpares.co.uk (quoting your original order number)

Alternatively, call the Spares Helpline on: 0370 112 1928.


For any other queries please contact the Customer Helpline on: 0345 640 2020

Hertford - 4 Drawer Chest

Assembly Instructions - Please keep for future reference

338/9003

357/1402

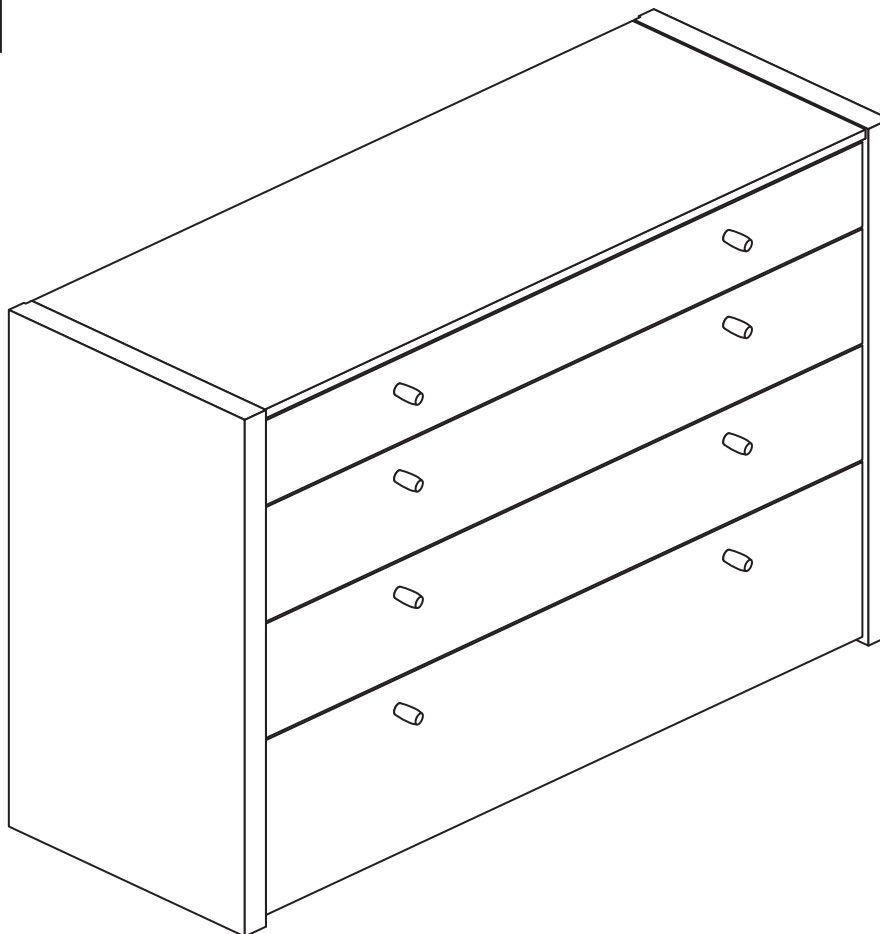

Dimensions

Width - 107cm

Depth - 39cm

Height - 85.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 32kgs. Please lift with care.
- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.
- Do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



• We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

• **Safety note:** It is recommended that this unit is secured to a wall using the overbalance kit supplied.

• Dispose of all packaging carefully and responsibly.


Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the panels listed on pages 1 and 2

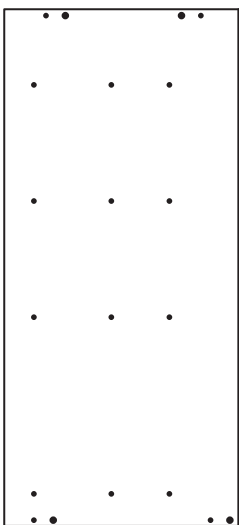

1 Left Side (DF657)
(854 x 390mm)

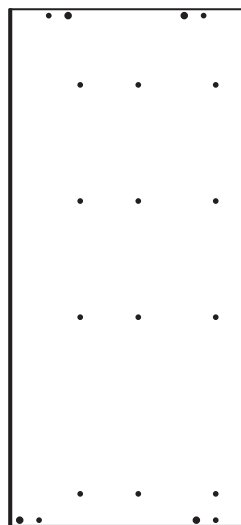

2 Right Side (DF658)
(854 x 390mm)



3 Top (DF659)
(996 x 385mm)




4 Rail (DF2033)
(996 x 70mm) x 2


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the panels listed on pages 1 and 2



5 Top Drawer Front (DF672)
(992 x 140mm)

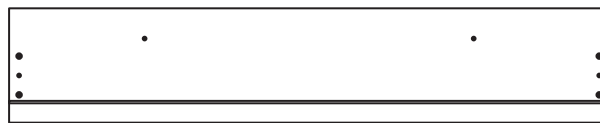


9 Middle Drawer Front (DF673)
(992 x 189mm) x 2



6 Top Left Drawer Side (W350-115LH)
(350 x 115mm)



7 Top Right Drawer Side (W350-115RH)
(350 x 115mm)




10 Middle Left Drawer Side (W350-124LH)
(350 x 124mm) x 2




11 Middle Right Drawer Side (W350-124RH)
(350 x 124mm) x 2



8 Top Drawer Back (W946-115)
(946 x 115mm)



12 Middle Drawer Back (W946-124)
(946 x 124mm) x 2

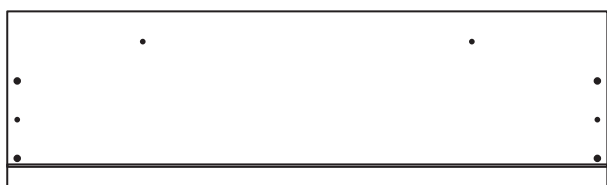

13 Bottom Drawer Front (DF674)
(992 x 289mm)



17 Drawer Base (T957-347)
(957 x 347mm) x 4



14 Bottom Left Drawer Side (W350-165LH)
(350 x 165mm)



15 Bottom Right Drawer Side (W350-165RH)
(350 x 165mm)



16 Bottom Drawer Back (W946-165)
(946 x 165mm)



18 Back (X1014-839)
(1014 x 839mm)












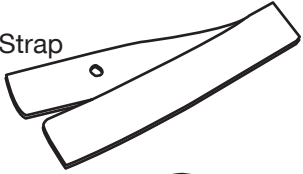







Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Metal dowel (F901) x 16	B  Large locking nut (F900) x 8	C  Small locking nut (F3) x 8
D  Wooden dowel (F22) x 8	E  Nail (F51) x 24	F  Knock-in Peg (F171GY) x 16
G  19mm Screw (F461) x 8	H  13mm Screw (F63) x 24	I  9mm Screw (F73) x 24
J  Wedgefix (F639) x 16	K  Handle (F341) x 8	L  Strap  Screw Washer x 2 Overbalance protector kit (F269) x 1
M a  L Runner (F159) x 4 ← 350mm long → M b  R Runner (F160) x 4 M c  L Runner (F161) x 4 M d  R Runner (F162) x 4		

Tools required



Rule



Cross-head screwdriver



Scissors



Hammer




Eye protection (when using a hammer or drill)



Electric drill (only use when drilling into walls)

Ruler - Use this ruler to help correctly identify the screws

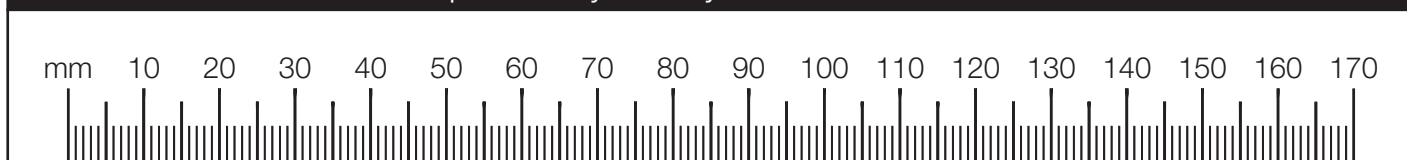

Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below

Step 1

Prepare the top drawer front

Screw 2 metal dowels **A** into the top drawer front **5**.

Note: Tighten the metal dowels up fully against the panels.

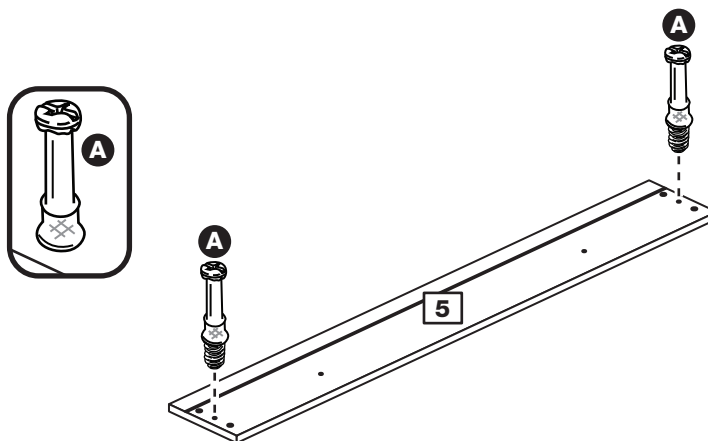


Step 2

Prepare the top drawer sides

Insert a small locking nut **C** into the hole shown on the top left drawer side **6** and top right drawer side **7**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

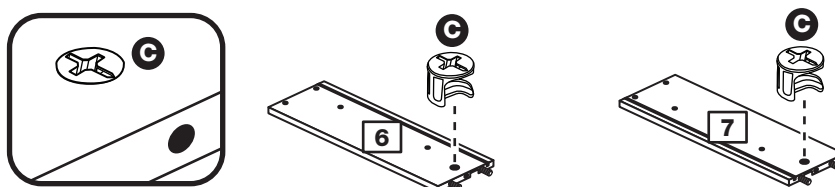


Step 3

Attach the top drawer sides to the top drawer front

Push the top left drawer side **6** and top right drawer side **7** onto the back of the top drawer front **5**.

Turn the small locking nuts **C** on the top left drawer side **6** and top right drawer side **7**.

Note: Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

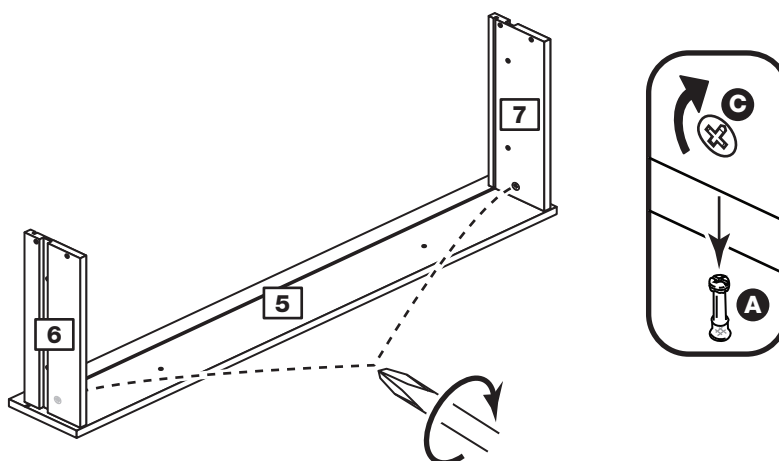


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **17** down the grooves in the top drawer sides **6** and **7** and down into the groove in the top drawer front **5**.

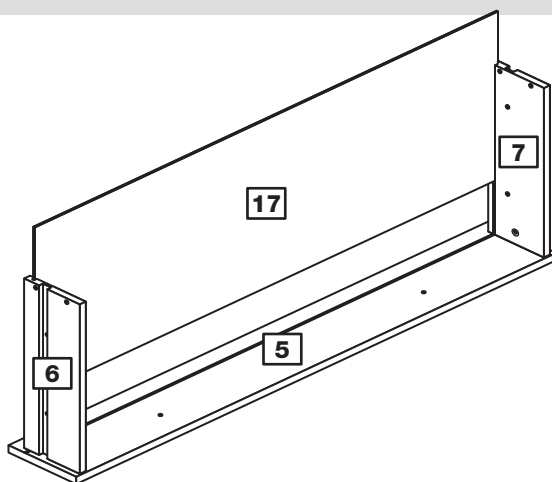


Step 5

Fit the top drawer back

Fit the top drawer back **8** between the top drawer sides **6** and **7**.

Make sure that the drawer base **17** fits into the groove in the top drawer back **8**.


Hold the top drawer back **8** in position and tap the knock-in pegs **F** through the holes in the top drawer sides **6** and **7**.

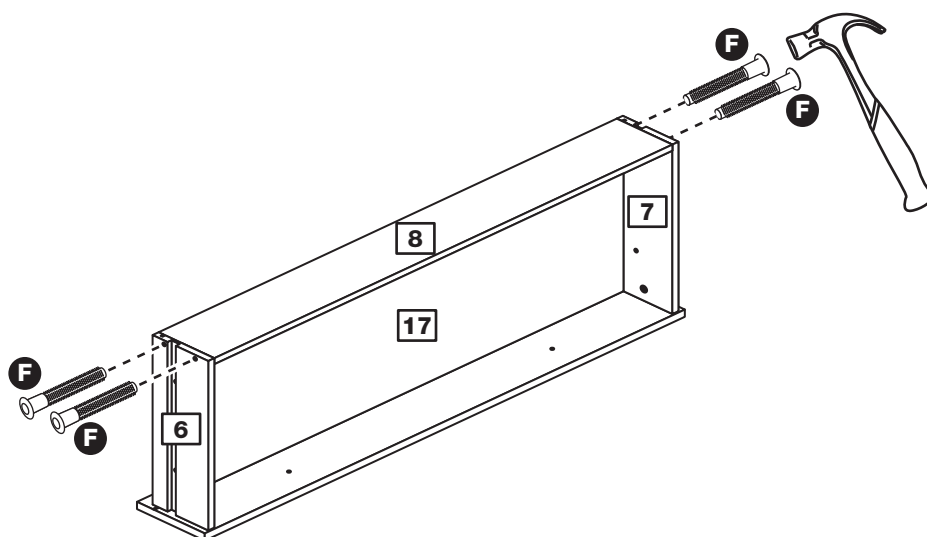

Step 6

Attach the handles

Attach 2 handles **K** to the top drawer front **5** using 2 screws **G**.

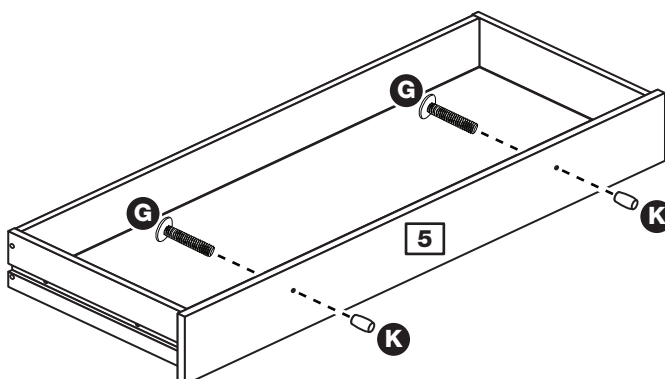


Assembly Instructions

Step 7

Prepare the 2 middle drawer fronts

Screw 2 metal dowels **A** into each of the 2 middle drawer fronts **9**.

Note: Tighten the metal dowels up fully against the panels.

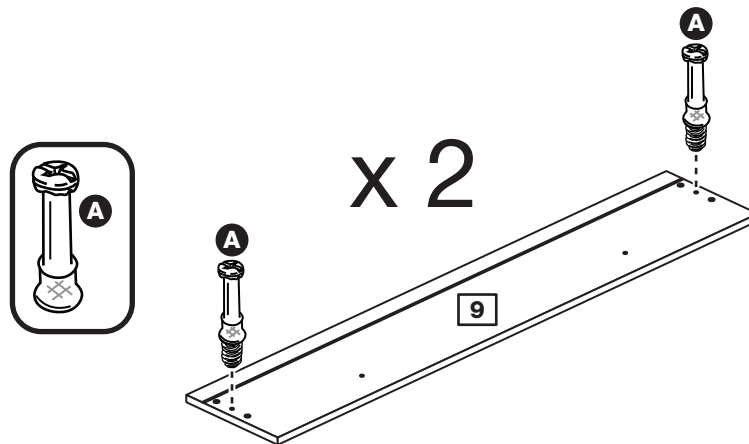


Step 8

Prepare the middle drawer sides

Insert a small locking nut **C** into the hole shown on the middle left drawer sides **10** and the middle right drawer sides **11**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

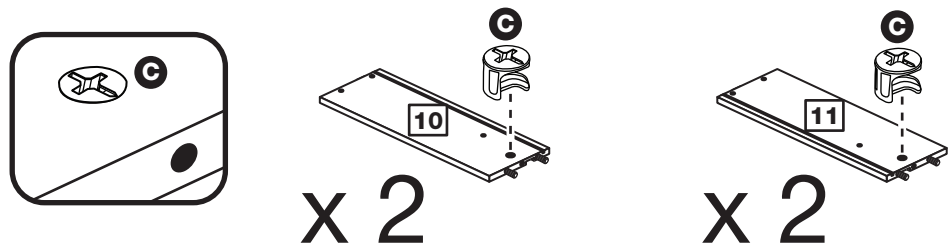


Step 9

Attach the middle drawer sides to the middle drawer fronts

Push the middle left drawer sides **10** and middle right drawer sides **11** onto the back of the middle drawer fronts **9**.

Turn the small locking nuts **C** on the middle left drawer sides **10** and middle right drawer sides **11**.

Note: Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

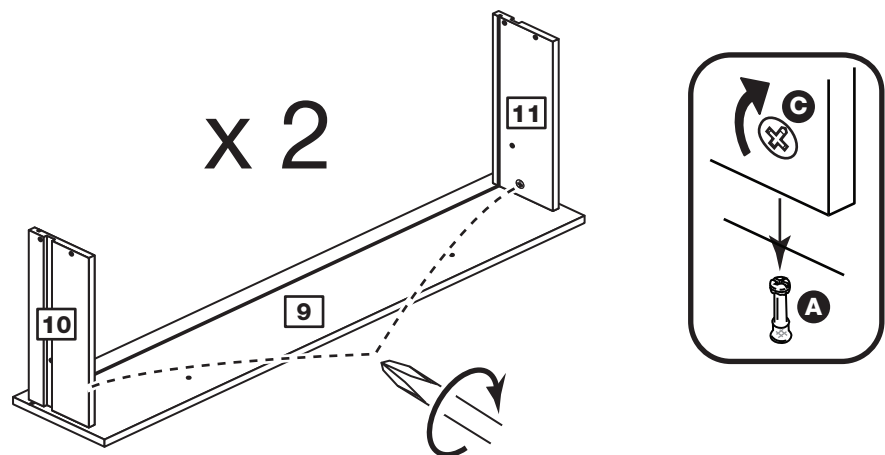


Assembly Instructions

Step 10

Fit the drawer base

Slide the drawer base **17** down the grooves in the middle drawer sides **10** and **11** and down into the groove in the middle drawer front **9**.

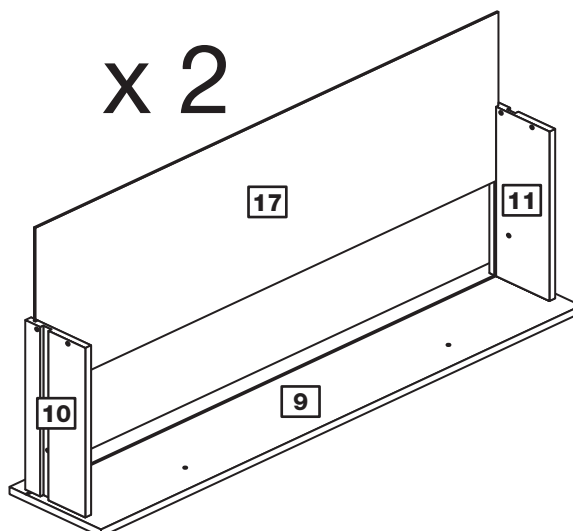


Step 11

Fit the middle drawer back

Fit the middle drawer back **12** between the middle drawer sides **10** and **11**.

Make sure that the drawer base **17** fits into the groove in the middle drawer back **12**.


Hold the middle drawer back **12** in position and tap the knock-in pegs **F** through the holes in the middle drawer sides **10** and **11**.

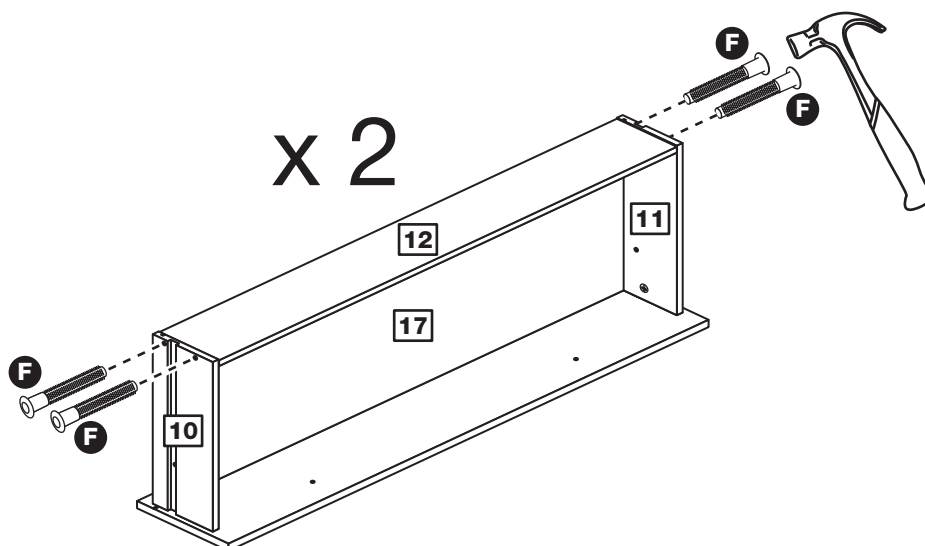

Step 12

Attach the handles

Attach 2 handles **K** to each of the middle drawer fronts **9** using screws **G**.

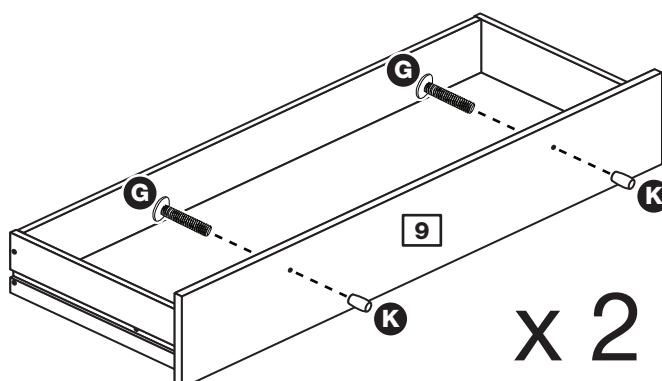


Assembly Instructions

Step 13

Prepare the bottom drawer front

Screw 2 metal dowels **A** into the bottom drawer front **13**.

Note: Tighten the metal dowels up fully against the panels.

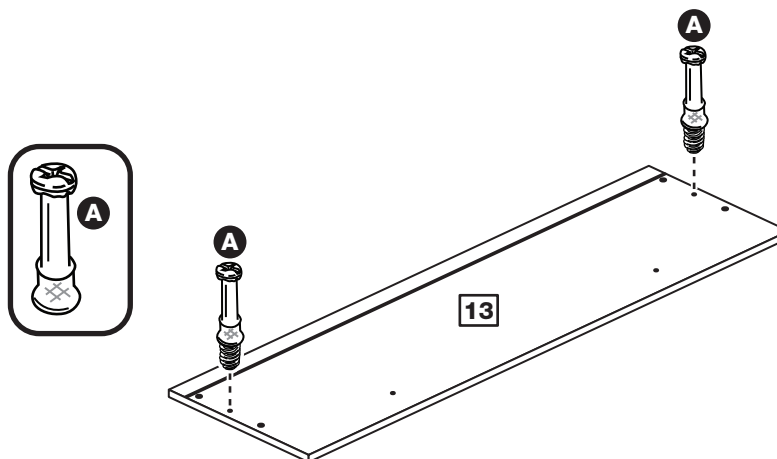


Step 14

Prepare the bottom drawer sides

Insert a small locking nut **C** into the hole shown on the bottom left drawer side **14** and the bottom right drawer side **15**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

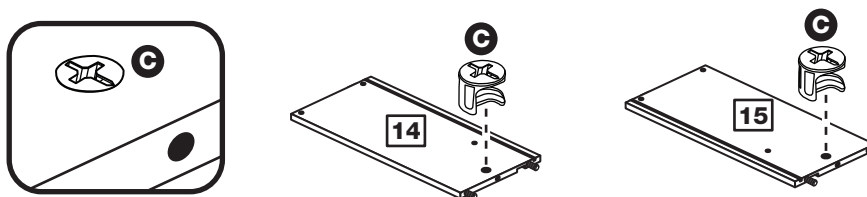


Step 15

Attach the bottom drawer sides to the bottom drawer front

Push the bottom left drawer side **14** and bottom right drawer side **15** onto the back of the bottom drawer front **13**.

Turn the small locking nuts **C** on the bottom left drawer side **14** and bottom right drawer side **15**.

Note: Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

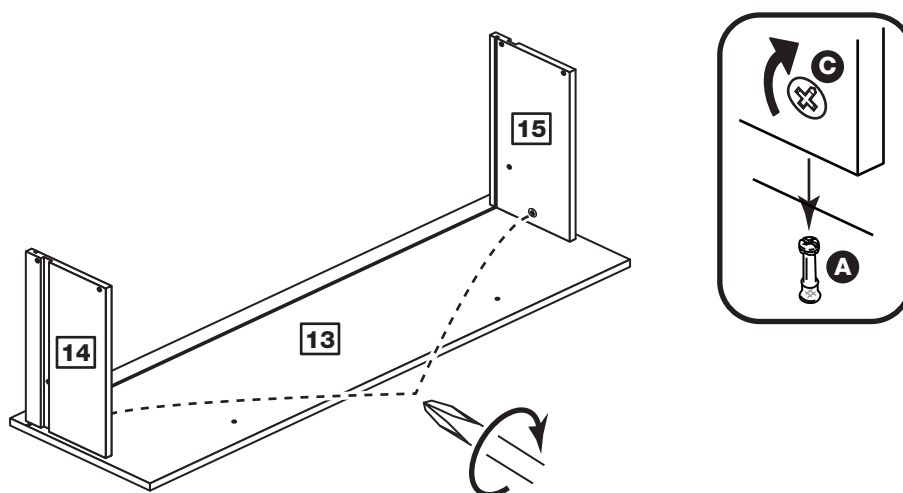


Assembly Instructions

Step 16

Fit the drawer base

Slide the drawer base **17** down the grooves in the bottom drawer sides **14** and **15** and down into the groove in the bottom drawer front **13**.

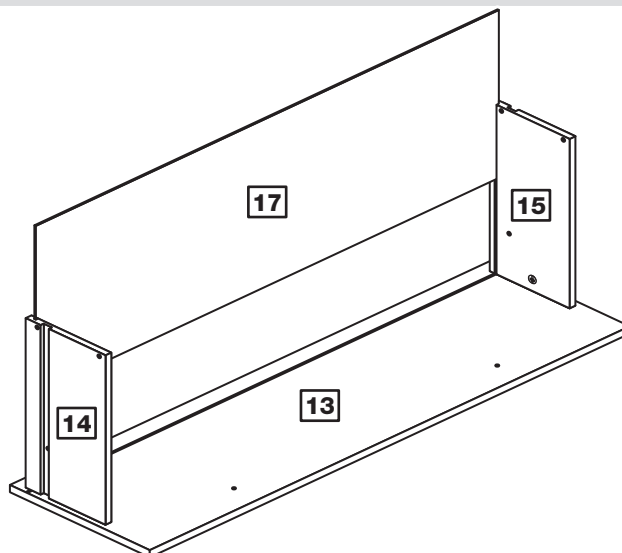


Step 17

Fit the bottom drawer back

Fit the bottom drawer back **16** between the bottom drawer sides **14** and **15**.

Make sure that the drawer base **17** fits into the groove in the bottom drawer back **16**.


Hold the bottom drawer back **16** in position and tap the knock-in pegs **F** through the holes in the bottom drawer sides **14** and **15**.

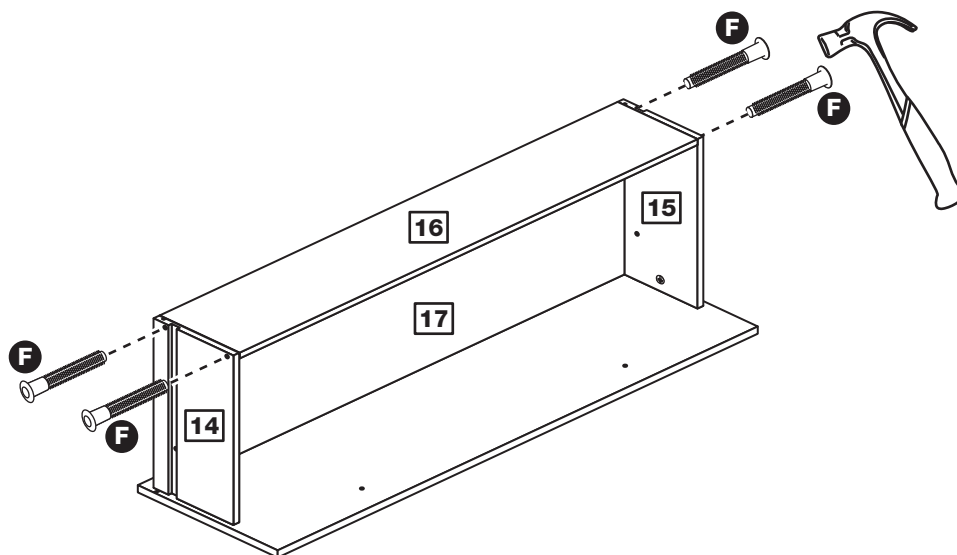

Step 18

Attach the handles

Attach 2 handles **K** to the bottom drawer front **13** using 2 screws **G**.

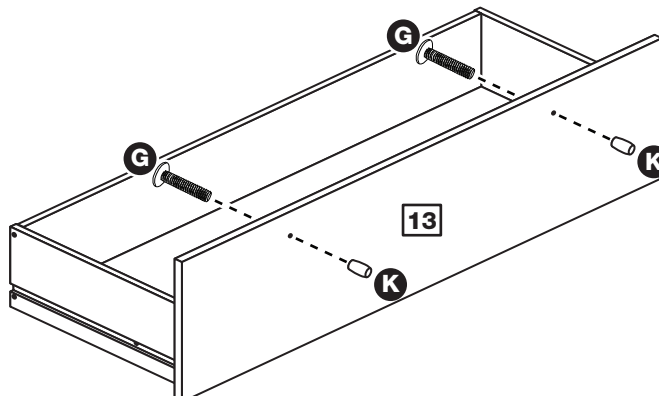


Assembly Instructions

Step 19

Fit 4 wedgexes to each of the drawers

Turn all 4 of the drawer assemblies over and slide 4 wedgexes **J** into the front and back grooves, as shown and tighten up the screws.

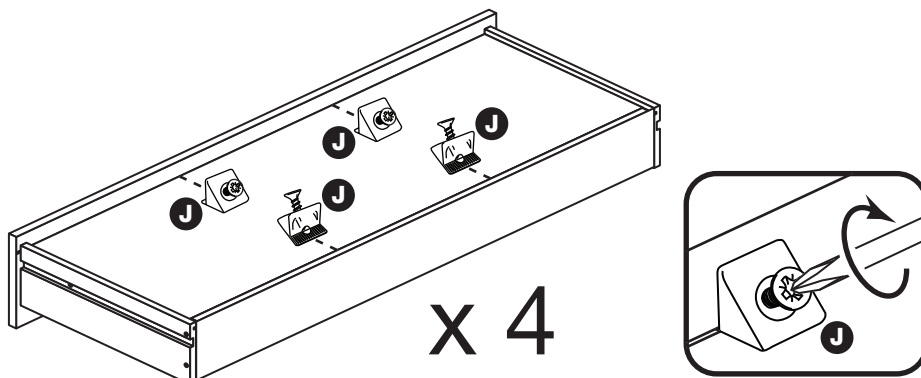


Step 20

Fit runners to each of the drawers

Fit runner **Md**, marked with 'R', to the bottom edge of the right drawer sides as shown, making sure that it is pushed up against the back of the drawer front. Use a bradawl to mark the fixing positions, then secure with 2 screws **H**.

Fit runner **Mc**, marked 'L', to the bottom edge of the left drawer sides using the same method.

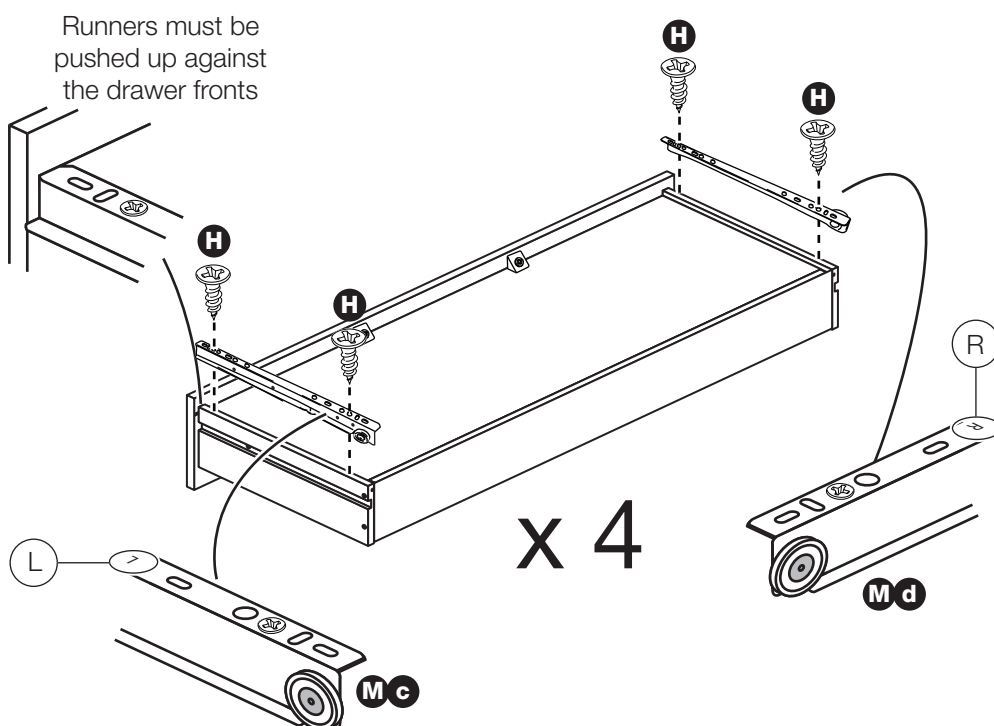

Assembly Instructions

Step 21

Prepare the left side





a: Fit 4 runners **Ma** to the left side **1**.

The 1st screw **I** uses the 1st hole in from the front of the runners.

The 2nd and 3rd screws **I** use the holes that line up with the other panel holes.

b: Fit a screw **H** into the 2nd hole in at the top of the runners **Ma**.

Screw 4 metal dowels **A** into the left side **1**.

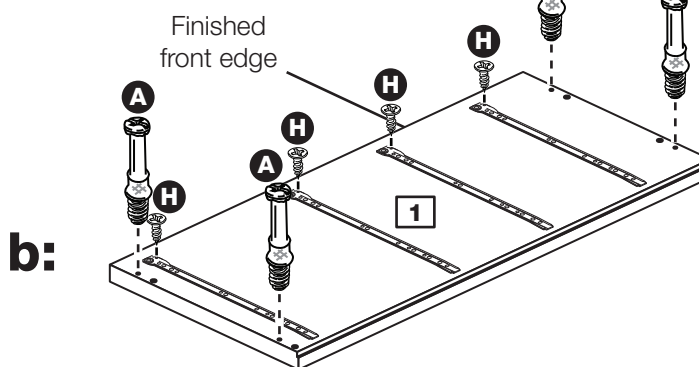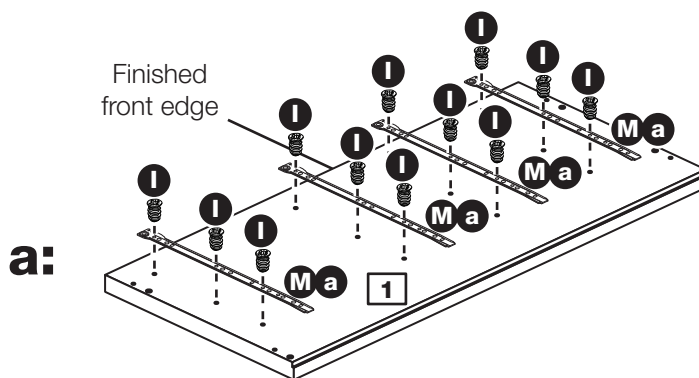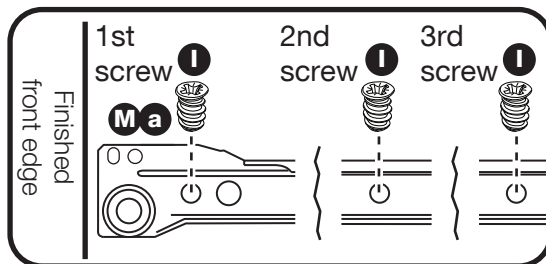

Assembly Instructions

Step 22

Prepare the right side





a: Fit 4 runners **M b** to the right side **2**.

The 1st screw **I** uses the 1st hole in from the front of the runners.

The 2nd and 3rd screws **I** use the holes that line up with the other panel holes.

b: Fit a screw **H** into the 2nd hole in at the top of the runners **M b**.

Screw 4 metal dowels **A** into the right side **2**.

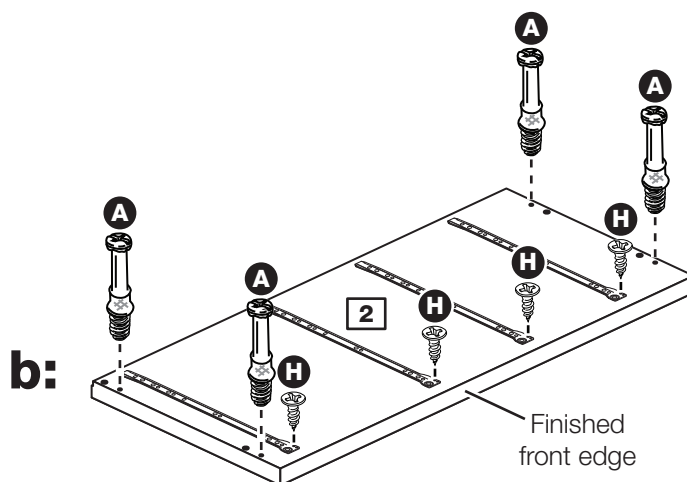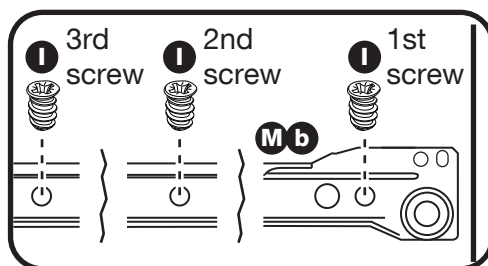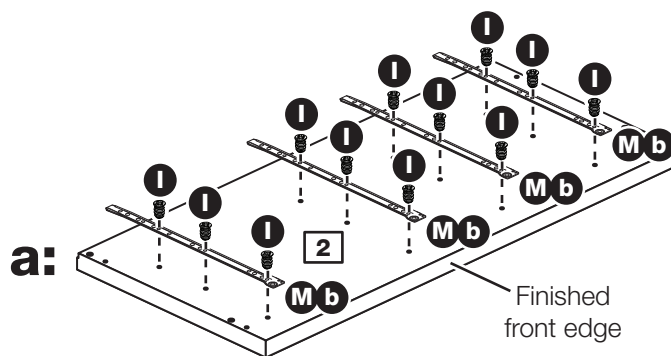

Assembly Instructions


Step 23

Prepare the top

Insert 4 large locking nuts **B** into the top **3**.

Tap 4 wooden dowels **D** into the top **3**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

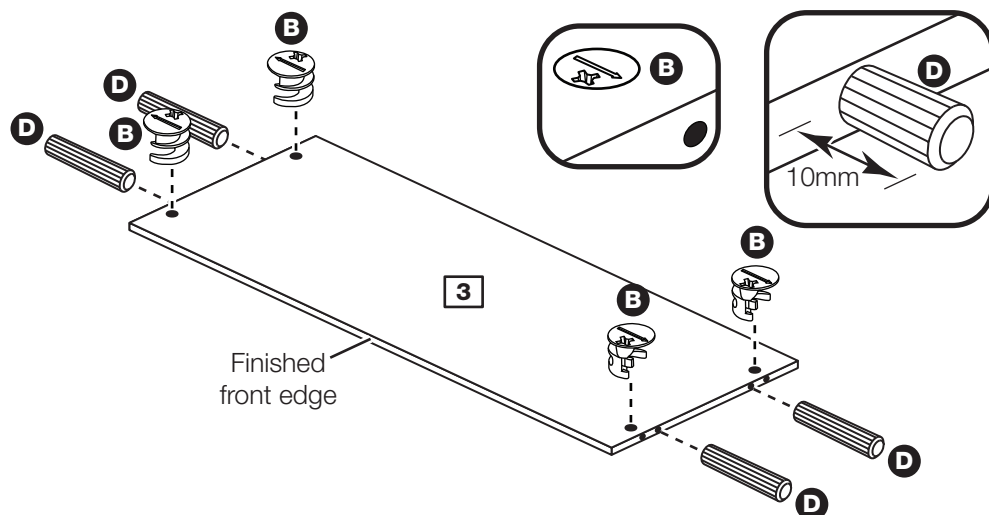


Step 24

Fit the top to the right side

Push the top **3** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the top **3**.

Note: Turn the large locking nuts **B** as far as they will go - more than 1/2 a turn.

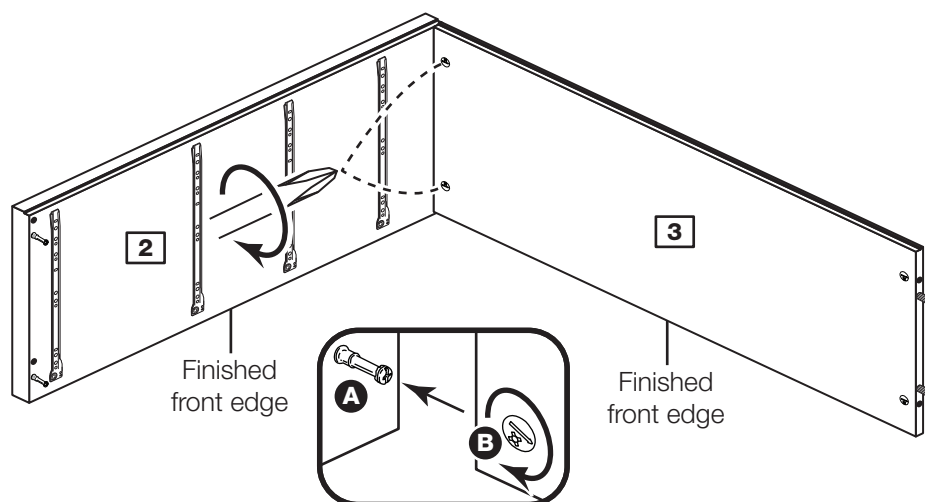


Step 25

Prepare the 2 rails

Insert 2 large locking nuts **B** into each of the 2 rails **4**.

Tap 2 wooden dowels **D** into each of the 2 rails **4**.

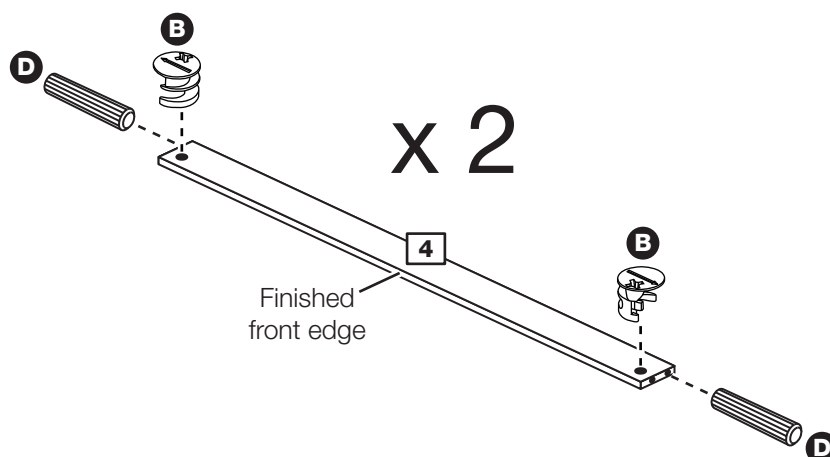


Assembly Instructions

Step 26

Fit the 2 rails

Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **B** fitted to each rail **4**.

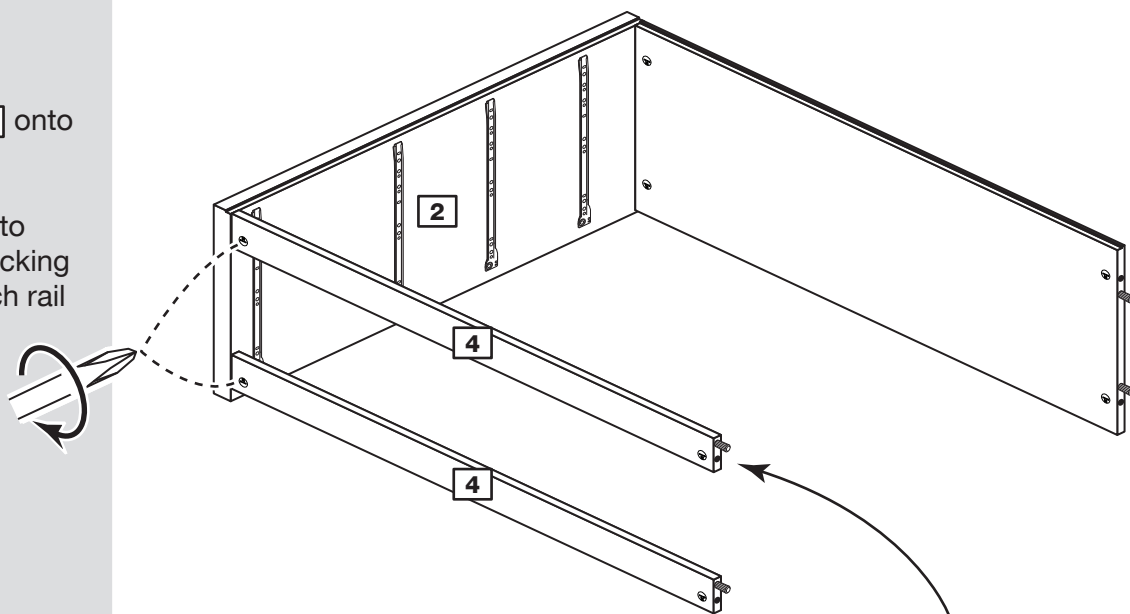


Note: Support this rail until the left side has been fitted in the next step.

Step 27

Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 4 large locking nuts **B** fitted to the top **3** and the 2 rails **4**.

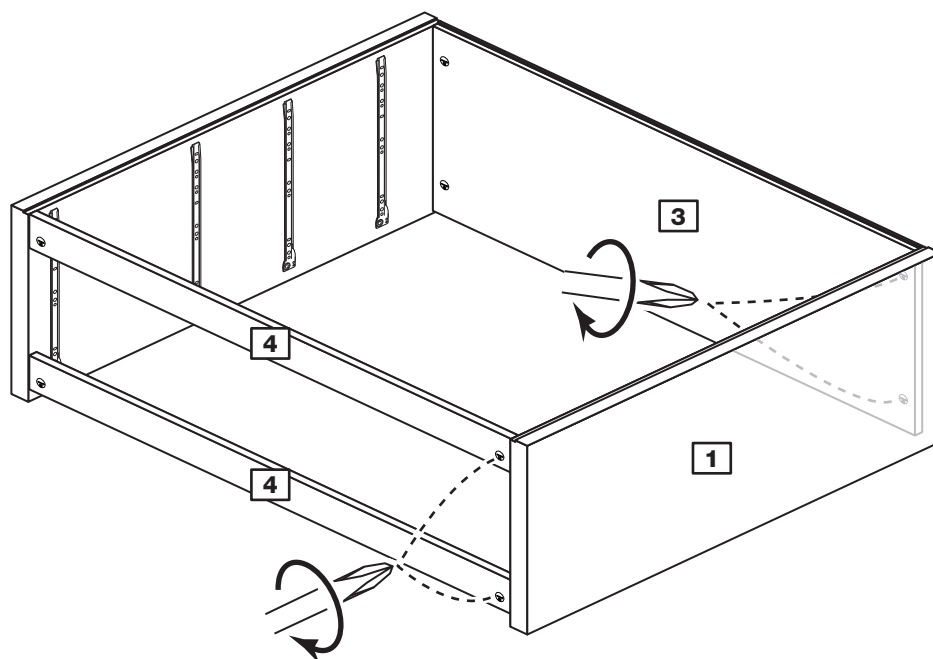

Assembly Instructions

Step 28

Fit the back

a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

b: Place the back **18** onto the unit.

Nail **E** around the outside edges of the back **18**.


Note: Nails should be spaced about 150mm apart.

Stand the unit up for the next step.



Warning: The unit is heavy. Lift with care.


a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

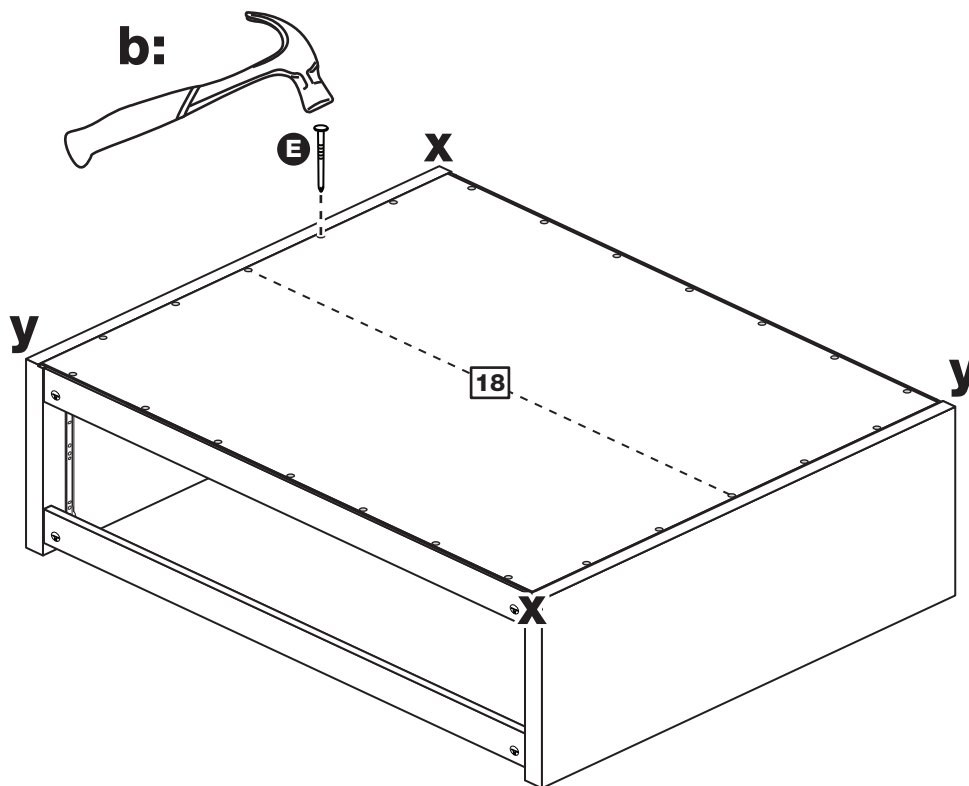

Step 29

Fit the drawers

Slide the wheels of the runners fitted to the drawers, over the wheels of the runners fitted to the side panels and push the drawers into position.

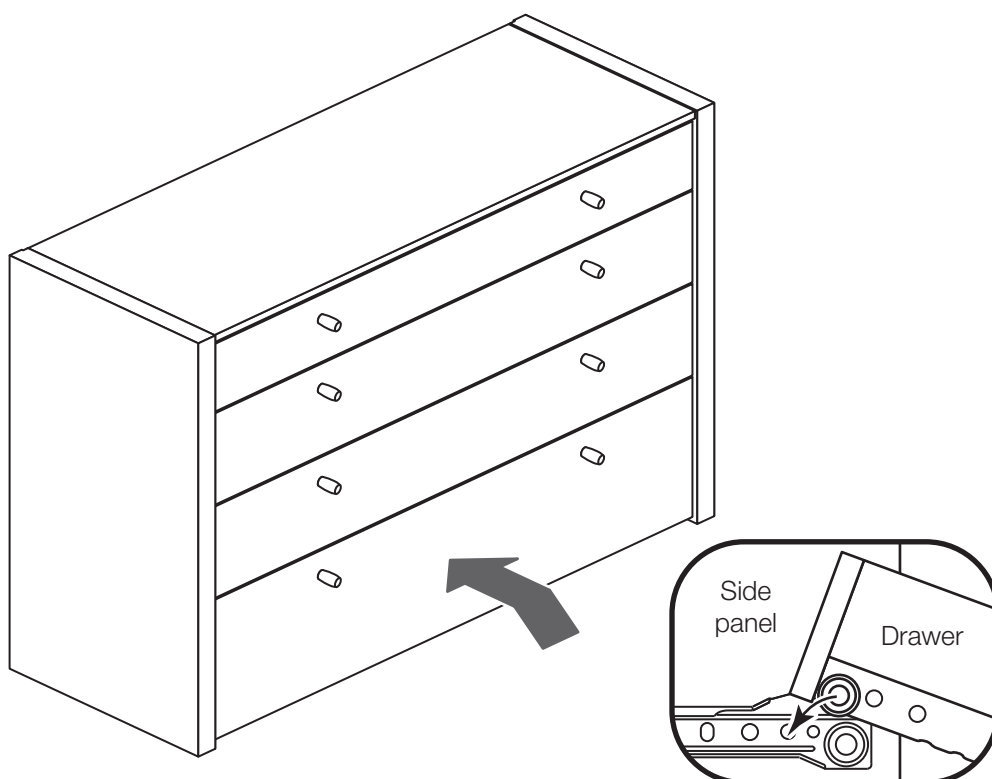

Assembly Instructions

Step 30

Fit the overbalance protector kit



To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit **L** to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

Assembly is complete

Example

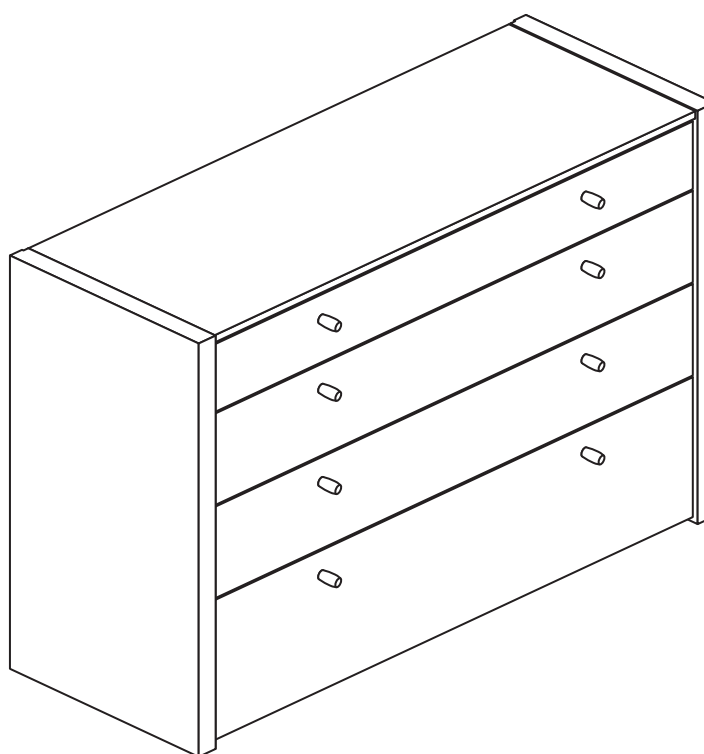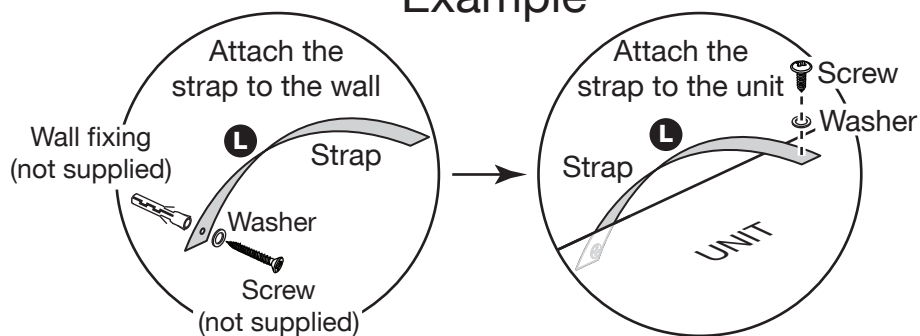

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.


Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

Hertford - Bedside

Assembly Instructions - Please keep for future reference

339/6254

325/7946

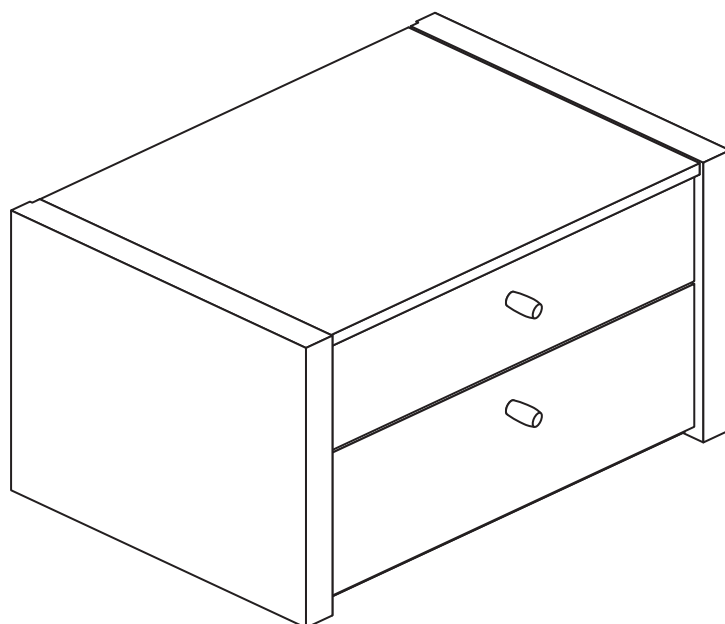

Dimensions

Width - 56cm

Depth - 39cm

Height - 37cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 11kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below


Please check you have all the panels listed below



1 Left Side (DF349)
(370 x 390mm)




2 Right Side (DF350)
(370 x 390mm)

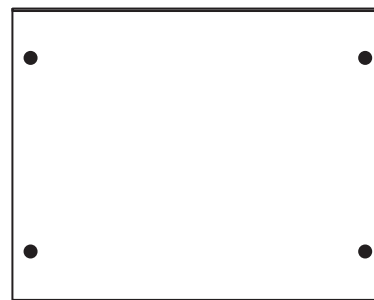


3 Top (DF351)
(490.5 x 385mm)




4 Rail (DF352)
(490.5 x 70mm) x 2




5 Top Drawer Front (DF353)
(486 x 140mm)

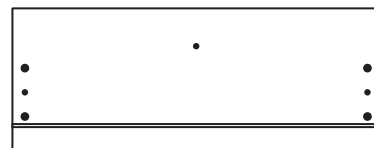


6 Bottom Drawer Front (DF354)
(486 x 189mm)




7 Top Left Drawer Side (W350-95LH)
(350 x 95mm)



8 Top Right Drawer Side (W350-95RH)
(350 x 95mm)




9 Top Drawer Back (W441-95)
(441 x 95mm)



10 Bottom Left Drawer Side (W350-124LH)
(350 x 124mm)



11 Bottom Right Drawer Side (W350-124RH)
(350 x 124mm)



12 Bottom Drawer Back (W441-124)
(441 x 124mm)



13 Drawer Base (T452-347)
(452 x 347mm) x 2



14 Back (X509-355)
(509 x 355mm)


















Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 03456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<p>A </p> <p>Metal dowel (F901) x 12</p>	<p>B </p> <p>Large locking nut (F900) x 8</p>	<p>C </p> <p>Small locking nut (F3) x 4</p>
<p>D </p> <p>Wooden dowel (F22) x 8</p>	<p>E </p> <p>Nail (F51) x 12</p>	<p>F </p> <p>Knock-in Peg (F171GY) x 8</p>
<p>G </p> <p>19mm Screw (F461) x 2</p>	<p>H </p> <p>13mm Screw (F63) x 12</p>	<p>I </p> <p>9mm Screw (F73) x 12</p>
<p>J </p> <p>Wedgefix (F639) x 4</p>	<p>K </p> <p>Handle (F341) x 2</p>	
<p>L a  L Runner (F159) x 2 ← 350mm long →</p> <p>L b  R Runner (F160) x 2</p> <p>L c  L Runner (F161) x 2</p> <p>L d  R Runner (F162) x 2</p>		

Tools required



Rule



Cross-head screwdriver



Scissors




Hammer



Eye protection (when using a hammer or drill)

Ruler - Use this ruler to help correctly identify the screws

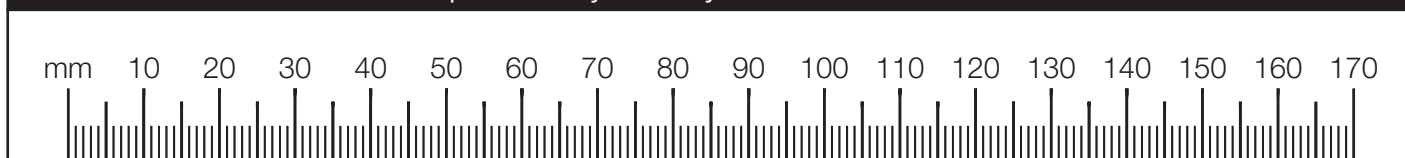

Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Step 1

Prepare the top drawer front

Screw 2 metal dowels **A** into the top drawer front **5**.

Note: Tighten the metal dowels up fully against the panels.

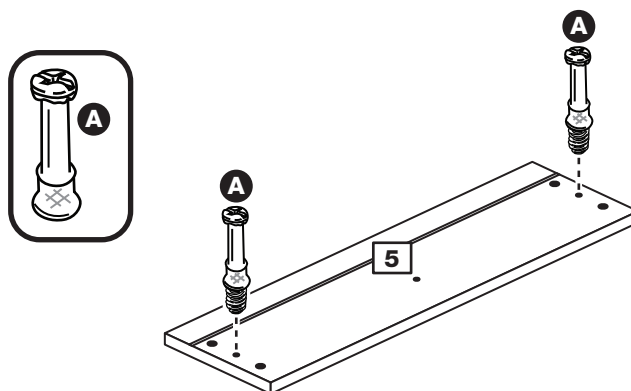


Step 2

Prepare the top drawer sides

Insert a small locking nut **C** into the hole shown on the top left drawer side **7** and the top right drawer side **8**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

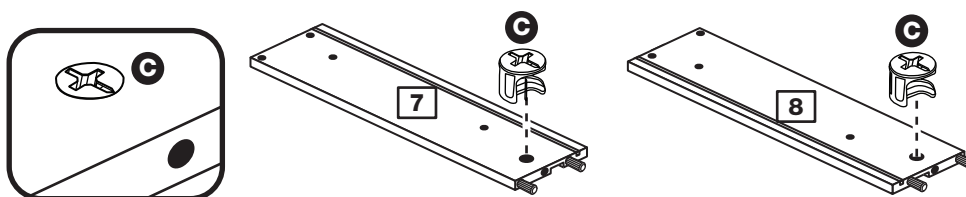


Step 3

Attach the top drawer sides to the top drawer front

Push the top left drawer side **7** and top right drawer side **8** onto the back of the top drawer front **5**.

Turn the small locking nuts **C** on the top left drawer side **7** and top right drawer side **8**.

Note: Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

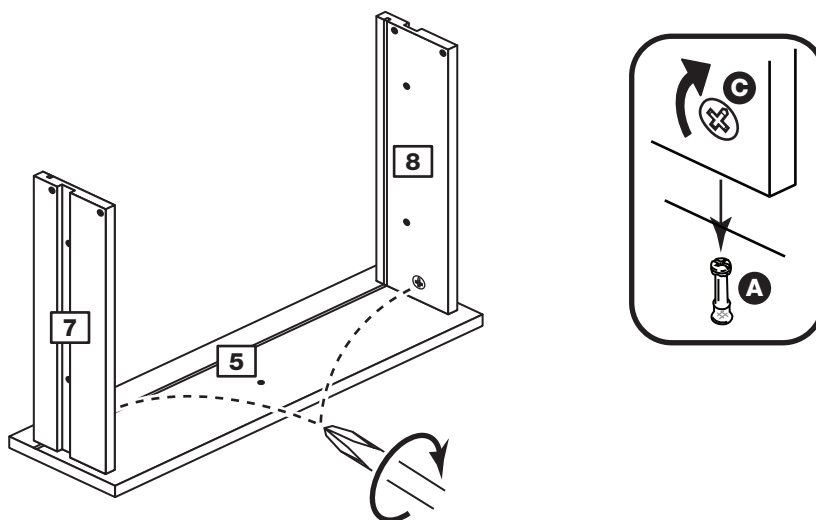


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **13** down the grooves in the top drawer sides **7** and **8** and down into the groove in the top drawer front **5**.

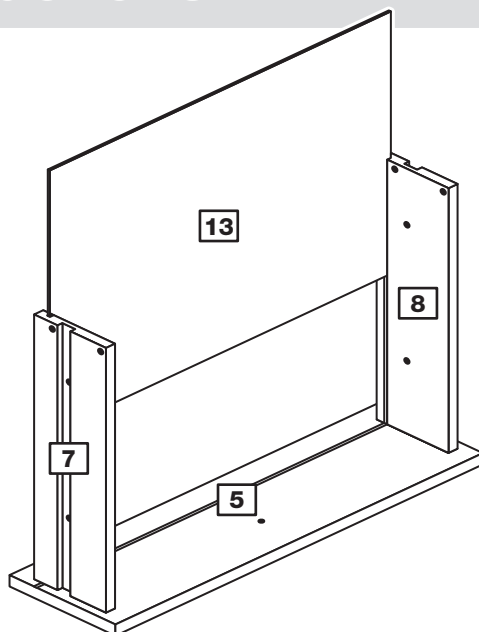


Step 5

Fit the top drawer back

Fit the top drawer back **9** between the top drawer sides **7** and **8**. Make sure that the drawer base **13** fits into the groove in the top drawer back **9**.


Hold the top drawer back **9** in position and tap the knock-in pegs **F** through the holes in the top drawer sides **7** and **8**.

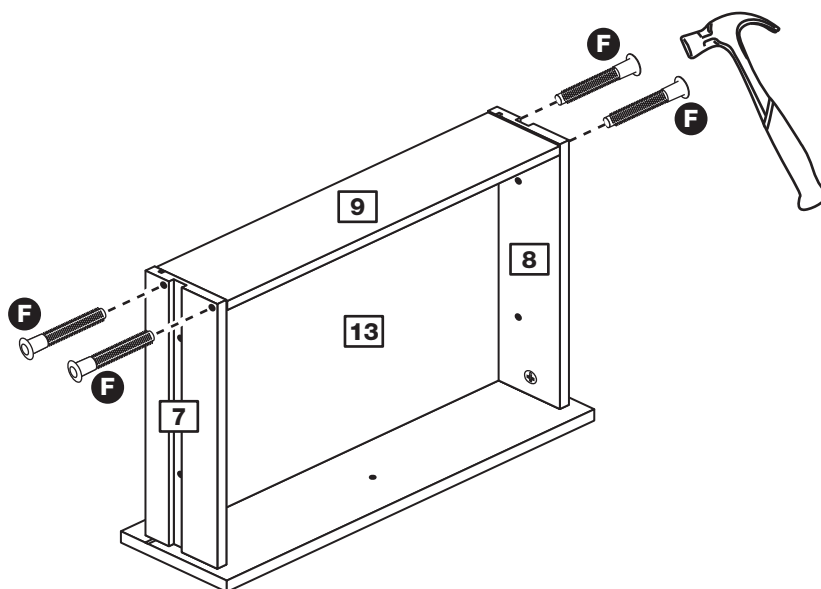

Step 6

Attach the handle

Attach a handle **K** to the top drawer front **5** using screw **G**.

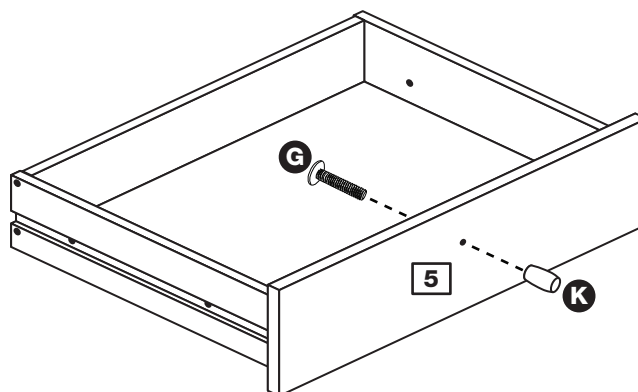


Assembly Instructions

Step 7

Prepare the bottom drawer front

Screw 2 metal dowels **A** into the bottom drawer front **6**.

Note: Tighten the metal dowels up fully against the panels.

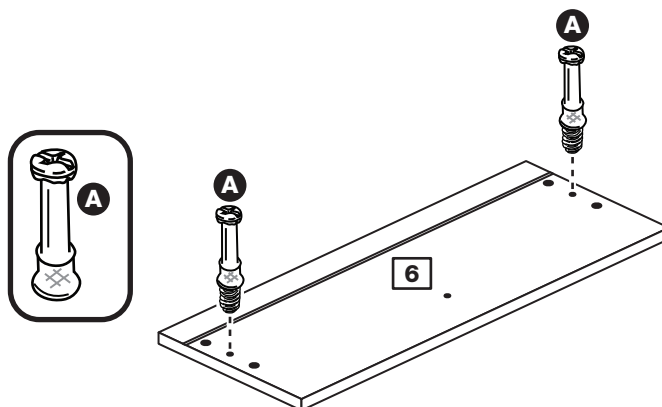


Step 8

Prepare the bottom drawer sides

Insert a small locking nut **C** into the hole shown on the bottom left drawer side **10** and the bottom right drawer side **11**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

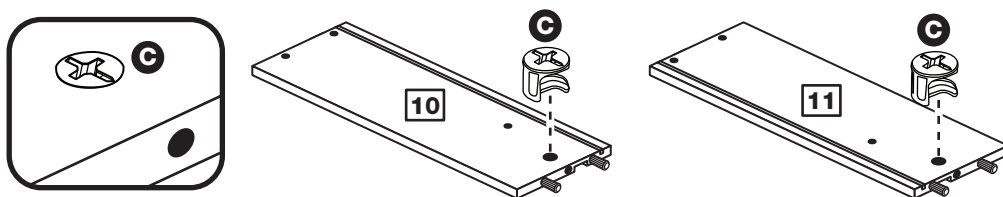


Step 9

Attach the bottom drawer sides to the bottom drawer front

Push the left drawer side **10** and right drawer side **11** onto the back of the bottom drawer front **6**.

Turn the small locking nuts **C** on the bottom left drawer side **10** and bottom right drawer side **11**.

Note: Turn the locking nuts **C** clockwise to secure panels - more than 1/2 a turn.

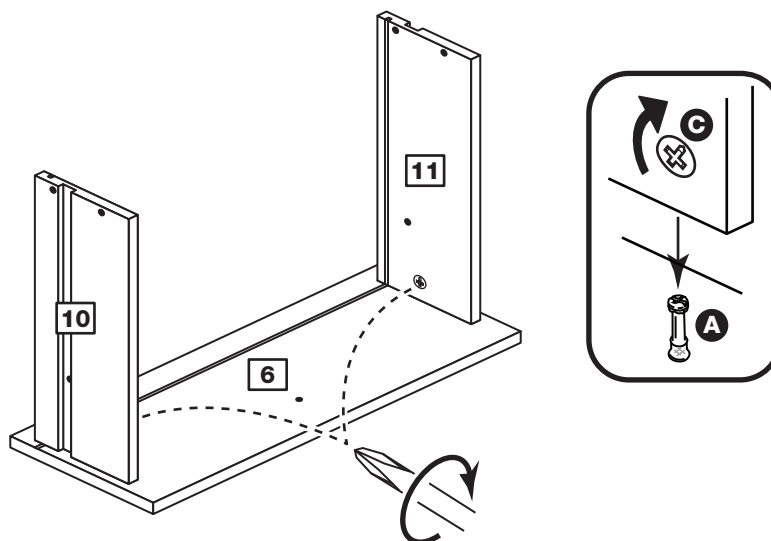


Assembly Instructions

Step 10

Fit the drawer base

Slide the drawer base **13** down the grooves in the bottom drawer sides **10** and **11** and down into the groove in the bottom drawer front **6**.

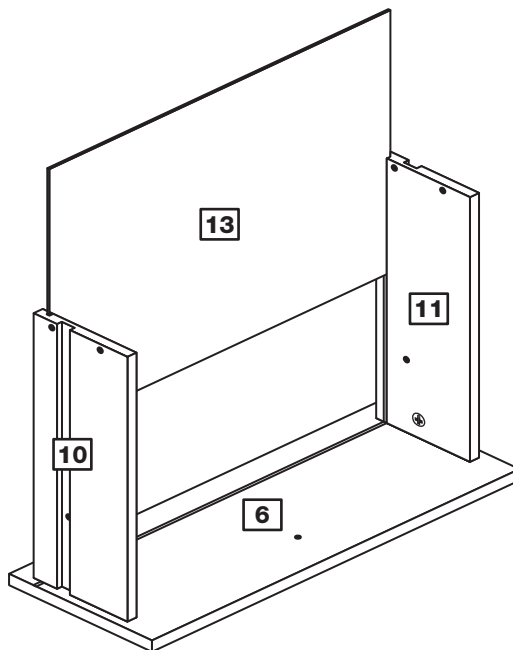


Step 11

Fit the bottom drawer back

Fit the bottom drawer back **12** between the bottom drawer sides **10** and **11**.

Make sure that the drawer base **13** fits into the groove in the bottom drawer back **12**.


Hold the bottom drawer back **12** in position and tap the knock-in pegs **F** through the holes in the bottom drawer sides **10** and **11**.

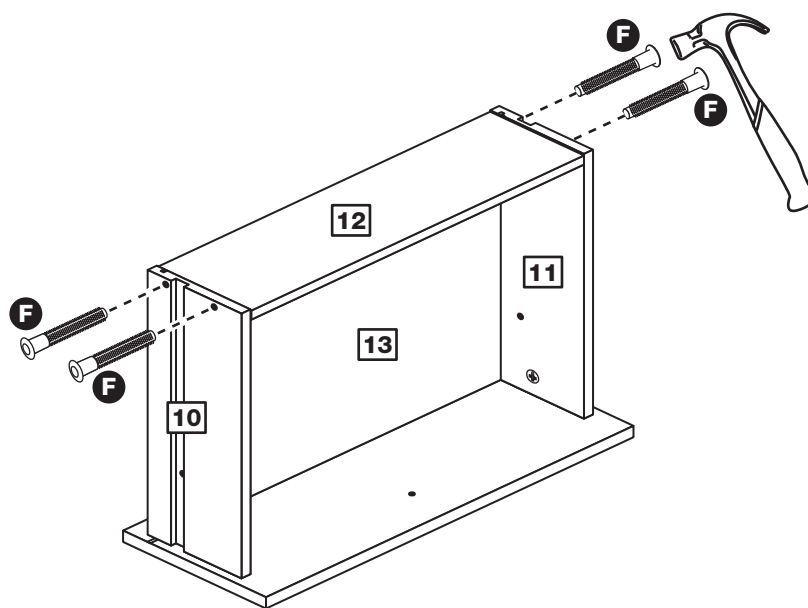

Step 12

Attach the handle

Attach a handle **K** to the bottom drawer front **6** using screw **G**.

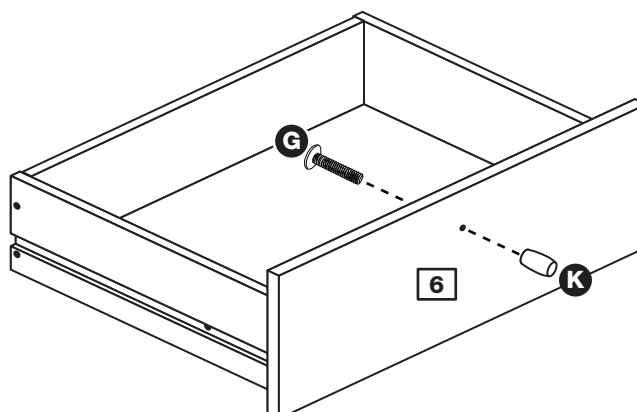


Assembly Instructions

Step 13

Fit the wedgexes to each of the drawers

Turn the both of the drawer assemblies over and slide 2 wedgexes **J** into the front and back grooves, as shown, and tighten up the screws.

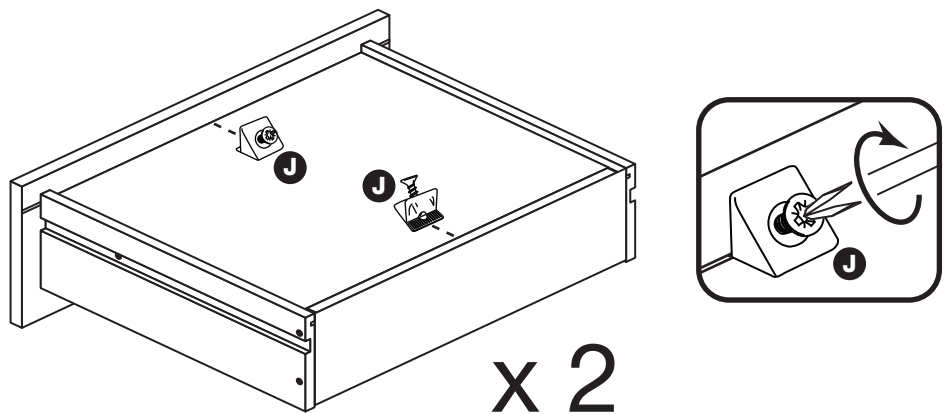


Step 14

Fit runners to each of the drawers

Fit runner **Ld**, marked with 'R', to the bottom edge of the right drawer sides as shown, making sure that it is pushed up against the back of the drawer fronts. Use a bradawl to mark the fixing positions, then secure with 2 screws **H**.

Fit runner **Lc**, marked 'L', to the bottom edge of the left drawer side using the same method.

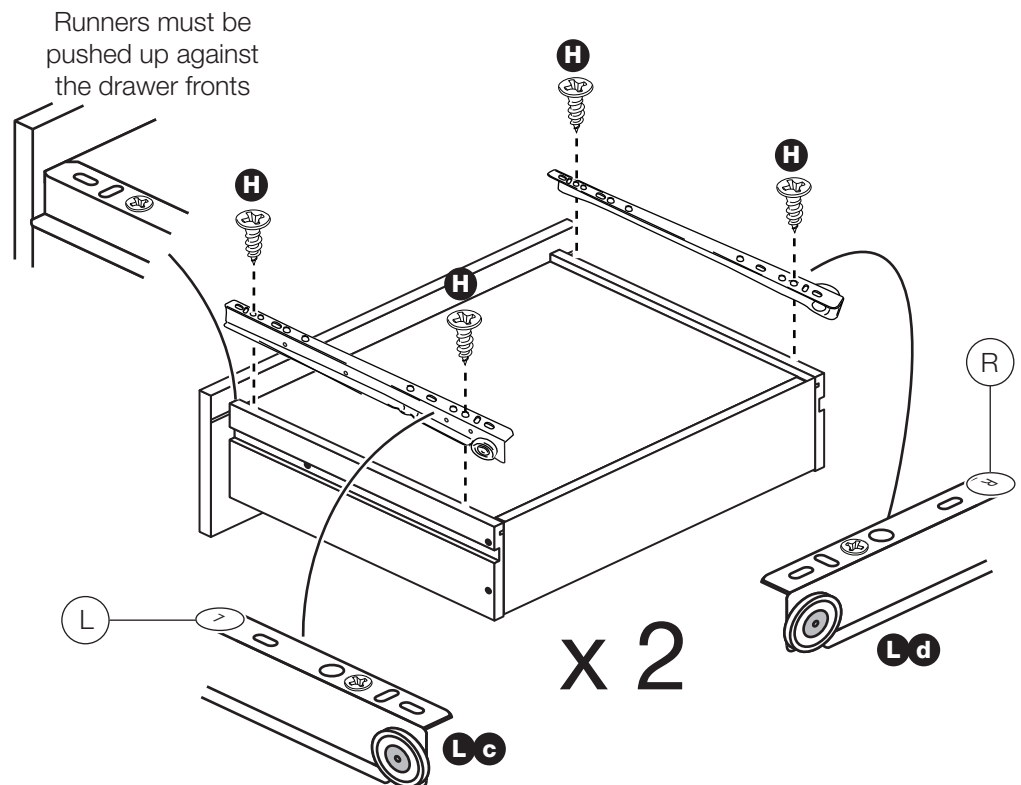

Assembly Instructions

Step 15

Prepare the left side





a: Fit 2 runners **L a** to the left side **1**.

The 1st screw **I** uses the 1st hole in from the front of the runners.

The 2nd and 3rd screws **I** use the holes that line up with the other panel holes.

b: Fit a screw **H** into the 2nd hole in at the top of the runners **L a**.

Screw 4 metal dowels **A** into the left side **1**.

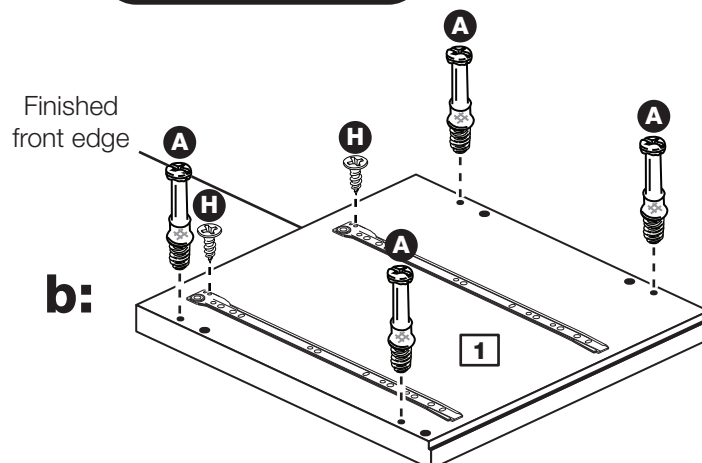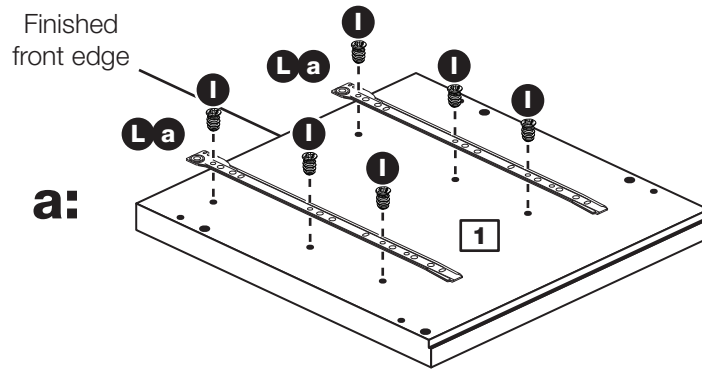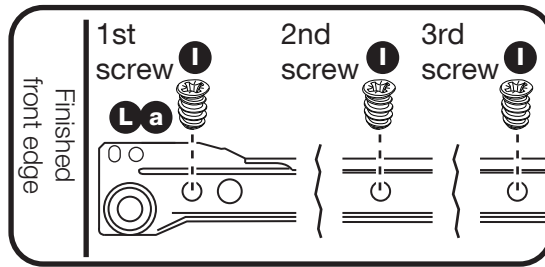

Assembly Instructions

Step 16

Prepare the right side





a: Fit 2 runners **Lb** to the right side **2**.

The 1st screw **I** uses the 1st hole in from the front of the runners.

The 2nd and 3rd screws **I** use the holes that line up with the other panel holes.

b: Fit a screw **H** into the 2nd hole in at the top of the runners **Lb**.

Screw 4 metal dowels **A** into the right side **2**.

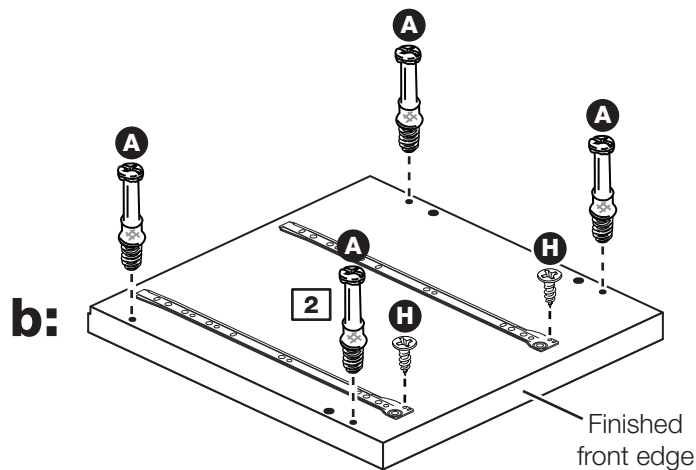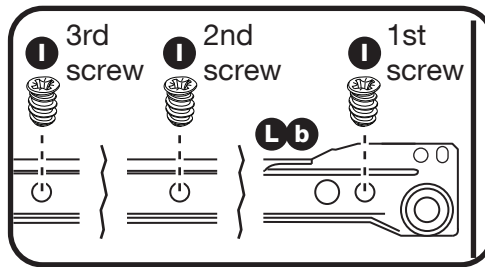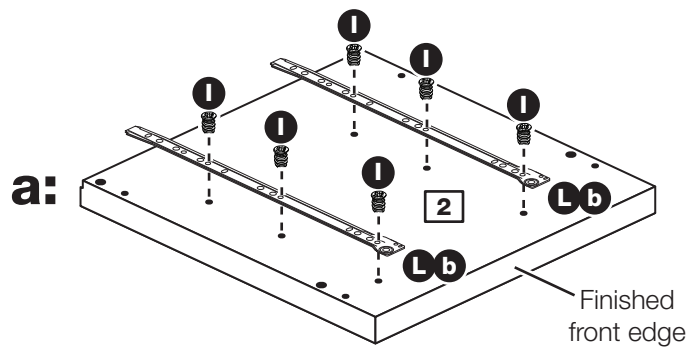

Assembly Instructions


Step 17

Prepare the top

Insert 4 large locking nuts **B** into the top **3**.

Tap 4 wooden dowels **D** into the top **3**.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

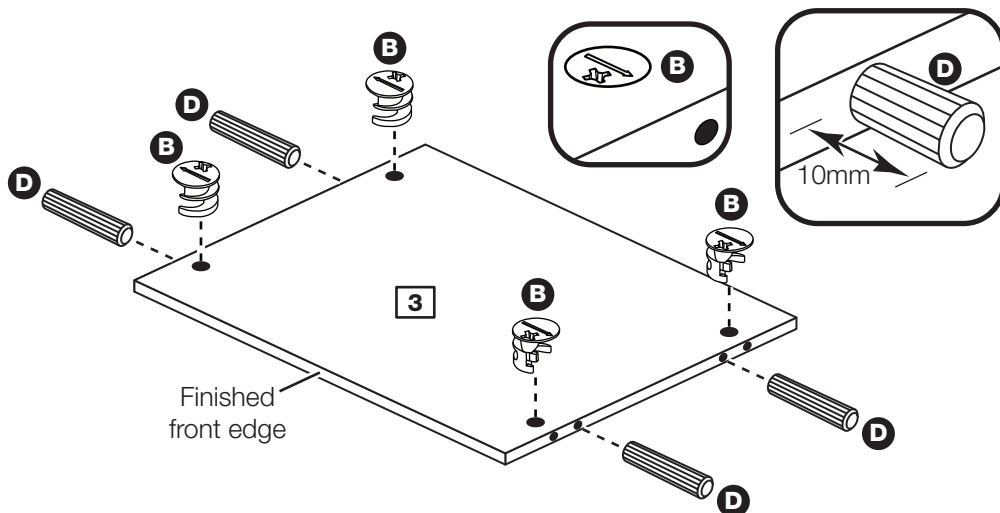


Step 18

Fit the top to the right side

Push the top **3** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the top **3**.

Note: Turn the large locking nuts **B** as far as they will go - more than 1/2 a turn.

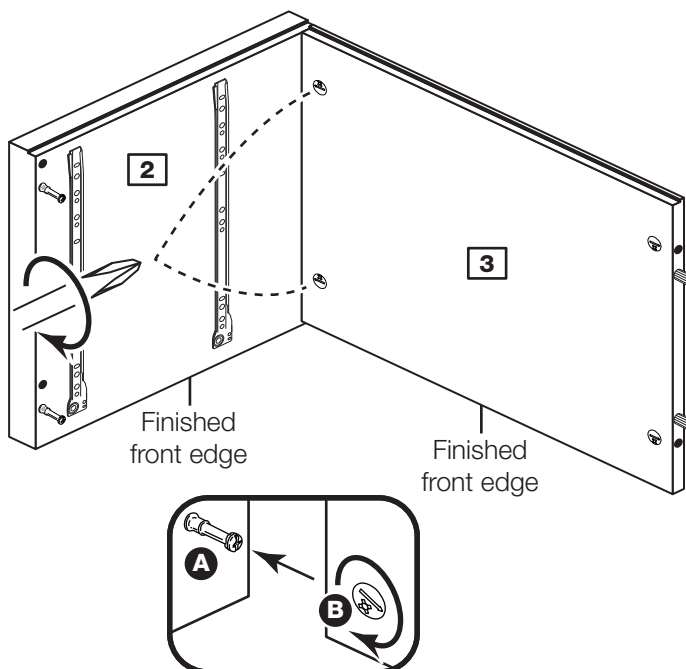


Step 19

Prepare the 2 rails

Insert 2 large locking nuts **B** into each of the 2 rails **4**.

Tap 2 wooden dowels **D** into each of the 2 rails **4**.

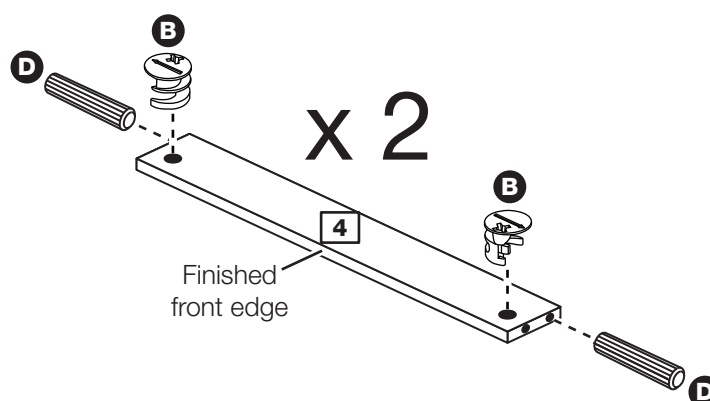


Assembly Instructions

Step 20

Fit the 2 rails

Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **B** fitted to each rail **4**.

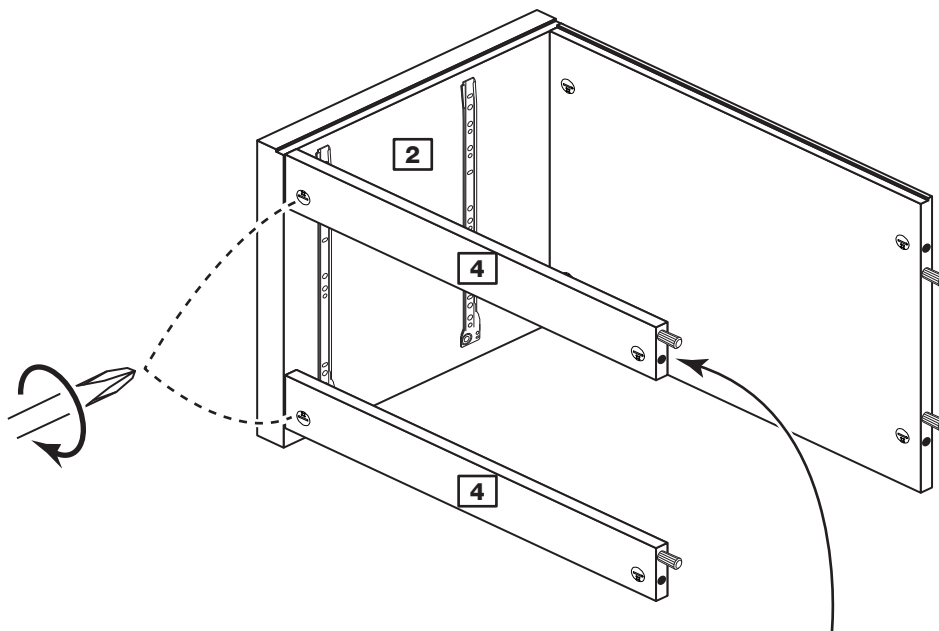


Note: Support this rail until the left side has been fitted in the next step.

Step 21

Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 4 large locking nuts **B** fitted to the top **3** and the 2 rails **4**.

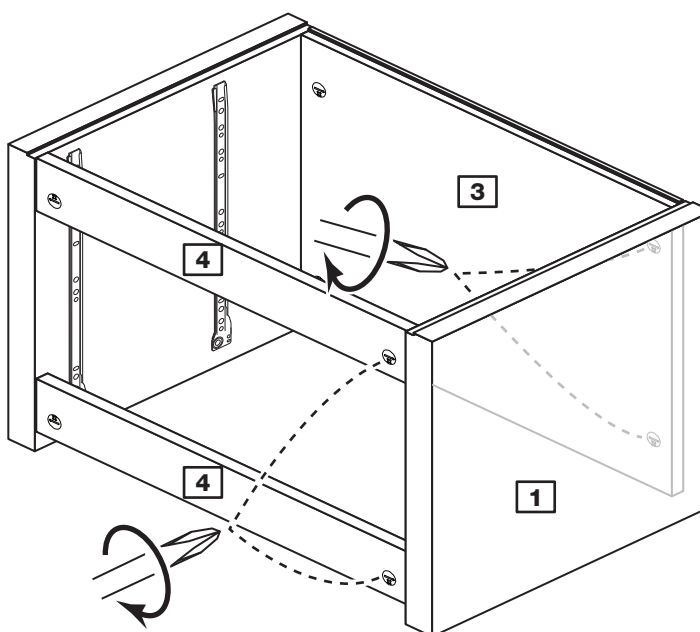

Assembly Instructions

Step 22

Fit the back

a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.


b: Place the back **14** onto the unit.

Nail **E** around the outside edges of the back **14**.

Note: Nails should be spaced about 150mm apart.

Stand the unit up for the next step.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

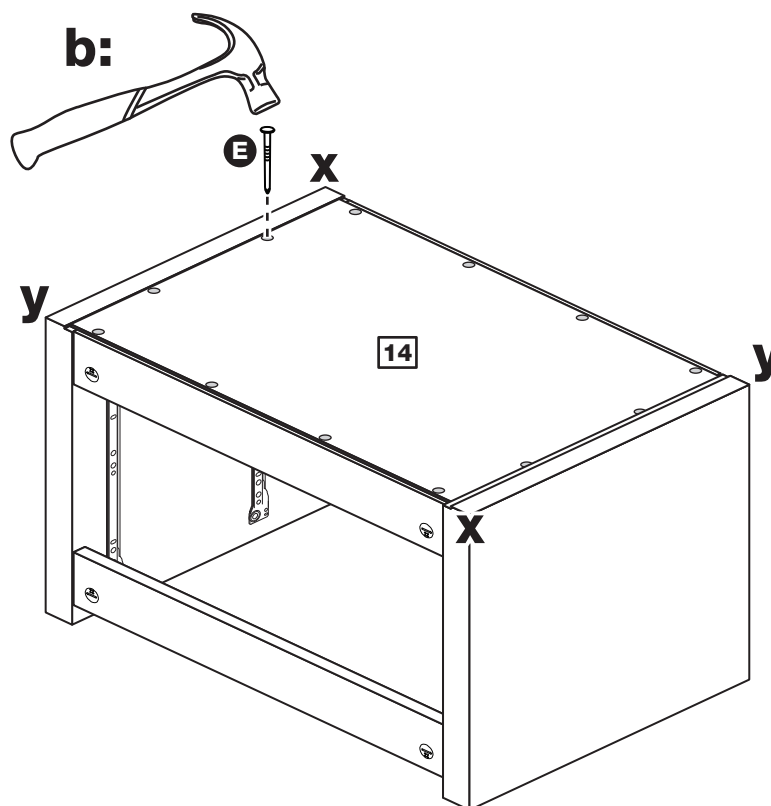


Step 23

Fit the drawers

Slide the wheels of the runners fitted to the drawers, over the wheels of the runners fitted to the side panels and push the drawers into position.

Note: Now the assembly has finished you can remove any protective film from the panels.

Assembly is complete

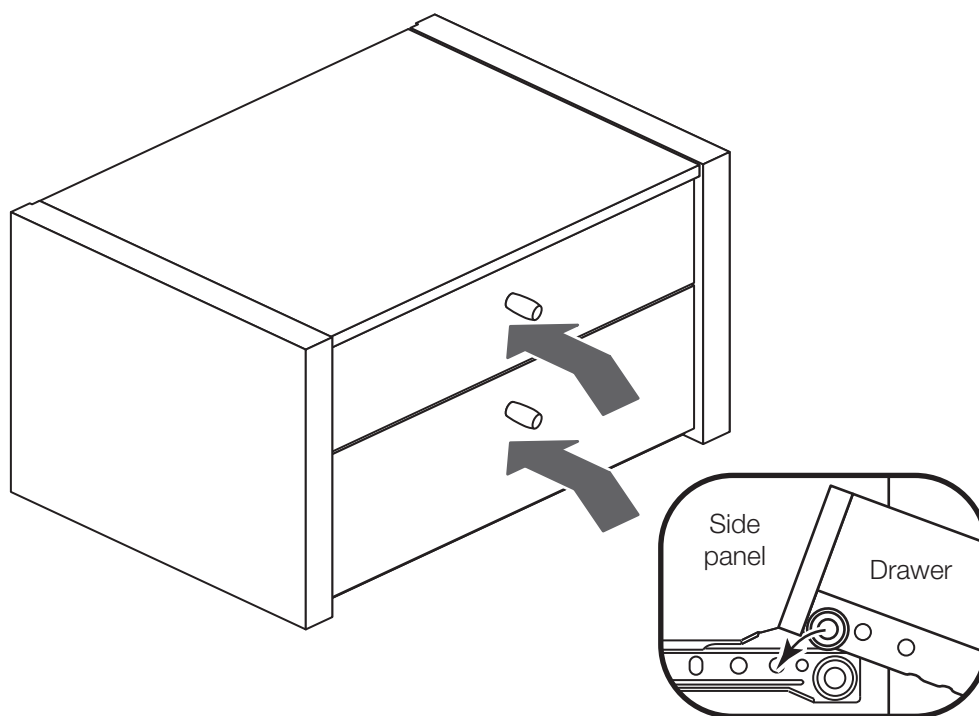

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

