
Sicily TV Bench

Assembly Instructions - Please keep for future reference

404/2772

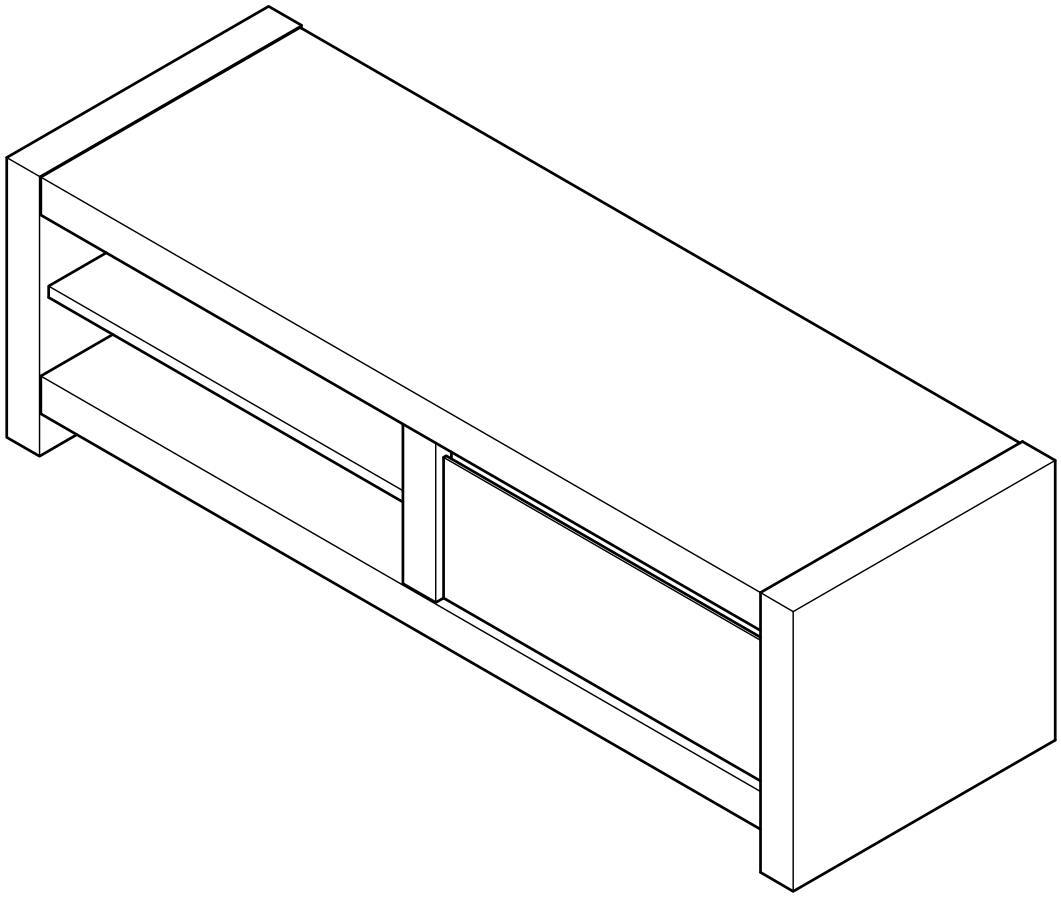

Dimensions

Width - 120cm
Depth - 40cm
Height - 37cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**

Issue 1 - 03/04/15

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints


- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.
- Regularly check and ensure that all bolts and fittings are tightend properly.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 03456 400800**


Please check you have all the panels listed below

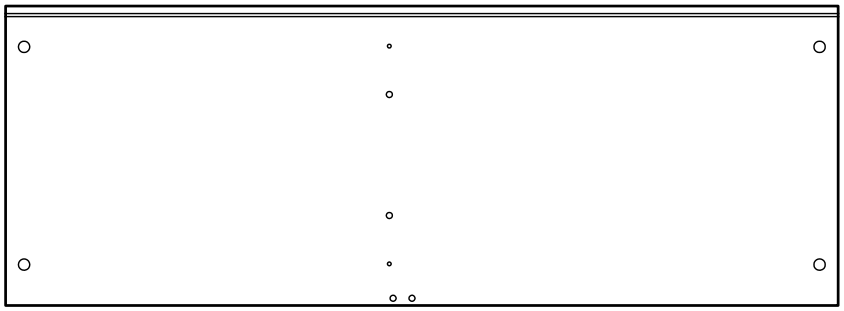


1 Top panel (110.1 x 39.6cm)




3 Left side panel (37 x 40cm)

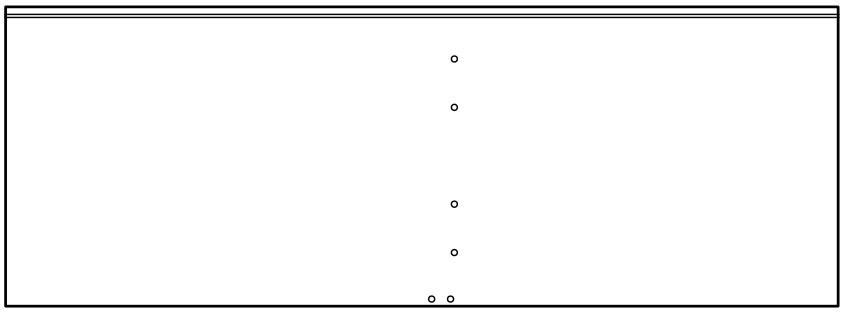


2 Bottom panel (110.1 x 39.6cm)



4 Right side panel (37 x 40cm)




5 Middle side panel (21.3 x 37.8cm)



7 Right rail (50 x 4.5cm)



6 Shelf (54.9 x 36cm)

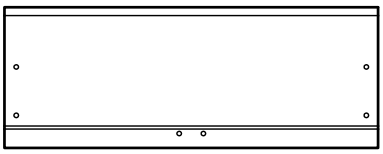


8 Drawer front (49.4 x 18.5cm)



9 Drawer right side (35 x 13cm)



10 Drawer left side (35 x 13cm)



11 Drawer back (45.1 x 13cm)



12 Drawer bottom (46.1 x 34.6cm)



13 Drawer support (33.6 x 6cm)









14 Back panel (22.3 x 111.1cm)

Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 03456 400800**

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A  Locking pin x 12	B  12mm Locking nut x 10	C  30mm Dowel x 16
D  85mm Screw x 2	E  9mm Locking nut x 2	F  30mm Small dowel x 6
G  31mm Screw x 4	H  Shelf support x 4	I  Plastic fastener x 6
J  16mm Screw x 6	K  12mm Screw x 8	L  Wrench x 1
M  Drawer runner x 1 set		


Tools required



Phillips screwdriver (medium & large)

Ruler - Use this ruler to help correctly identify the screws






The screws length is measured from the head to the point (30mm screw shown).

Assembly Instructions


Step 1

Fitting drawer runner

a: Use screws K to fix drawer runners M onto the middle side 4 and right side 5.

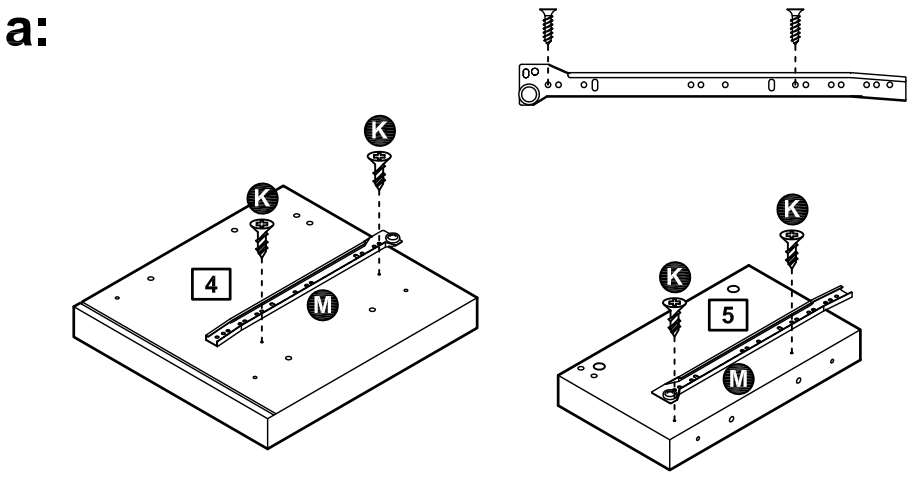


b: Screw locking pins A into side panels 3 and 4. Insert locking pins as far as shown.

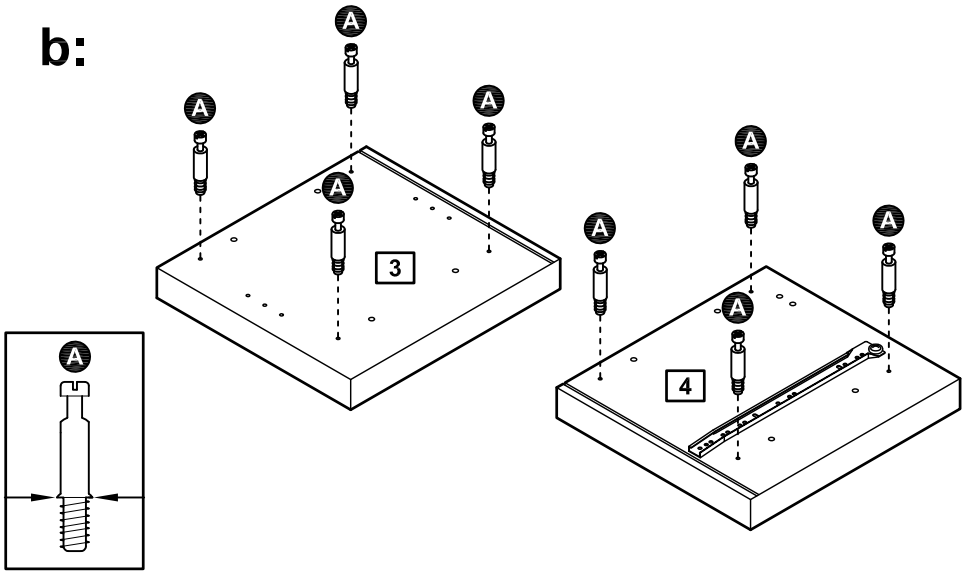

Step 2

Fitting middle part

a: Insert dowels C into bottom panel 2, middle panel 5 and right rail 7.

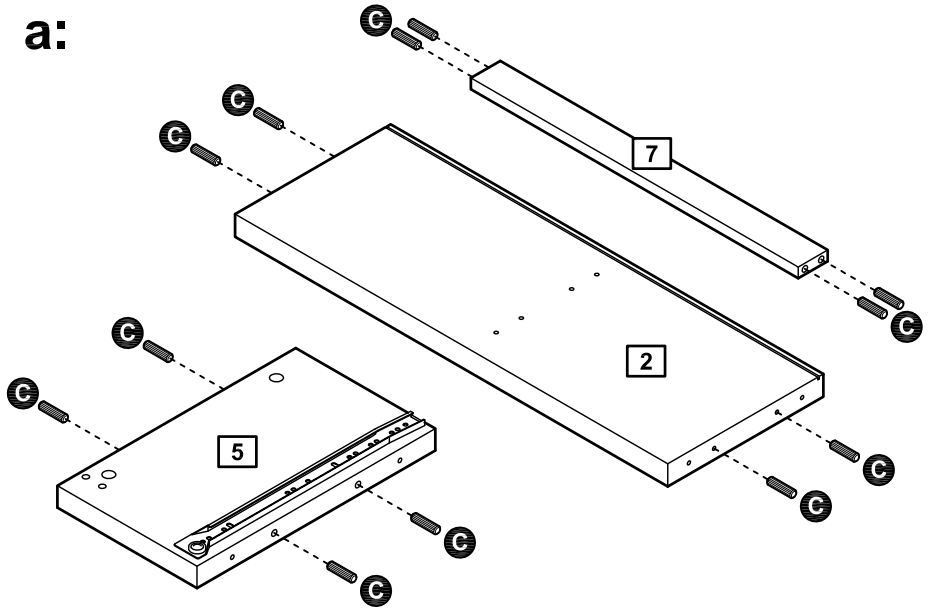


Step 2 - continued

b: Insert dowels C into top panel 1.


Screw locking pins A into top panel 1. Insert locking pins as far as shown.

b:

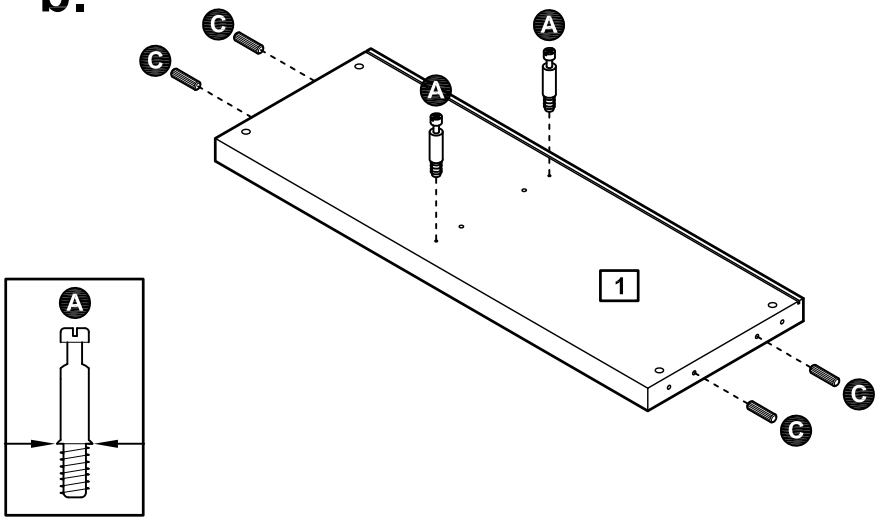

c: Use screws D to fix bottom panel 2 onto middle panel 5 by wrench L.


c:

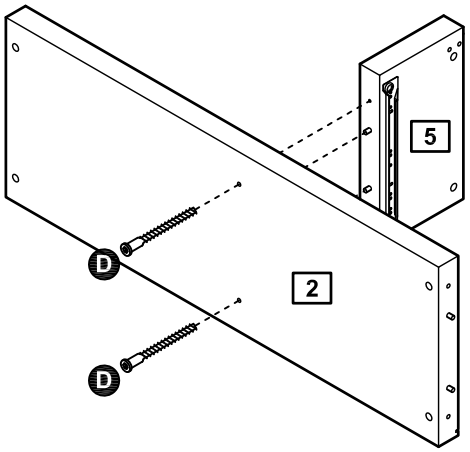



d: Attach top panel 1 onto the unit.

Insert locking nuts B into the unit, then use a screwdriver to turn locking nuts B clockwise to lock.

d:

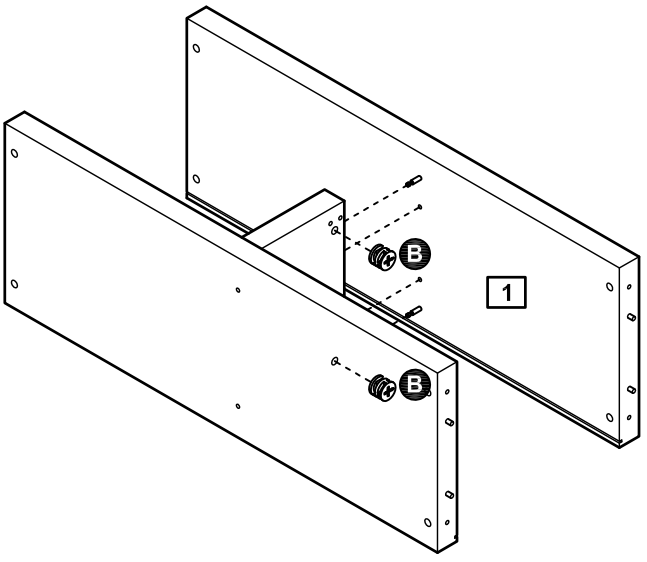






Step 3


Fitting side panel

a: Attach left side panel 3 onto the unit.

Insert locking nuts B into the unit, then use a screwdriver to turn locking nuts B clockwise to lock.

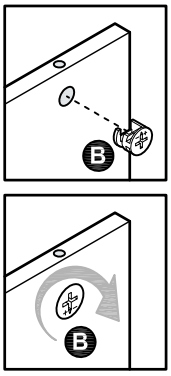


a:

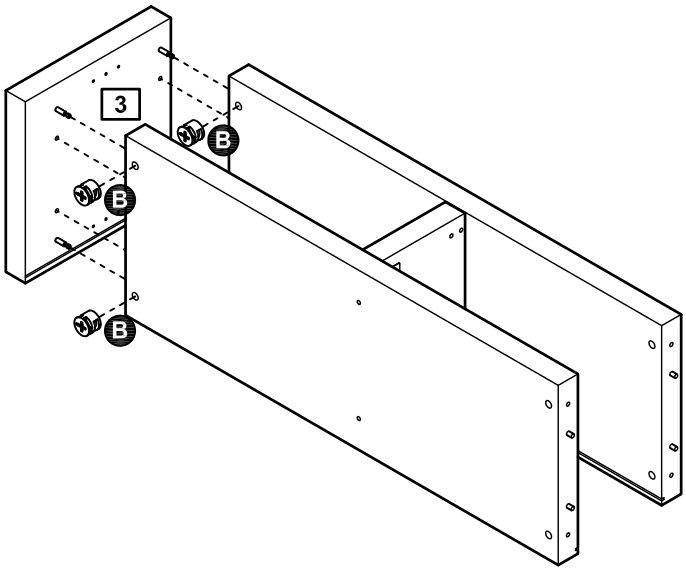


b: Slide back panel 14 into the unit.


b:

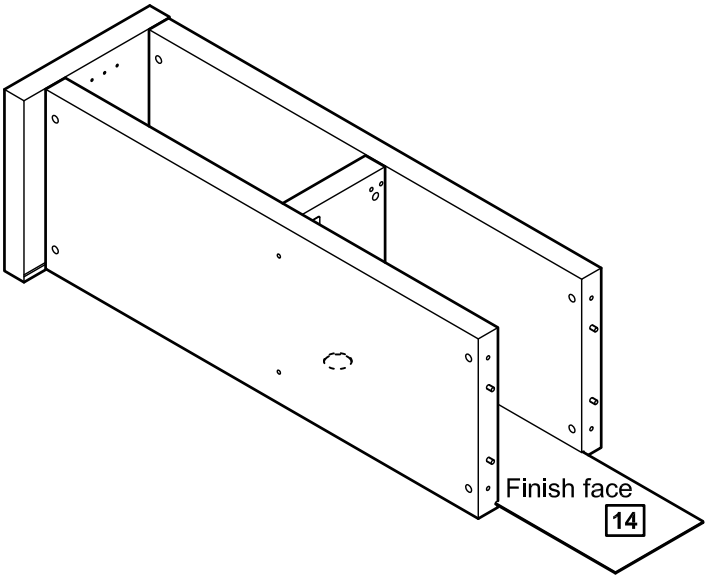


c: Attach right side panel 4 and right rail 7 onto the unit.

Insert locking nuts B into the unit, then use a screwdriver to turn locking nuts B clockwise to lock.





c:

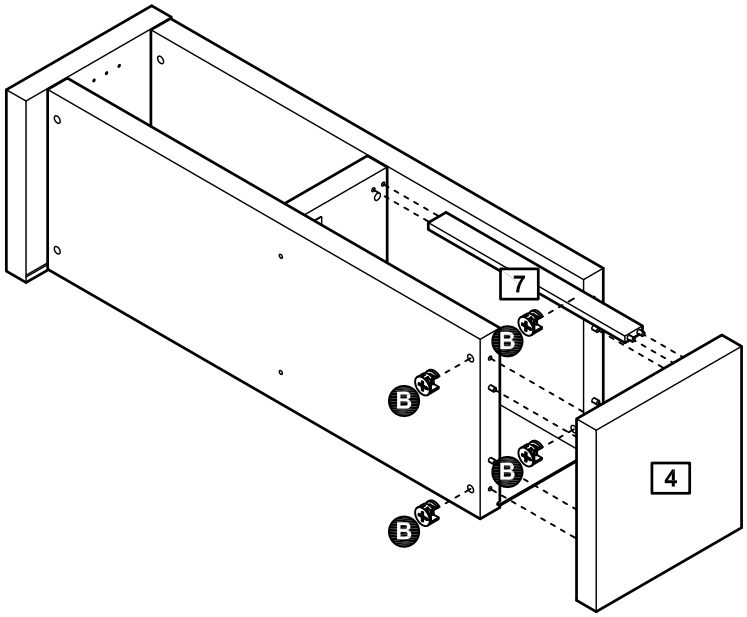

Assembly Instructions

Step 4


Fitting shelf

a: Place shelf supports (H) into the unit.

***NOTE:* Adjust the shelf supports to the desired height.**

Slide shelf [6] into the unit.

a:

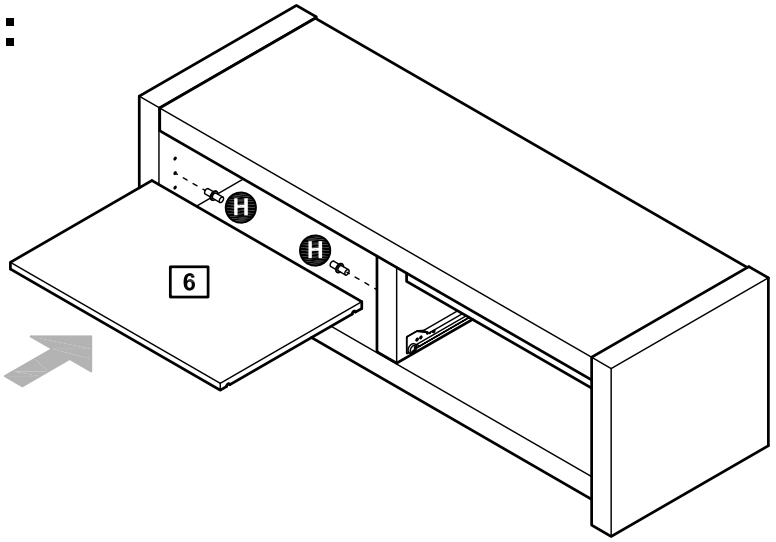

Step 5


Fitting the drawer

a: Use screws (G) to fix drawer side [9] and [10] onto drawer back [11].

Insert dowels (F) into drawer side [9], [10] and drawer support [14].

Attach drawer support [14] onto drawer back [11].


a:

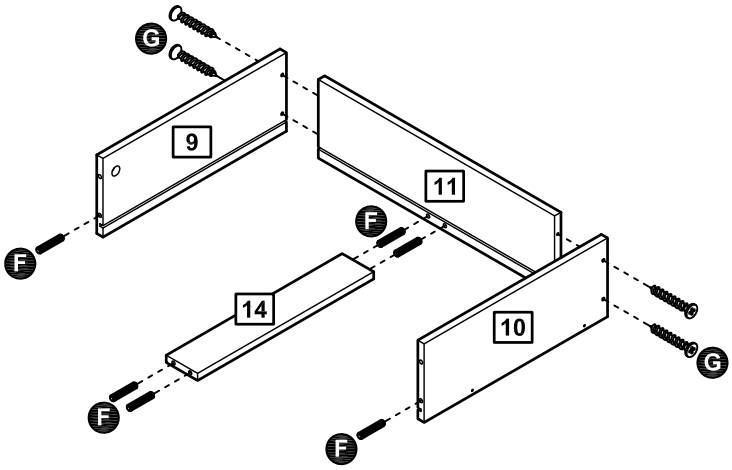

b: Screw locking pins (A) into drawer front [8]. Insert locking pins as far as shown.

Slide drawer bottom [12] into the unit (B)

b:

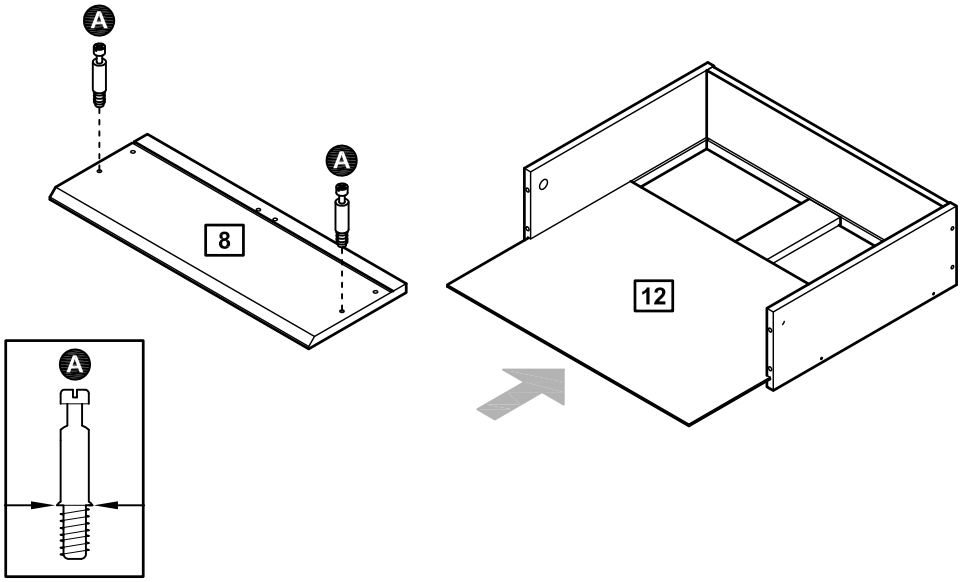


Assembly Instructions

Step 5- continued

c: Attach drawer front 8 onto the unit.

Insert locking nuts E into the unit, then use a screwdriver to turn locking nuts E clockwise to lock.

Use screws K to fix drawer runners M onto the unit.

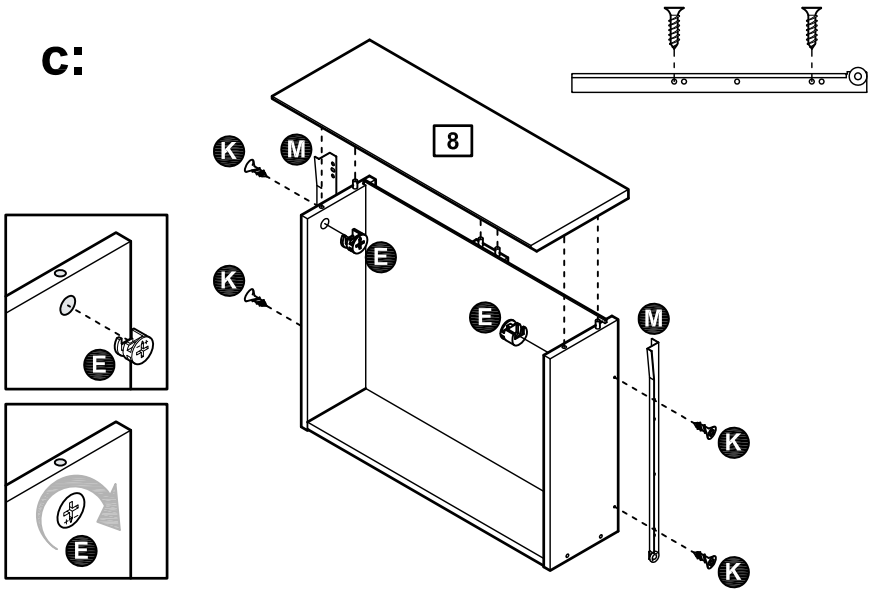


Step 6

Finish the unit

a: Slide the drawer into the unit.

Insert plastic fasteners I into the back panel grooves and secure with screws J, tighten with a screwdriver.

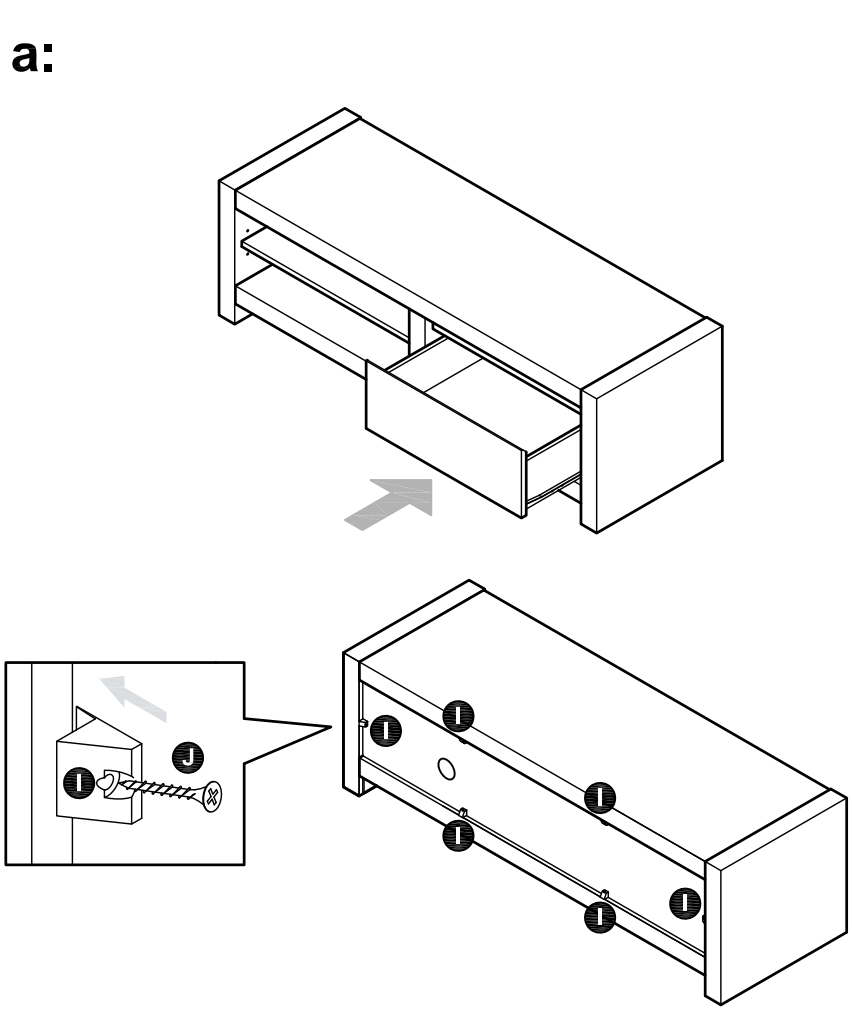

Assembly is complete.

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**