

# 5+2 Drawer Chest

Assembly Instructions - Please keep for future reference

246/5014


238/4872

245/7589

343/3904

346/6562

325/9731

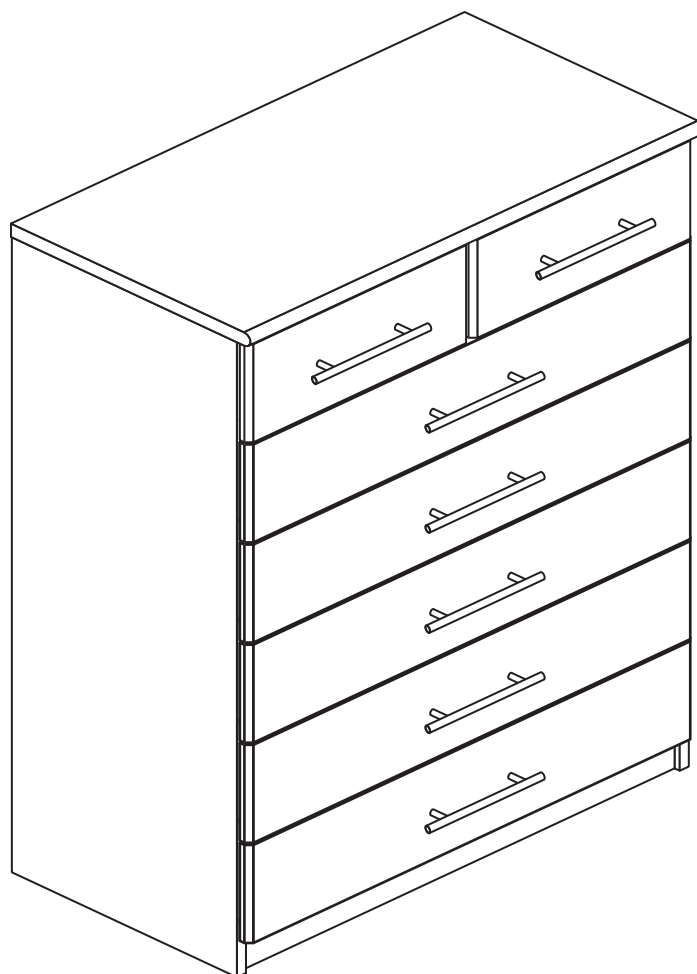

## Dimensions

Width - 75cm

Depth - 40cm

Height - 107.5cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 37.5kgs. Please lift with care.
  - Check you have all the components and tools listed on pages 2 and 3.
  - Remove all fittings from the plastic bags and separate them into their groups.
  - Keep children and animals away from the work area, small parts could choke if swallowed.
  - Parts of the assembly will be easier with 2 people.
  - Make sure you have enough space to layout the parts before starting.
  - Do not stand or put weight on the product, this could cause damage.
  - Assemble the item as close to its final position (in the same room) as possible.
  - Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).
- 
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
  - **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.
  - Dispose of all packaging carefully and responsibly.

## Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below


Please check you have all the panels listed below

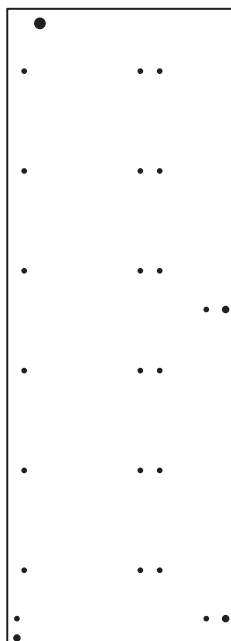

**1** Left Side (D2364B)  
(1051 x 372mm)

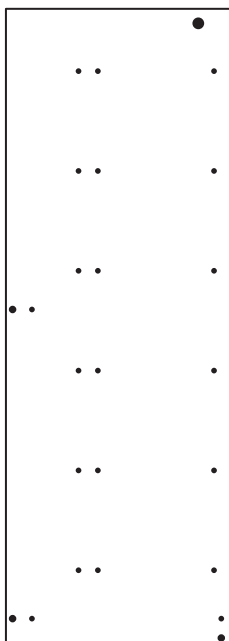


**2** Right Side (D2365B)  
(1051 x 372mm)

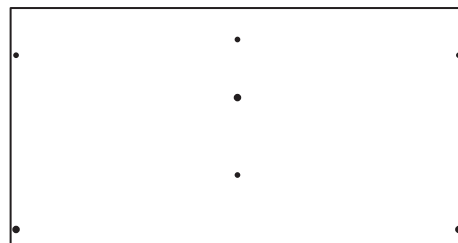


**3** Top (D2363A)  
(750 x 396mm)




**4** Rail (D2370A)  
(717 x 60mm) x 3



**5** Divider (D2369A)  
(165 x 303mm)



**6** Large Drawer  
Front (D2366A)  
(737 x 162mm) x 5



**7** Small Drawer  
Front (D2367A)  
(366.5 x 162mm) x 2



**8** Left Drawer Side  
(W370-124LH)  
(370 x 124mm) x 7



**9** Right Drawer Side  
(W370-124RH)  
(370 x 124mm) x 7




**10** Large Drawer  
Back (W684-124)  
(684 x 124mm) x 5




**11** Small Drawer  
Back (W314-124)  
(314 x 124mm) x 2



**12** Large Drawer  
Base (T695-367)  
(695 x 367mm) x 5



**13** Small Drawer  
Base (T325-367)  
(325 x 367mm) x 2











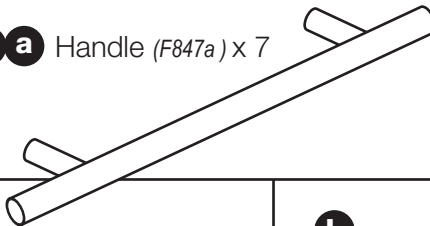






**14** Back (X1033-743)  
(1033 x 743mm)



# Components - Fittings

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 9	<b>B</b>  Metal dowel (F901) x 24	<b>C</b>  Large locking nut (F900) x 10
<b>D</b>  Small locking nut (F3) x 14	<b>E</b>  Nail (F51) x 28	<b>F</b>  9mm Screw (F73) x 28
<b>G</b>  9mm Screw (F74) x 14	<b>H</b>  Drawer runner (F1004) x 14	
<b>I a</b>  Handle (F847a) x 2		<b>I b</b>  Handle screw (F847b) x 14
<b>K</b>  13mm Screw (F79) x 1	<b>L</b>  Bracket (F327) x 1	<b>M</b>  Wedgefix (F639) x 24
<b>J</b>  Knock-in Peg (F171) x 28		<b>N</b>  Plastic Nail (F91) x 4

## Tools required



Rule



Cross-head screwdriver



Scissors



Hammer




Eye protection  
(when using a hammer or drill)



Electric drill  
(only use when drilling into walls)

Ruler - Use this ruler to help correctly identify the screws



# Assembly Instructions


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

## Step 1

### Prepare the 2 small drawer fronts

Screw 2 metal dowels **B** into the holes shown on the back of the small drawer fronts **7**.

**Note:** Tighten metal dowels up fully against the panels.

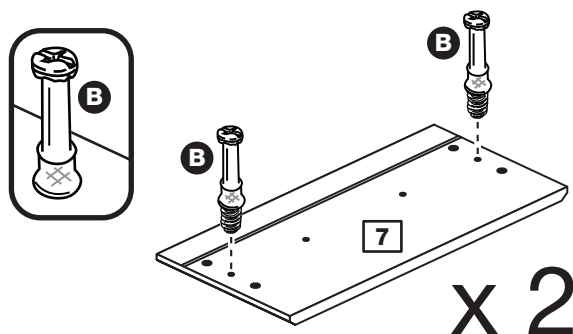


## Step 2

### Prepare 2 sets of drawer sides

Insert a small locking nut **D** into the hole shown on the left drawer side **8** and right drawer side **9**.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

**Note:** Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.

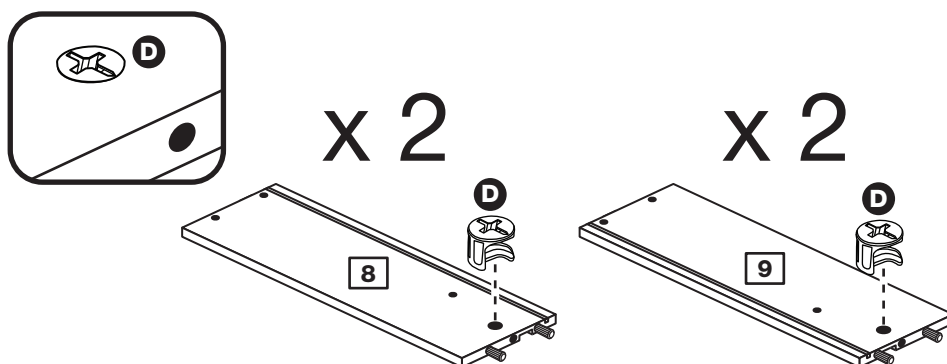



## Step 3

### Attach the drawer sides to the small drawer front

Push the left drawer side **8** and right drawer side **9** onto the back of the small drawer front **7**.

Turn the small locking nuts **D** on the left drawer side **8** and right drawer side **9**.

**Note:** Turn the locking nuts **D** clockwise to secure panels - more than 1/2 a turn.

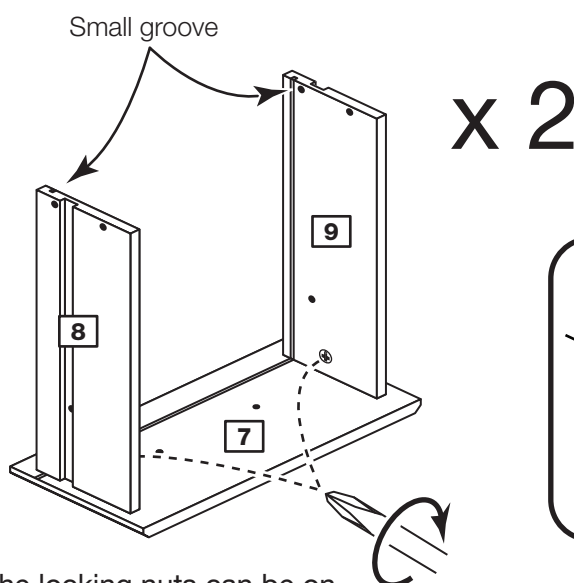


**Note:** The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

# Assembly Instructions

## Step 4

### Fit the small drawer base

Slide the small drawer base **13** down the grooves in the drawer sides **8** and **9** then down into the groove in the small drawer front **7**.

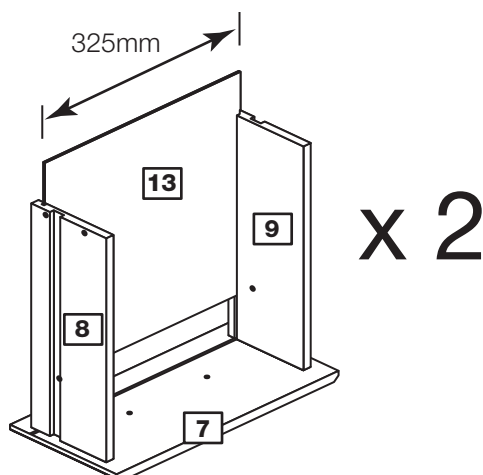


## Step 5

### Fit the small drawer back

Fit the small drawer back **11** between the drawer sides **8** and **9**.

Make sure that the small drawer base **13** fits into the groove in the small drawer back **11**.


Hold the small drawer back **11** in position and tap the knock-in pegs **J** through the holes in the drawer sides **8** and **9**.

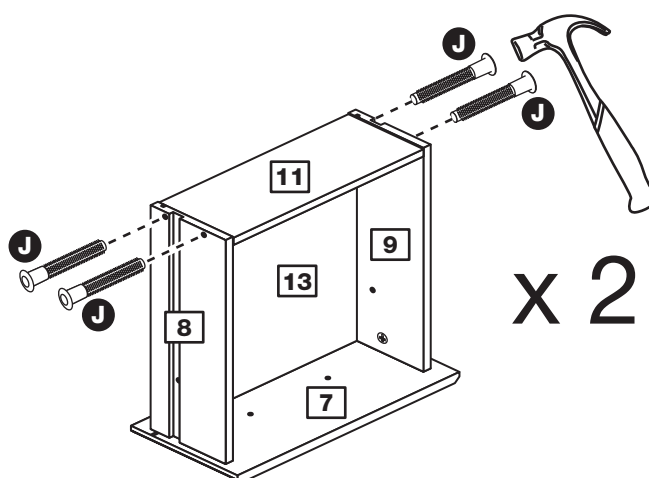

## Step 6

### Attach the handles


Attach a handle **1a** to each of the small drawer fronts **7** using 2 screws **1b**.

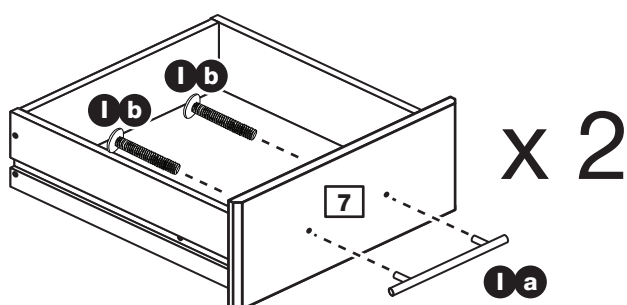

## Step 7

### Fit the wedgefixes

Turn the drawer assemblies over and slide 2 wedgefixes **M** into the front and back grooves, as shown, and tighten up the screws.

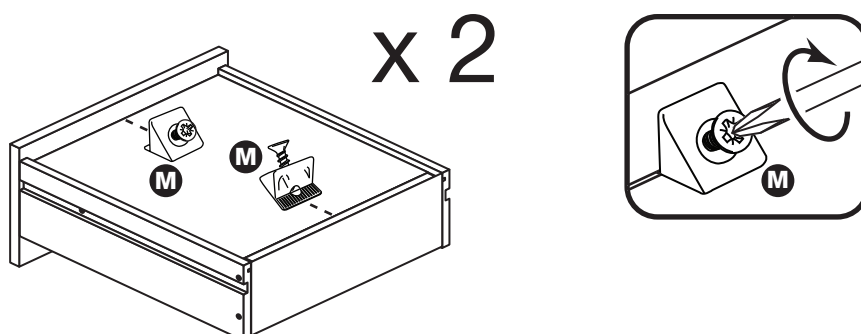


# Assembly Instructions

## Step 8

### Prepare the 5 large drawer fronts

Screw 2 metal dowels **B** into the holes shown on the back of each large drawer front **6**.

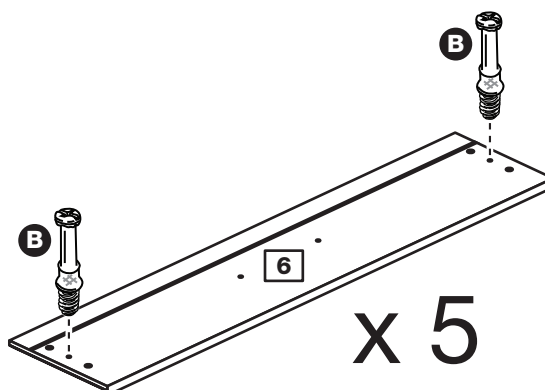


## Step 9

### Prepare 5 sets of drawer sides

Insert a small locking nut **D** into the hole shown on the left drawer side **8** and right drawer side **9**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

**Note:** Due to the manufacturing process, the holes for the locking nut can be on either surface of the drawer sides.

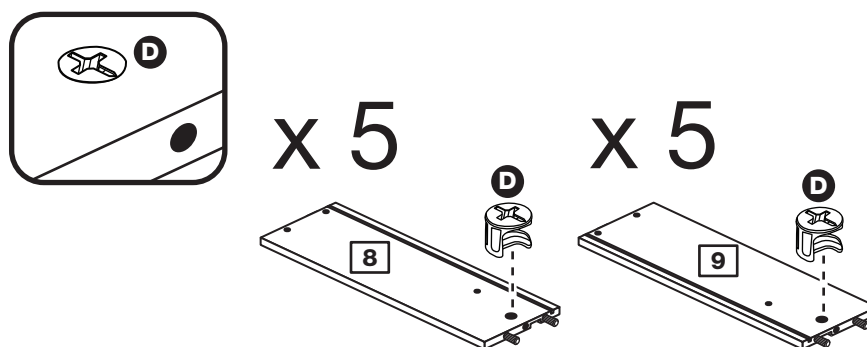


## Step 10

### Attach the drawer sides to the large drawer fronts

Push the left drawer side **8** and right drawer side **9** onto the back of the large drawer fronts **6**.

Turn the small locking nuts **D** on the left drawer side **8** and right drawer side **9**.

**Note:** Turn the locking nuts **D** clockwise to secure panels - more than 1/2 a turn.

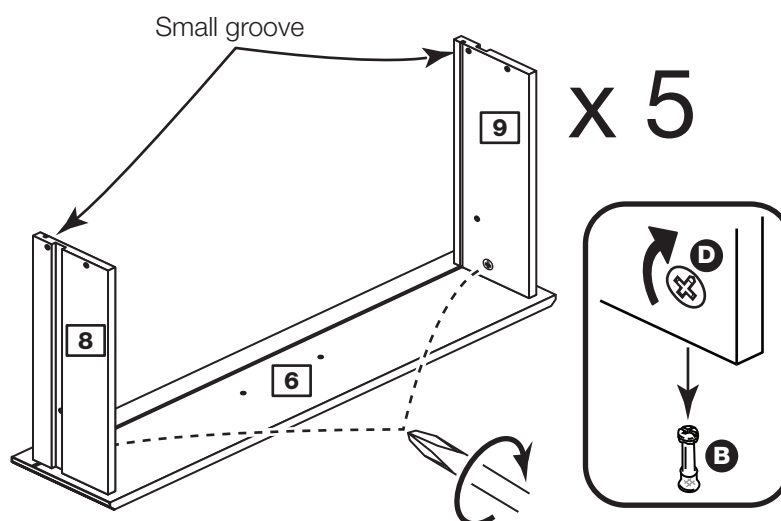

**Note:** The locking nuts can be on either surface of the drawer sides. Make sure that the small groove is on the inside, as shown.

# Assembly Instructions

## Step 11

### Fit the large drawer base

Slide the large drawer base **12** down the grooves in the drawer sides **8** and **9** then down into the groove in the large drawer front **6**.



## Step 12

### Fit the large drawer back

Fit the large drawer back **10** between the drawer sides **8** and **9**.

Make sure that the large drawer base **12** fits into the groove in the large drawer back **10**.


Hold the large drawer back **10** in position and tap the knock-in pegs **J** through the holes in the drawer sides **8** and **9**.

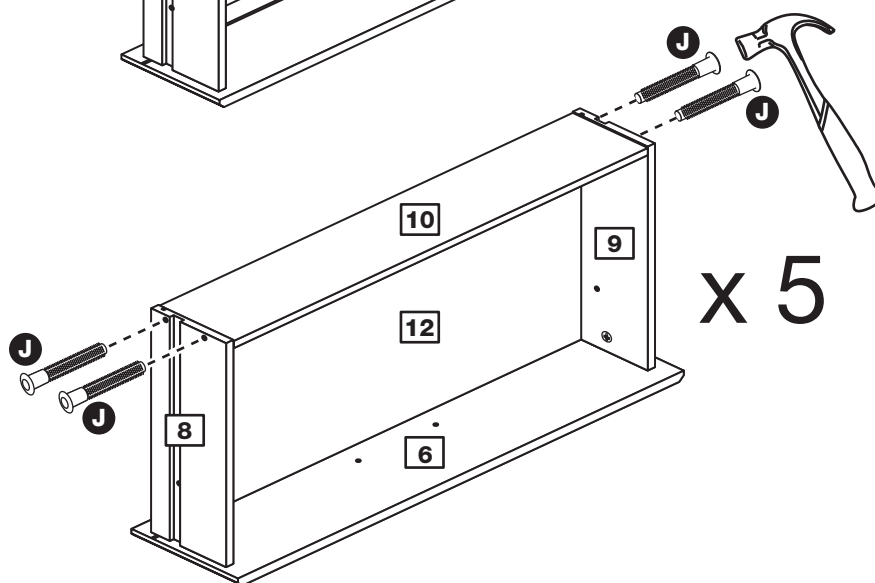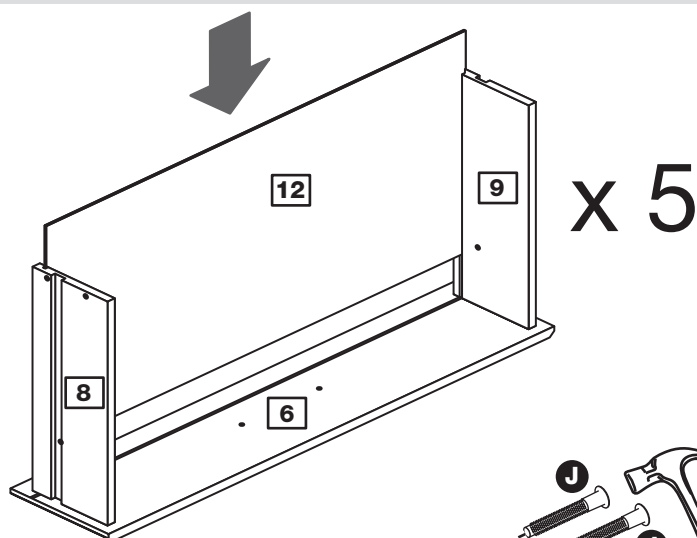

## Step 13

### Attach the handles


Attach a handle **Ia** to each of the large drawer fronts **6** using 2 screws **Ib**.

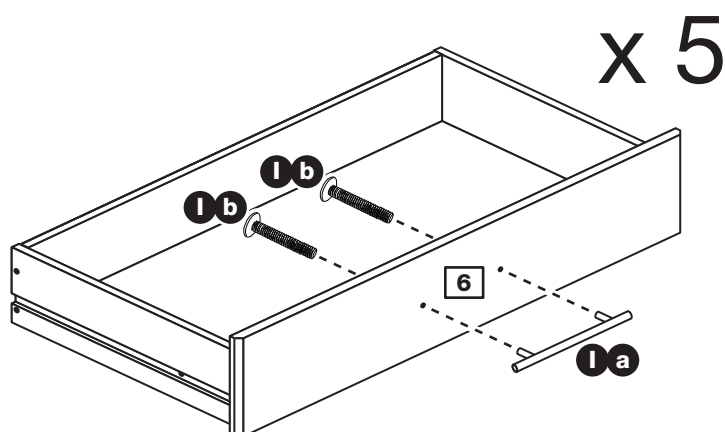

## Step 14

### Fit the wedgefixes

Turn the drawer assemblies over and slide 2 wedgefixes **M** into the front and back grooves, as shown, and tighten up the screws.

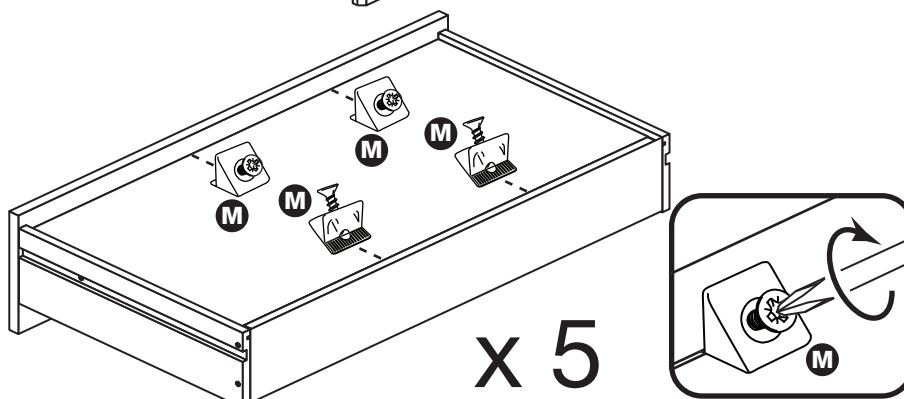

# Assembly Instructions

## Step 15

### Prepare the left side

**a:** Place 6 runners **H** on the left side **1**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **F**.

**b:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the left side **1**.


**c:** Tap a wooden dowel **A** into the left side **1**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.


Screw 3 metal dowels **B** into the left side **1**.

Insert a large locking nut **C** into the left side **1**.


**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

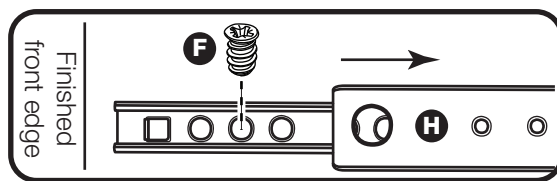


**a:**

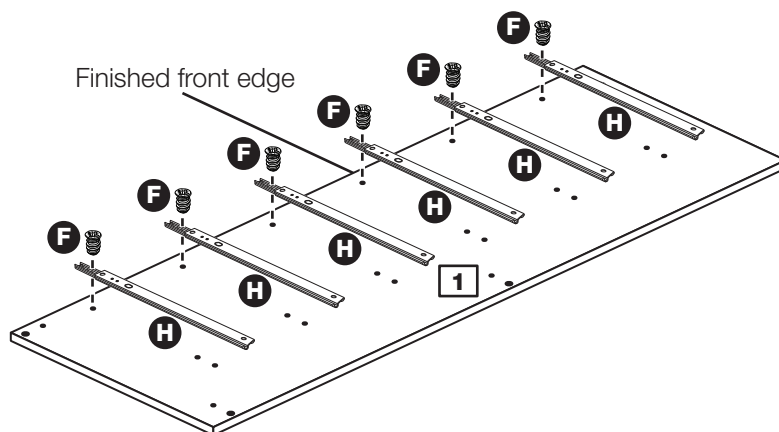

**b:**

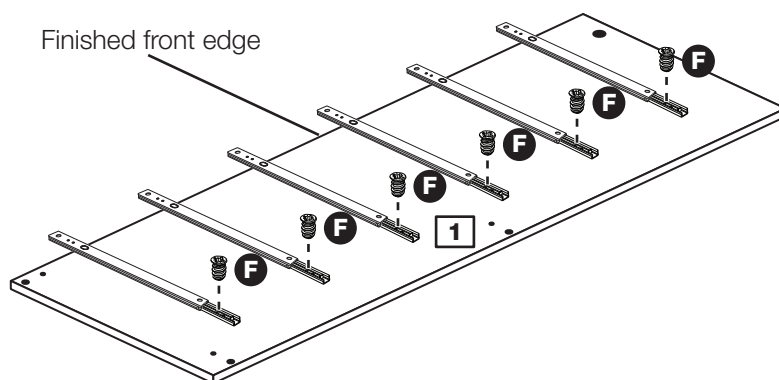

**c:**

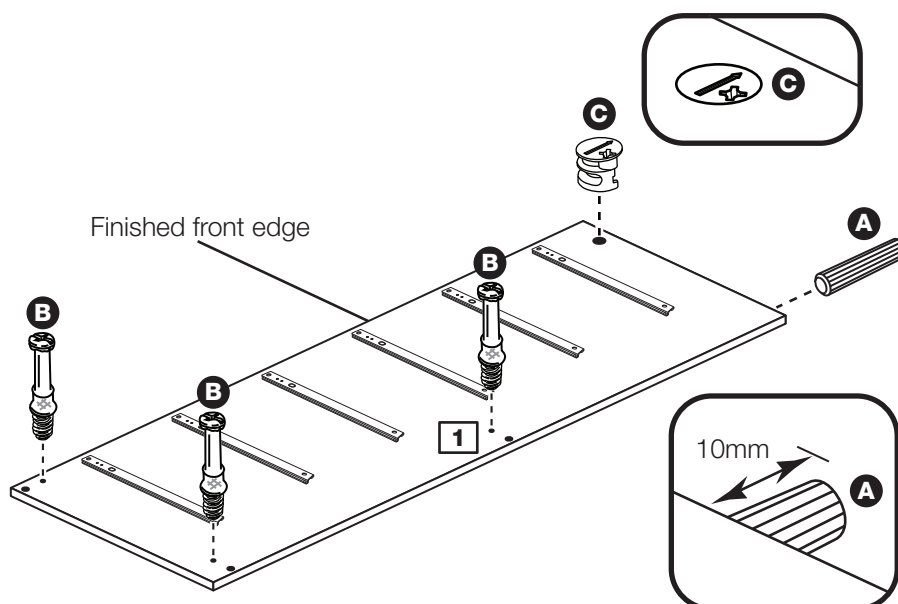

# Assembly Instructions

## Step 16

### Prepare the right side




**a:** Place 6 runners **H** on the right side **2**. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **F**.

**b:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the right side **2**.

**c:** Tap a wooden dowel **A** into the right side **2**.

Screw 3 metal dowels **B** into the right side **2**.

Insert a large locking nut **C** into the right side **2**.

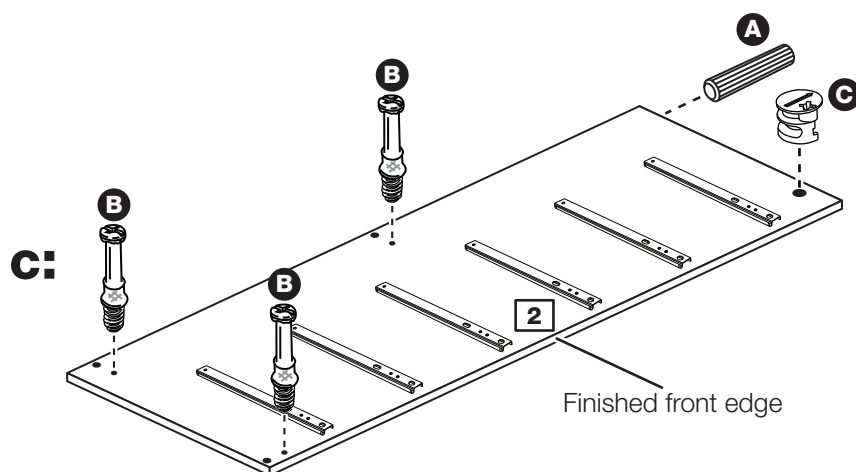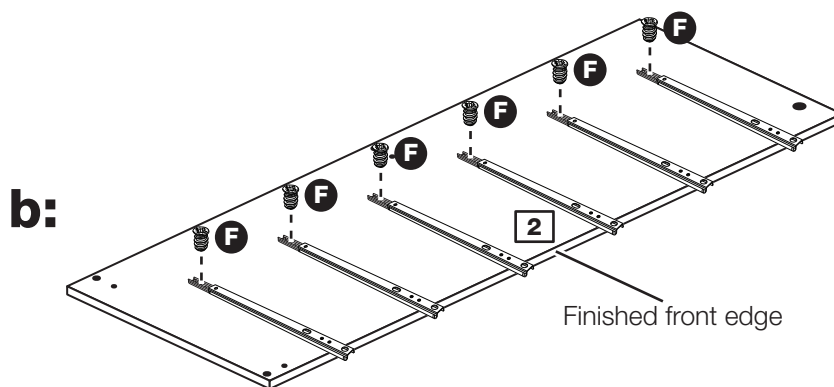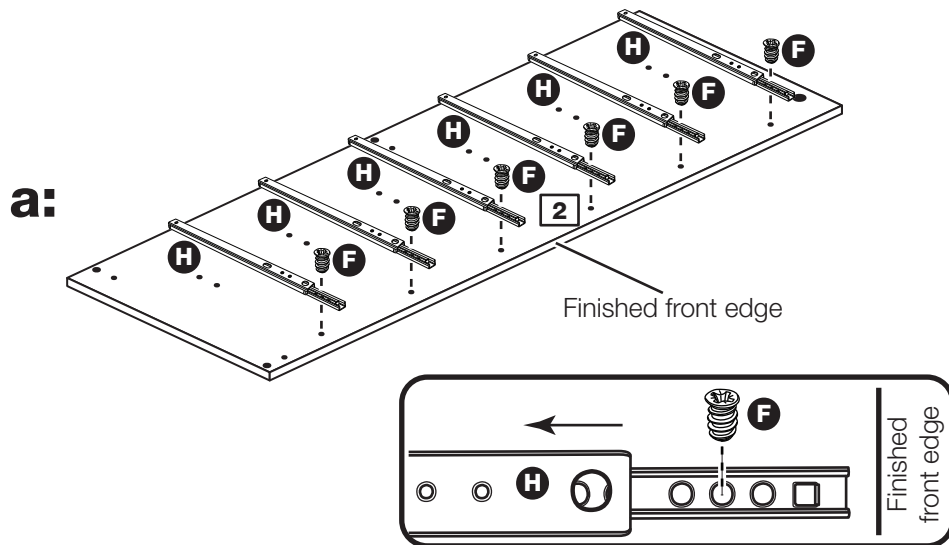


# Assembly Instructions

## Step 17

### Prepare the 3 rails

Insert 2 large locking nuts **C** into each of the 3 rails **4**.

Tap 2 wooden dowels **A** into each of the 3 rails **4**.

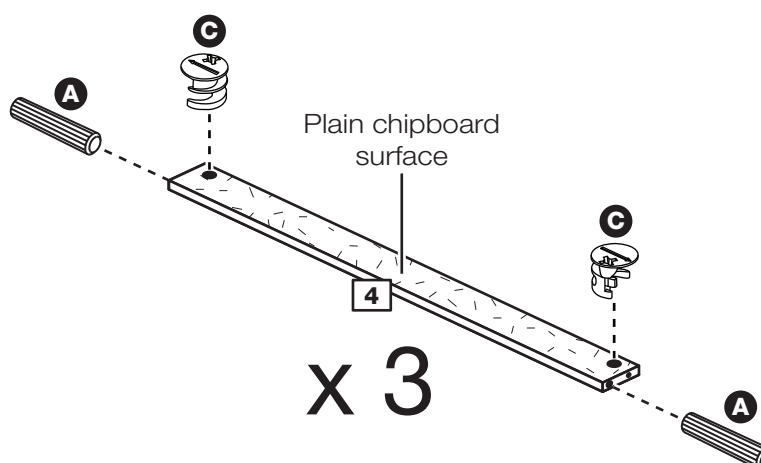

## Step 18


### Fit the 3 rails to the right side

*2 people are needed here*

Push the 3 rails **4** onto the right side **2**.

Use a screwdriver to tighten the 3 large locking nuts **C** fitted to the rails **4**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

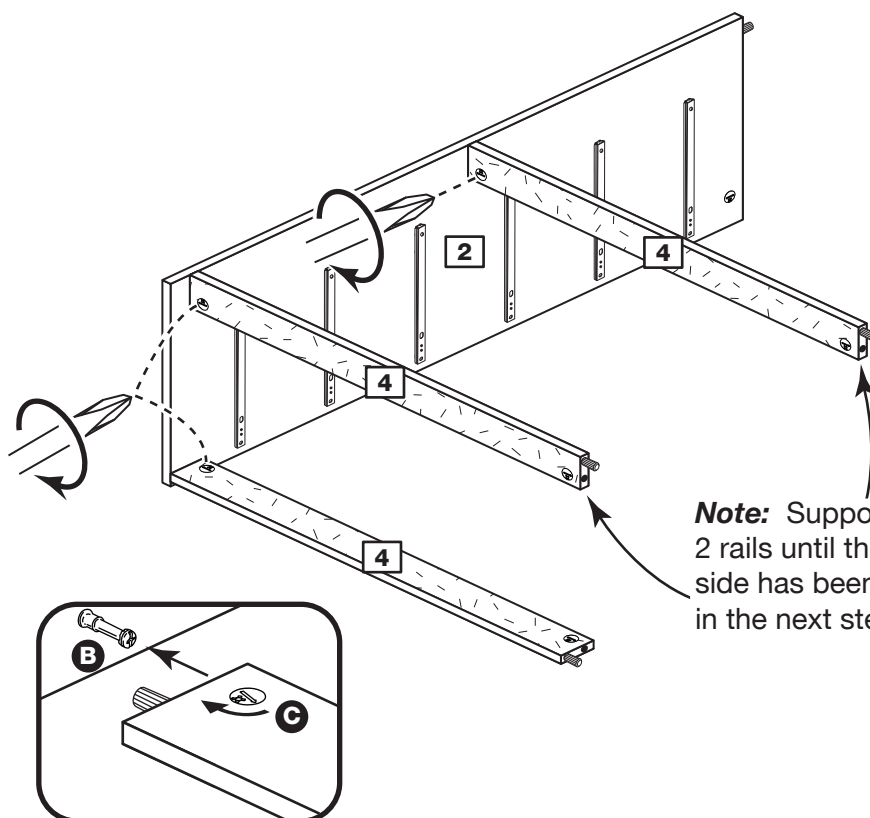


# Assembly Instructions

## Step 19

### Fit the left side

Push the left side **1** onto the 3 rails **4**.

Use a screwdriver to tighten the 3 large locking nuts **C** fitted to the rails **4**.

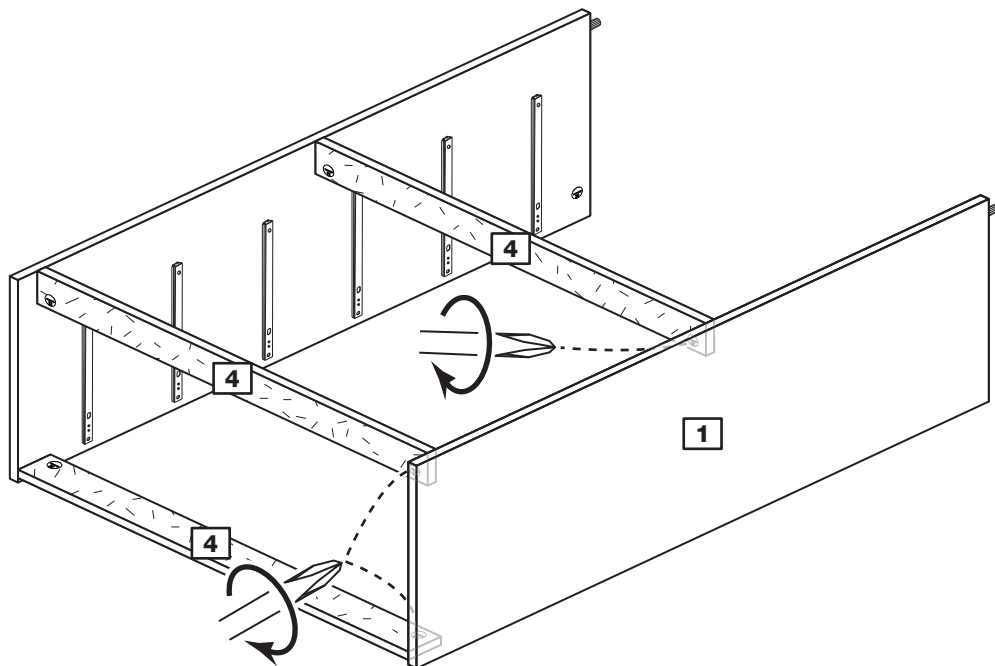


## Step 20

### Prepare the top

Screw 4 metal dowels **B** into the top **3**.

Fix the bracket **L**, 220mm in from the end and flush to the back edge, using screw **K**.

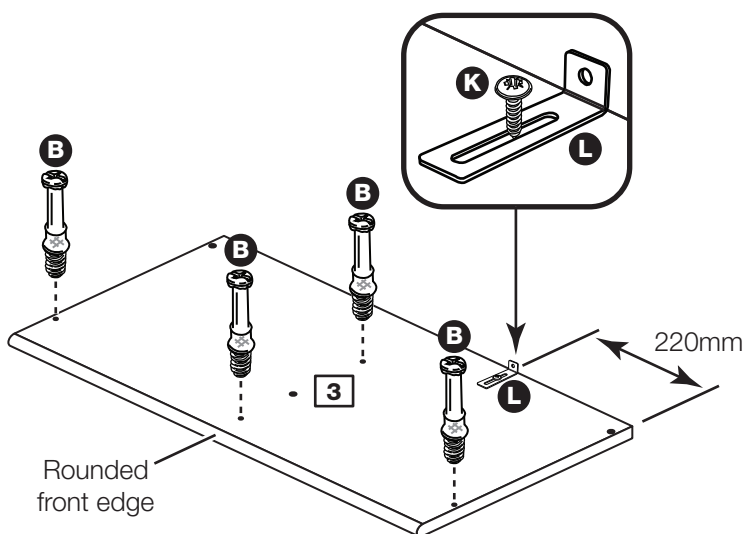

# Assembly Instructions

## Step 21


### Prepare the divider

**a:** Tap a wooden dowel **A** into the divider **5**.



Insert 2 large locking nuts **C** into the divider **5**.

**b:** Place a runner **H** on the divider **5**. Slide back the top of runner and use the 1st hole from the front to fit the 1st screw **F**.

**c:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the divider **5**.

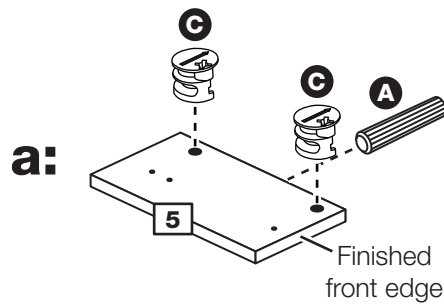

**Note:** Due to the manufacturing process, the 2 holes for the large locking nut can be on either surface of the divider.


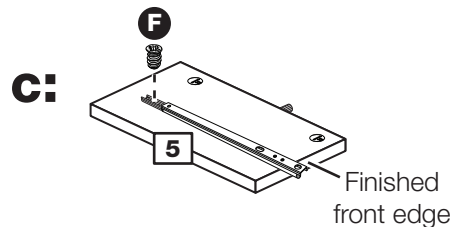
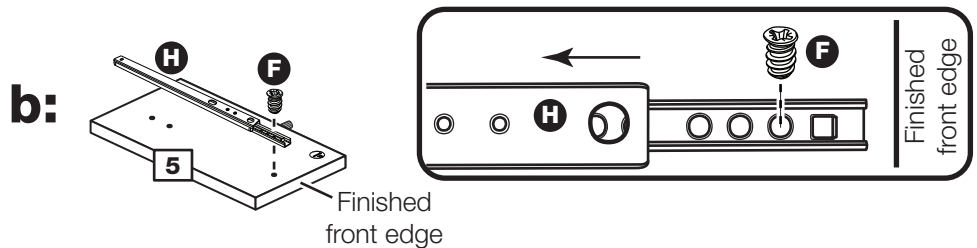


### Turn the divider over



**d:** Place a runner **H** on the divider **5**. Slide back the top of runner and use the 1st hole from the front to fit the 1st screw **F**.

**e:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the divider **5**.

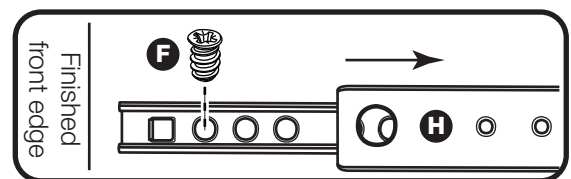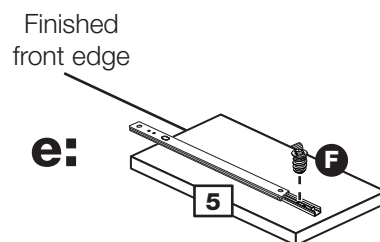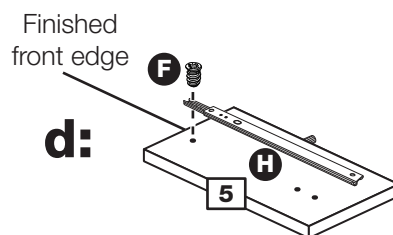


# Assembly Instructions

## Step 22

### Fit the divider to the top

Push the divider **5** onto the top **3**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the divider **5**.

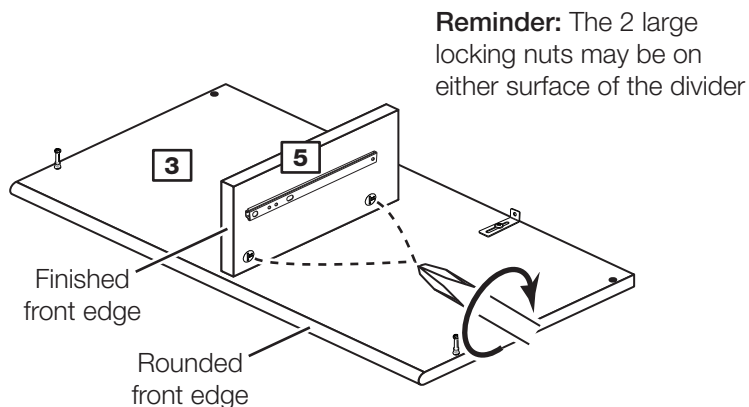


## Step 23

### Fit the top and the plastic nails

Push the top **3** onto the left side **1** and right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the left side **1** and right side **2**.

Tap 2 plastic nails **N** into the bottom edge of each of the sides **1** and **2**.

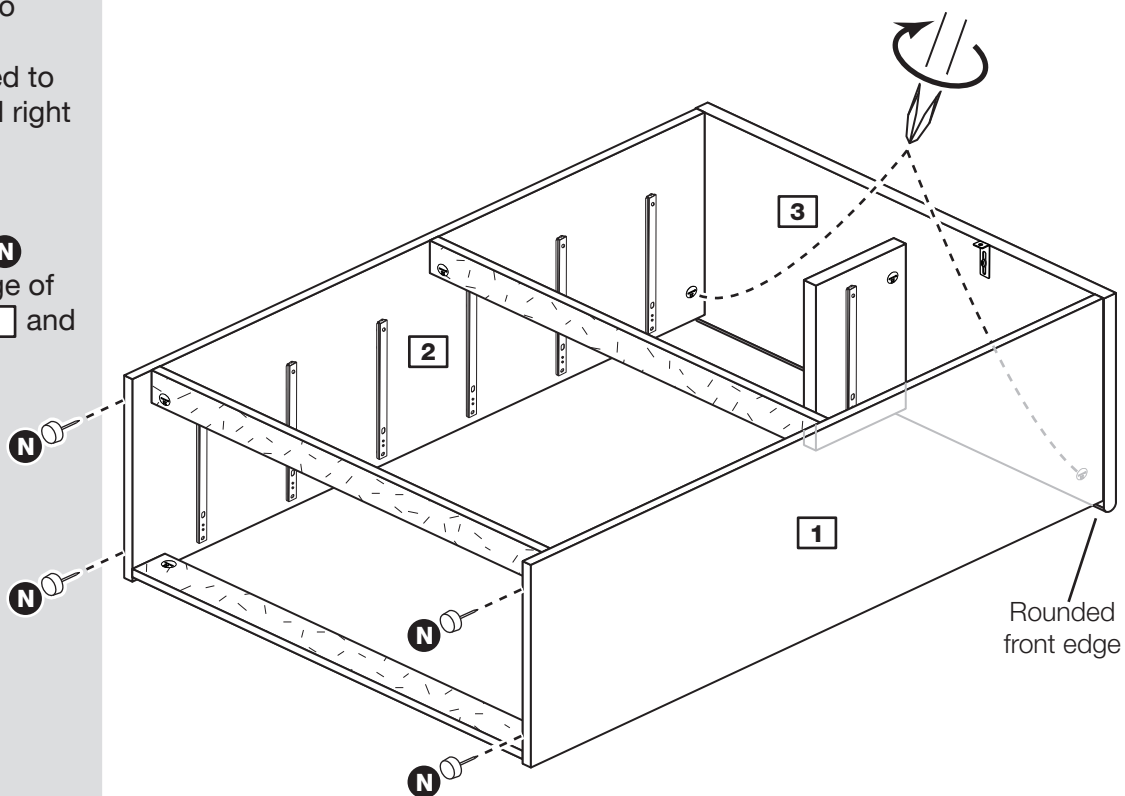

# Assembly Instructions

## Step 24

### Fit the back

**a:** Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.

**b:** Place the back **14** onto the unit.

Nail **E** around the outside edges of the back **14**.


**Note:** Nails should be spaced about 150mm apart.

**Stand the unit up for the next step.**



**Warning:** The unit is heavy. Lift with care.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

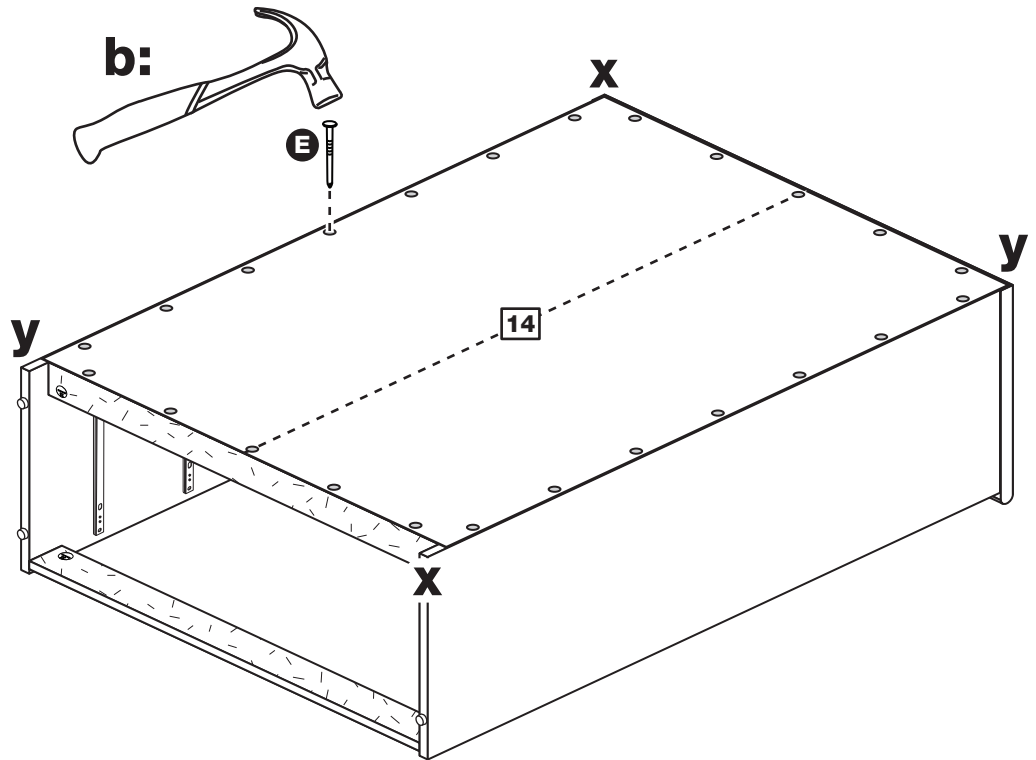

## Step 25


### Secure unit to a wall

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by use of the metal bracket **L** fitted under the top **3**.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the unit to the wall.



**Warning:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

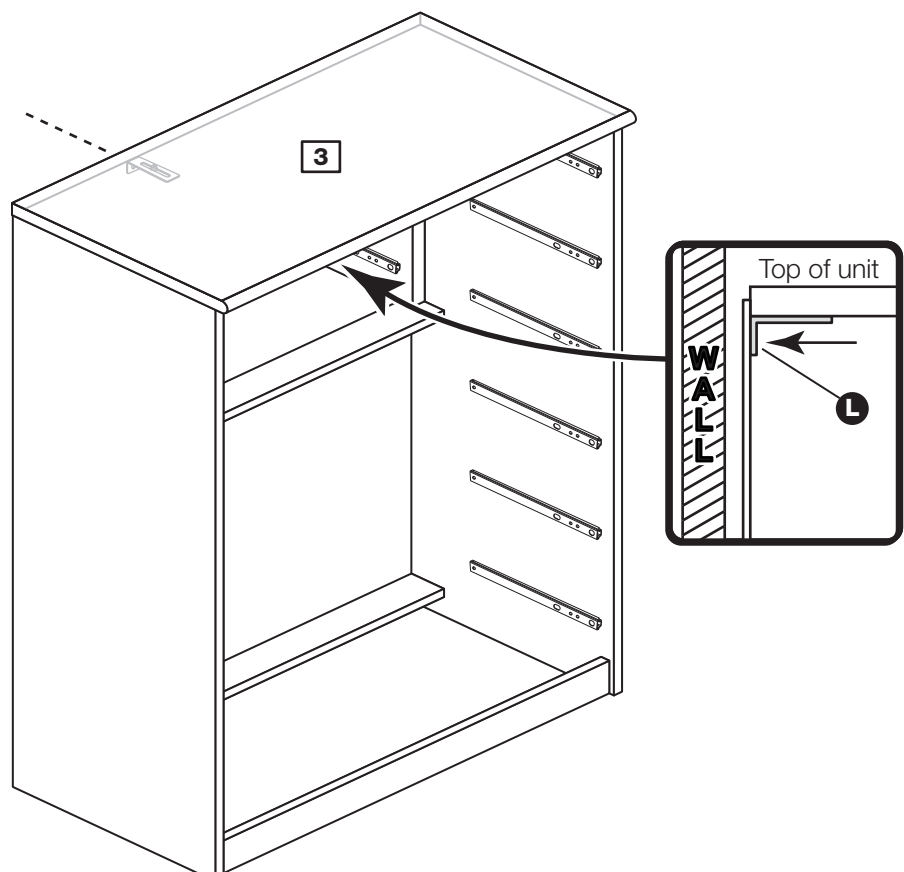

# Assembly Instructions

## Step 26

### Fit the drawers

Starting with the bottom drawer, slide both the runners **H** forward and locate the drawer sides **8** and **9** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **H**.



Working from the inside of the drawer, insert 2 screws **G** through the drawer sides and out into the 2nd threaded hole in the runner.

**Note:** Do not overtighten the screws **G**. If they catch on the runner you may need to loosen them slightly.

### Assembly is complete



**Warning:** The unit is heavy. Lift with care.

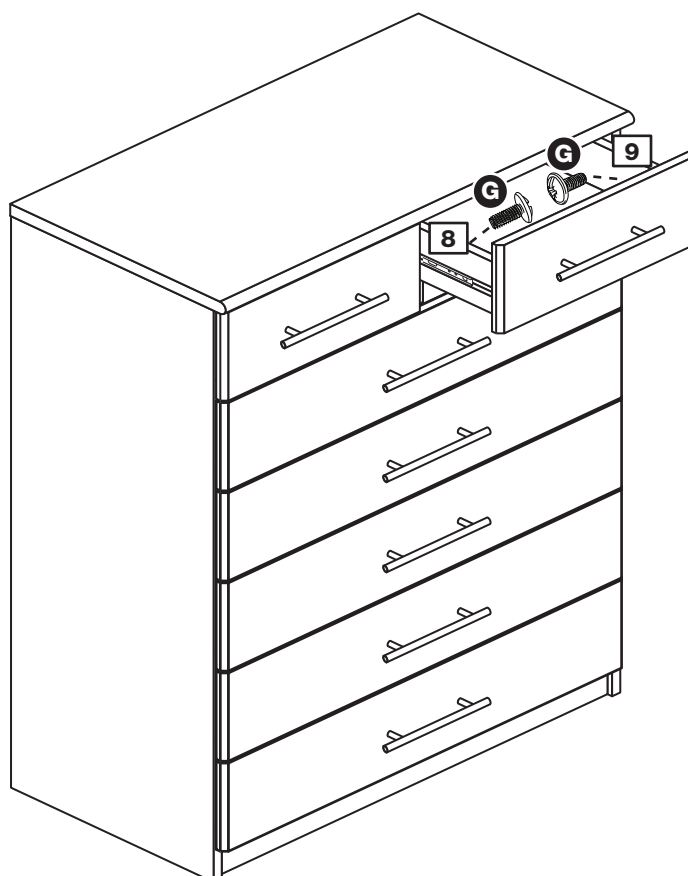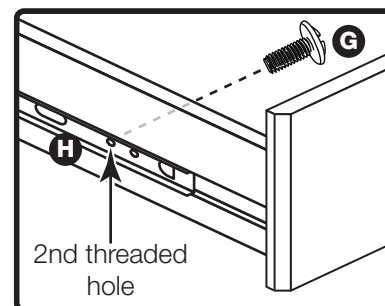

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

# 2 Door Robe

Assembly Instructions - Please keep for future reference

249/3251


249/3660

244/2518

356/1003

343/3935

339/1194

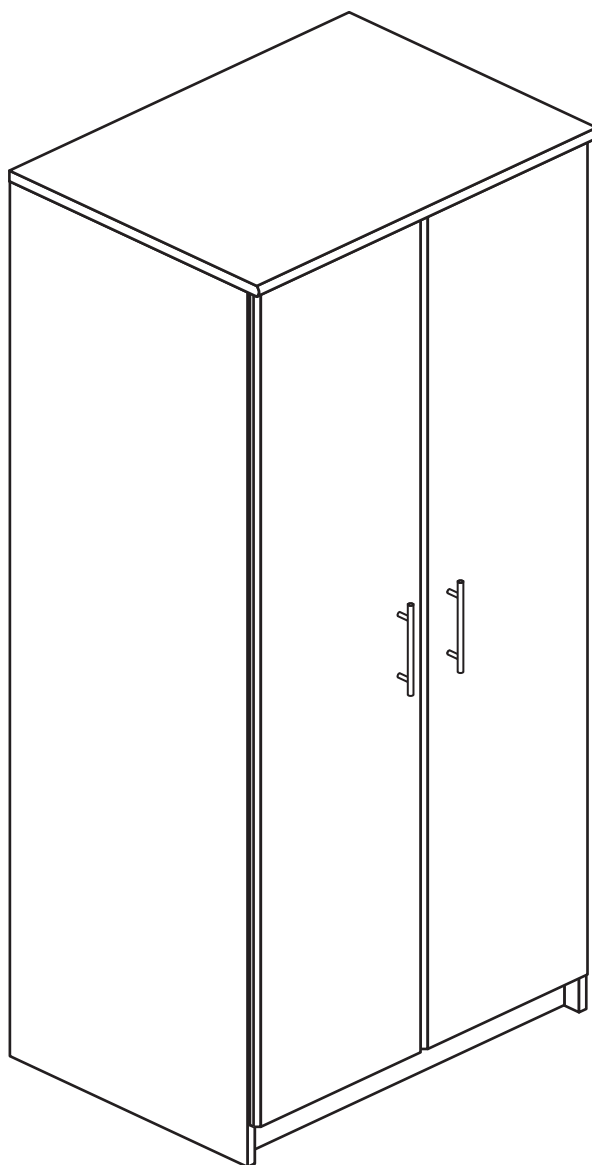

## Dimensions

Width - 70.5cm

Depth - 51.5cm

Height - 183cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 48kgs. Please lift with care.
  - Check you have all the components and tools listed on pages 2 and 3.
  - Remove all fittings from the plastic bags and separate them into their groups.
  - Keep children and animals away from the work area, small parts could choke if swallowed.
  - Parts of the assembly will be easier with 2 people.
  - Make sure you have enough space to layout the parts before starting.
  - Do not stand or put weight on the product, this could cause damage.
  - Assemble the item as close to its final position (in the same room) as possible.
  - Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).
- 
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
  - **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
  - Dispose of all packaging carefully and responsibly.

## Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below

Please check you have all the panels listed below

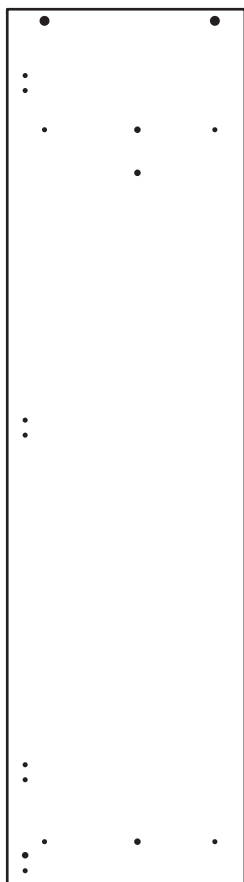


**1** Left Side (D0527B)  
(1808 x 491mm)

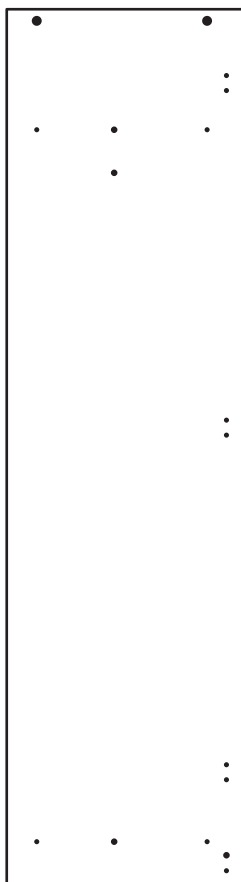

**2** Right Side (D0528B)  
(1808 x 491mm)




**3** Top (D0532A)  
(702 x 516mm)



**4** Horizontal (D0531A)  
(670 x 490mm)




**5** Plinth (D0529A)  
(670 x 80mm)

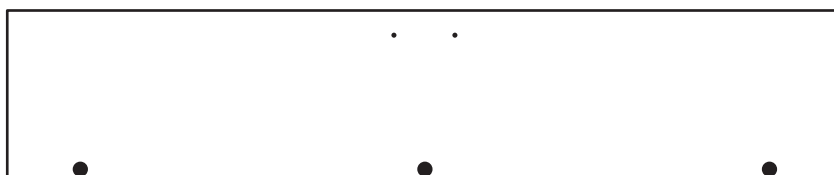

**6** Door (D0530A)  
(1724 x 345mm) x 2



**7** Hanging Rail (FHR660)  
(660mm long)

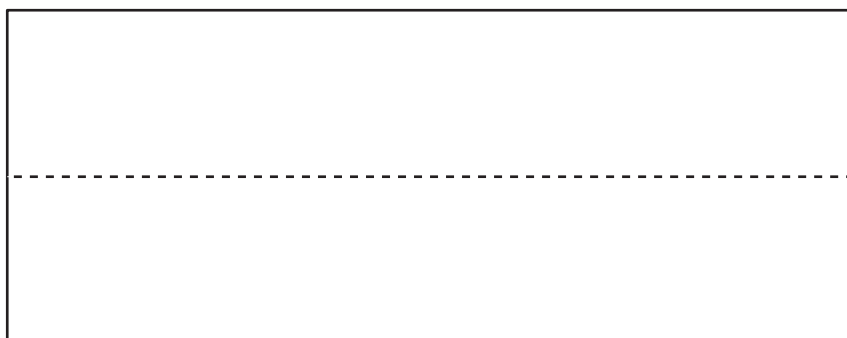

**8** Back (X754)  
(1750 x 688mm)



**9** Base (D0582A)  
(670 x 490mm)














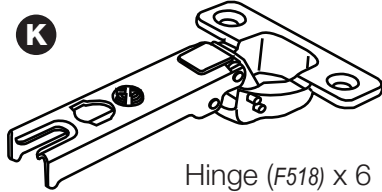


# Components - Fittings






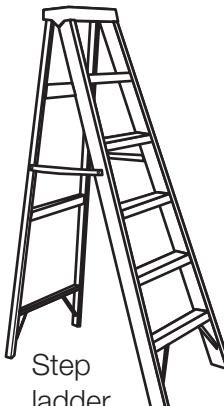




If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

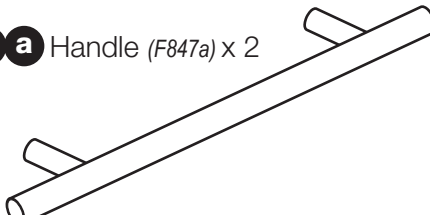
**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 8	<b>B</b>  Metal dowel (F901) x 14	<b>C</b>  Large locking nut (F900) x 14
<b>D</b>  Nail (F51) x 33	<b>E</b>  Plastic Nail (F91) x 4	<b>F</b>  13mm Screw (F63) x 14
<b>G</b>  Rail holder (F1014) x 2	<b>H</b>   Screw  Washer x 2 Overbalance protector kit (F269) x 1	
<b>I a</b>  Handle (F847a) x 2		<b>I b</b>  Handle Screw (F847b) x 4
<b>J</b>  Hinge plate (F523) x 6	<b>K</b>  Hinge (F518) x 6	

## Tools required

 Rule	 Spirit level	 Eye protection (when using a hammer or drill)	 Cross-head screwdriver	 Electric drill (only use when drilling into walls)	 Step ladder
 Square	 Scissors	 Hammer	 Bradawl		

**Ruler** - Use this ruler to help correctly identify the screws

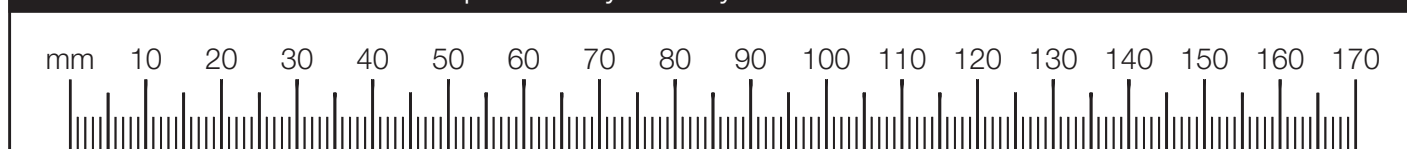

# Assembly Instructions

If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below


## Step 1

### Prepare the left side

**a:** Screw 5 metal dowels **B** into the holes shown on the left side **1**.

**Note:** Tighten metal dowels up fully against the panel.

Push a rail holder **G** into the hole shown. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **F**.

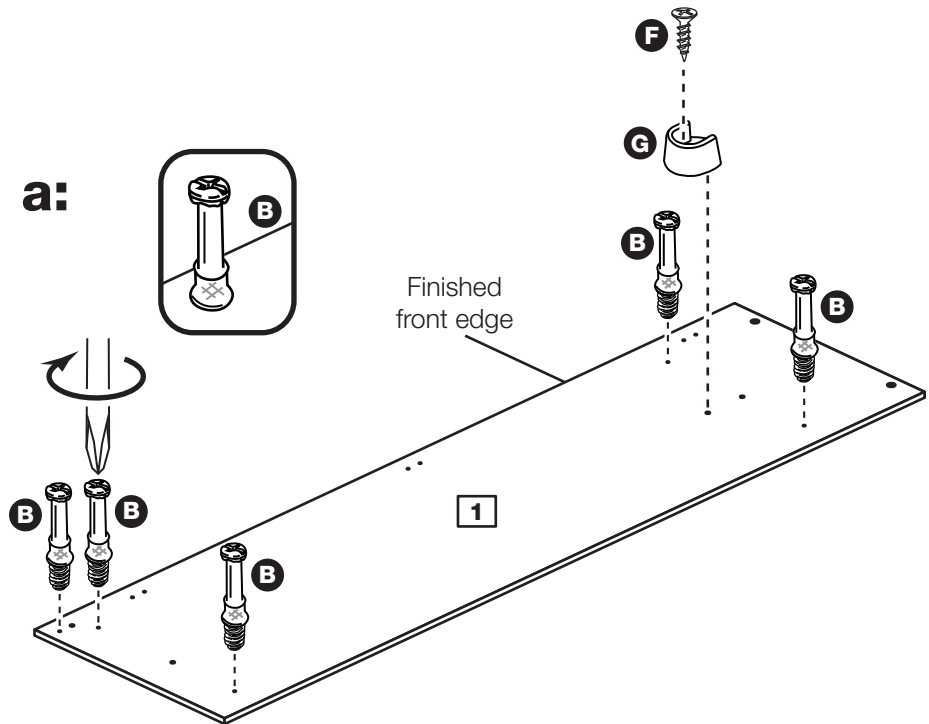


**b:** Fit 3 hinge plates **J** onto the left side **1**, making sure that the slot is facing towards the finished front edge.

Insert 2 large locking nuts **C** into the left side **1** as shown.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

Tap a wooden dowel **A** into the left side **1** as shown.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

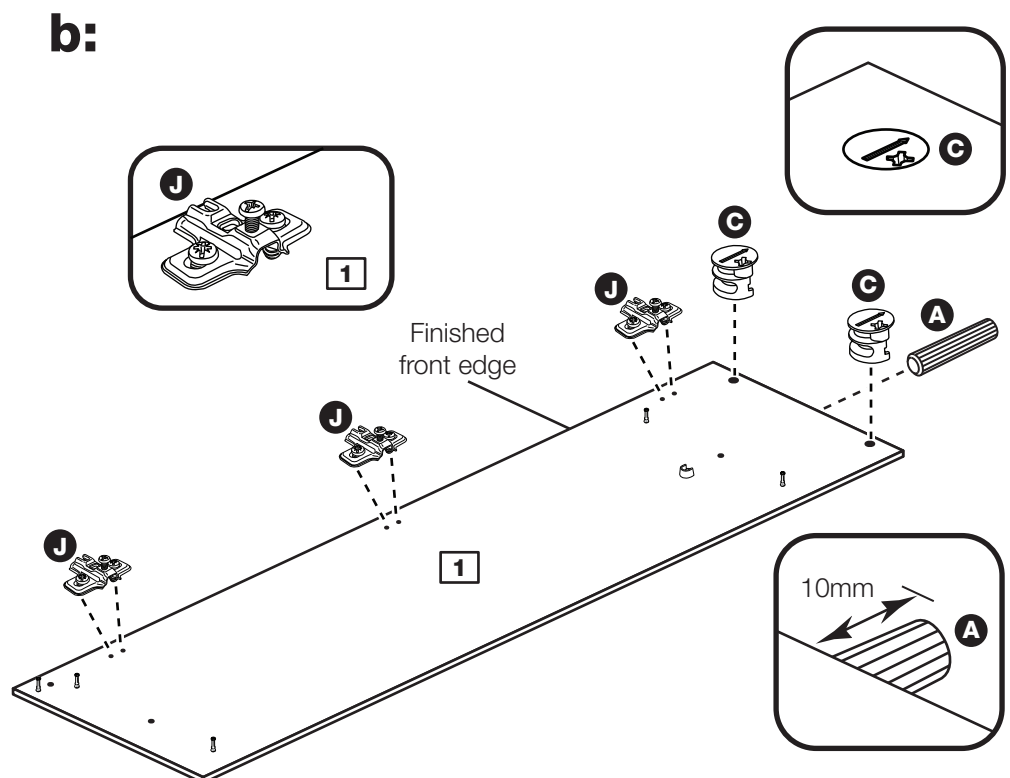

# Assembly Instructions

## Step 2


### Prepare the right side

**a:** Screw 5 metal dowels **B** into the holes shown on the right side **2**.

**Note:** Tighten metal dowels up fully against the panel.

Push a rail holder **G** into the hole shown. Make sure that it is fitted straight, in line with the panel edges and then secure with screw **F**.

**a:**

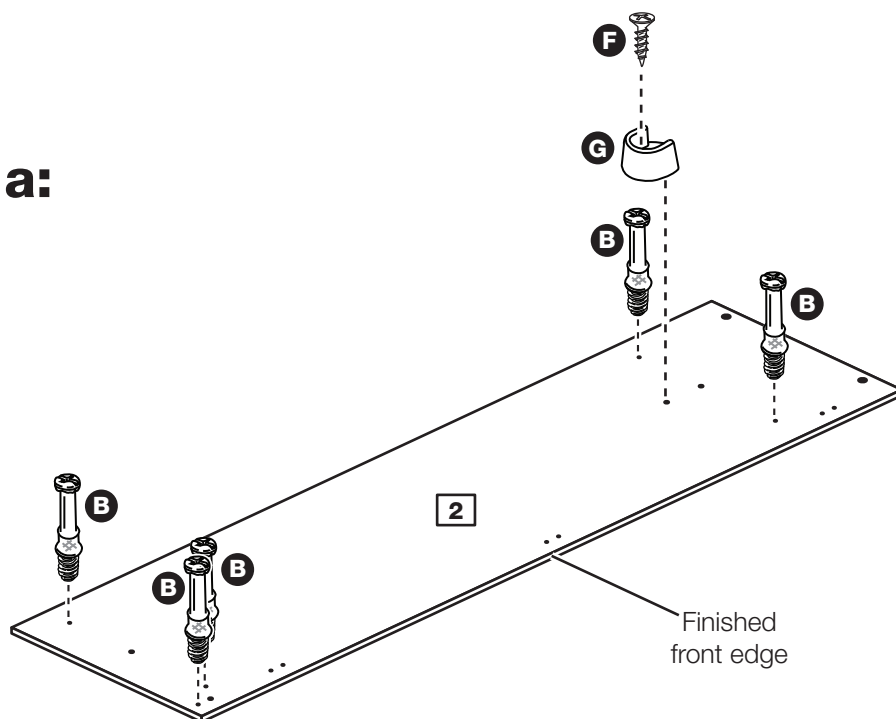

**b:** Fit 3 hinge plates **J** onto the right side **2**, making sure that the slot is facing towards the finished front edge.


Insert 2 large locking nuts **C** into the right side **2** as shown.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

Tap a wooden dowel **A** into the right side **2** as shown.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

**b:**

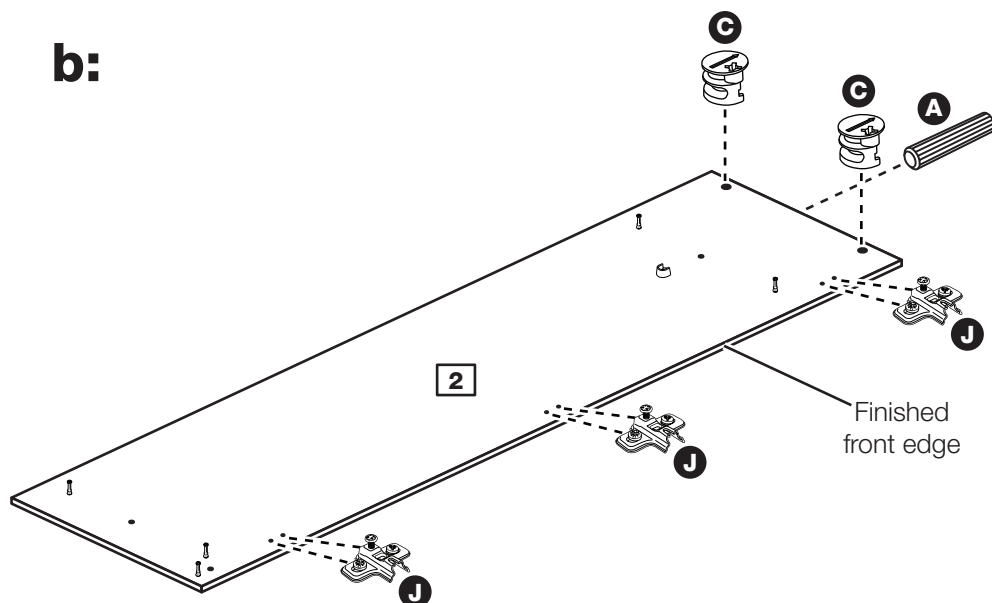

# Assembly Instructions

## Step 3


### Prepare the horizontal and base

Insert 4 large locking nuts **C** into both the horizontal **4** and the base **9** as shown.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

Tap 2 wooden dowels **A** into both the horizontal **4** and the base **9** as shown.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

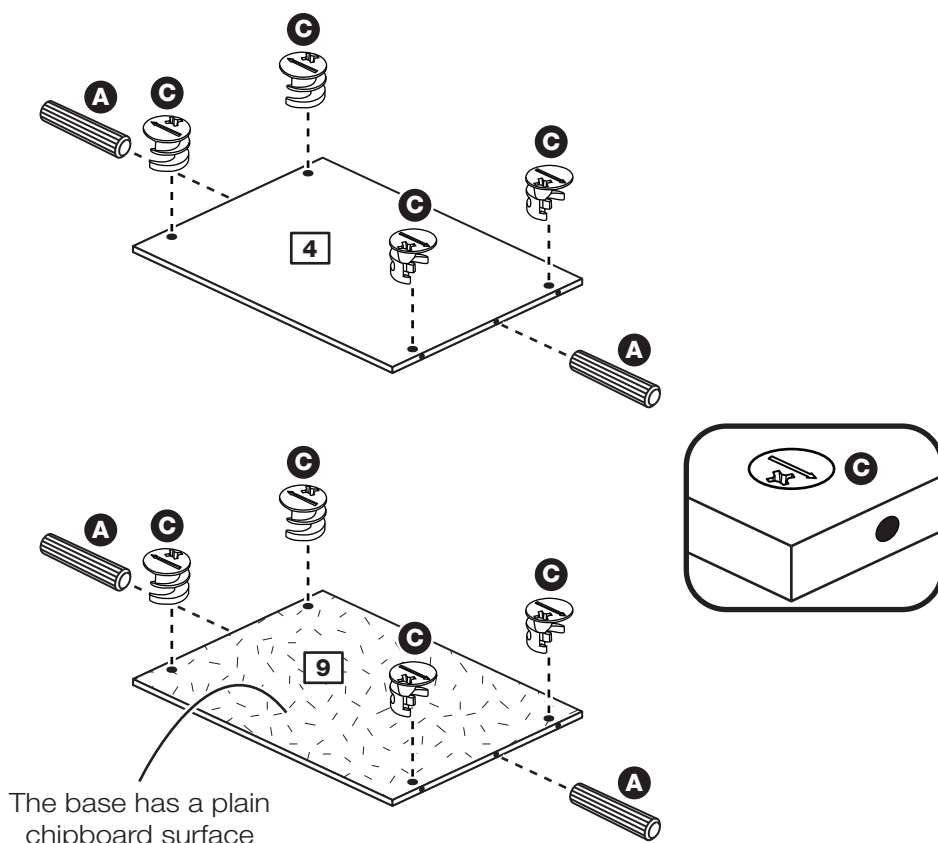


## Step 4

### Join the horizontal and base to the right side

Push the horizontal **4** and base **9** onto the right side **2** as shown.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to both the horizontal **4** and base **9**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

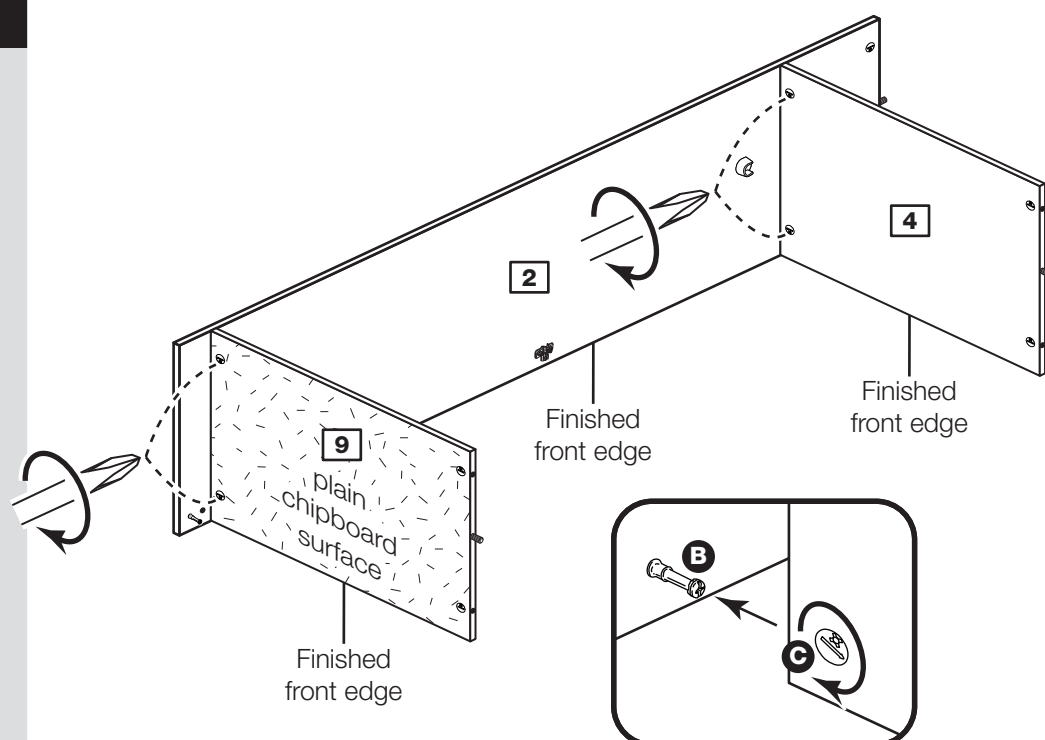


# Assembly Instructions

## Step 5

### Prepare the plinth

Insert 2 large locking nuts **C** into the plinth **5** as shown.

Tap 2 wooden dowels **A** into the plinth **5** as shown.

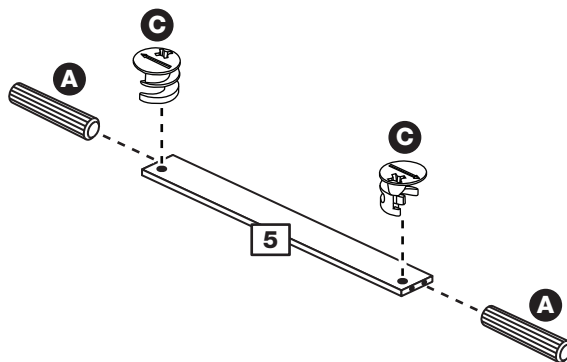


## Step 6

### Fit the plinth

Push the plinth **5** onto the right side **2** as shown.

Use a screwdriver to tighten the large locking nut **C** fitted to the plinth **5**.

**Note:** Turn the large locking nut **C** as far as it will go - more than 1/2 a turn.

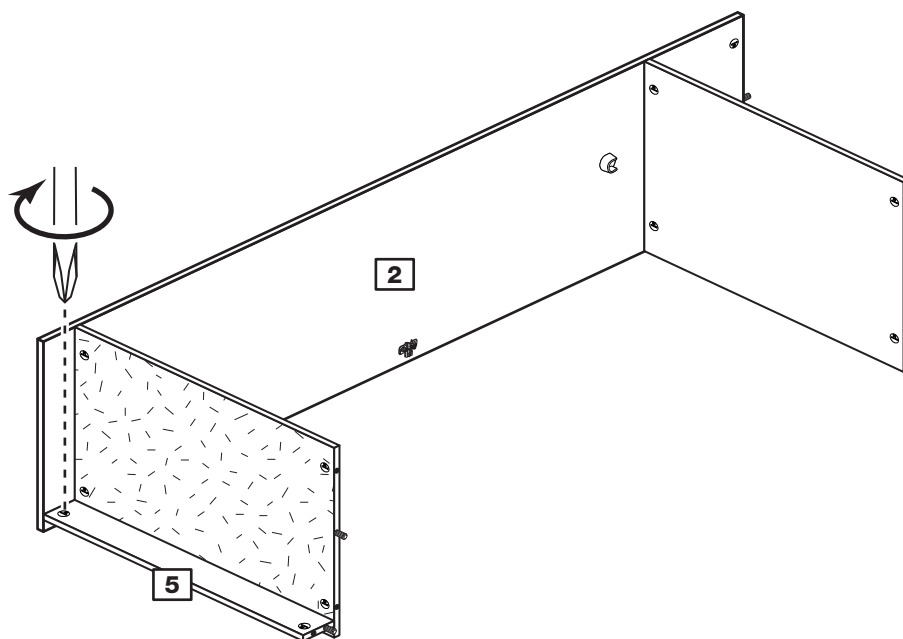


## Step 7

### Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **C** fitted to the horizontal **4**, plinth **5** and base **9**.

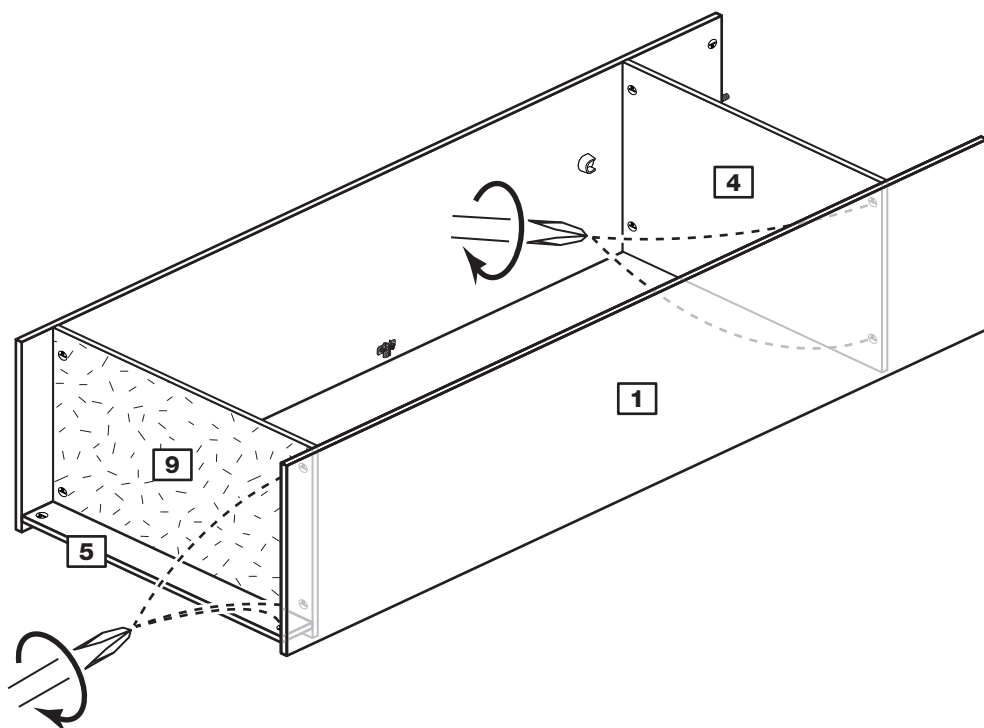


# Assembly Instructions

## Step 8

### Prepare the top

Screw 4 metal dowels **B** into the holes shown on the top **3**.

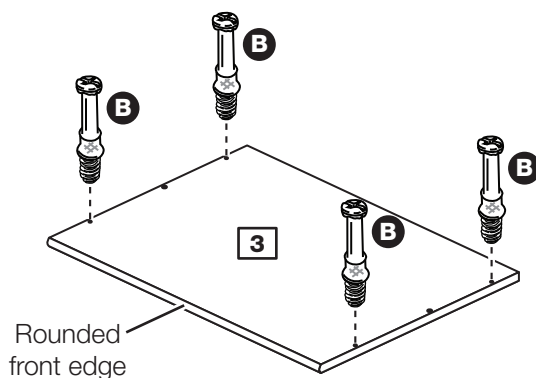


## Step 9

### Fit the top

Push the top **3** onto the side panels **1** and **2**.

Use a screwdriver to tighten the 4 large locking nuts **C** fitted to the side panels **1** and **2**.

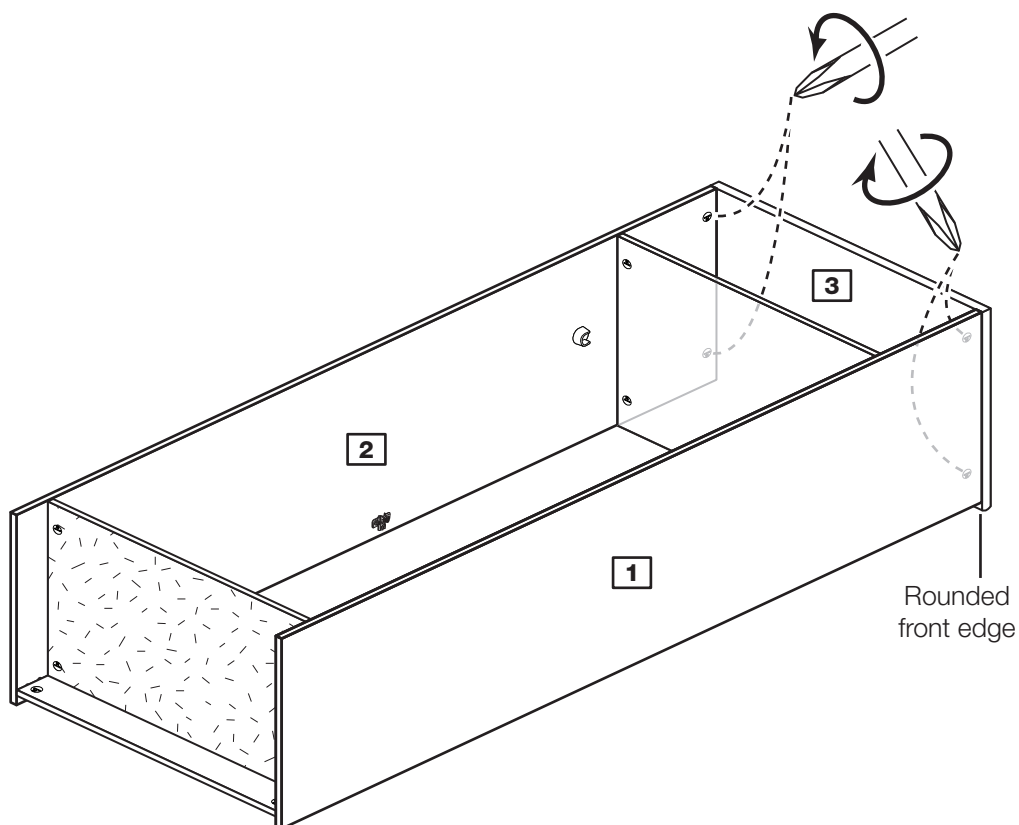

# Assembly Instructions

## Step 10

### Fit the back and plastic nails

**a:** Square up the unit by making sure that measurement **x to x** equals **y to y**.

**b:** Place the back **8** onto the unit.

Nail **D** around the outside edges of the back **8**.

**Note:** Nails should be spaced about 150mm apart.


Tap 2 plastic nails **E** into the bottom edge of each of the sides **1** and **2**.

**Stand the unit up for the next step.**



**Warning:** The unit is heavy. Lift with care.

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

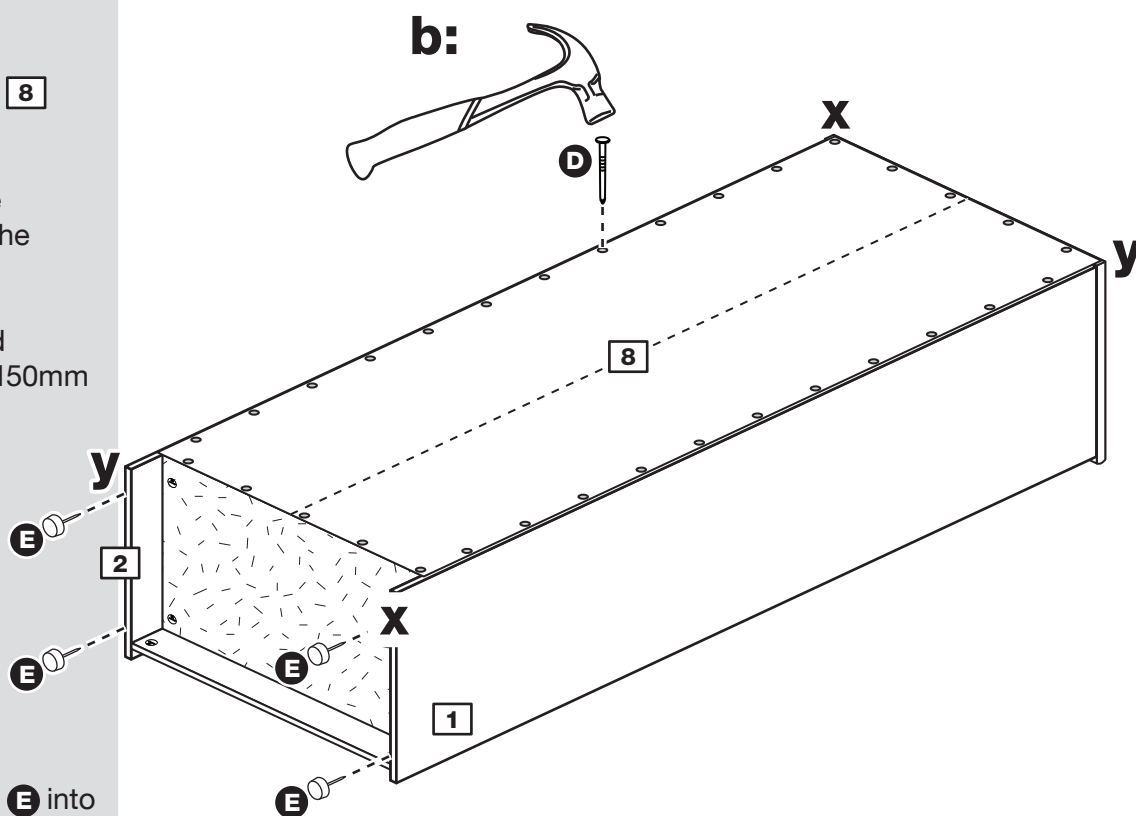


# Assembly Instructions

## Step 11

### Fit the hanging rail

Push the hanging rail **7** into the rail holders **G** fitted to the side panels.

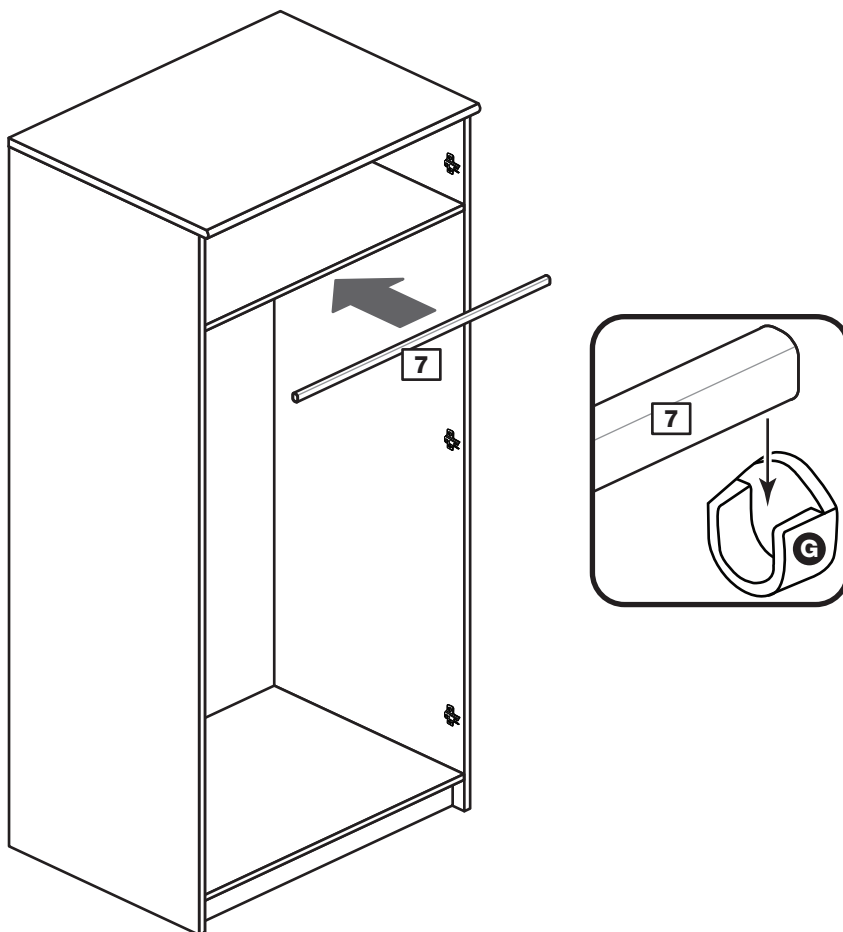


## Step 12

### Prepare the 2 doors

Push fit 3 hinges **K** into each door **6**.

Secure each hinge with 2 screws **F**.

**Note:** Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

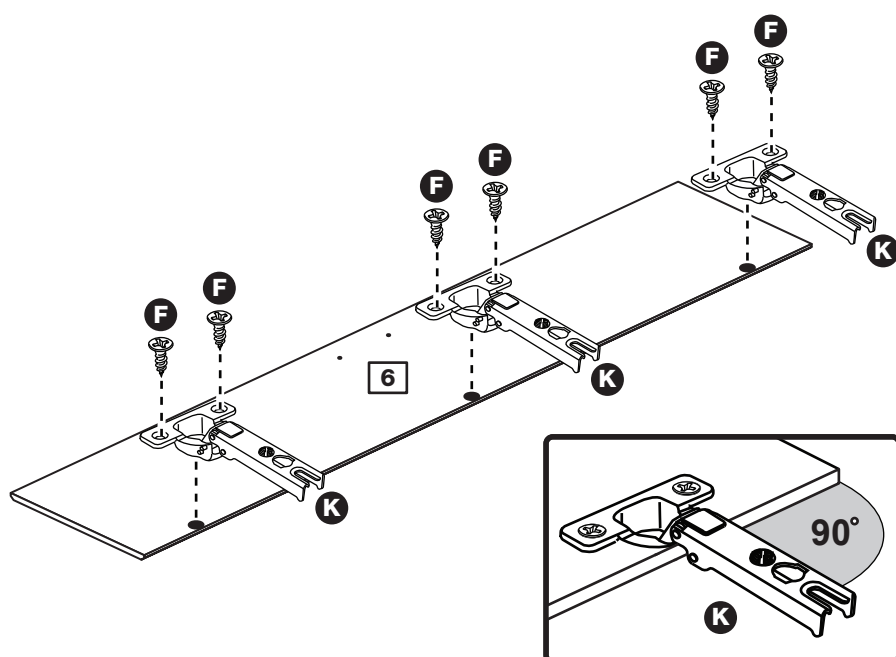

# Assembly Instructions

## Step 13

### Fit doors and handles

**Note:** The easiest way to attach each door **6** is to fit the top hinge first, then align and fit the other hinges.



**a:** Push the hinge **K** onto the front part of the hinge plate **J**.  
The recess at the bottom of screw B goes into the slot in the hinge plate.

**b:** Keep the hinge **K** FLAT against the hinge plate **J** as you slide it across as far as it will go. Tighten screw A.

**c:** The hinge **K** must be flat against the hinge plate **J** prior to any adjustment.

**d:** The hinge **K** must NOT be AT AN ANGLE to the hinge plate **J** when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

**e:** Attach a handle **la** to each door **6** using 2 screws **lb**.

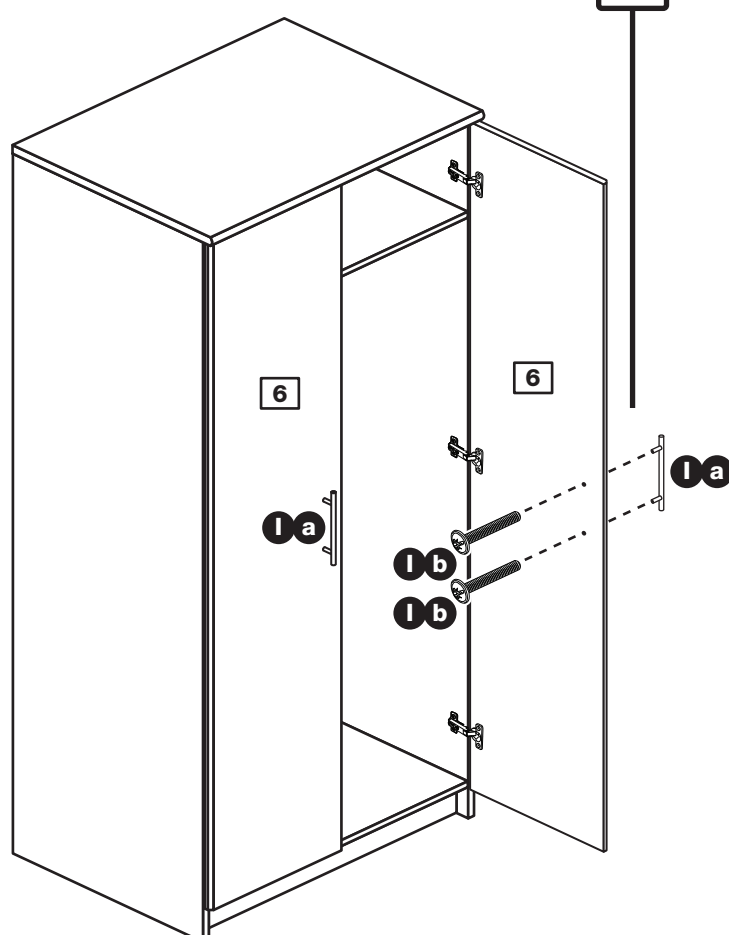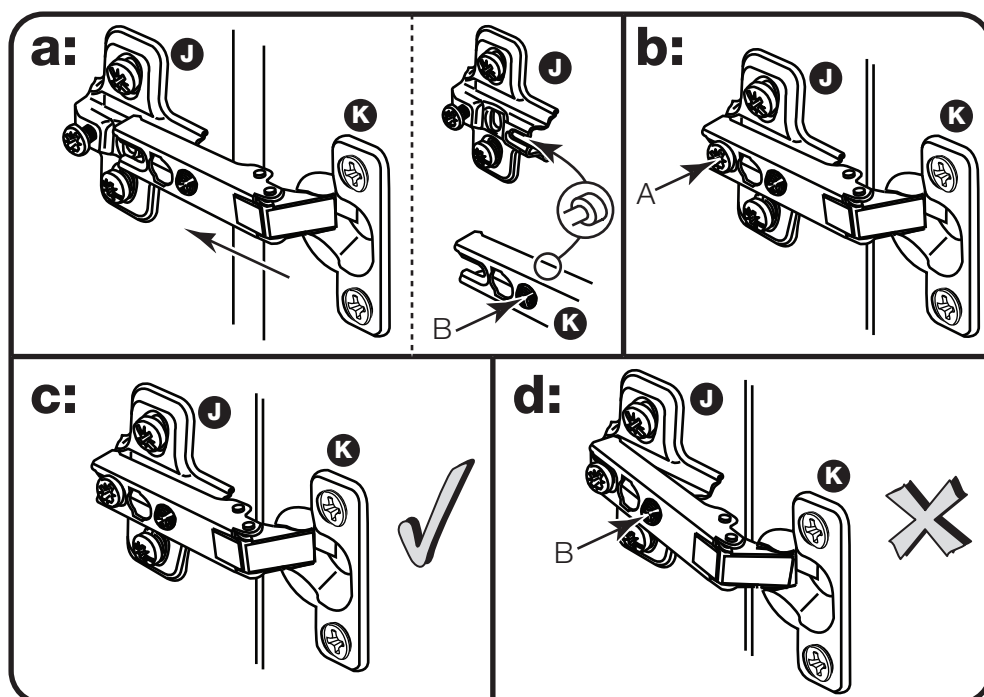

# Assembly Instructions

## Step 14

### Adjust the doors if needed

**a:** Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

### **b:** Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

### **c:** Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

### **d:** Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

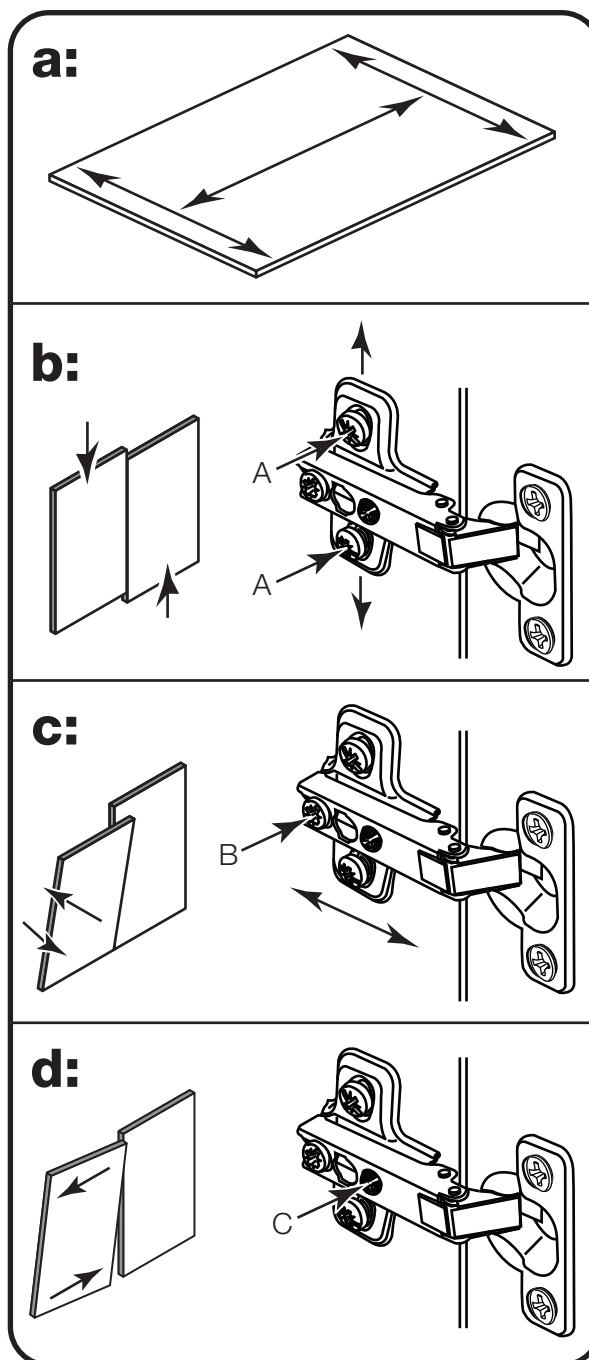

# Assembly Instructions

## Step 15


### Fit the overbalance protector kit

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit **H** to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.

**Note:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

**Assembly is complete**

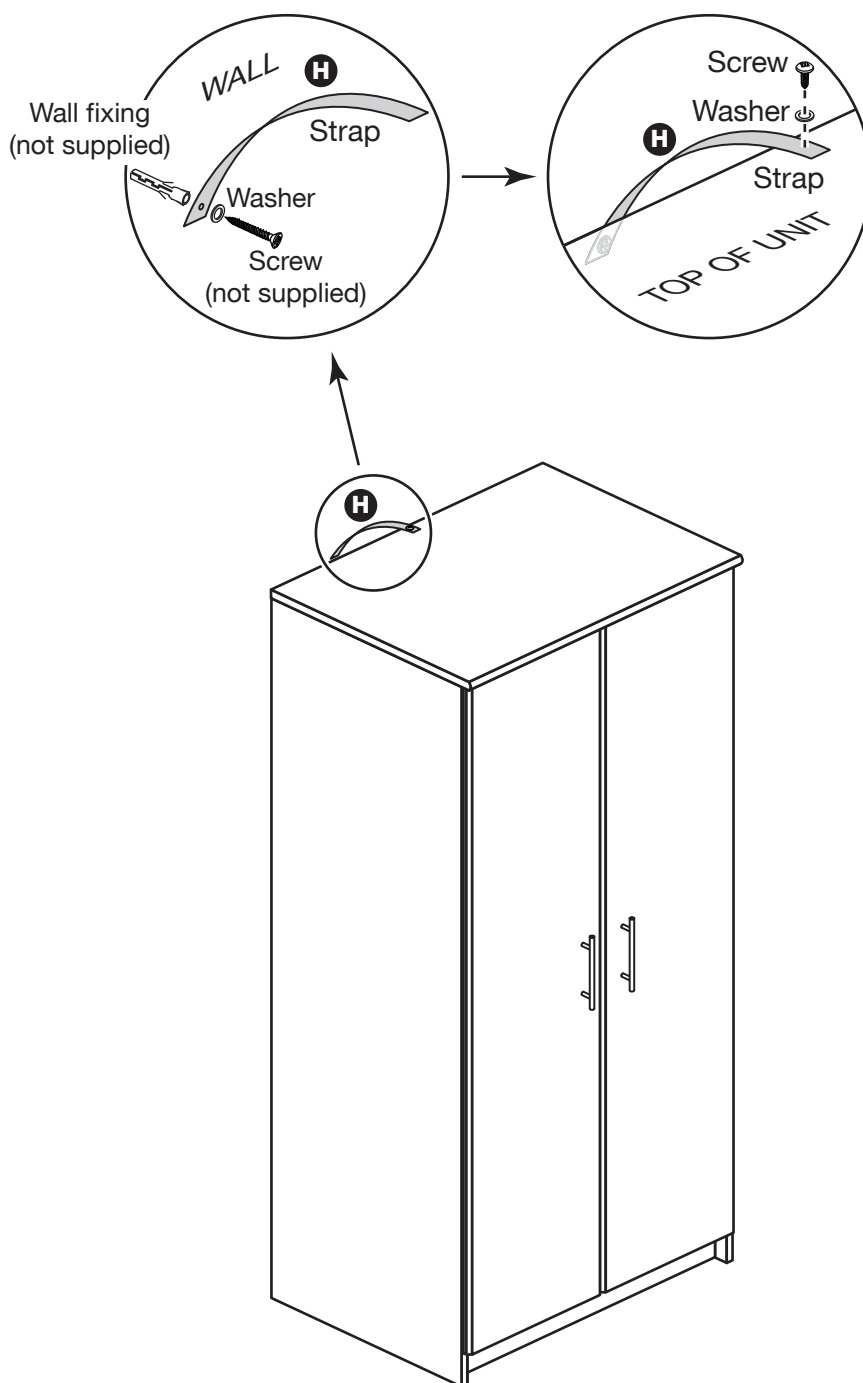

If you need help or have damaged or missing parts, call the Customer Helpline: 03456 400800 and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW






# Normandy - 3 Drawer Bedside

Assembly Instructions - Please keep for future reference

412/9011

392/9243

424/6138

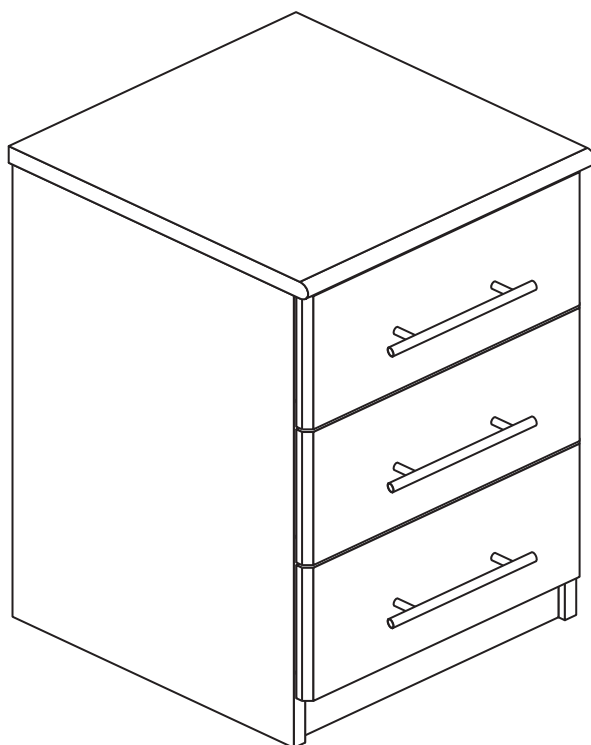

## Dimensions

Width - 38cm

Depth - 40cm

Height - 62.5cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 15kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** If there is any chance of this unit being pulled over by children etc. it is recommended that the unit is secured to a wall using suitable fixings (not supplied).

- Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below


Please check you have all the panels listed below

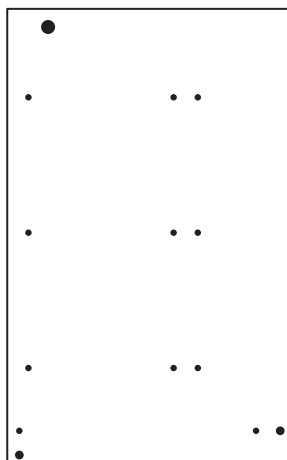


**1** Left Side (DF3851)  
(601 x 372mm)

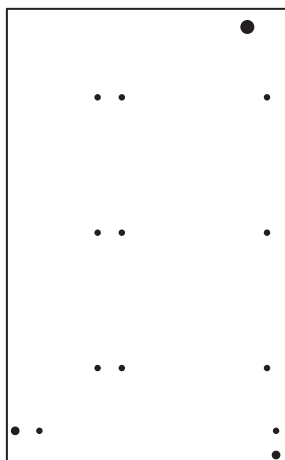


**2** Right Side (DF3852)  
(601 x 372mm)



**3** Top (D2349A)  
(380 x 396mm)



**4** Rails (D2354A)  
(347 x 60mm) x 2



**5** Drawer Front (D2353A)  
(367 x 176mm) x 3



**6** Drawer Base (T325-367)  
(325 x 367mm) x 3



**7** Left Drawer Side (W370-124LH)  
(370 x 124mm) x 3



**8** Right Drawer Side (W370-124RH)  
(370 x 124mm) x 3



**9** Drawer Back (W314-124)  
(314 x 124mm) x 3











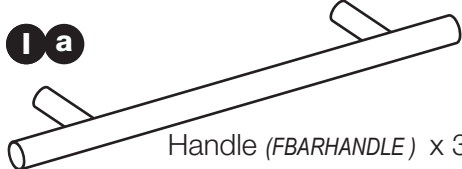




**10** Back (X583-373)  
(583 x 373mm)




# Components - Fittings

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 6	<b>B</b>  Metal dowel (F901) x 12	<b>C</b>  Large locking nut (F900) x 6
<b>D</b>  Small locking nut (F3) x 6	<b>E</b>  Nail (F51) x 14	<b>F</b>  9mm Screw (F73) x 12
<b>G</b>  9mm Screw (F74) x 6	<b>H</b>  Drawer runner (F1004) x 6	
<b>I a</b>  Handle (F8ARHANDLE) x 3		<b>I b</b>  19mm Screw (F461) x 6
		<b>J</b>  Knock-in Peg (F171) x 12
		<b>K</b>  Wedge (F639) x 6
		<b>L</b>  Plastic Nail (F91) x 4

## Tools required



Rule



Cross-head screwdriver



Scissors




Hammer



Eye protection  
(when using a hammer or drill)

Ruler - Use this ruler to help correctly identify the screws



# Assembly Instructions


If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below

## Step 1

### Prepare the 3 drawer fronts

Screw 2 metal dowels **B** into each of the drawer fronts **5**.

**Note:** Tighten the metal dowels up fully against the panels.

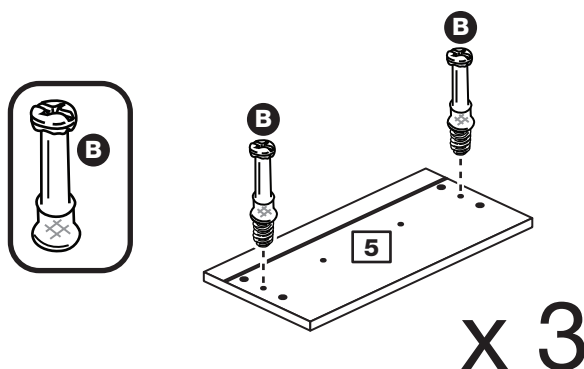


## Step 2

### Prepare the drawer sides

Insert a small locking nut **D** into the hole shown on the left drawer side **7** and the right drawer side **8**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

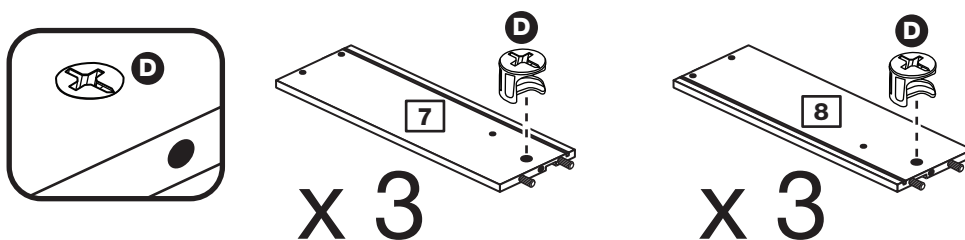


## Step 3

### Attach the drawer sides to the drawer fronts

Push the left drawer sides **7** and right drawer sides **8** onto the back of the drawer fronts **5**.

Turn the small locking nuts **D** on the left drawer side **7** and right drawer side **8**.

**Note:** Turn the locking nuts **D** clockwise to secure panels - more than 1/2 a turn.

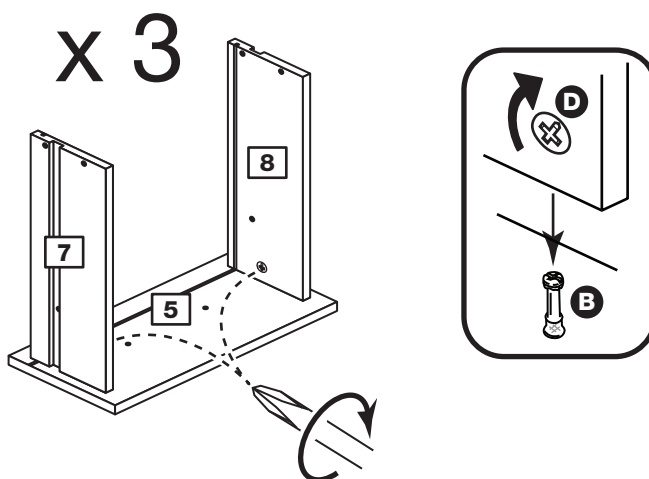


# Assembly Instructions

## Step 4

### Fit the drawer base

Slide the drawer base **6** down the grooves in the drawer sides **7** and **8** and down into the groove in the drawer front **5**.

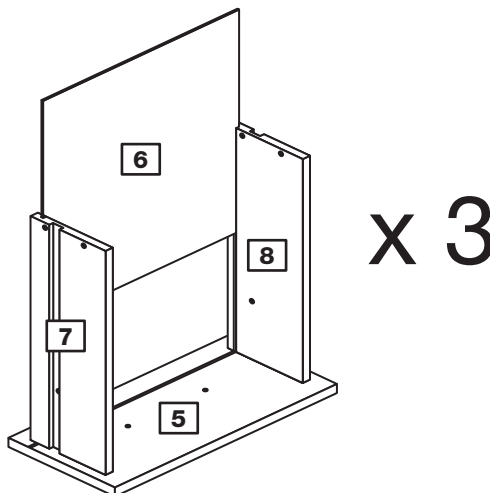


## Step 5

### Fit the drawer back

Fit the drawer back **9** between the drawer sides **7** and **8**. Make sure that the drawer base **6** fits into the groove in the drawer back **9**.


Hold the drawer back **9** in position and tap the knock-in pegs **J** through the holes in the drawer sides **7** and **8**.

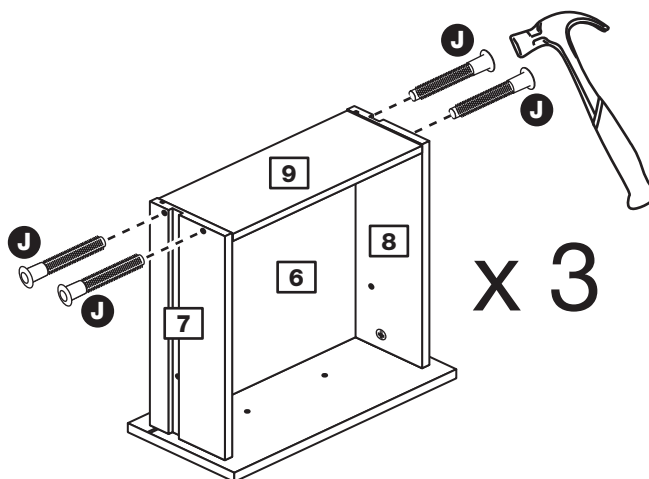

## Step 6

### Attach the handle



Attach a handle **1a** to each drawer front **5** using screws **1b**.

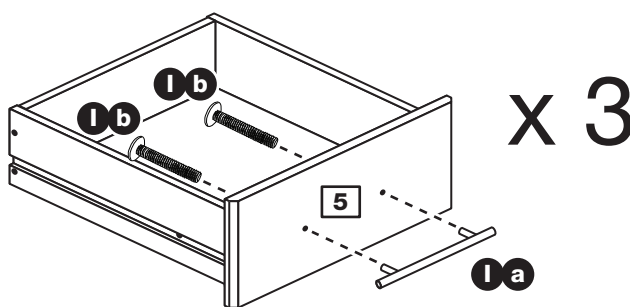

## Step 7

### Fit the wedgexes

Turn the drawer assemblies over and slide 2 wedgexes **K** into the front and back grooves, as shown, and tighten up the screws.

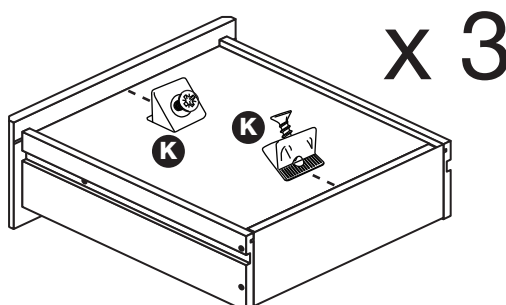

# Assembly Instructions

## Step 8

### Prepare the left side

**a:** Place 3 runners **H** on the left side **1** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **F**.

**b:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the left side **1**.





**c:** Tap a wooden dowel **A** into the left side **1**.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Screw 2 metal dowels **B** into the left side **1**.

Insert a large locking nut **C** into the left side **1**.

**Note:** The arrow on the locking nuts **must** point towards the hole in the edge of the panel.

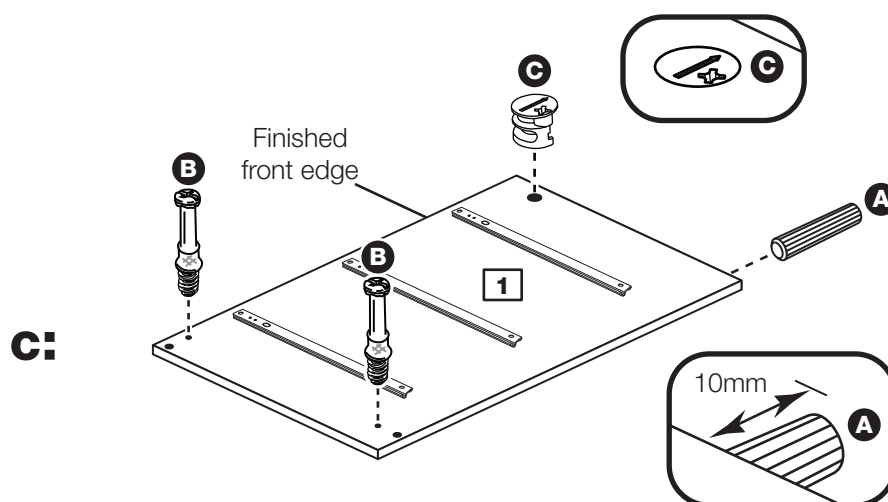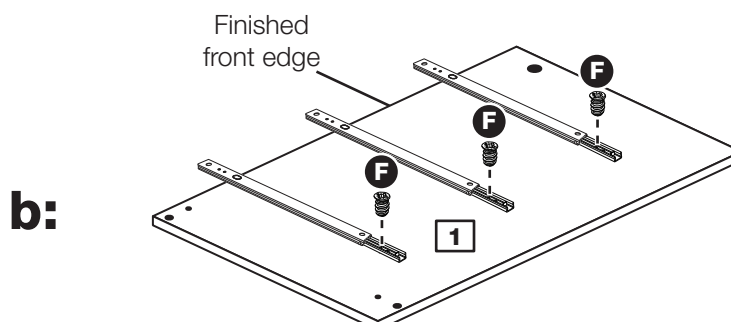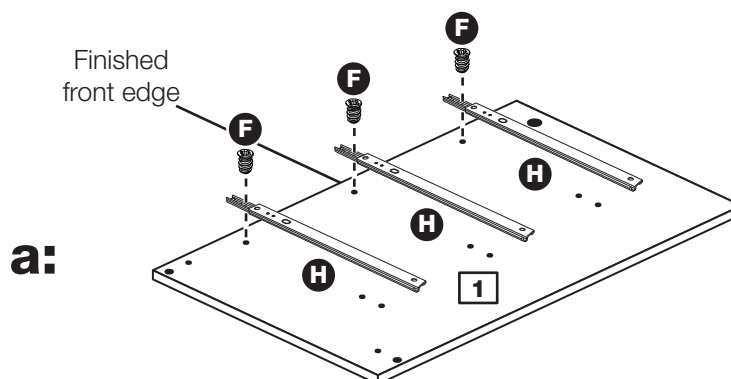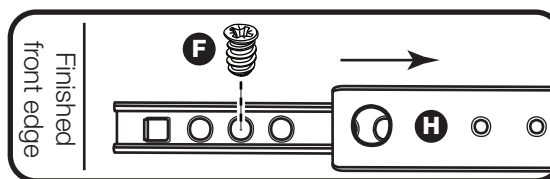

# Assembly Instructions

## Step 9

### Prepare the right side


**a:** Place 3 runners **H** on the right side **2** as shown. Slide back the top of runner and use the 2nd hole from the front to fit the 1st screw **F**.

**b:** Slide the runner **H** back the other way and fit the 2nd screw **F** into the corresponding hole in the right side **2**.


**c:** Tap a wooden dowel **A** into the right side **2**.

Screw 2 metal dowels **B** into the right side **2**.


Insert a large locking nut **C** into the right side **2**.

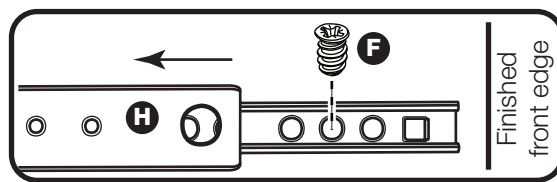


**a:**

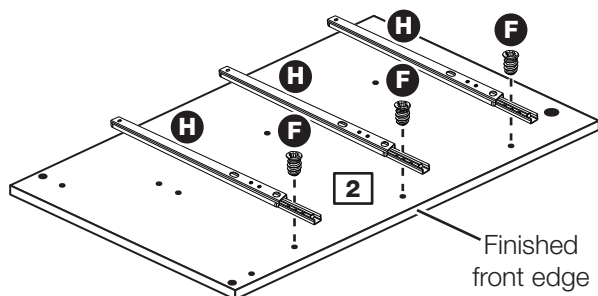

**b:**

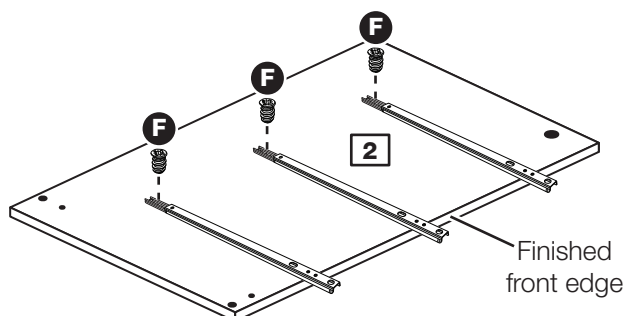

**c:**

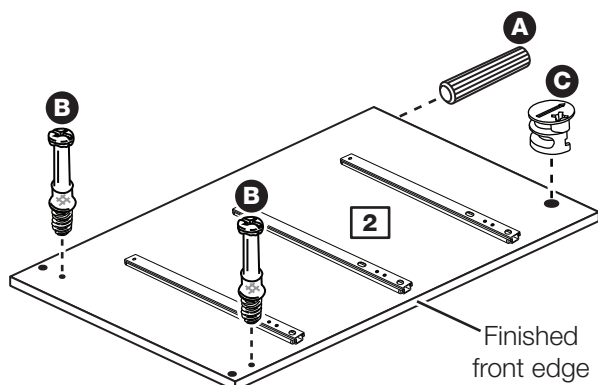


# Assembly Instructions

## Step 10

### Prepare the 2 rails

Insert 2 large locking nuts **C** into each of the 2 rails **4**.

Tap 2 wooden dowels **A** into each of the 2 rails **4**.

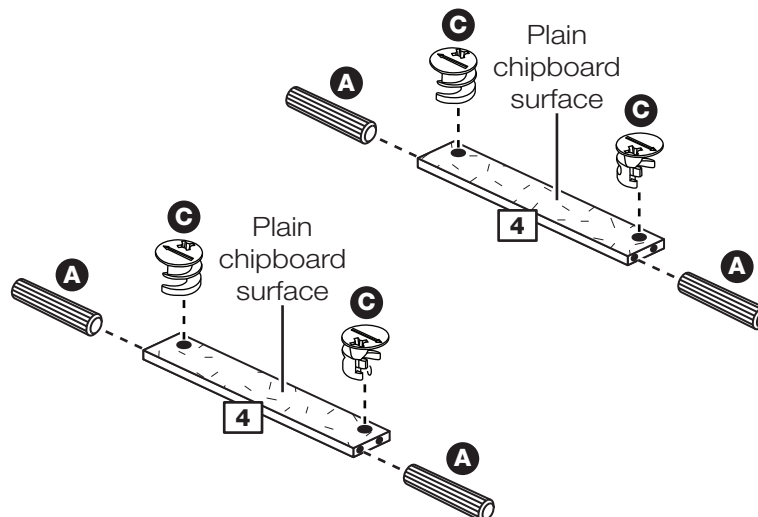


## Step 11

### Fit rails to the right side

Push the 2 rails **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the rails **4**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

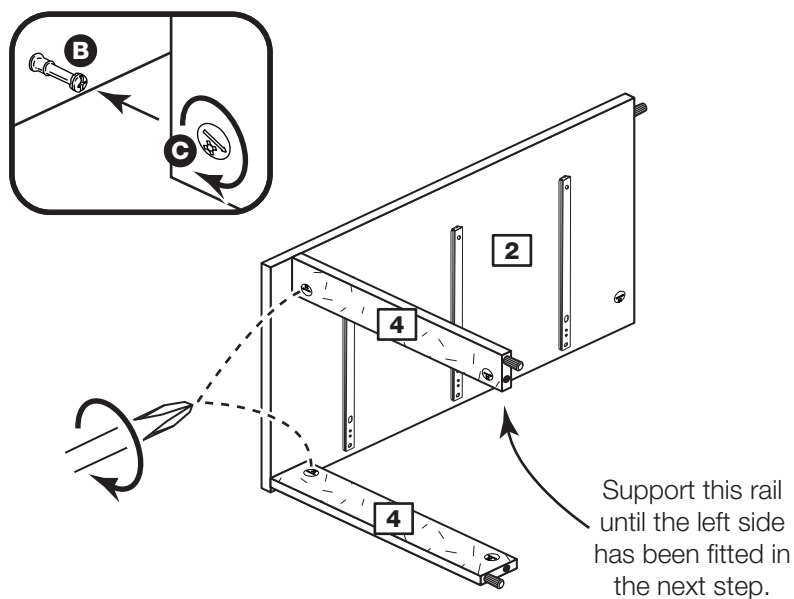


## Step 12

### Fit the left side

Push the left side **1** onto the 2 rails **4**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the rails **4**.

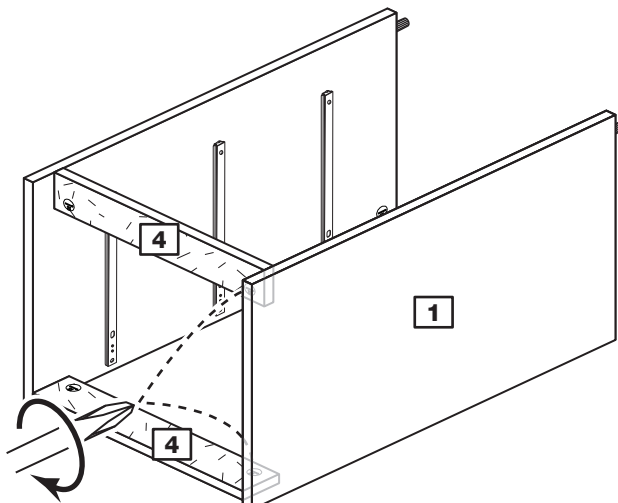


# Assembly Instructions

## Step 13

### Prepare the top

Screw 2 metal dowels **B** into the top **3**.

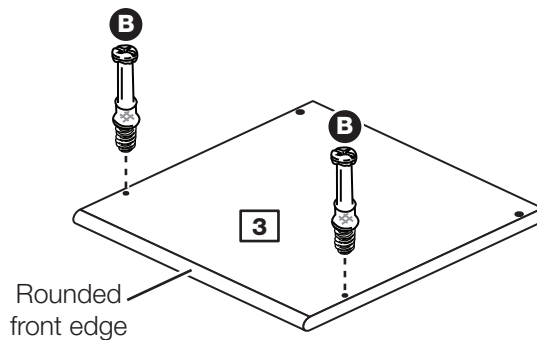


## Step 14

### Fit the top

Push the top **3** onto the assembly.


Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the left side **1** and right side **2**.

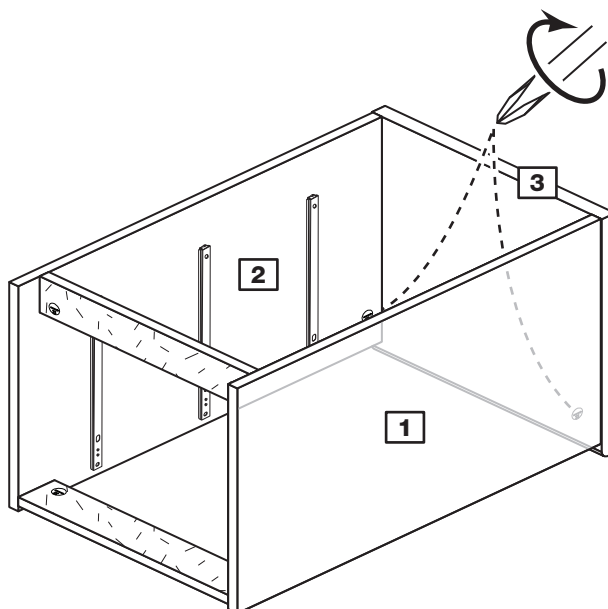

## Step 15

### Fit the 4 plastic nails

Tap 2 plastic nails **L** into the bottom edge of each of the sides **1** and **2**.

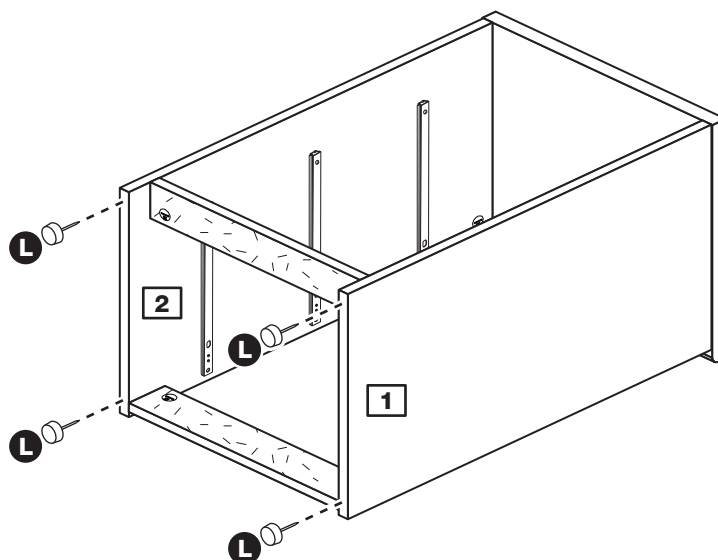

# Assembly Instructions

## Step 16

### Fit the back

**a:** Square up the unit by making sure that measurement **x to x** equals **y to y**.


**b:** Place the back **10** onto the unit.

Nail **E** around the outside edges of the back **10**.

**Note:** Nails should be spaced about 150mm apart.

**Carefully stand the unit up for the next step.**

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

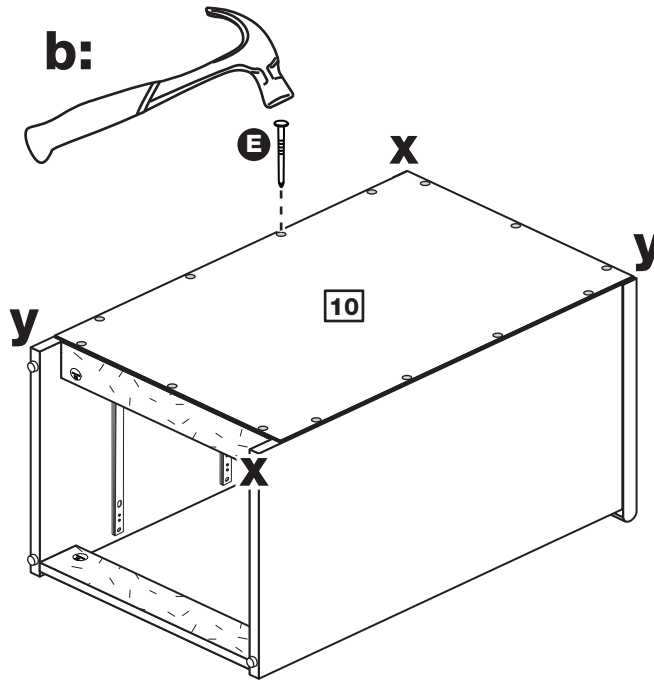



## Step 17

### Fit the drawers

Starting with the bottom drawer, slide both the runners **H** forward and locate the drawer sides **7** and **8** between them, lining up the holes in the drawer wrap with the 2nd 'threaded' holes in the runners **H**.

Working from the inside of the drawer, insert 2 screws **G** through the drawer sides and out into the 2nd threaded hole in the runner **H**.


**Note:** Do not overtighten the screws **G**. If they catch on the runner you may need to loosen them slightly.

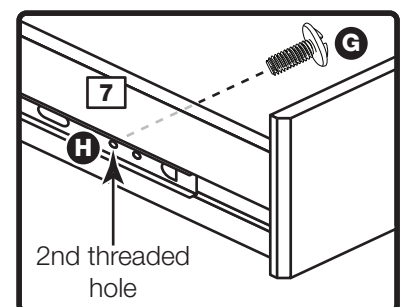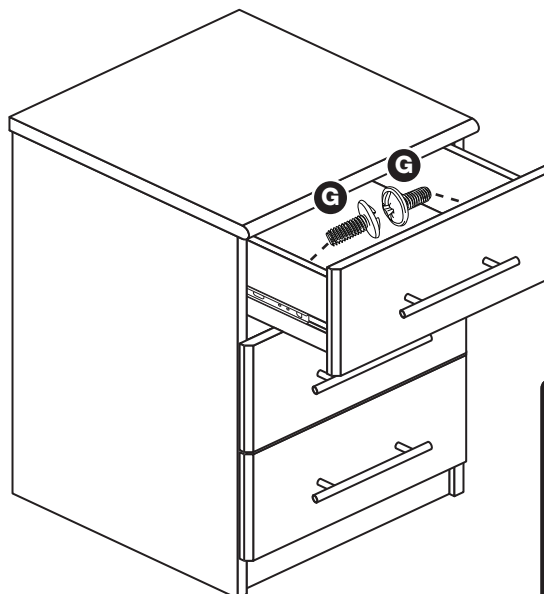

# Assembly Instructions

## Step 18

**Assembly is complete**

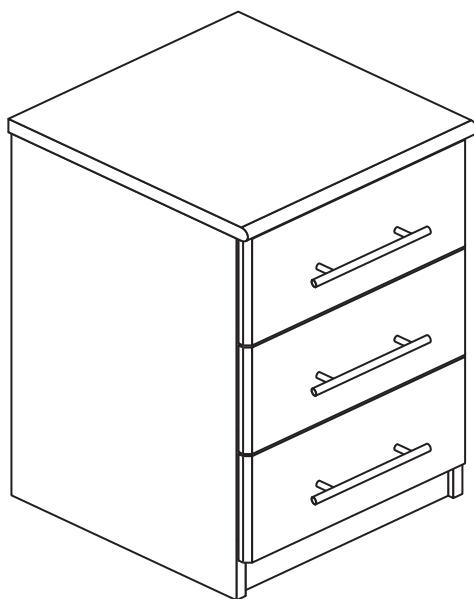

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW