


Sparkle - 3 Door Mirrored Robe

Assembly Instructions - Please keep for future reference

427/5484

395/5640

428/4767

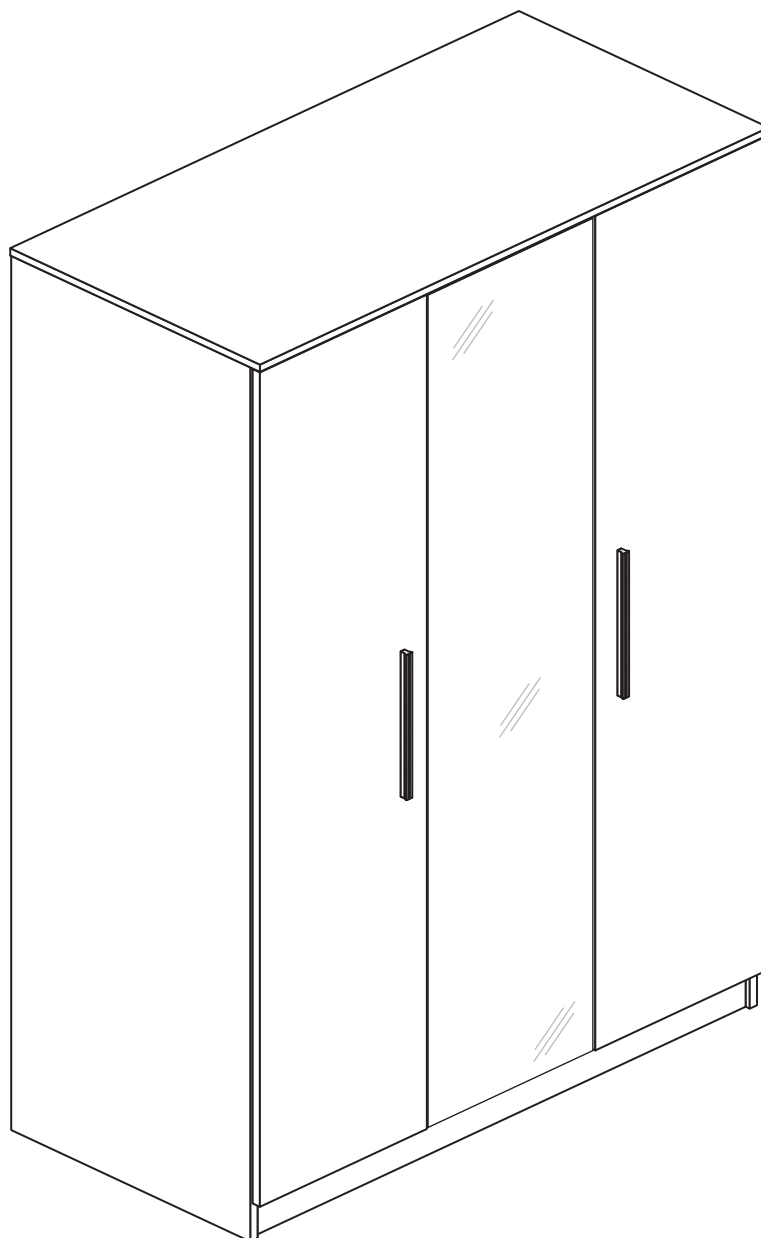

Dimensions

Width - 105.1cm

Depth - 51.6cm

Height - 182.3cm




**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**

Safety and Care Advice






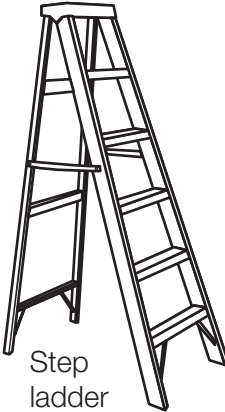




Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 68kgs. Please lift with care.
 - Check you have all the components and tools listed on pages 1, 2 and 3.
 - Remove all fittings from the plastic bags and separate them into their groups.
 - Keep children and animals away from the work area, small parts could choke if swallowed.
 - Parts of the assembly will be easier with 2 people.
 - Make sure you have enough space to layout the parts before starting.
 - Do not stand or put weight on the product, this could cause damage.
 - Assemble the item as close to its final position (in the same room) as possible.
 - Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).
- 
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
 - **Safety note:** It is recommended that this unit is secured to a wall using the overbalance protector kit supplied or, an alternative fixing method of your choice.
 - Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Tools required


 Rule	 Spirit level	 Eye protection (when using a hammer or drill)	 Cross-head screwdriver	 Electric drill (only use when drilling into walls)	 Step ladder
 Square	 Scissors	 Hammer	 Bradawl		

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below


Please check you have all the panels listed below

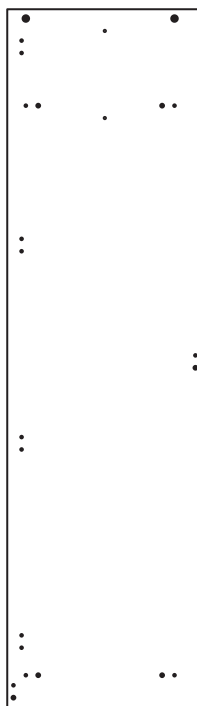


1 Left Side (DF3837)
(180.8 x 49.4cm)

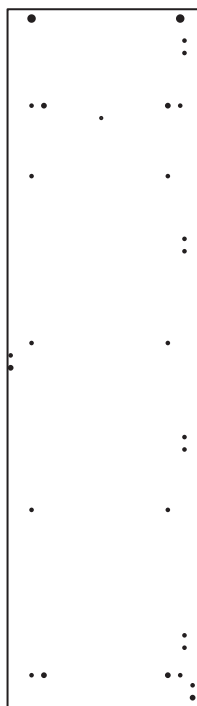


2 Right Side (DF3838)
(180.8 x 49.4cm)

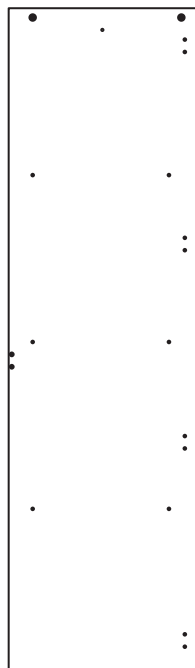


3 Divider (DF3847)
(171.25 x 49.2cm)

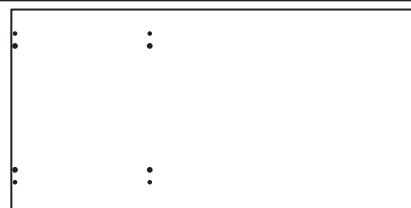


4 Top (DF3844)
(105.1 x 51.6cm)

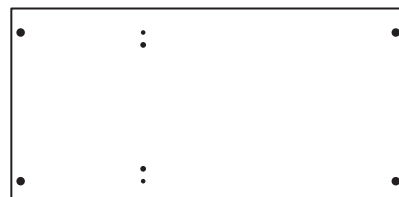


5 Base (DF3846)
(101.7 x 49.3cm)




6 Shelf (DF3848)
(33.3 x 45cm) x 3



7 Plinth (DF3845)
(101.7 x 8cm)



8 Small Rail (DF4400)
(33.3 x 8cm)




9 Large Rail (DF3840)
(66.9 x 8cm)



10 Hanging Rail (FHR663)
(66.3cm long)



11 Plain Door (DF3842)
(172.4 x 34.5cm) x 2

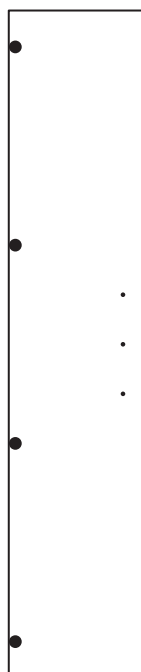


12 Mirror Door (DF3842M)
(172.4 x 34.5cm)

Mirror - SG31
172 x 34.1cm
Safety Back SAR



13 Small Back (X1739-352)
(173.9 x 35.2cm)

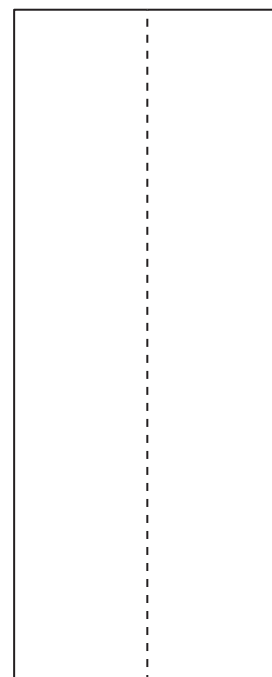

14 Large Back (X1739-688)
(173.9 x 68.8cm)















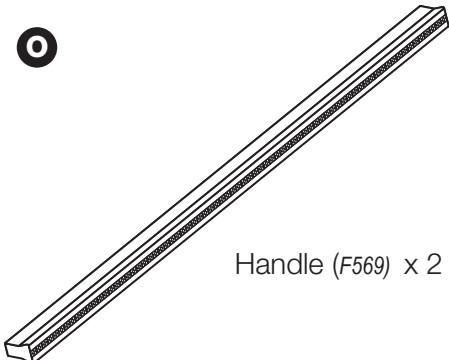

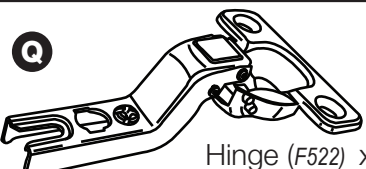
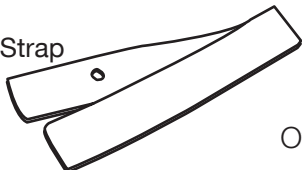




Components - Fittings


If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Metal dowel (F901) x 14	B  Large locking nut (F900) x 16	C  Wooden dowel (F22) x 16
D  40mm Screw (F910) x 2	E  25mm Screw (F50) x 6	F  13mm Screw (F63) x 28
G  Nail (F51) x 40	H  Plastic Nail (F91) x 4	I  Shelf stud (F110) x 12
J  Large wooden dowel (F40) x 1	K  Double metal dowel (F566) x 1	L  Rail Holder (F891) x 2
M  Nail screw (F277) x 5	N  Back holder (F276) x 5 *These can also be round	O  Handle (F569) x 2
P  Hinge plate (F523) x 12	Q  Hinge (F522) x 12	
R    Strap Screw Washer x 2 Overbalance protector kit (F269) x 1		

Ruler - Use this ruler to help correctly identify the screws

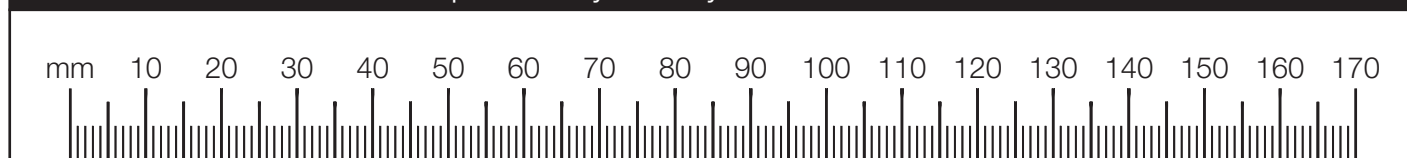

Assembly Instructions

If you have damaged or missing components, call the
Customer Helpline: 03456 400800 quoting the reference
 numbers below

Step 1

Prepare the left side

a: Screw 4 metal
 dowels **A** into the left
 side **1**.

Note: Tighten the metal
 dowels up fully against
 the panels.

Insert 2 large locking
 nuts **B** into the
 left side **1**.









Note: The arrow on the
 locking nut **must** point
 towards the hole in the
 edge of the panel.

Tap 2 wooden dowels **C**
 into the left side **1**.

Note: Wooden dowels
must not stick out from
 the edge by more than
 10mm or they may
 damage other panels.

b: To fit the rail holder **L**
 screw through the top
 hole with screw **F** and
 into the mark hole drilled
 in the left side **1**. Make
 sure that it is fitted
 straight, in line with the
 panel edges and then fit
 another screw **F** using
 the lower hole.

Fit 4 hinge plates **P** onto
 the left side **1**, making
 sure that the slot is
 facing towards the
 finished front edge.

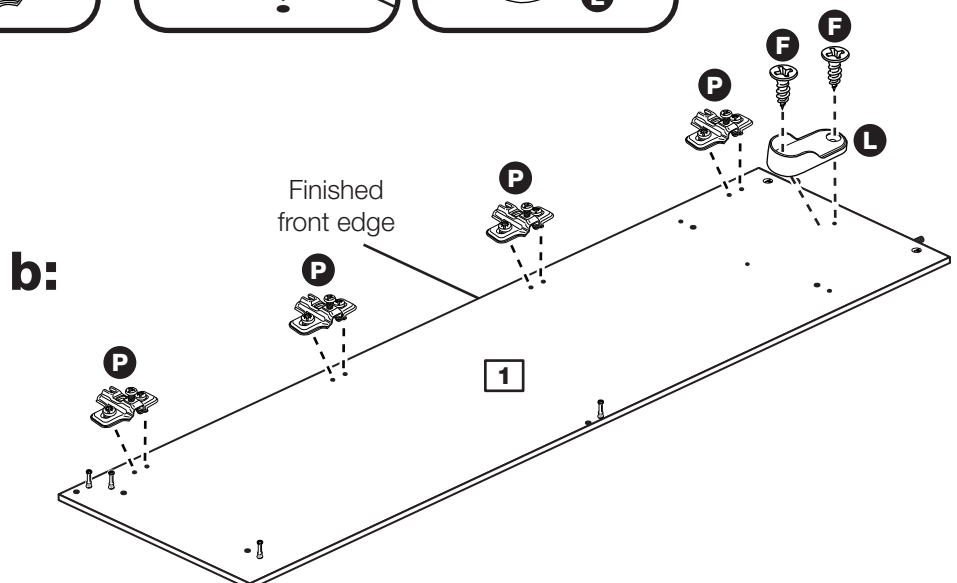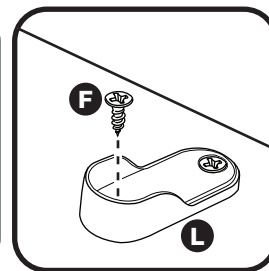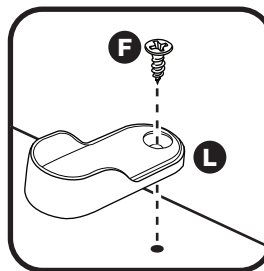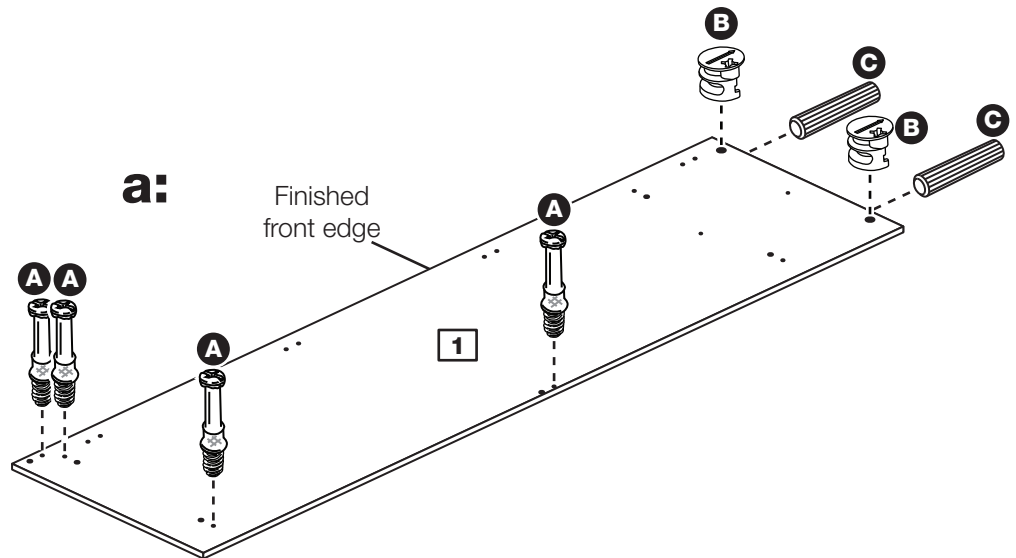

Assembly Instructions

Step 2



Prepare the right side

a: Screw 4 metal dowels **A** into the right side **2**.

Insert 2 large locking nuts **B** into the right side **2**.

Tap 2 wooden dowels **C** into the right side **2**.

b: Fit 4 hinge plates **P** onto the right side **2**, making sure that the slot is facing towards the finished front edge.

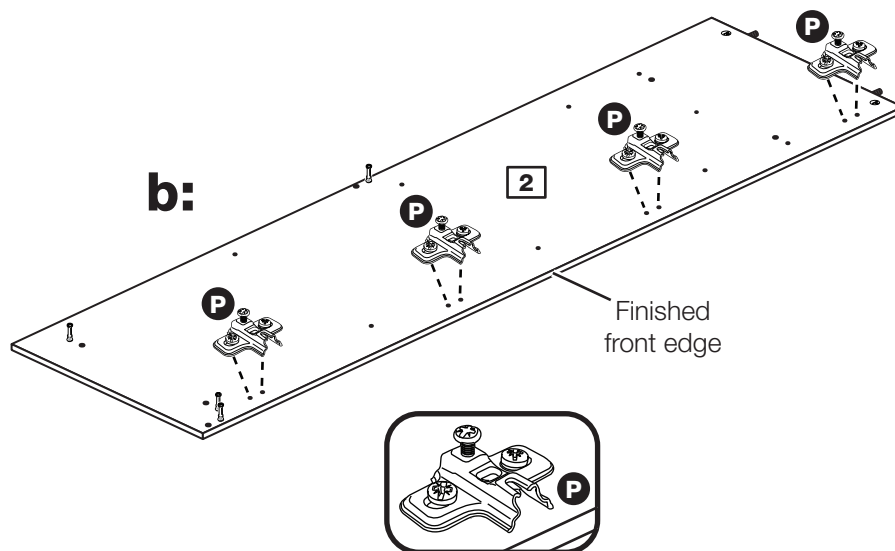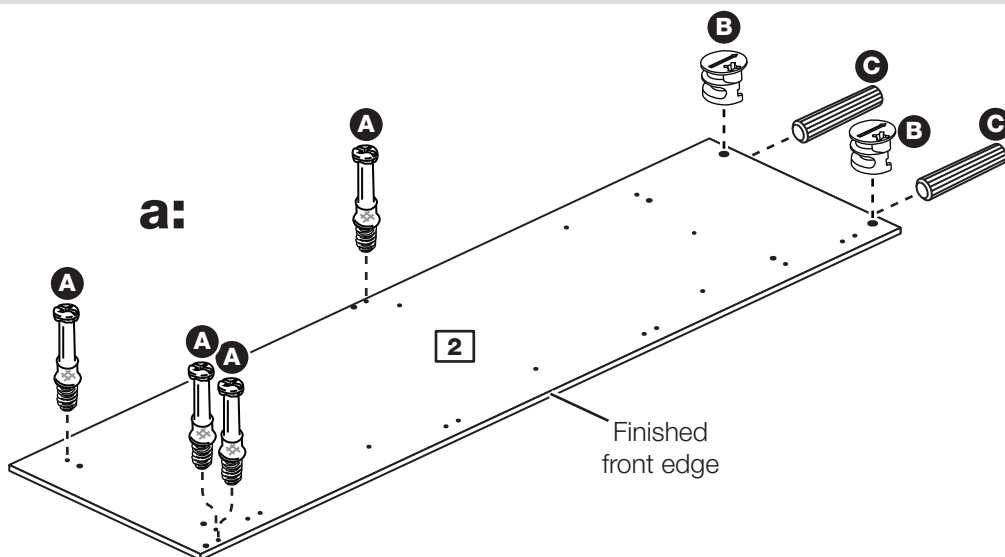


Step 3

Prepare the base

Insert 4 large locking nuts **B** into the base **5**.

Tap 4 wooden dowels **C** into the base **5**.

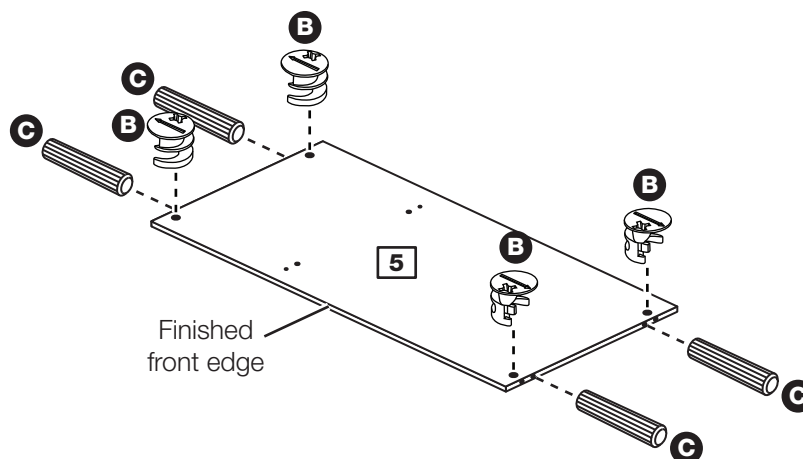

Assembly Instructions


Step 4

Fit the base to the right side

Push the base **5** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the base **5**.

Note: Turn the large locking nuts **B** as far as they will go - more than 1/2 a turn.

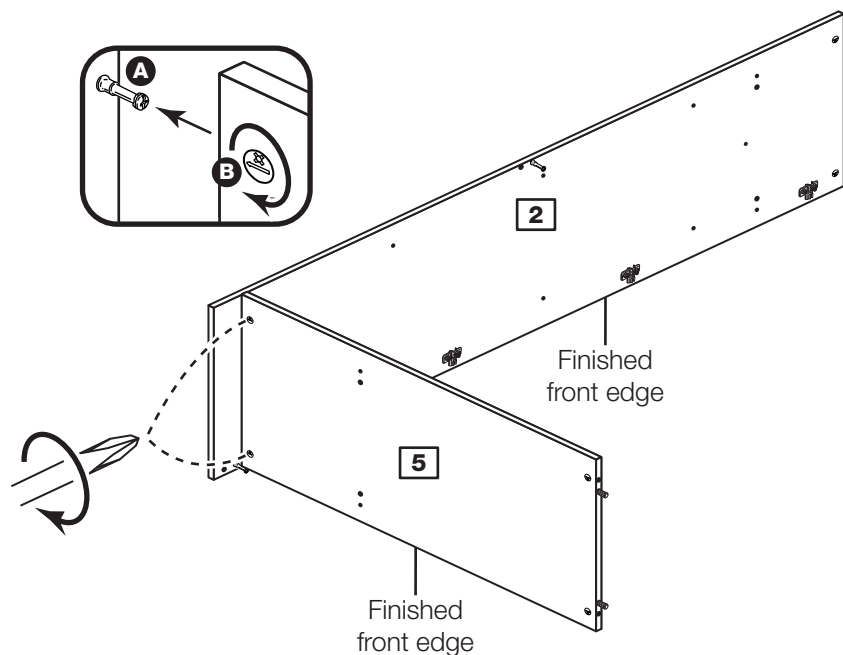

Step 5


Prepare the divider

Insert 2 large locking nuts **B** into the divider **3**.

Tap 4 wooden dowels **C** into the divider **3**.

To fit the rail holder **L** screw through the top hole with screw **F** and into the mark hole drilled in the divider **3**. Make sure that it is fitted straight, in line with the panel edges and then fit another screw **F** using the lower hole.

Fit 4 hinge plates **P** onto the divider **3**, making sure that the slot is facing towards the finished front edge.

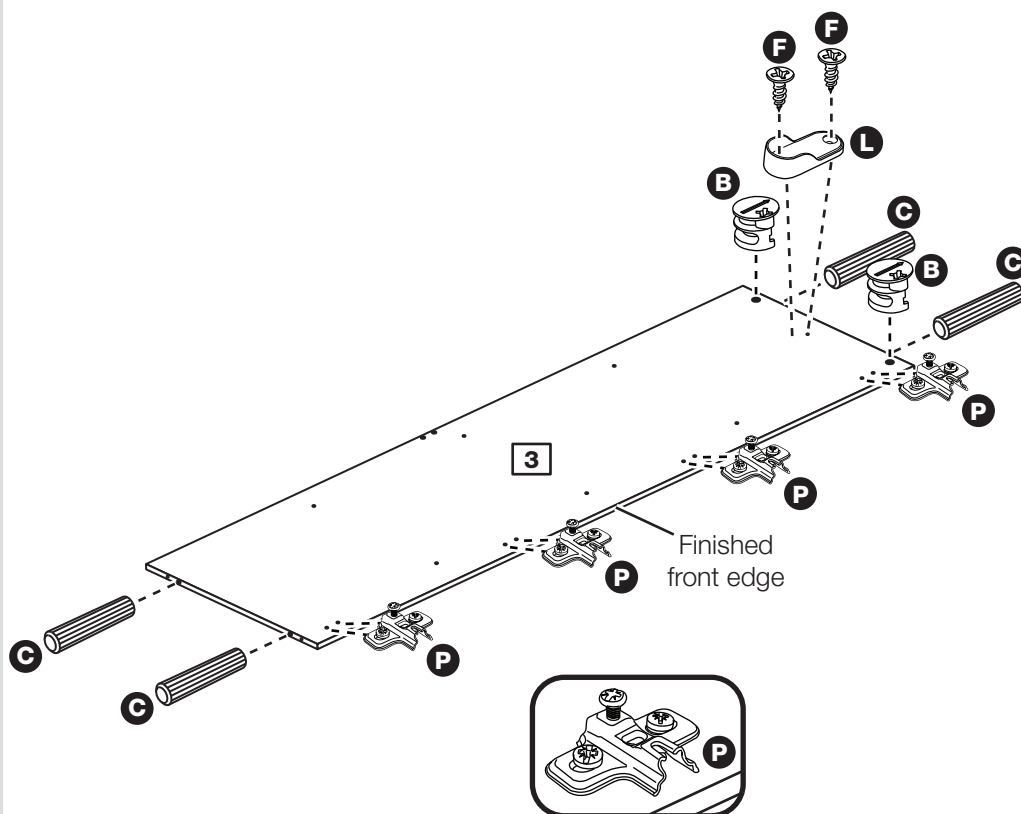


Assembly Instructions

Step 6

Prepare the small rail

Insert 2 large locking nuts **B** into the small rail **8**.

Tap a wooden dowel **C** into the small rail **8**.

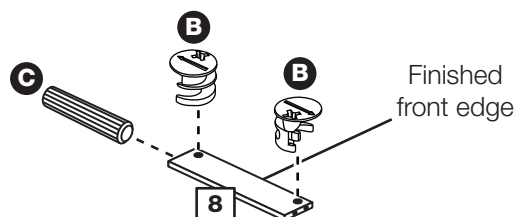


Step 7

Fit the small rail

Push the small rail **8** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **B** fitted to the small rail **8**.

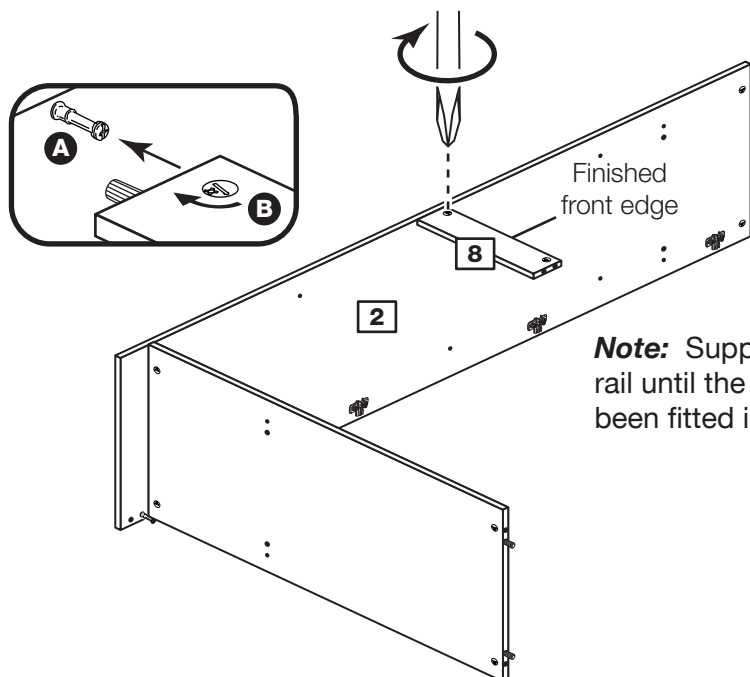

Note: Support the small rail until the divider has been fitted in the next

Step 8


Fit the divider

a: Push the divider **3** onto the base **5** and attach it using 2 screws **D**.

b: Tap a double metal dowel **K** through the divider **3** and into the small rail **8** until it "bottoms out".

Tap a large wooden dowel **J** through the divider **3** and into the small rail **8** until it "bottoms out".

c: Use a screwdriver to tighten the large locking nut **B** fitted to the small rail **8**.

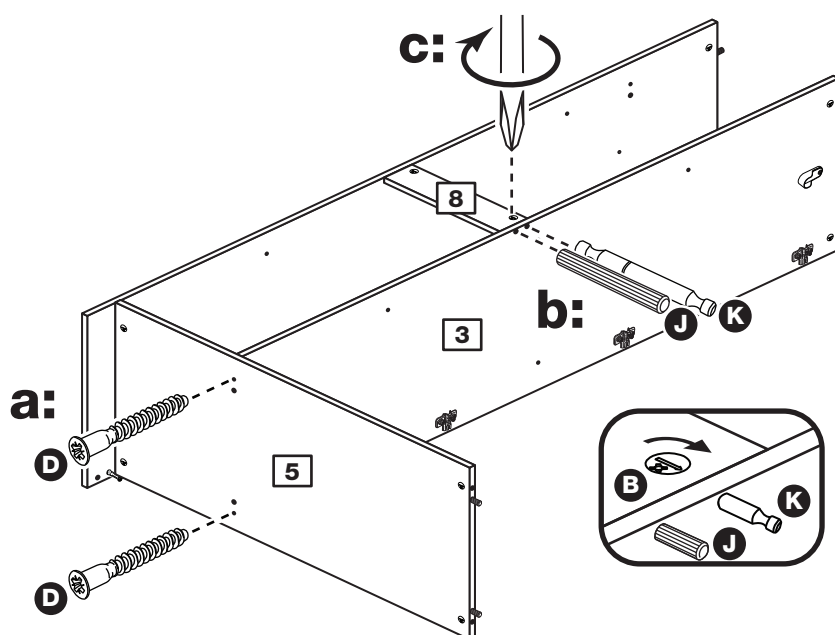


Assembly Instructions

Step 9

Prepare the plinth

Insert 2 large locking nuts **B** into the plinth **7**.

Tap 2 wooden dowels **C** into the plinth **7**.

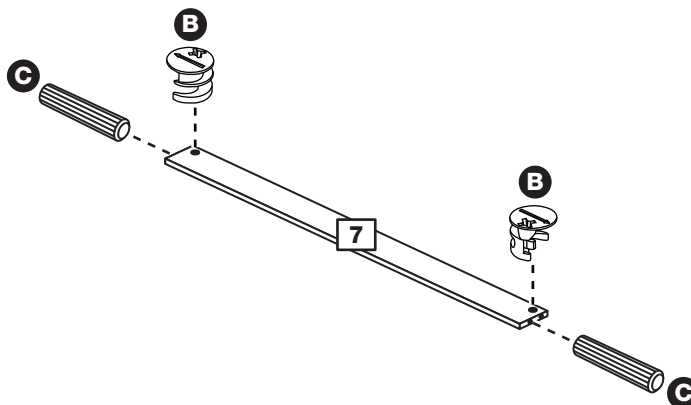


Step 10

Fit the plinth

Push the plinth **7** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **B** fitted to the plinth **7**.

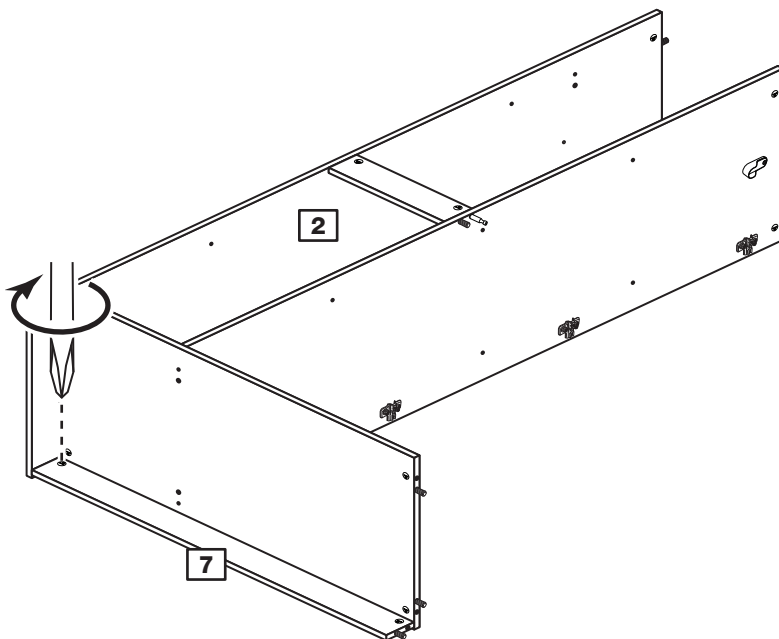


Step 11

Prepare the large rail

Insert 2 large locking nuts **B** into the large rail **9**.

Tap a wooden dowel **C** into the large rail **9**.

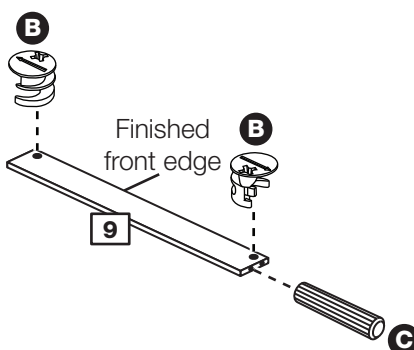


Assembly Instructions

Step 12

Fit the large rail

Push the large rail **9** onto the divider **3**.

Use a screwdriver to tighten the large locking nut **B** fitted to the large rail **9**.

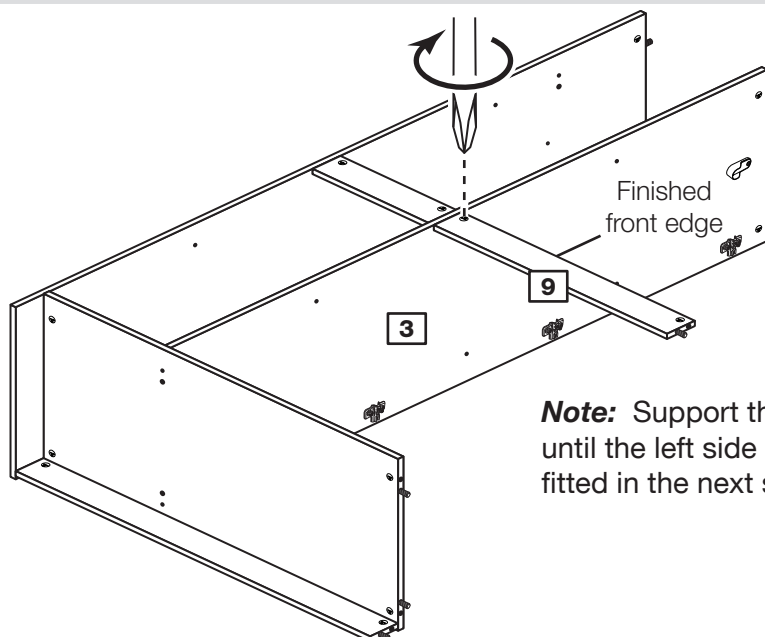


Note: Support the large rail until the left side has been fitted in the next step.

Step 13

Fit the left side

Push the left side **1** onto the assembly.


Use a screwdriver to tighten the 4 large locking nuts **B** fitted to the base **5**, the plinth **7** and the large rail **9**.

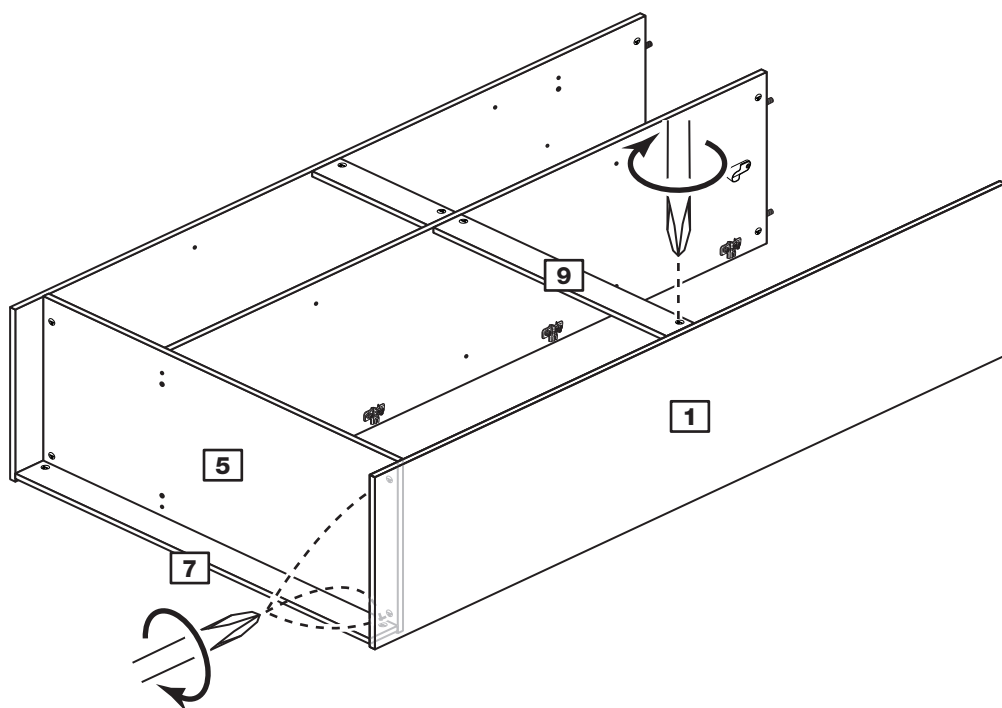

Step 14

Prepare the top

Screw 6 metal dowels **A** into the top **4**.

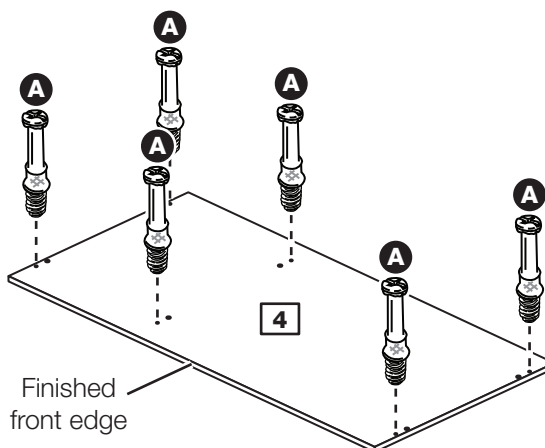

Assembly Instructions


Step 15

Fit the top

Note: To make it easier to fit the top, place polystyrene blocks from the packaging underneath the side and divider panels to raise the assembly.

Push the top **4** onto the assembly.


Use a screwdriver to tighten the 2 large locking nuts **B** fitted to the left side **1**, the right side **2** and the divider **3**.

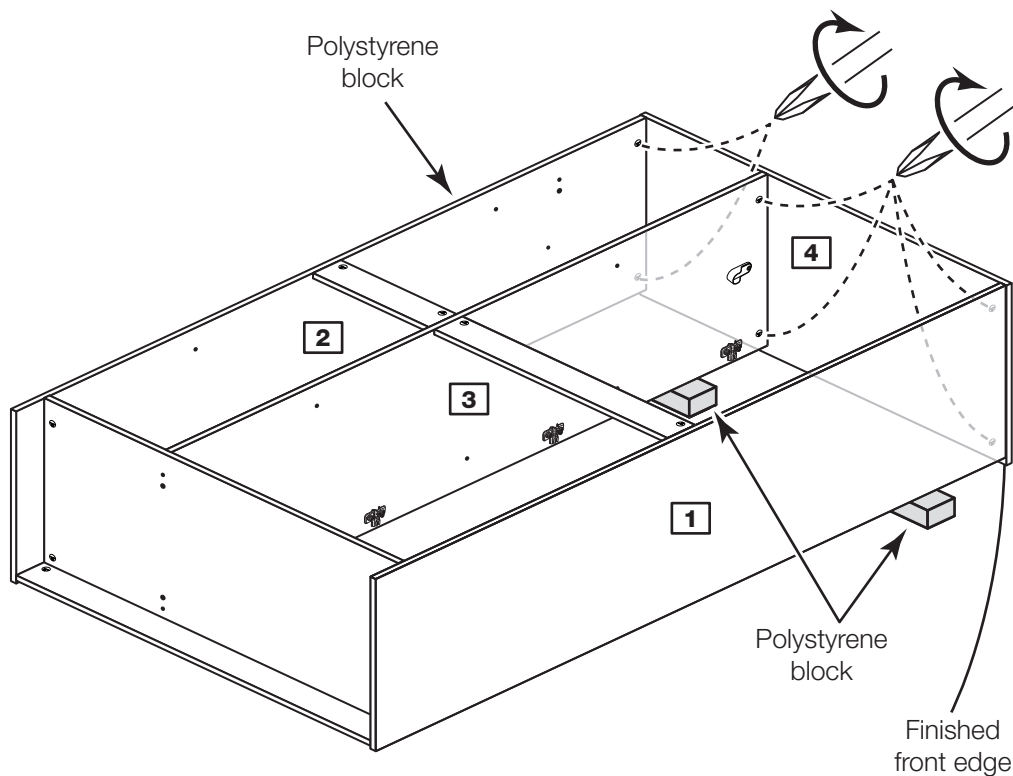

Step 16

Fit the 4 plastic nails

Tap 2 plastic nails **H** into the bottom edge of each of the sides **1** and **2**.

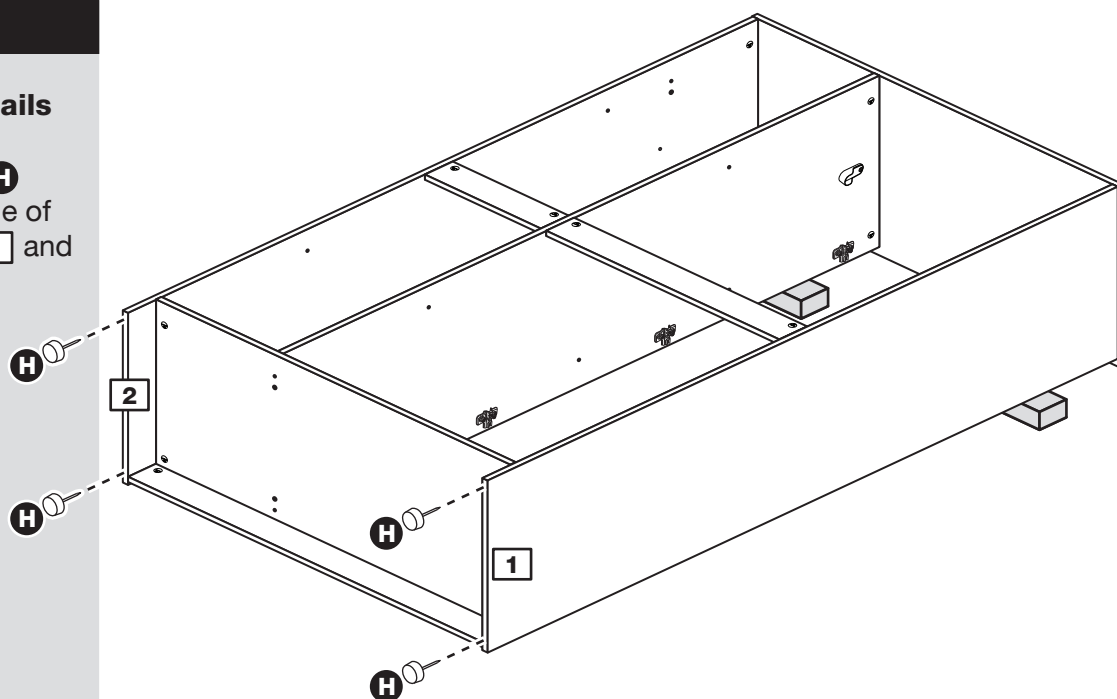

Assembly Instructions

Step 17

Fit the 2 back panels

a: Square up the unit by making sure that measurement **x:x** equals **y:y**.

Place the small back **13** and large back **14**, coloured surface facing down, onto the unit as shown.

Make sure that the 2 backs are pushed up tight against each other and that they meet in the centre of the divider's back edge.

b: Nail **G** around the outside edges of the 2 backs.


Note: Do not nail where the 2 backs meet.

c: Push the nail screws **M** through the back holders **N** and tap them down between the small back **13** and large back **14** and into the back edge of the divider **3**.

Keep tapping the nail screws **M** in until the back holders **N** dig into the small and large back.


Stand the unit up for the next step.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

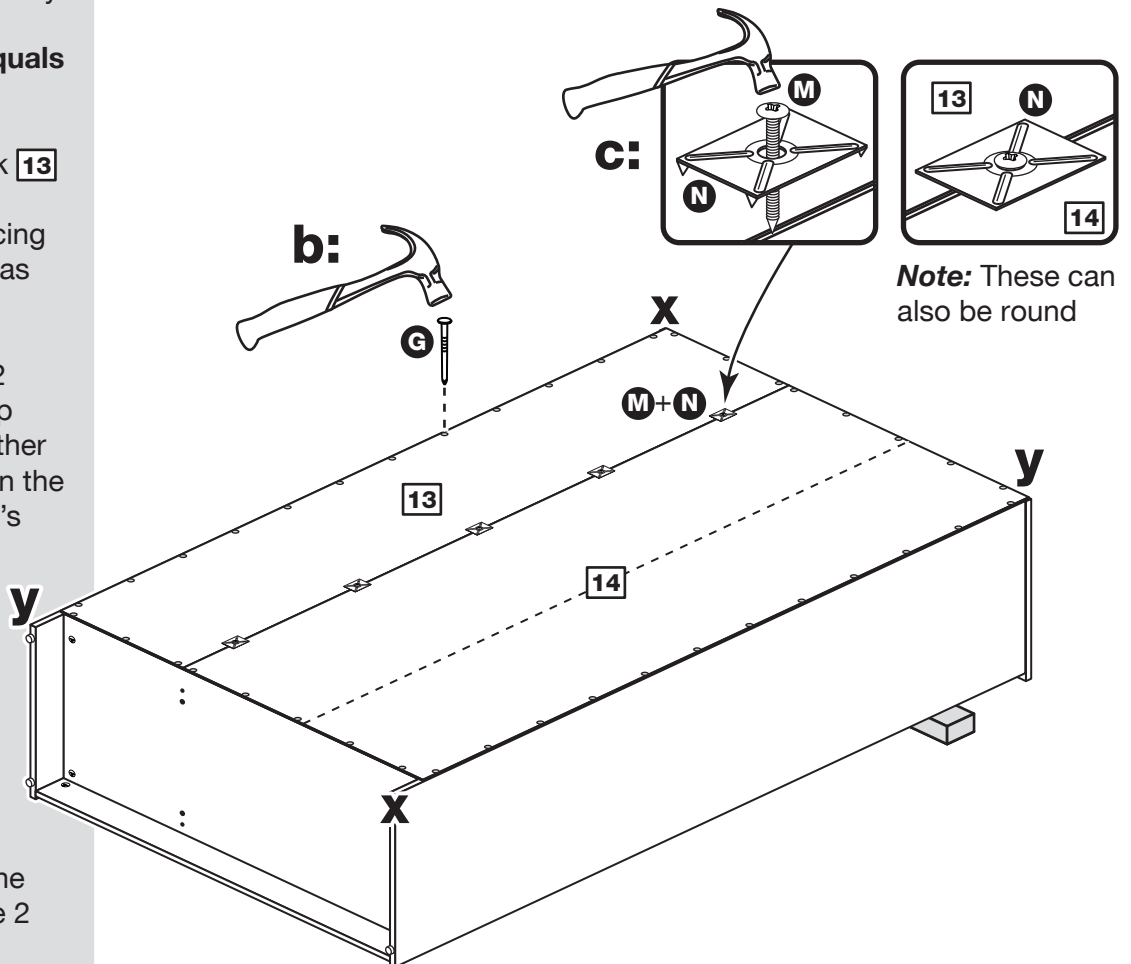

Warning: The unit is heavy. Lift with care.

Note: If ever you need to take the backs off to dismantle the unit, the nail screws can be taken out using a screwdriver.

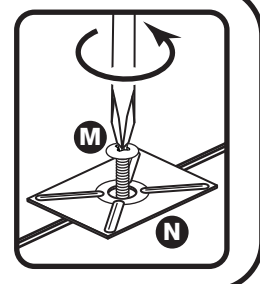


Assembly Instructions

Step 18

Fit the shelf studs


For each of the 3 shelves **6**, insert 4 shelf studs **1**.

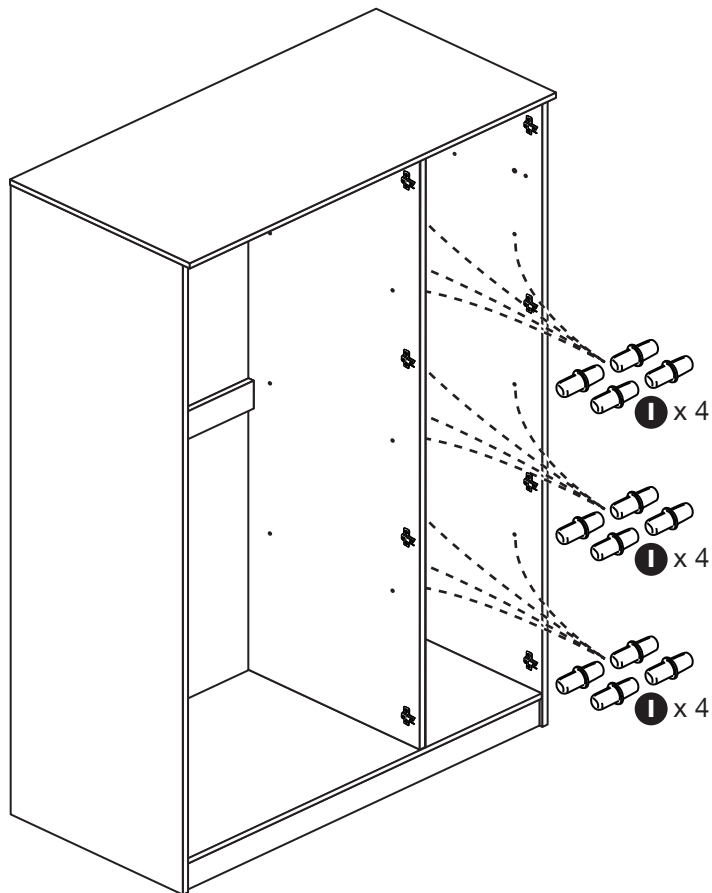

Step 19

Fit the shelves

Lower the 3 shelves **6** down onto the shelf studs **1**.


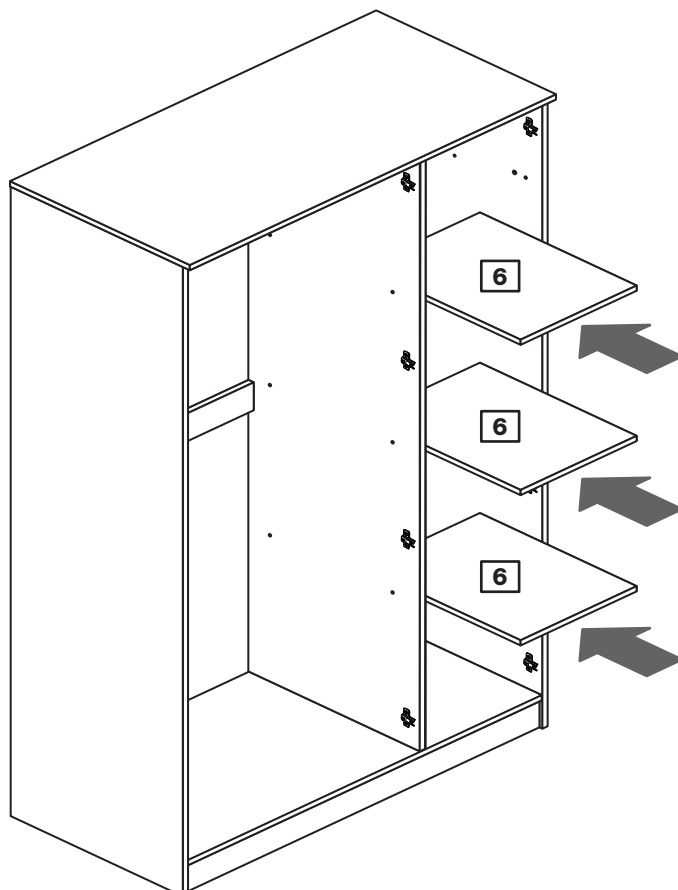


Assembly Instructions

Step 20

Fit the hanging rail

Push the hanging rail **10** into the rail holders **L** fitted to the side panels.

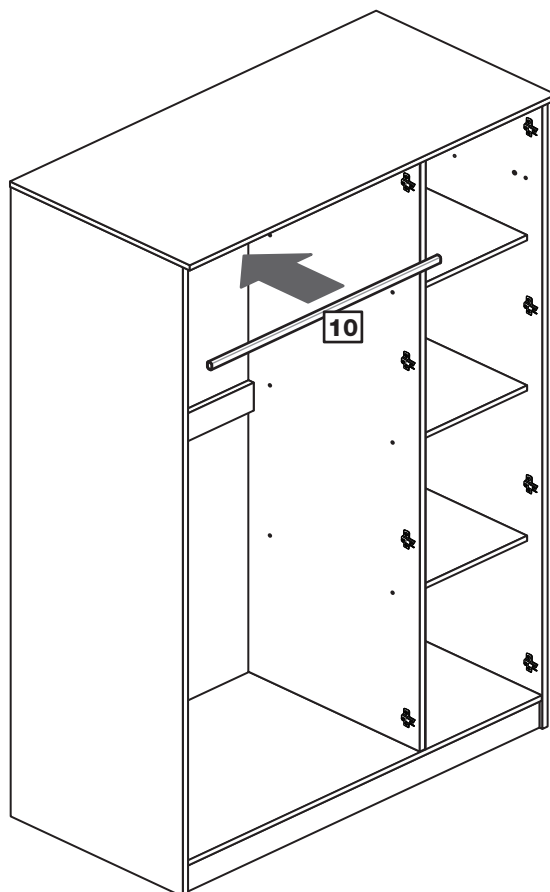


Step 21

Prepare the 3 doors

Push fit 4 hinges **Q** into each of the 2 plain doors **11** and the mirror door **12**.

Secure each hinge with 2 screws **F**.

Note: Before securing with the screws, make sure that the hinges are positioned at 90 degrees with the edge of the door.

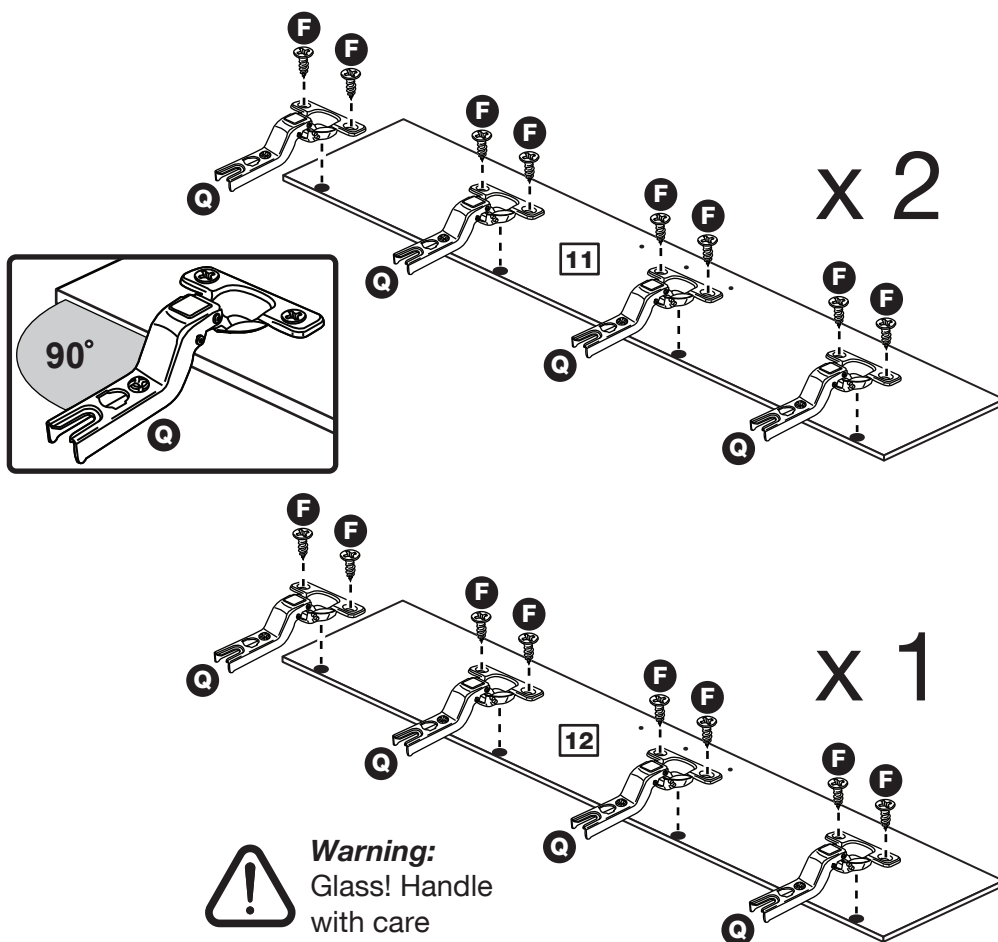

Assembly Instructions

Step 22

Fit doors and handles

Note: The easiest way to attach each door **11** and **12** is to fit the top hinge first, then align and fit the other hinges.


a: Push the hinge **Q** onto the front part of the hinge plate **P**. The recess at the bottom of screw B goes into the slot in the hinge plate.

b: Keep the hinge **Q** FLAT against the hinge plate **P** as you slide it across as far as it will go. Tighten screw A.


c: The hinge **Q** must be flat against the hinge plate **P** prior to any adjustment.

d: The hinge **Q** must NOT be AT AN ANGLE to the hinge plate **P** when assembled. This would indicate that the recess at the bottom of screw B had not located in the slot in the hinge plate and the hinge would not be secure. Remove the hinge from the hinge plate and then re-assemble being careful to follow instructions a-c.

e: Attach a handle **O** to the 2 plain doors **11** using 3 screws **E**.

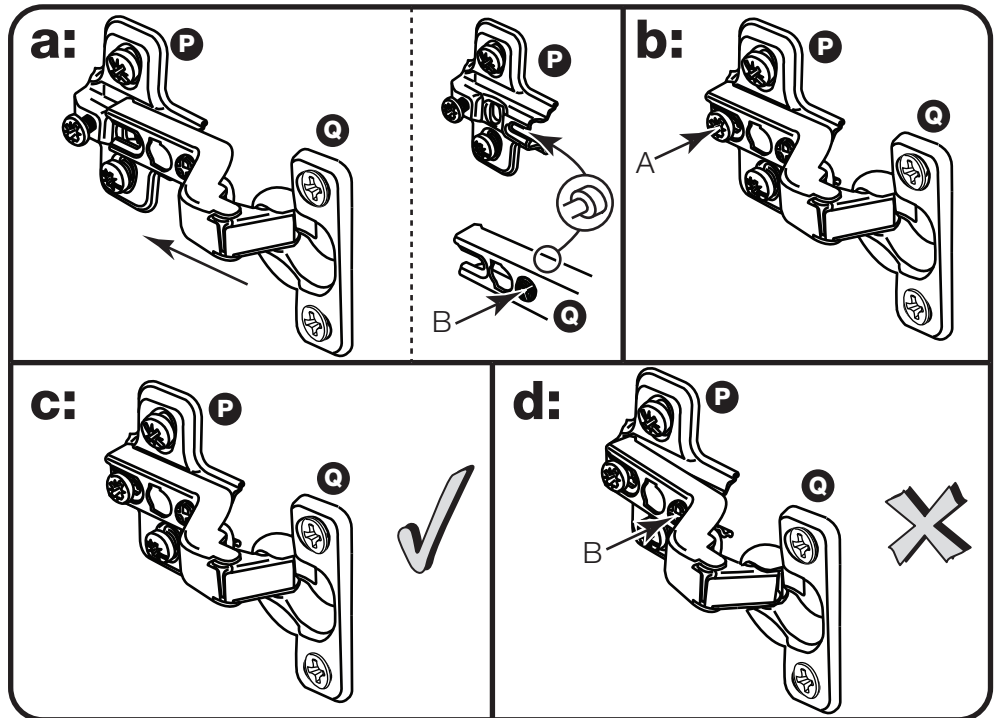

Important: DO NOT attempt to attached a handle to the mirror door.

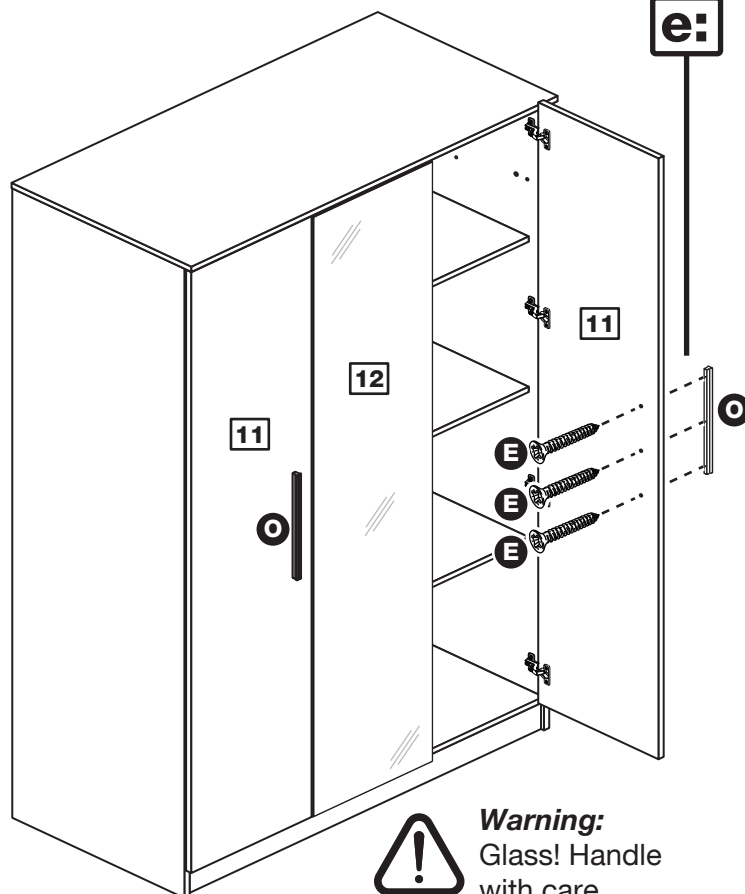

Warning:
Glass! Handle
with care

Assembly Instructions

Step 23

Adjust the doors if needed

a: Before adjusting the doors, use a spirit level to check the base (or top) of the unit is level, front-to-back and side-to-side in the 3 positions shown. Use suitable packing pieces (not supplied) to make the unit level BEFORE making any adjustment to the hinges, as shown.

b: Height adjustment.


Loosen screws A on hinge plates and move door up or down as required. Retighten screw A.

c: Forward and Back adjustment.

Loosen screw B on hinge plate and move door in or out as required. Retighten screw B.

d: Sideways adjustment.

To move door 'out' loosen screw C. To move door 'in' tighten screw C.

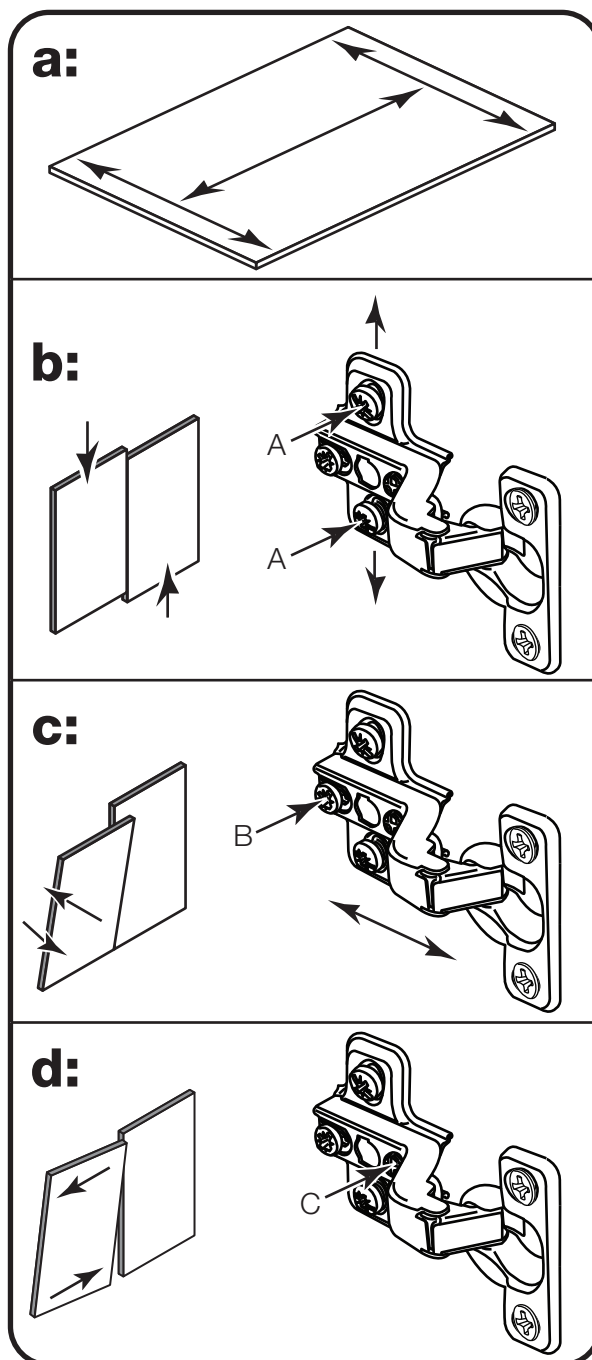

Assembly Instructions


Step 24

Fit the overbalance protector

To prevent possible overbalancing we recommend that this unit is secured to a suitable wall by fitting of the overbalance protector kit **(R)** to the unit, or an alternative fixing method of your choice.

Wall fixings are not supplied as they will need to suit the wall type.


Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

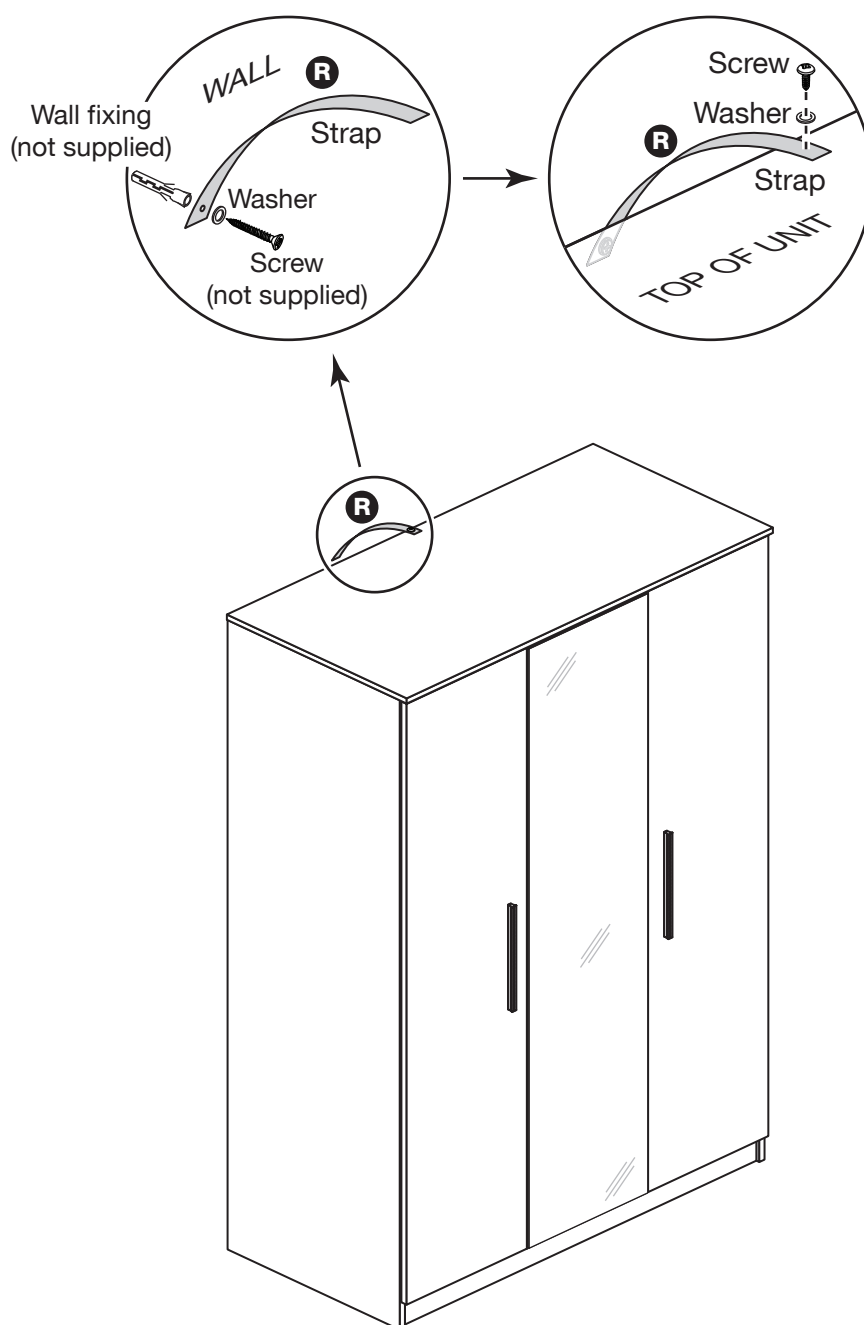

Assembly Instructions

Step 25

Assembly is complete

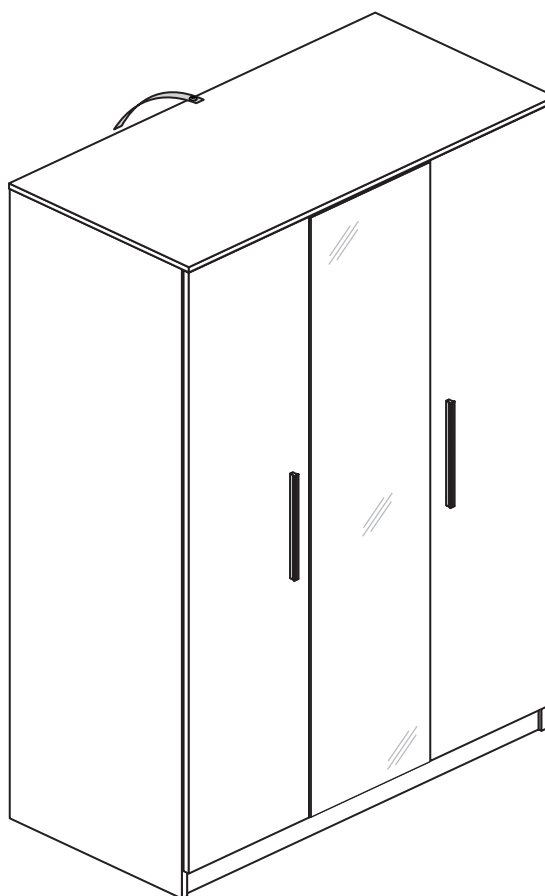

IMPORTANT INFORMATION ABOUT THIS PRODUCT

This product complies with the requirements of BS 7449:1991 and has been manufactured by DECORATIVE PANELS FURNITURE LTD, TEESSIDE INDUSTRIAL ESTATE, THORNABY-ON-TEES, CLEVELAND, TS17 9LT.

The product code for this unit and the item code(s) for the glass components are listed in the Assembly Instructions along with a description of the type of glass used. All clear/tinted glass complies with the requirements of BS 6206 Class A. All mirrors comply with the requirements of BS 6206 Class C. If the glass component contained in this unit is chipped or broken consult the furniture manufacturer, retailer, or agent with regard to obtaining a manufacturing specification and shape for replacement glass quoting the unit description and batch number or date of manufacture.

Do not place very hot or very cold items against or in close proximity to glass surface(s) unless adequately thick insulating material is used to prevent such items coming in contact with the glass.

Do not strike the glass with hard or pointed items.

Do not sit or stand upon horizontal glass surfaces.

When cleaning glass panels use a damp cloth or leather with washing up liquid or soft soap if necessary - do not use washing powders or any other substance containing abrasives since these substances scratch glass.

If stated in the instruction leaflet, it is essential that this unit is fixed to a wall.

KEEP THESE INSTRUCTIONS FOR FUTURE USE

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

