
Phoenix Wall Desk

Assembly Instructions - Please keep for future reference

455/5991
497/4479
498/1307
460/6613

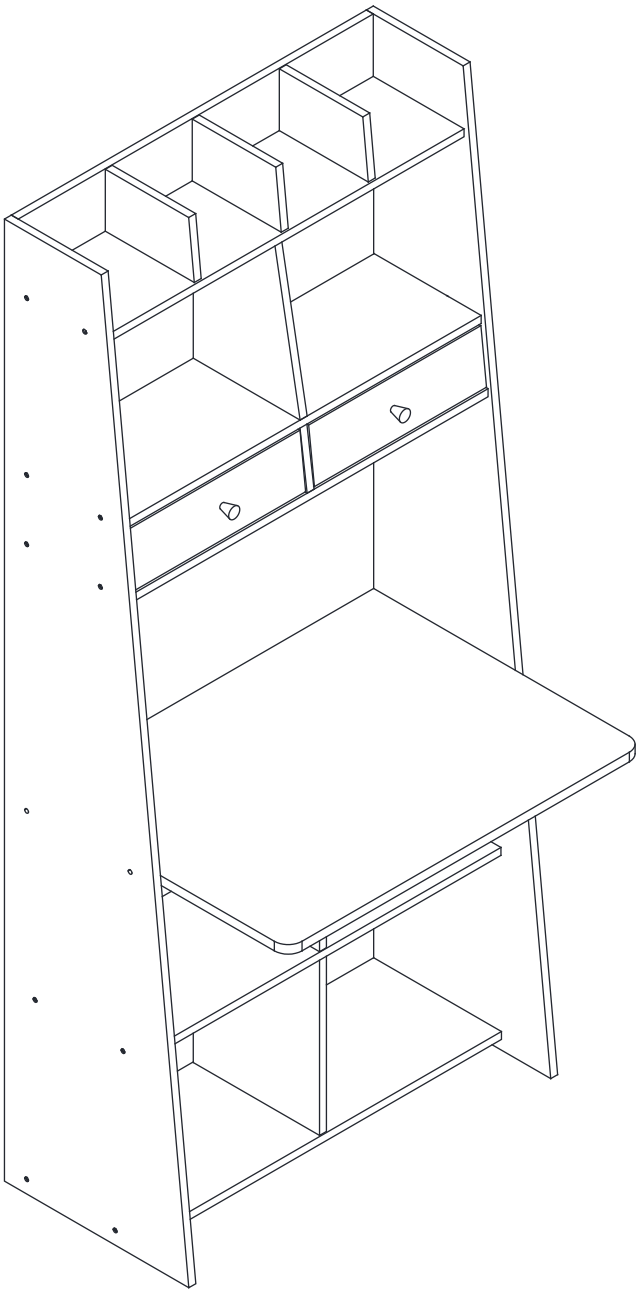

Dimensions

Width - 80cm
Depth - 60 cm
Height -180.5 cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline:** 0345 6400 800

Issue 1-19-10-15

Safety and Care Advice

Important – Please read these instructions fully before starting assembly

Check you have all the components and tools listed on pages 2 and 3.
Remove all fittings from the plastic bags and separate them into their groups.
Keep children and animals away from the work area, small parts could choke if swallowed.
Make sure you have enough space to layout the parts before starting.

Assemble the item as close to its final position (in the same room) as possible.

Assemble on a soft level surface to avoid damaging the unit or your floor.

Assembly requires 2 people.

Keep this instructions for future use.

Do not stand or put excessive weight on the product, this could cause damage.



We do not recommend the use of power drill/drivers ***for inserting screws,*** as this could damage the unit. Only use hand screwdrivers and Allen keys.

Dispose of all packaging carefully and responsibly.

Care and maintenance

Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.


From time to time check that there are no loose screws on this unit.

This product should not be discarded with household waste. Take to your local authority waste disposal centre.


Components - Parts

If you have damaged or missing components.
call the **Customer Helpline** : 0345 6400 800


Please check you have all the parts listed below

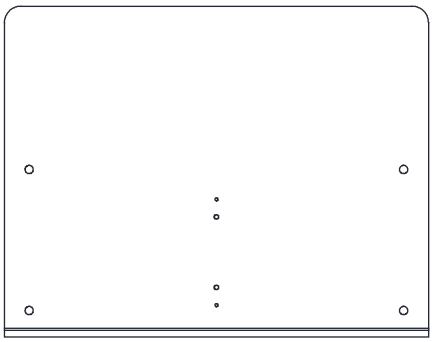


1 Desk Top x 1
(77x60x1.8cm)



2 Lower Divider x 1
(33x27.4x1.5cm)

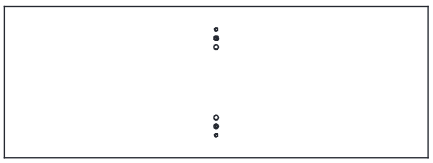

3 Lower Shelf x 1
(77x27.5x1.5cm)

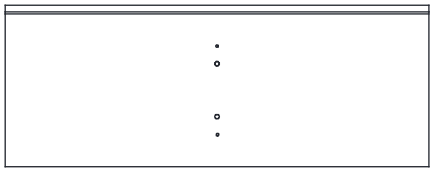


4 Base Panel x 1
(77x29.3x1.5cm)






5 Upper Divider
(Left And Right) x 2
(19.3x11.6x1.5cm)

6 Top Horizontal Rail X 1
(77x11.7x1.5cm)

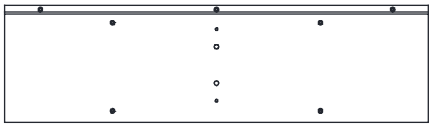


7 Top Shelf x 1
(77x21.2x1.5cm)

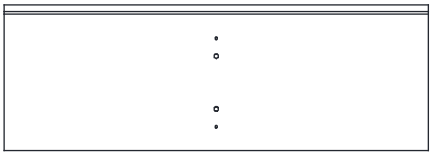


8 Upper Shelf x 1
(77x26.5x1.5cm)




9 Drawer Divider x 1
(24.7x11.5x1.5cm)

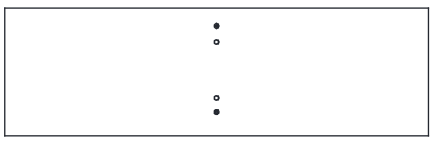

10 Drawer Shelf x 1
(77x23.5x1.5cm)



11 Middle Divider x 1
(32.9x23.2x1.5cm)

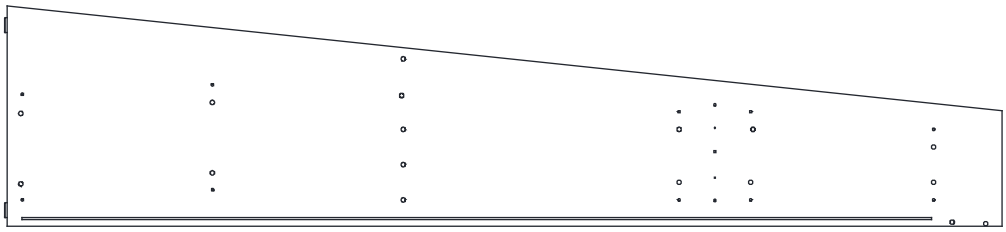


12 Side Panel (Right)x 1
(180.6x40x1.5cm)

Components - Parts

If you have damaged or missing components.
call the **Customer Helpline** : 0345 6400 800

Please check you have all the parts listed below

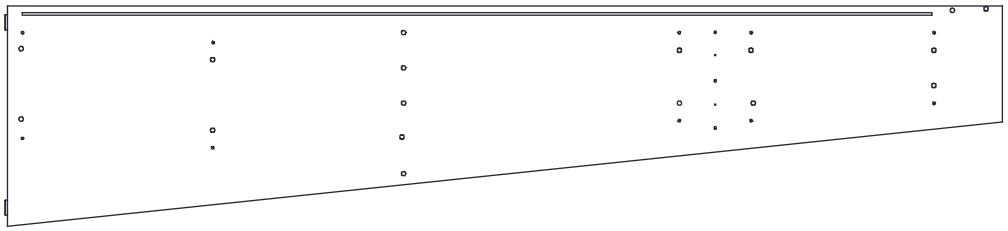

13 Side Panel (Left) x 1
(180.6x40x1.5cm)



14 Upper Divider (Middle) x 1
(19.3x11.6x1.5cm)




15 Drawer Side (Right) x 2
(21.3x9x1.2cm)



16 Drawer Side (Left) x 2
(21.3x9x1.2cm)




17 Drawer Back x 2
(34.9x8.9x1.2cm)



18 Drawer Front x 2
(37.4x11.1x1.5cm)




19 Drawer Base x 2
(35.6x20.8x0.3cm)




20 Lower Back Panel x 2
(77.7x34x0.3cm)



21 Middle Back Panel x 1
(77.7x47.4x0.3cm)



22 Upper Back Panel （Extra hole） x 1
(77.7x46.7x0.3cm)




23 Lower Divider x 1
(33x27.4x1.5cm)

Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 0345 6400 800**


Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A  Short 30mm wooden dowel x 46	**B**  Metal dowel x 14	**C**  Large locking nut x 6
D  35mm screw x 49	**E**  Plastic drawer runner x 4	**F**  10mm screw x 8
G  Crosshead nut x 4	**H**  53mm screw x 4	**I**  Allen Key x 1
J  Plastic trim x 1	**K**  Small locking nut x 8	**L**  Handle x 2
M  20mm screw x 2	**N**  Plastic Drawer Stop x 4	**O**  Plastic Bracket x 14
P  16mm screw x 14	**Q**  Wall Strap x 2	**R**  screw x 2
S  Sticker x (24+2)	**T**  Sticker x (6+2)	**U**  10mm screw x 3
V  Long 50mm wooden dowel x 4		

Tools required

 Ruler/tape measure

 Phillips screwdriver (Not supplied)

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions

Step 1


Preparing panels

Place desk top 1 flat onto the floor with the fixing holes facing up.

Insert short wooden dowels A into desk top 1 as shown.

Screw metal dowels B into desk top 1 as shown.

Note: Screw metal dowels as far as shown. Do not overtighten.

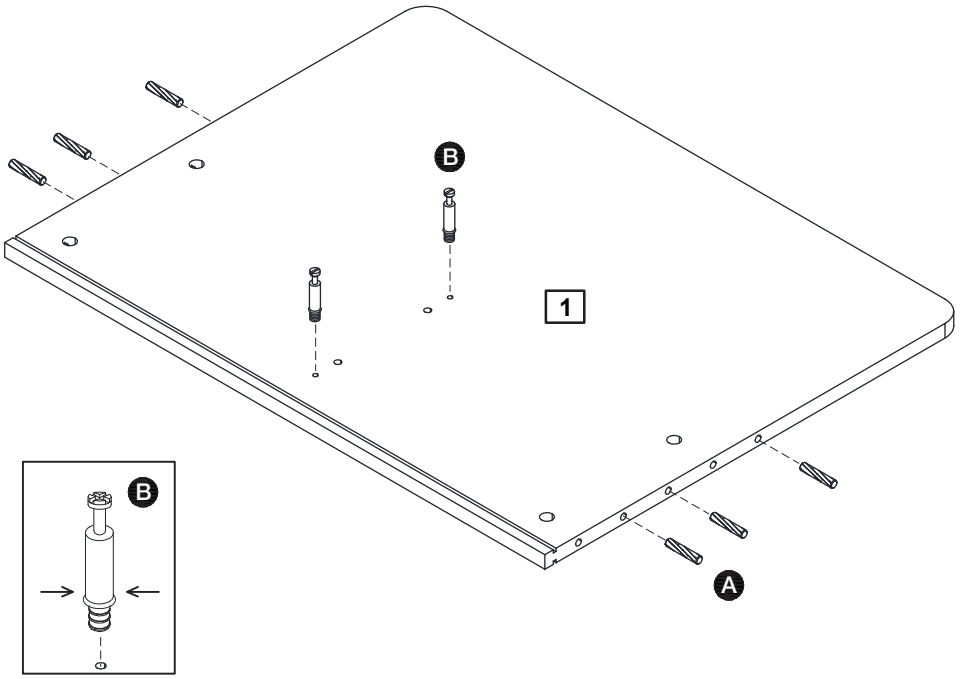


Step 2

Preparing panels

Place lower divider 2 and 23 flat onto the floor with the fixing holes facing up.

Insert short wooden dowels A into each side as shown.

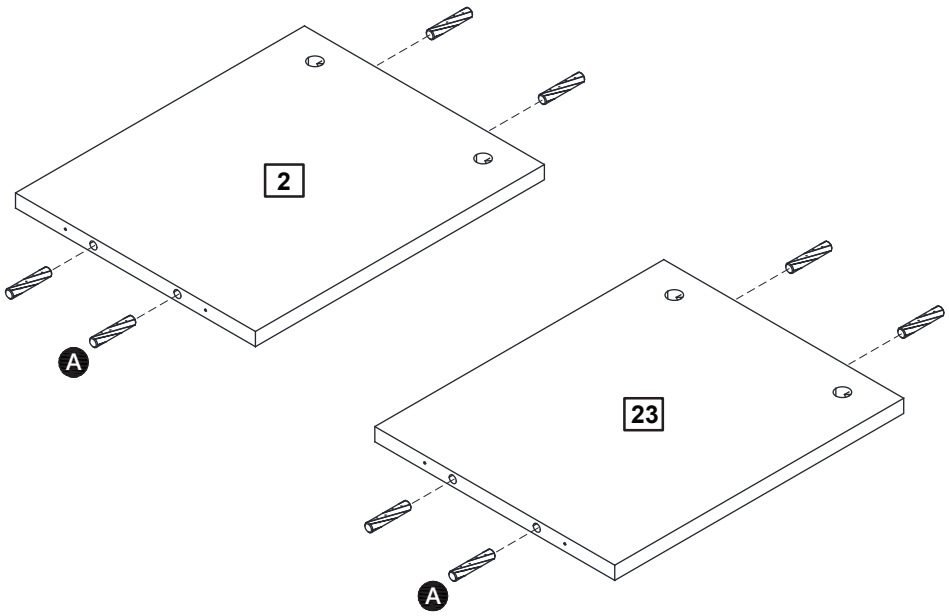

Assembly Instructions


Step 3

Preparing panels

With help, locate lower divider 2 to the underside of desk top 1 as shown.

Insert large locking nuts C into the holes in lower divider 2 .

Turn locking nuts C clockwise to secure.

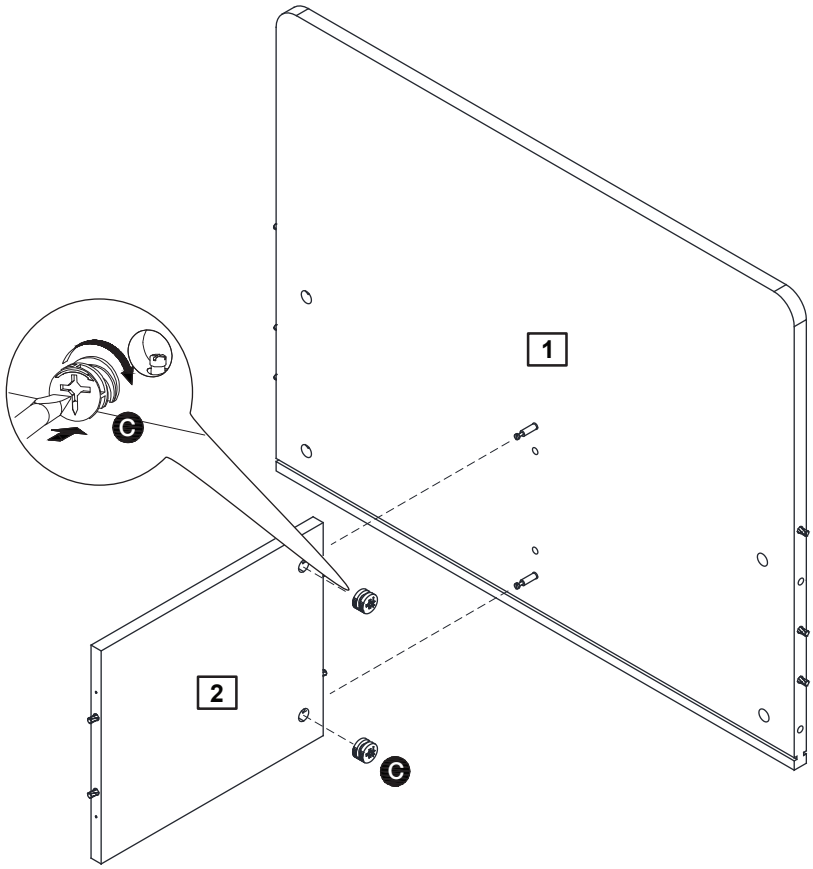

Step 4


Preparing panels

Place lower shelf 3 flat onto the floor with the fixing holes facing up.

Insert short wooden dowels A into lower shelf 3 as shown.

Screw metal dowels B into lower shelf 3 as shown.

Note: Screw metal dowels as far as shown. Do not overtighten.

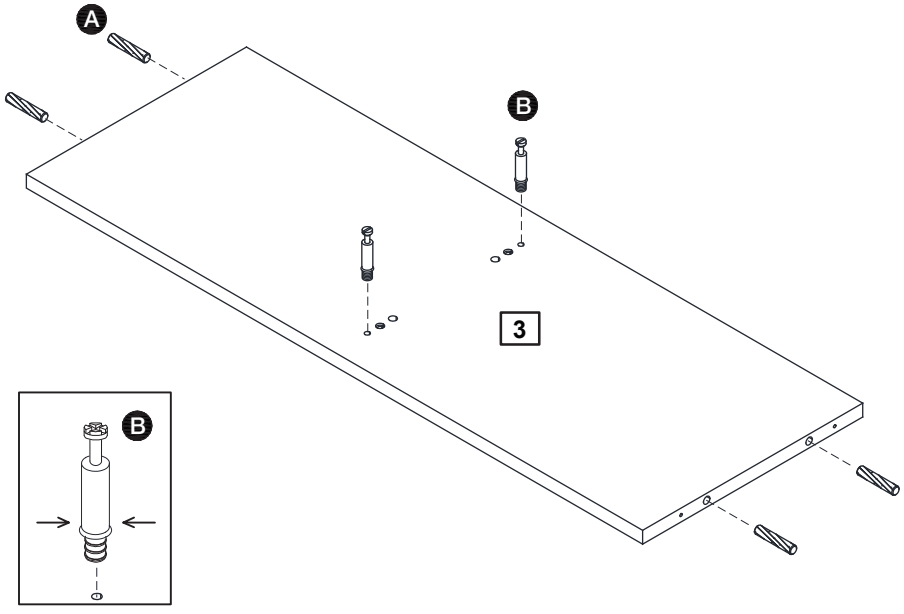


Assembly Instructions

Step 5

Preparing panels

With help, assemble lower shelf [3] to lower divider [2] using screws (D).

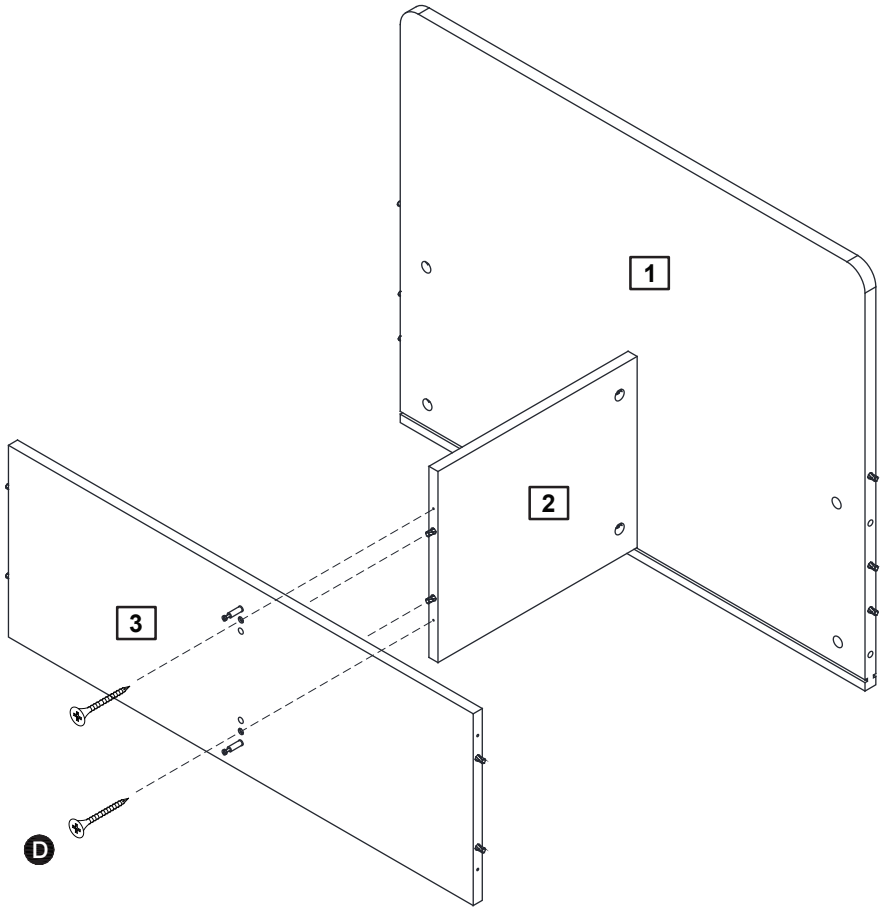


Step 6

Preparing panels

With help, assemble base panel [4] to the remaining lower divider [23] using screws (D).

Note: Ensure the groove along one edge of base panel [4] is on the same side as lower divider [23].

Insert short wooden dowels (A) into the ends of base panel [4] .

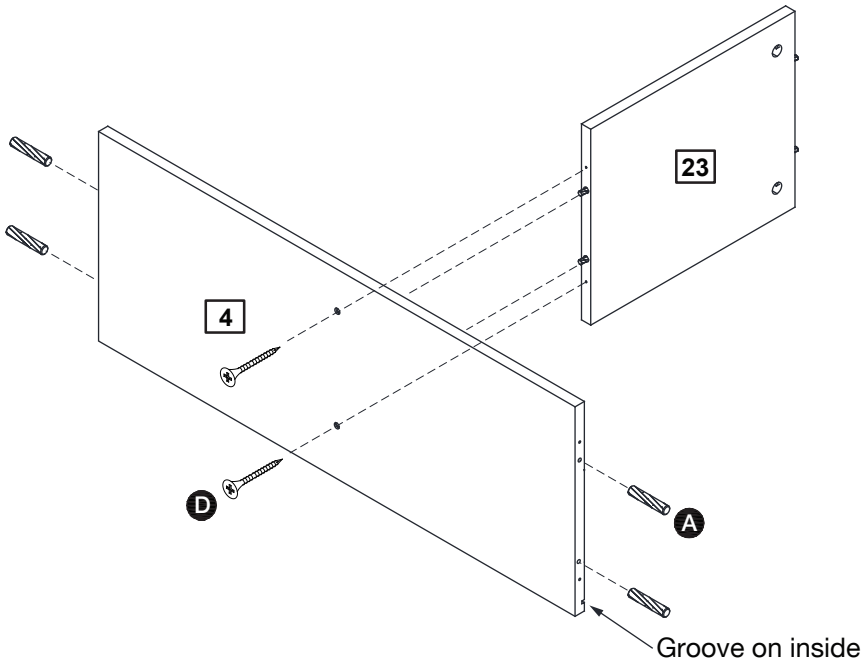

Assembly Instructions


Step 7

Preparing panels

With help, assemble lower divider 23 and base panel 4 assembly , to the lower shelf 3 as shown.

Insert large locking nuts C into one side of lower divider 23 .


Turn locking nuts C clockwise to secure.

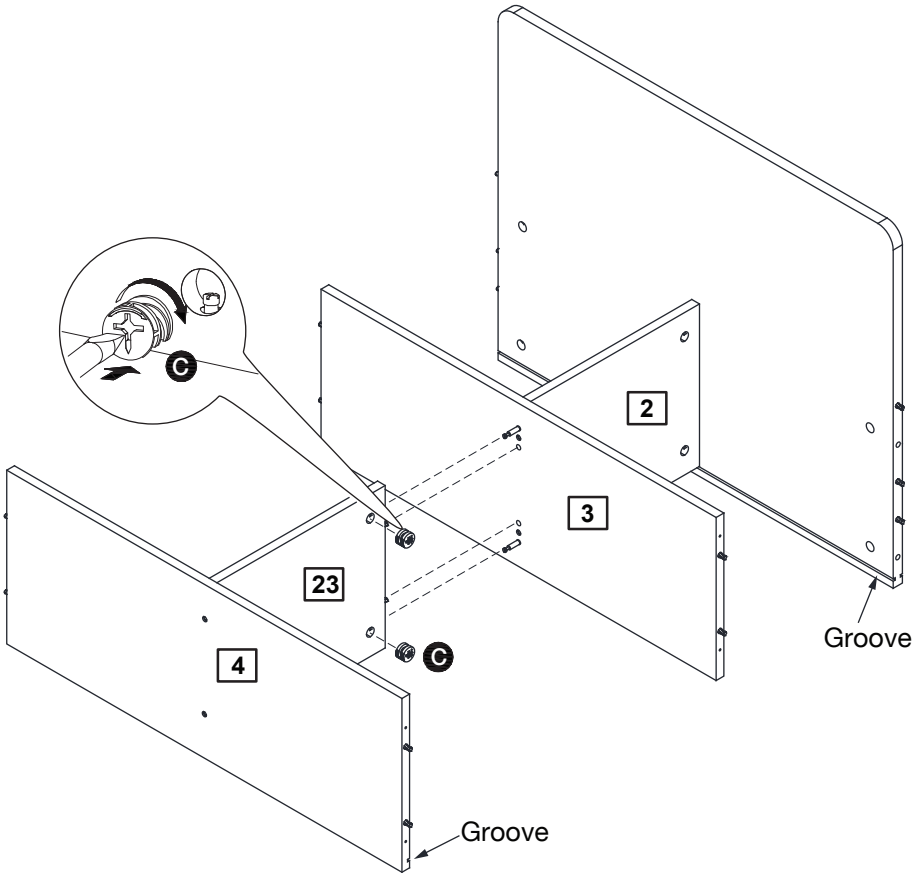

Step 8

Preparing panels

Insert short wooden dowels A into both upper dividers (left and right) 5 as shown.

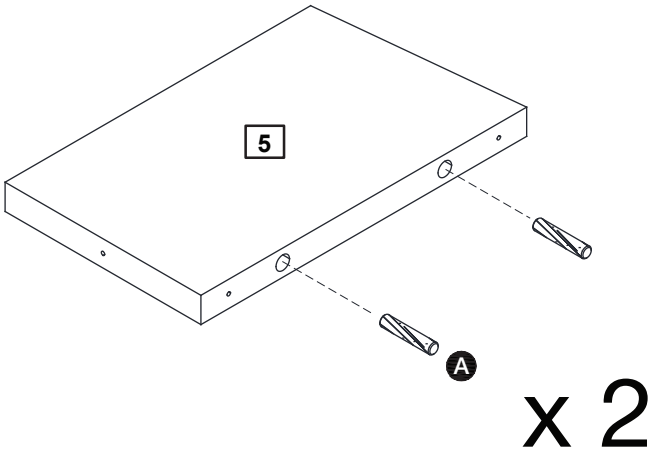


Assembly Instructions

Step 9

Preparing panels


Insert short wooden dowels Ⓐ into top horizontal rail 6 as shown.

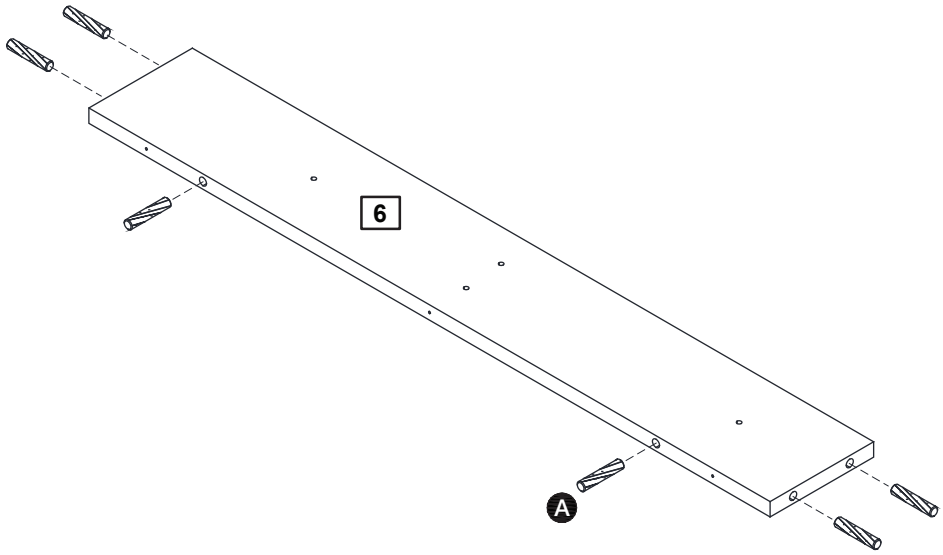

Step 10

Preparing panels

With help, assemble both upper dividers (left and right) 5 ,to top horizontal rail 6 using screws Ⓓ.

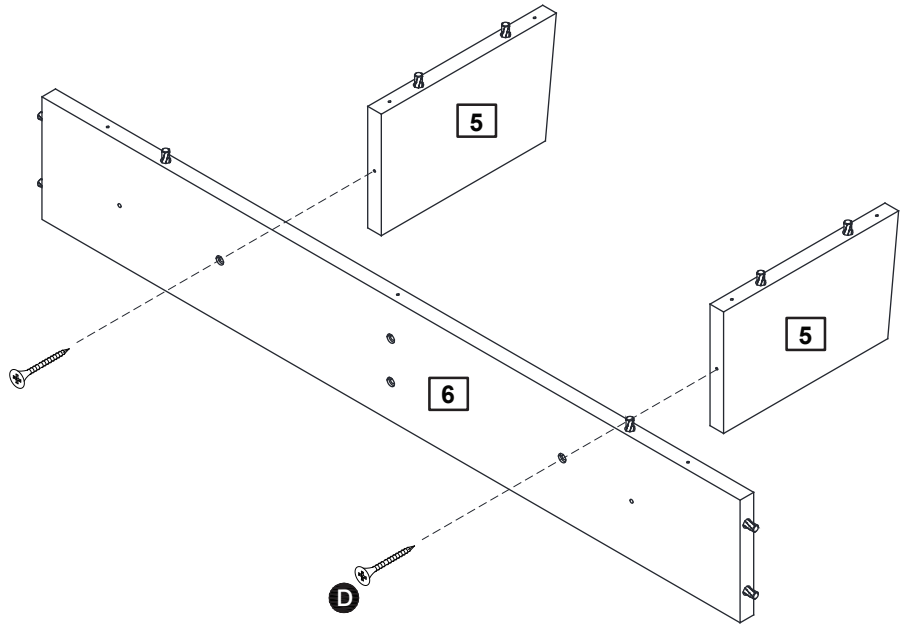


Assembly Instructions

Step 11

Preparing panels

Insert short wooden dowels Ⓐ into the ends of top shelf 7 as shown.

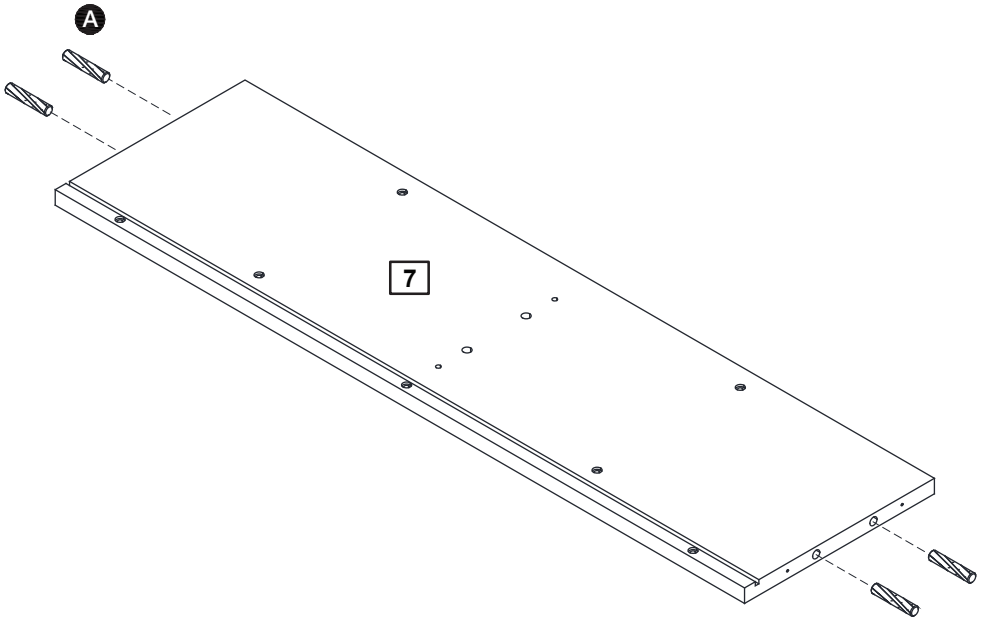


Step 12

Preparing panels

With help, assemble top shelf 7 to upper dividers (left and right) 5 and top horizontal rail 6 using screws Ⓓ as shown.

Note: Ensure the groove along one edge of top shelf 7 is facing down as shown.

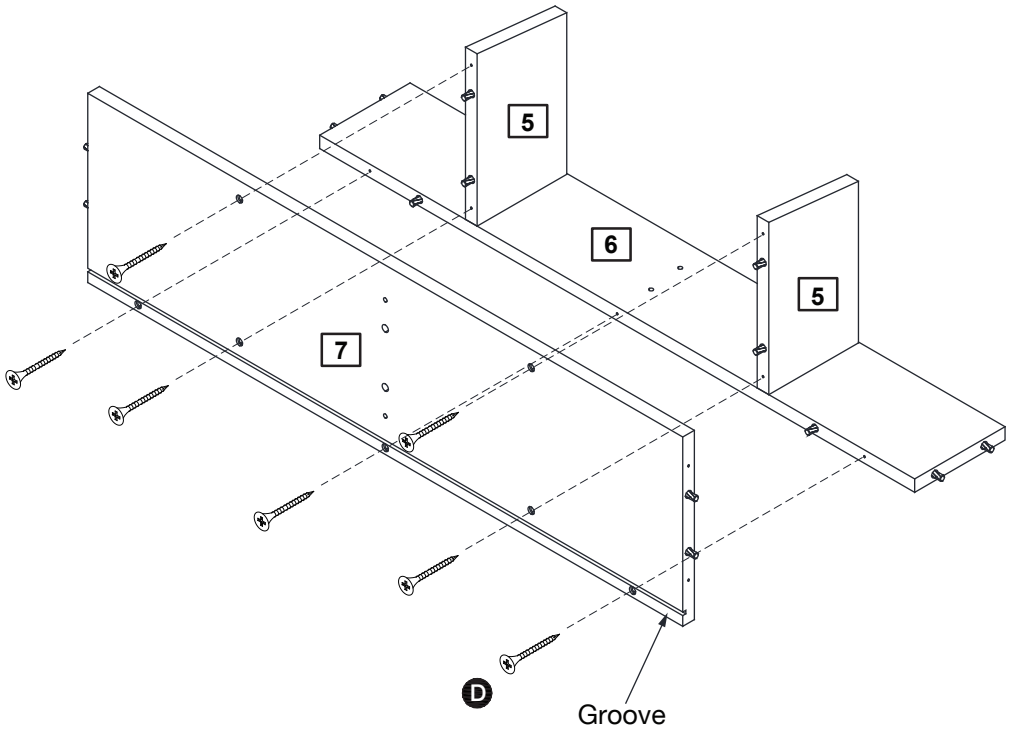


Assembly Instructions

Step 13

Preparing panels

Insert short wooden dowels (A) into the ends of upper shelf [8] as shown.

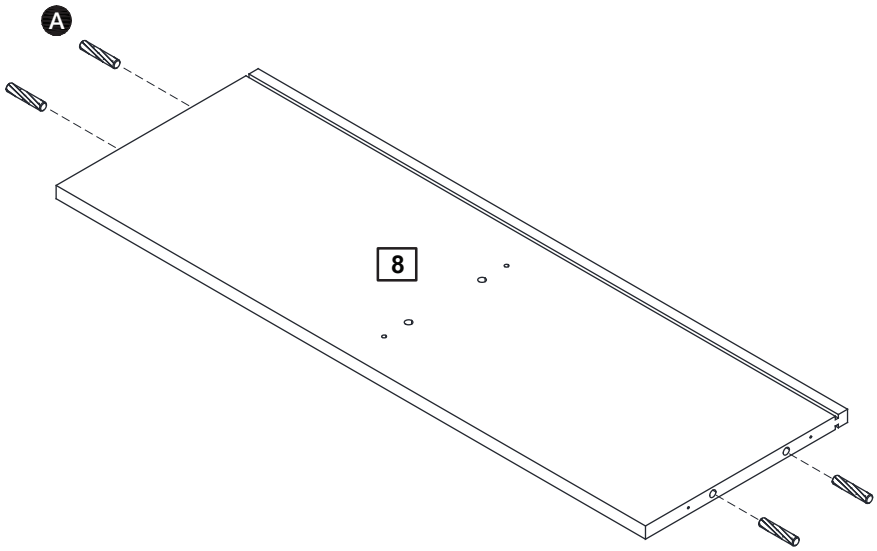


Step 14

Fitting drawer runners

With help, assemble plastic drawer runners (E) to both sides of drawer divider [9] using screws (F).


Insert short wooden dowels (A) into the side of drawer divider [9] as shown.

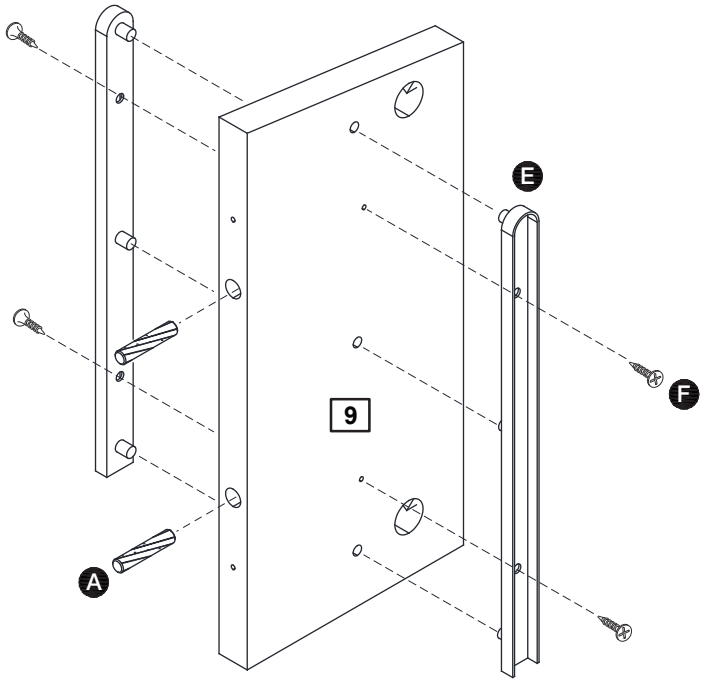

Step 15

Preparing panels

With help, assemble upper shelf 8 to drawer divider 9 using screws D .

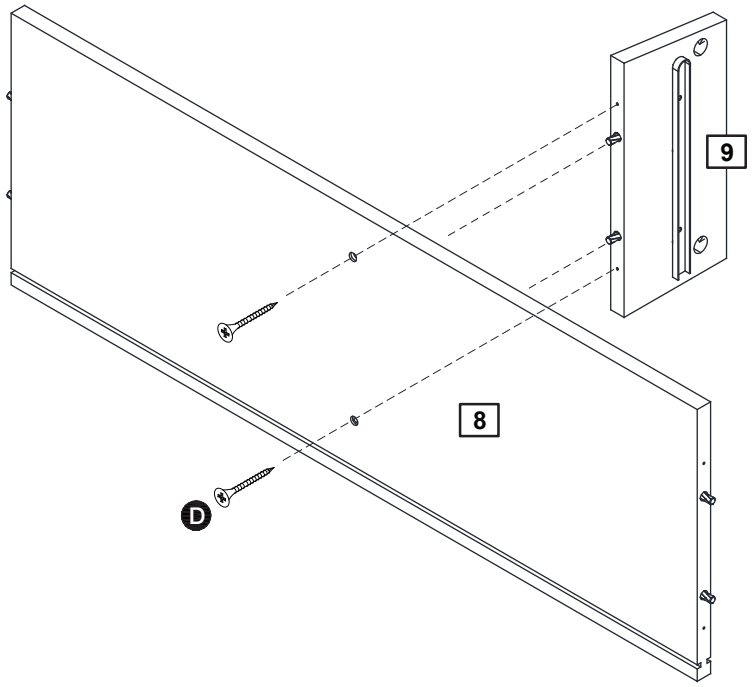


Step 16

Preparing panels

Insert short wooden dowels A into each end of drawer shelf 10 .

Screw metal dowels B into drawer shelf 10 as shown.

Note: Screw metal dowels as far as shown. Do not overtighten.

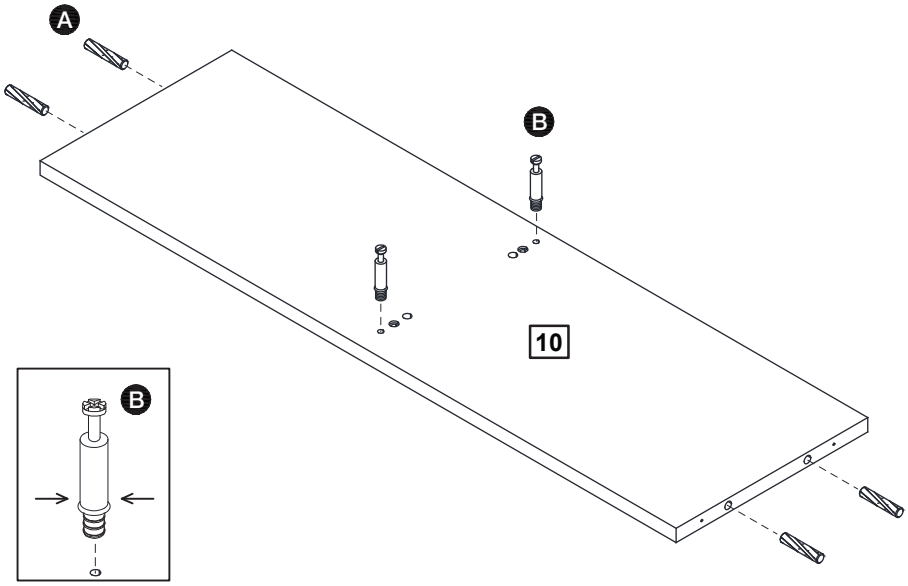


Assembly Instructions

Step 17

Preparing panels


Insert long wooden dowels (V) into middle divider [11] as shown.

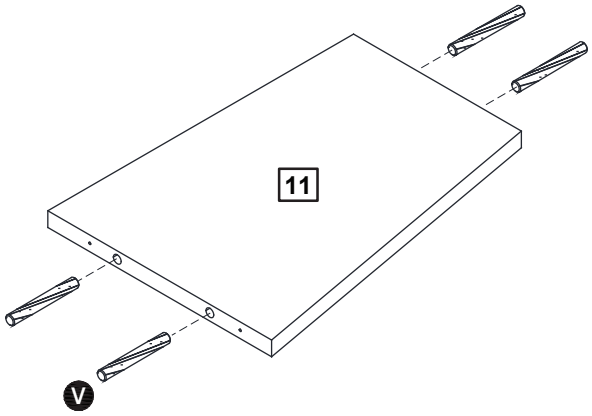

Step 18

Preparing panels

With help, assemble drawer shelf [10] to middle divider [11] using screws (D) .

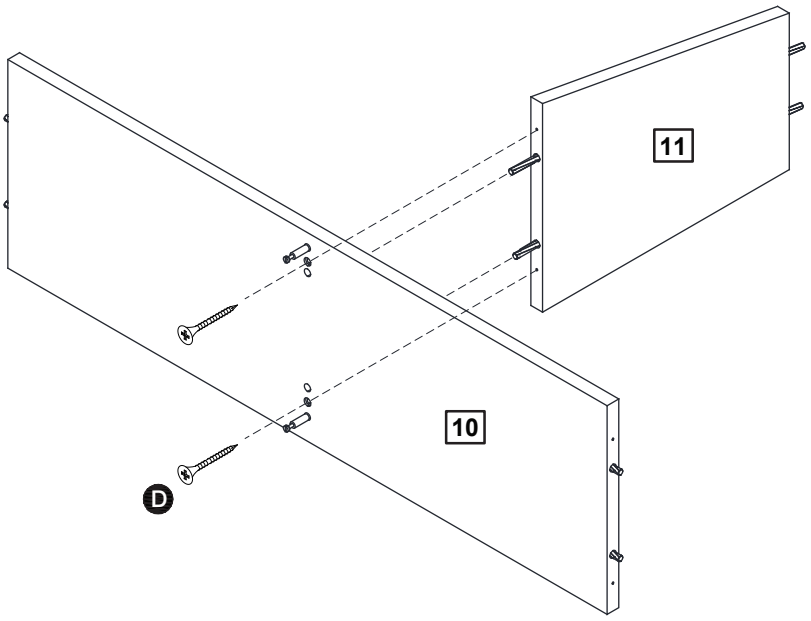


Step 19

Preparing panels

With help, locate the drawer divider [9] and upper shelf [8] assembly, onto drawer shelf [10].

Insert large locking nuts Ⓒ into the holes in one side of drawer divider [9] .


Turn locking nuts Ⓒ clockwise to secure.

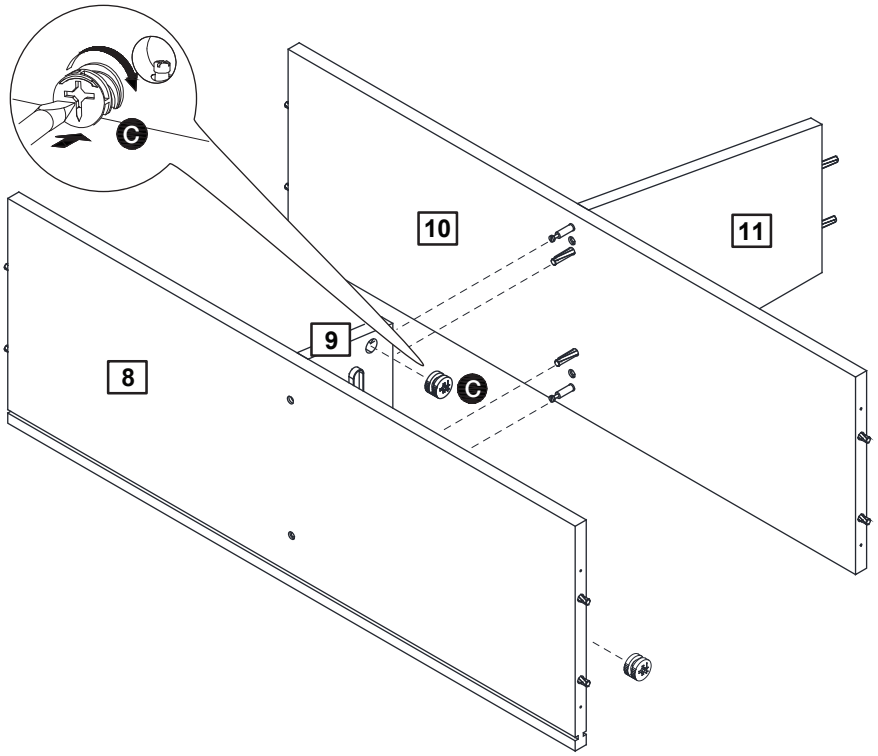

Step 20

Preparing panels

With help, assemble middle divider [11] ,to the top shelf assembly ([7] [6] [5]) using screws Ⓓ .

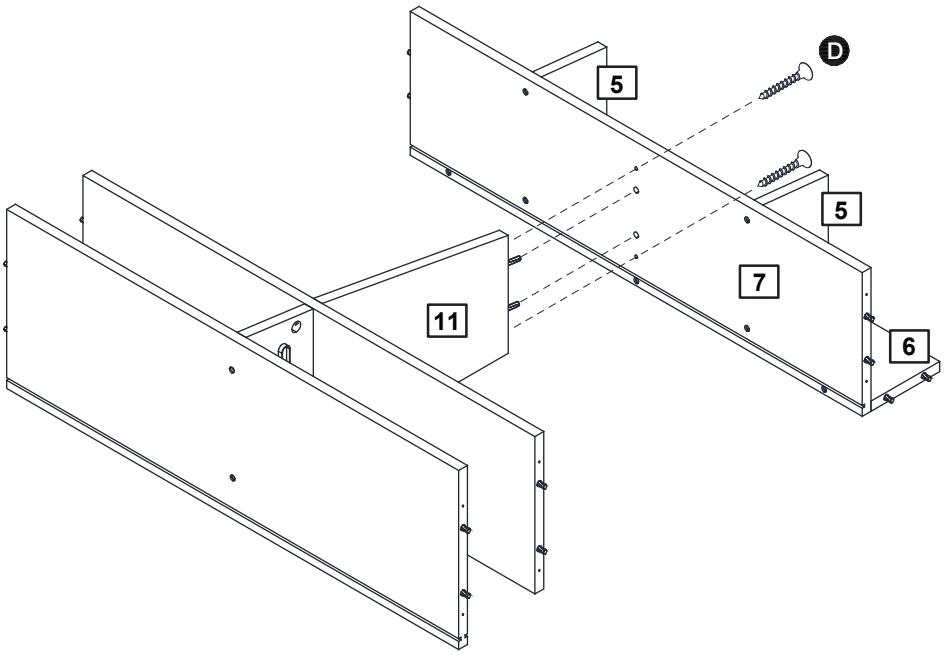


Assembly Instructions

Step 21

Preparing panels

With help, assemble plastic drawer runners E to left and right side panels 12 and 13, using screws F as shown.

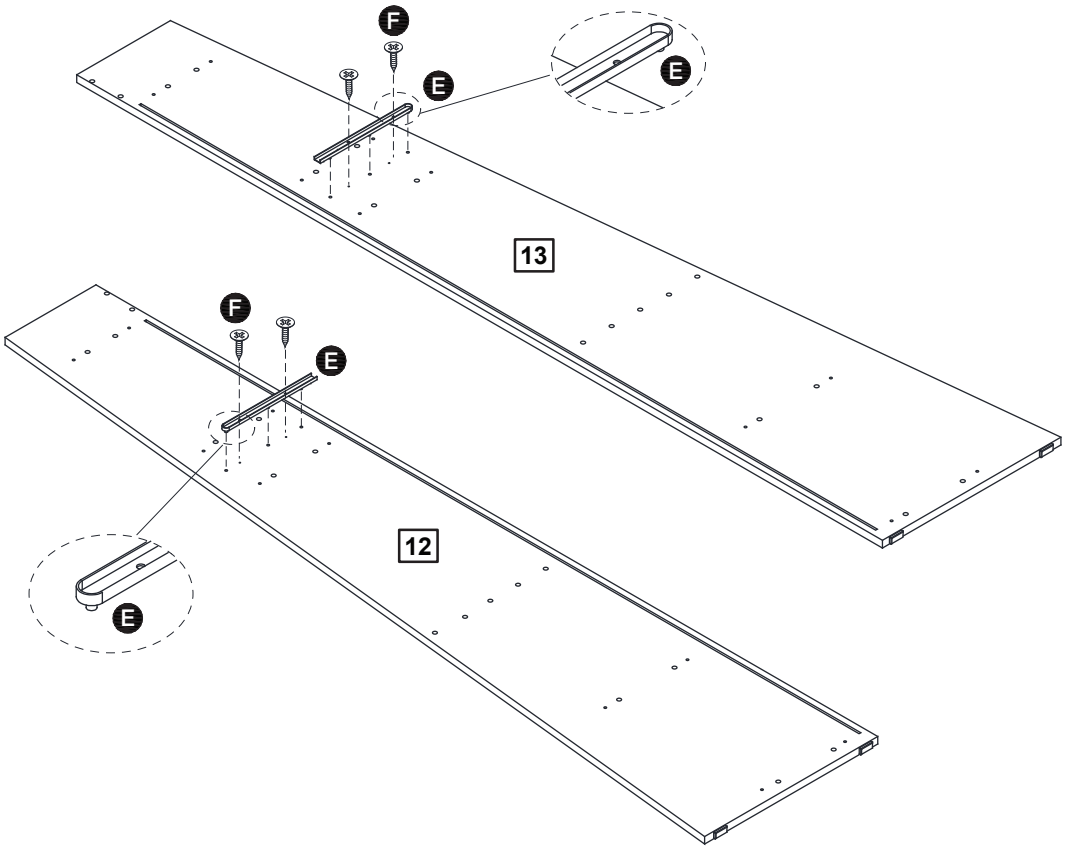


Step 22

Assembling side panel

Carefully align all sub-assemblies together as shown.

With help, locate left side panel 13 into position and secure using fixings D G and H as shown.

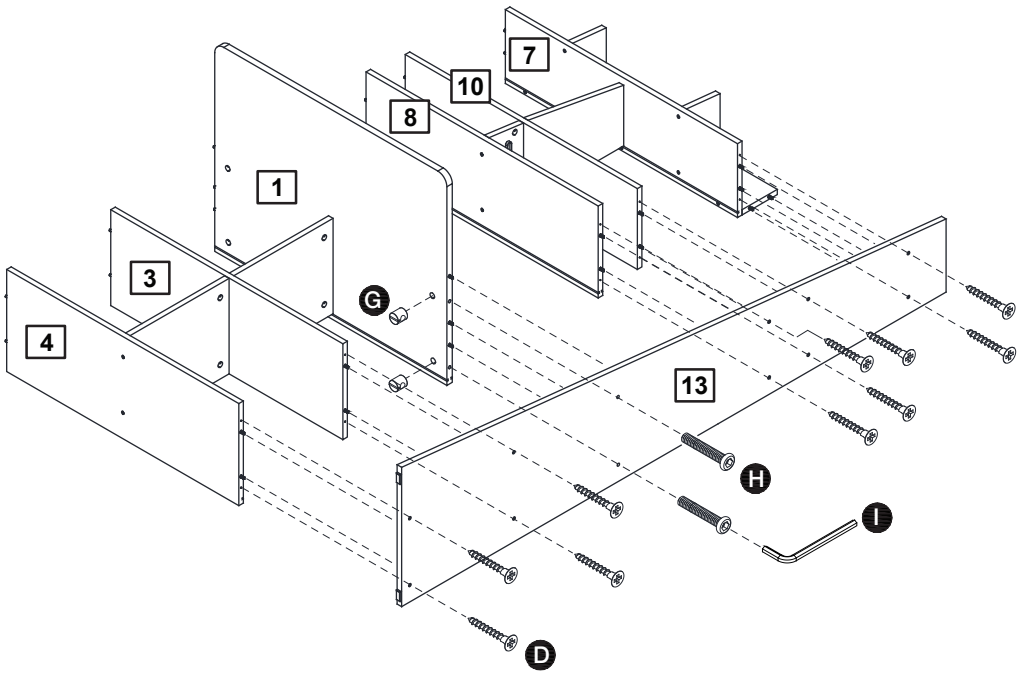

Step 23


Fitting back panels

With help, carefully turn the wall desk over onto it's side as shown.

Warning: The wall desk is heavy. Lift with care.

With help, slide lower back panels **20** , middle back panel **21** and upper back panel **22** into position as shown.


Insert plastic trim **J** in between lower back panels **20** as shown.

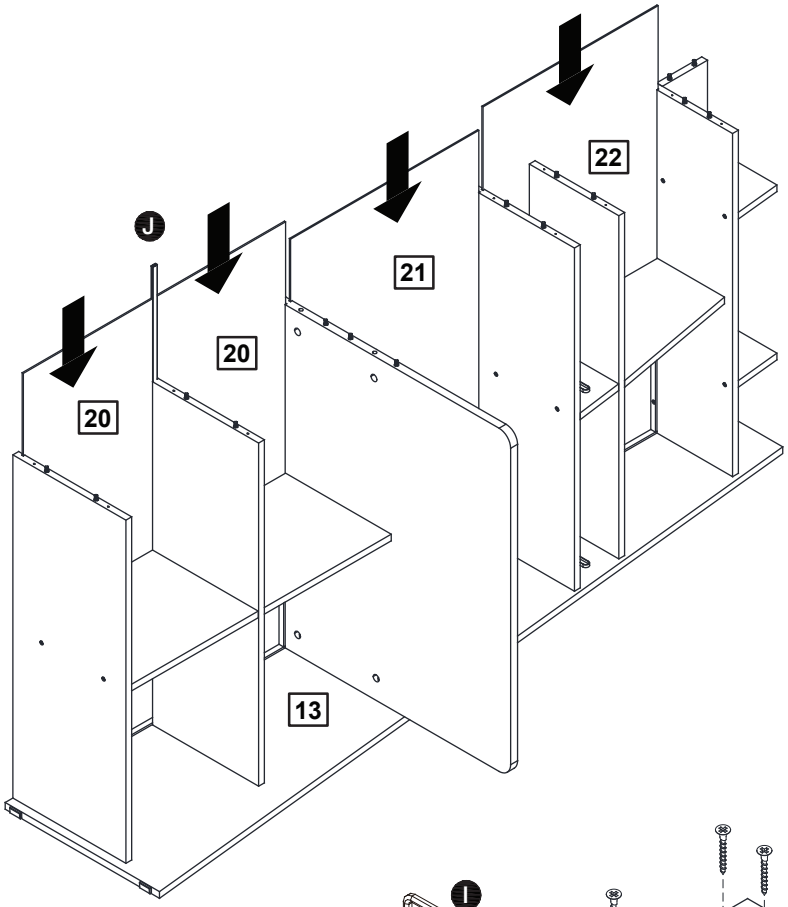

Step 24

Assembling side panel


With help, locate right side panel **12** into position and secure using fixings **D** **G** and **H** as shown.

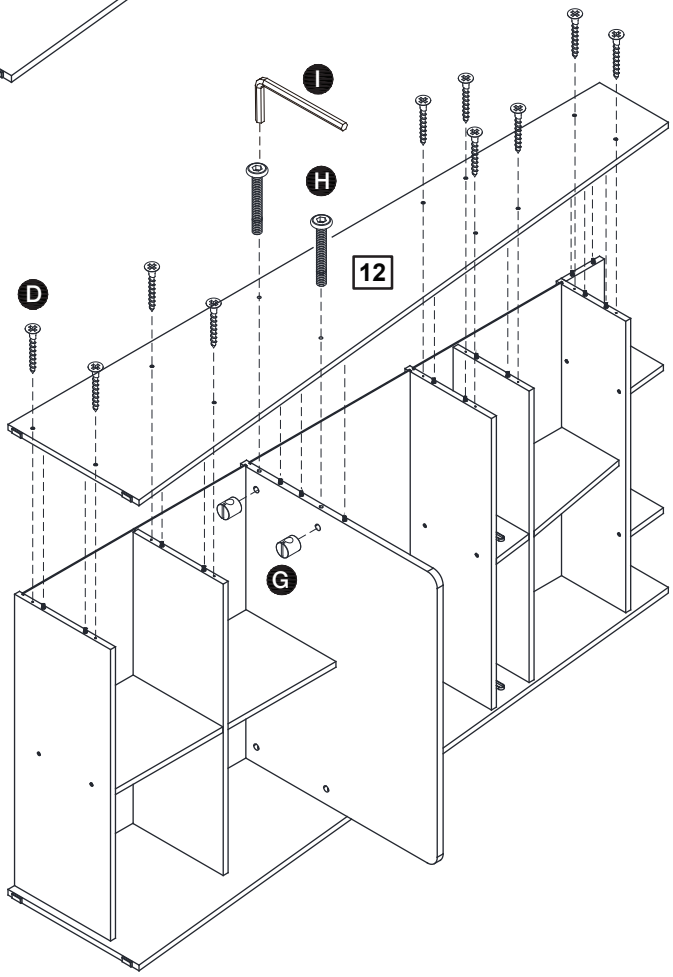

Step 25

Fitting divider

Locate upper divider 14 into the central position at the top of the unit and secure from behind using screws D.

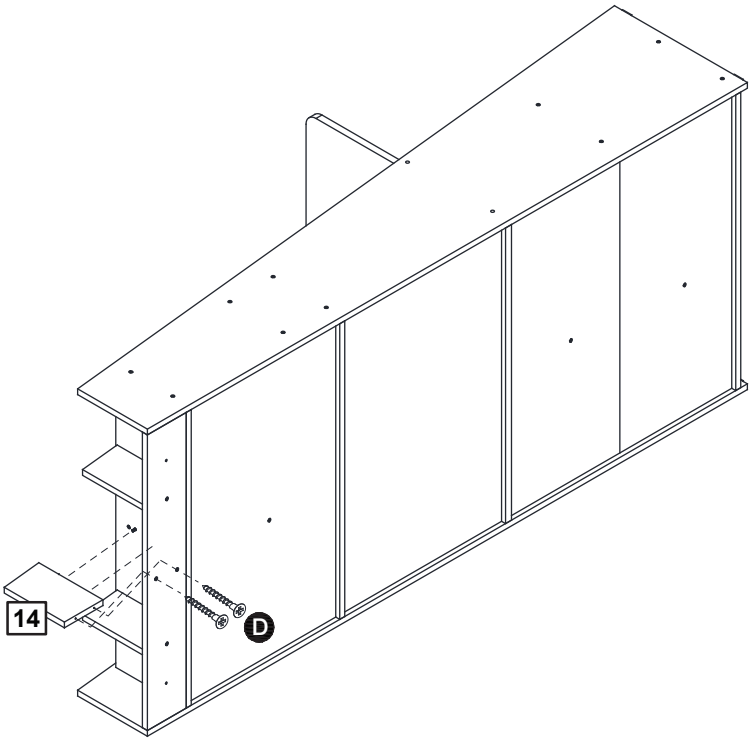

Step 26


Securing back panels

With help , stand the wall desk upright.

Warning: The desk is heavy. Lift with care .

a: Secure back panels 20 and 22 using screws U as shown.

a:

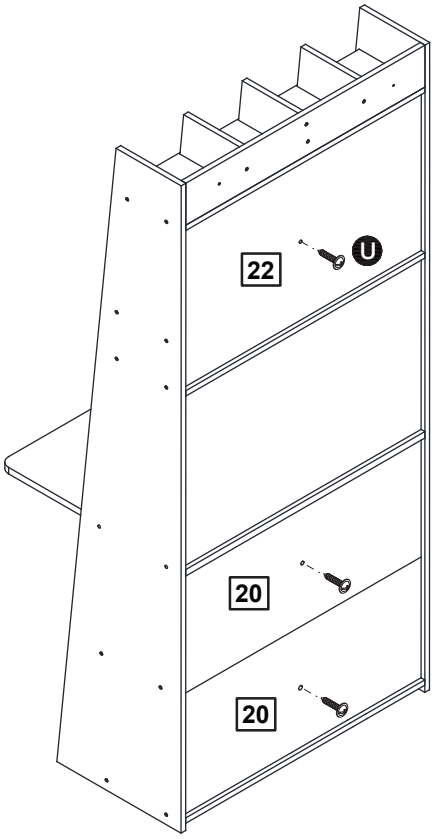


b: Ensure the desk is straight and square.

Fit plastic brackets O around the edges of all back panels as shown.

Use screws P to secure.

b:

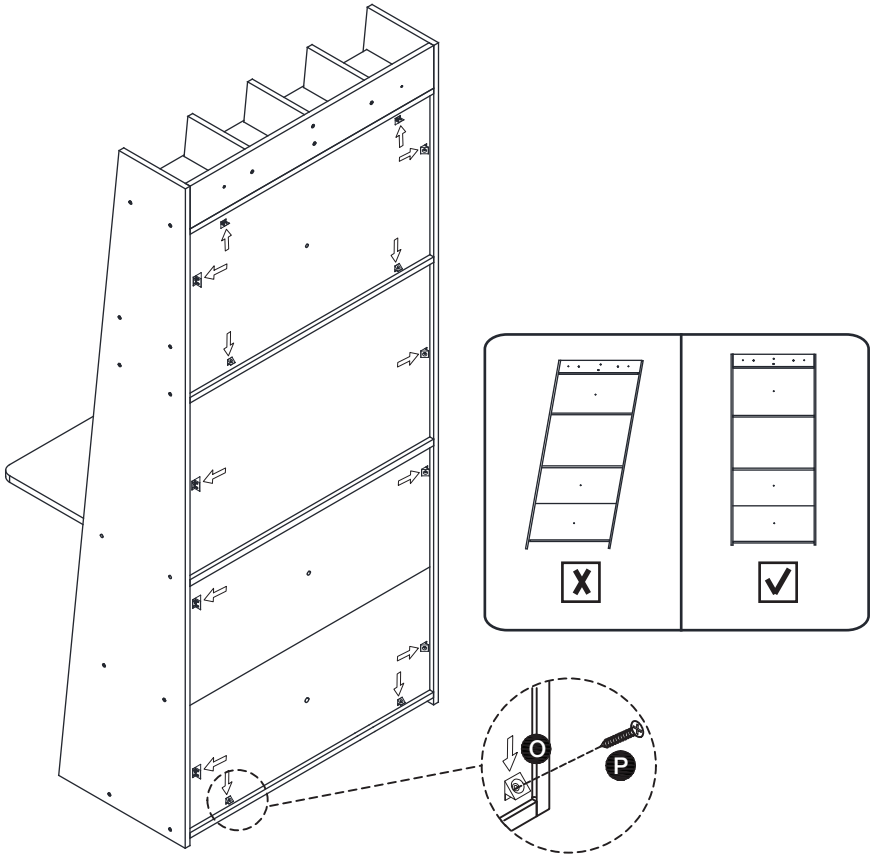

Step 27

Fixing to wall

It is recommended that the wall desk is fixed to the wall to ensure stability.

Assemble wall straps Q to the back of top horizontal rail 6 using screws R .

With help, move the unit to the desired location.


Mark the fixing hole locations on the wall and remove the unit.

Drill the wall and fit suitable plugs for your wall type.

Note: Wall plugs are not supplied.

Warning: Before drilling. Check the wall for hidden pipes or cables.Re-position the unit and secure the wall straps to the wall.

Note: Screws are not supplied.

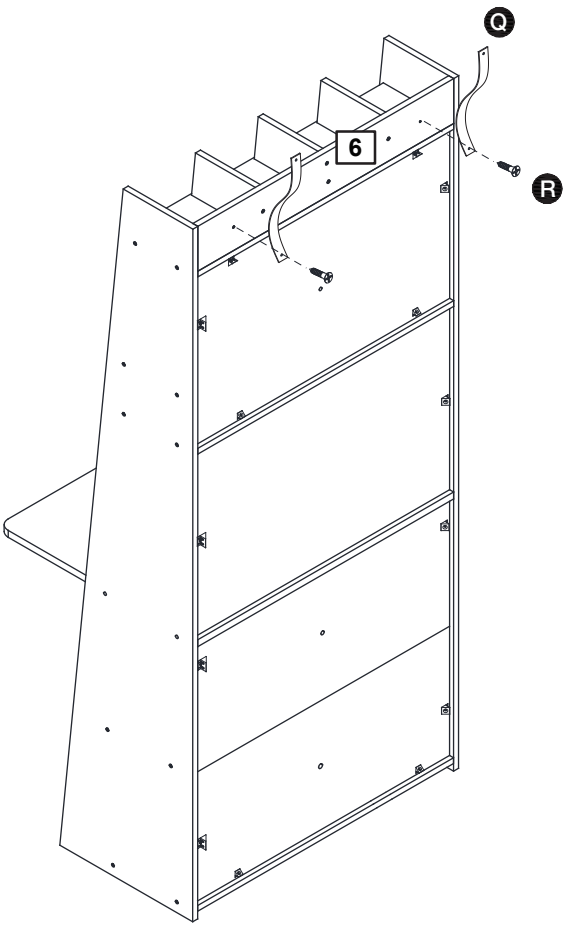

Step 28

Assembling drawers

a: Assemble drawer back 17 in between drawer sides 15 and 16 using screws D.

Note: Ensure the grooves are correctly aligned at the bottom as shown.

b: Screw metal dowels B into drawer front 18 as shown.

Note: Screw metal dowels as far as shown. Do not overtighten.

Assemble handle L to drawer front 18 using screw M as shown.

c: Side drawer base 19 into the grooves as shown .


Locate drawer front 18 into position .

Insert small locking nuts K into the holes in drawer sides 15 and 16 .

Turn locking nuts K clockwise to secure.


Repeat for both drawers.

a:

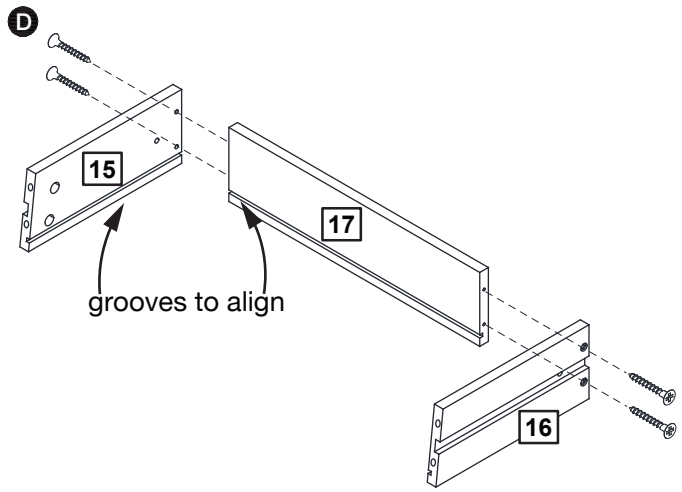


x 2

b:

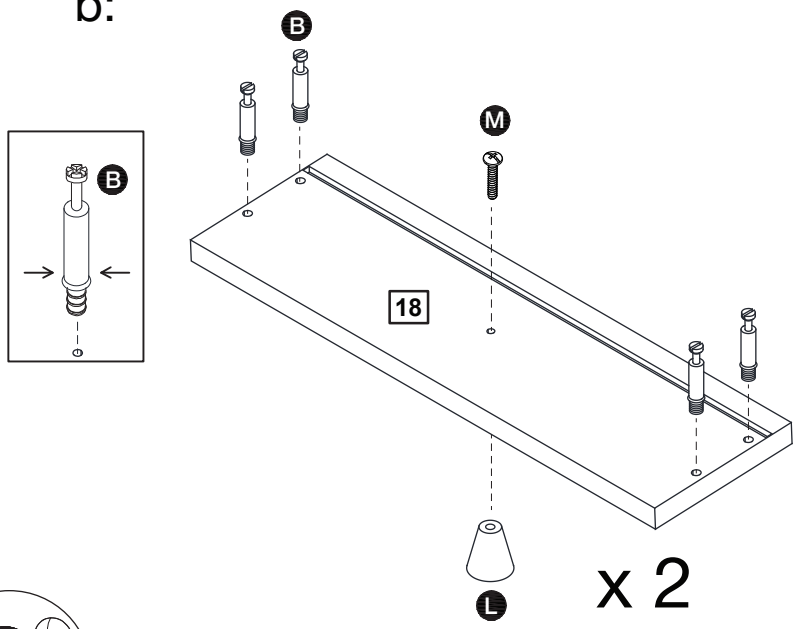

x 2

c:

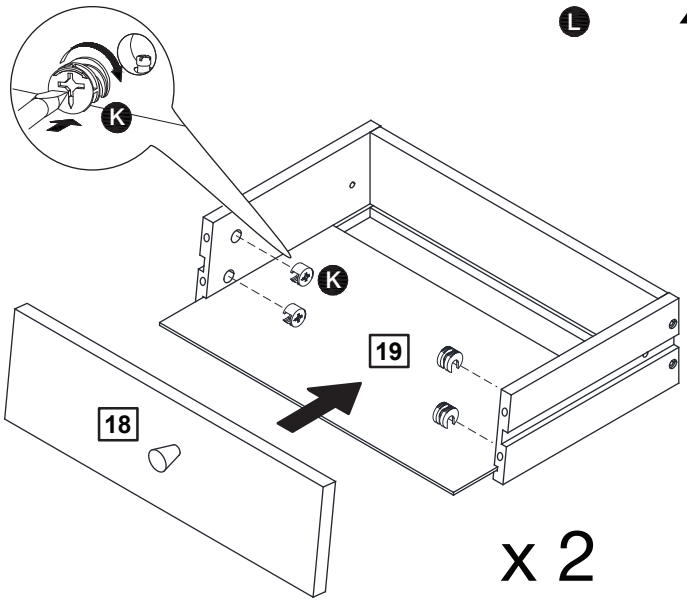


x 2

Step 29

Locating drawers

Locate both drawers into position.

Fit plastic drawer stops (N), into the holes on the inside of drawer sides [15] and [16] as shown.

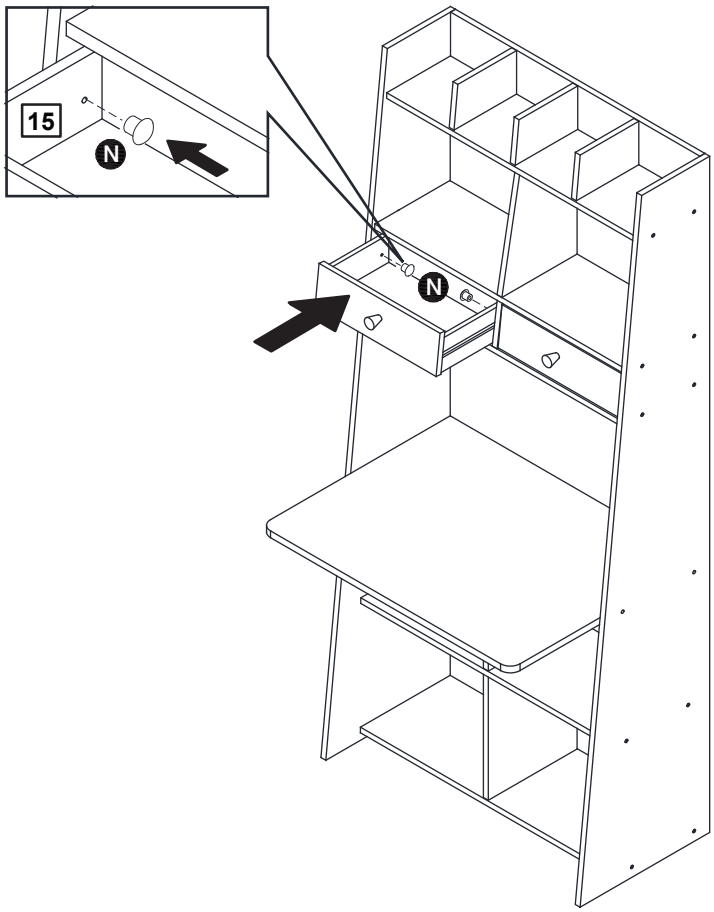


Step 30

Covering fixing holes


a: Stickers (S) can be used to cover the fixing holes as shown.

a:

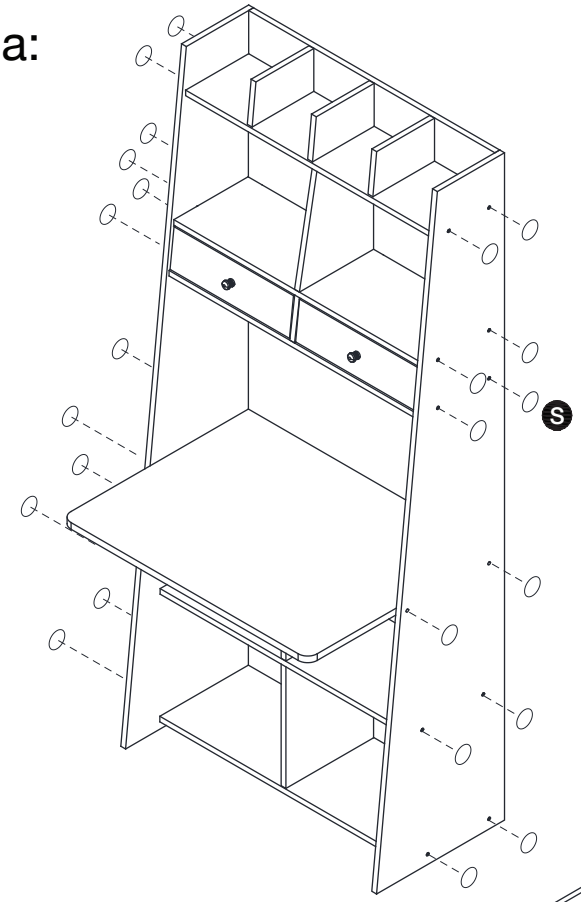

b: Stickers (T) can be used to cover the fixing holes as shown.

b:

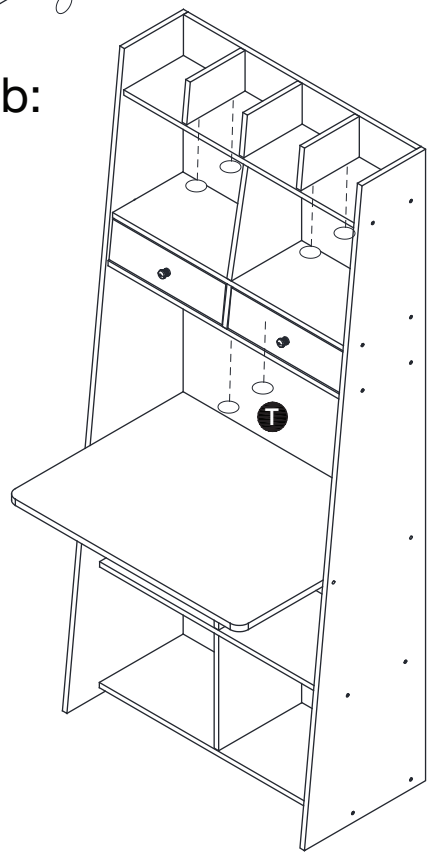

Assembly is complete.