

# Athina - 500 Drawer Unit

Assembly Instructions - Please keep for future reference

608/0804

608/0921

608/0866

608/0983

608/2974



## Dimensions

Width - 50cm

Depth - 59cm

Height - 89.5cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 34kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the brackets supplied.

- Dispose of all packaging carefully and responsibly.

## Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the panels listed below

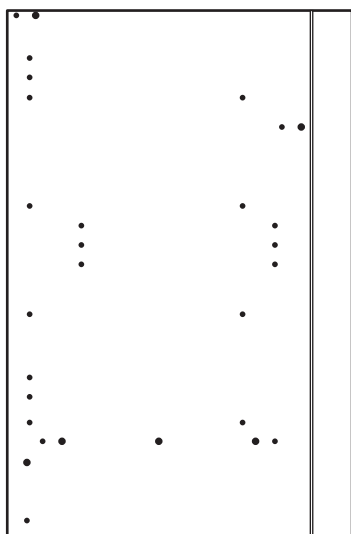


**1** Left Side (D0315B)  
(870 X 570mm)

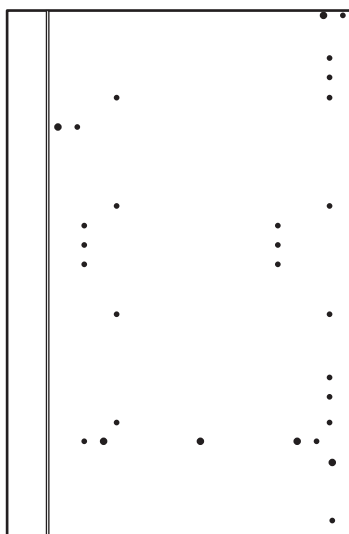


**2** Right Side (D0316B)  
(870 x 570mm)




**3** Top (D0338A)  
(500 x 590mm)



**4** Base (D0319A)  
(470 X 499mm)




**5** Rail (D0321A)  
(470 x 60mm) x 2




**7** Drawer Front (D0318A)  
(497 x 176mm) x 4




**6** Plinth (D0322A)  
(470 x 150mm)




**8** Drawer Back (W413BCK)  
(422 x 120mm) x 4




**9** Left Drawer Side (W413LH)  
(450 x 120mm) x 4



**10** Right Drawer Side (W413RH)  
(450 x 120mm) x 4



**11** Drawer Base (T413)  
(447 x 433mm) x 4



**12** Back (X739)  
(480 x 533mm)

















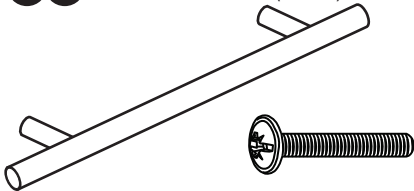


# Components - Fittings


If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<b>A</b>  Wooden dowel (F22) x 12	<b>B</b>  Metal dowel (F901) x 18	<b>C</b>  Large locking nut (F900) x 10
<b>D</b>  Small locking nut (F3) x 8	<b>E</b>  Nail (F51) x 8	<b>F</b>  Bracket (F945) x 4
<b>G</b>  25mm Screw (F50) x 2	<b>H</b>  13mm Screw (F79) x 6	<b>I</b>  13mm Screw (F63) x 16
<b>J</b>  Door Buffer (F137) x 8	<b>K</b>  45mm Screw (F65) x 16	<b>L</b>  13mm Screw (F52) x 16
<b>M a</b>  CR Runner (F133) x 4 <b>M b</b>  CL Runner (F134) x 4 <b>M c</b>  DR Runner (F135) x 4 <b>M d</b>  DL Runner (F136) x 4		<b>N a</b> Handle (F847a) x 4 <b>N b</b> Handle Screw (F847b) x 8 

## Tools required



Rule



Scissors



Cross-head screwdriver



Hammer



Eye protection  
(when using a hammer or drill)



Electric drill

Ruler - Use this ruler to help correctly identify the screws

mm 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

# Assembly Instructions

If you have damaged or missing components, call the  
**Customer Helpline: 08456 400800** quoting the reference  
numbers below



## Step 1

### Prepare 4 drawer fronts

Screw 2 metal dowels **B** into the holes shown on the back of each drawer front **7**.

**Note:** Tighten metal dowels up fully against the panels.

Stick a drawer buffer **J** into the top corners of each drawer front **7**.


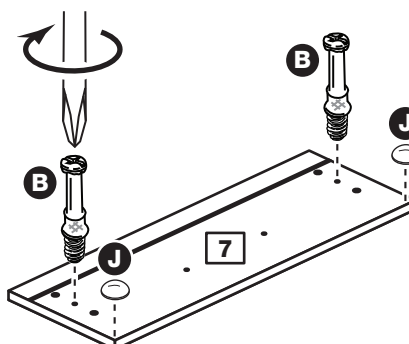



## Step 2

### Prepare the drawer sides

Insert a small locking nut **D** into the hole shown on the left drawer side **9** and right drawer side **10**.


**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

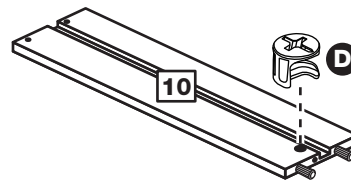

## Step 3

### Assemble drawer sides and back


Fit the left drawer side **9** and right drawer side **10** to the drawer back **8** using 4 screws **K**.

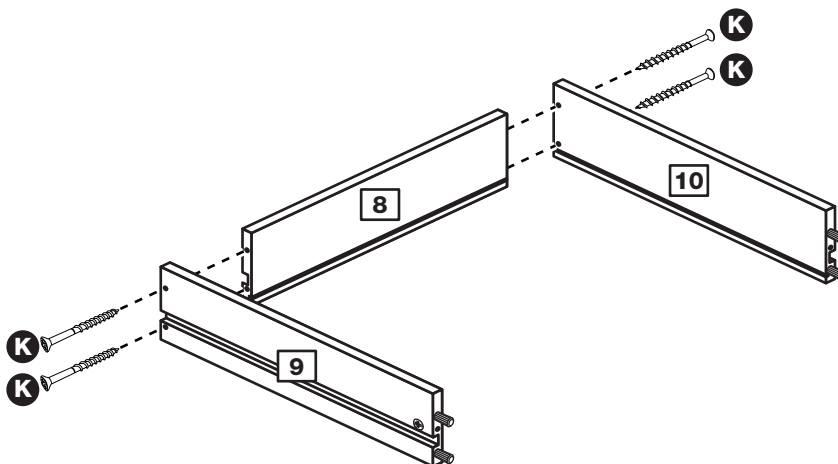

## Step 4

### Fit drawer base

Slide the drawer base **11** along the grooves of the drawer sides **9** and **10** into the groove of the drawer back **8**.

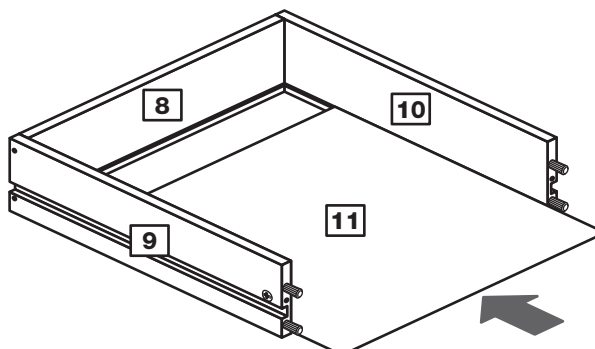


# Assembly Instructions

## Step 5

### Attach drawer front

Turn the drawer assembly over and push onto the back of the drawer front **7**.


**Note:** Turn locking nuts **D** clockwise to secure panels - more than 1/2 a turn.

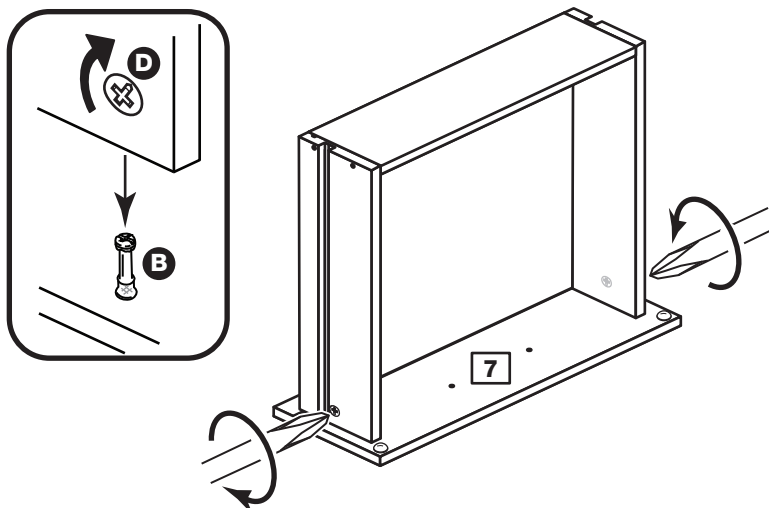

## Step 6

### Attach 2 handles

Attach each handle **N a** to the drawer fronts **7** using 2 screws **N b**.

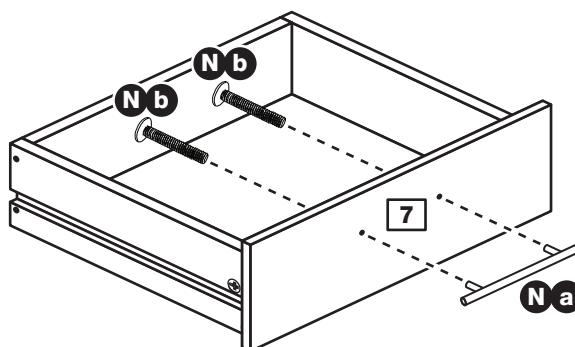


## Step 7

### Fit runners to the drawers

Turn the 4 drawer assemblies over.

Fit runner **M c**, marked with 'DR', to the bottom edge of the right drawer side **10**, making sure that it is pushed up against the back of the drawer front **7**. Use a bradawl to mark the fixing positions, then secure with 2 screws **I**.

Fit runner **M d**, marked 'DL', to the bottom edge of the left drawer side **9** using the same method.

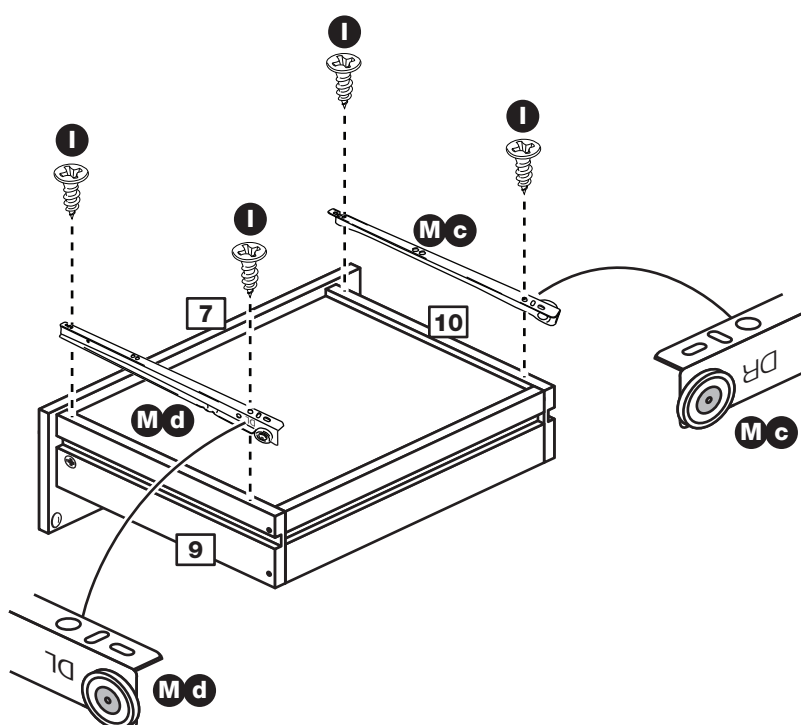

# Assembly Instructions

## Step 8



### Fit 2 brackets to the left side

Fit a bracket **F** to the left side **1**, 100mm in from the back edge, see diagram.

Fit another bracket **F** to the left side **1**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

**Note:** The brackets must be flush with the edges of the panel.

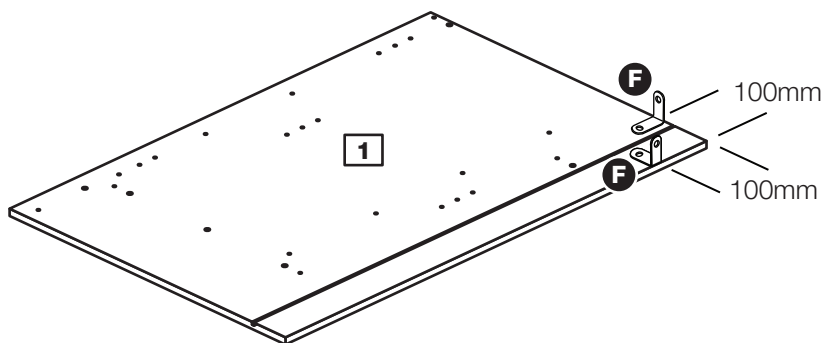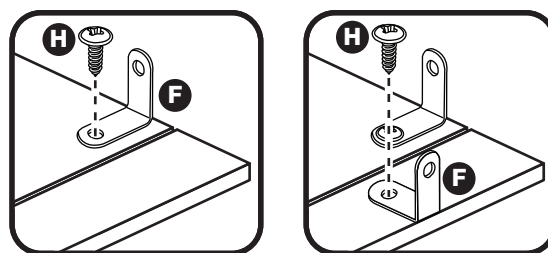


## Step 9

### Fit runners to the left side

Fit the 4 runners **M b** marked 'CL' to the left side **1**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd screw **L** uses the 4th hole in from the back of the runner.

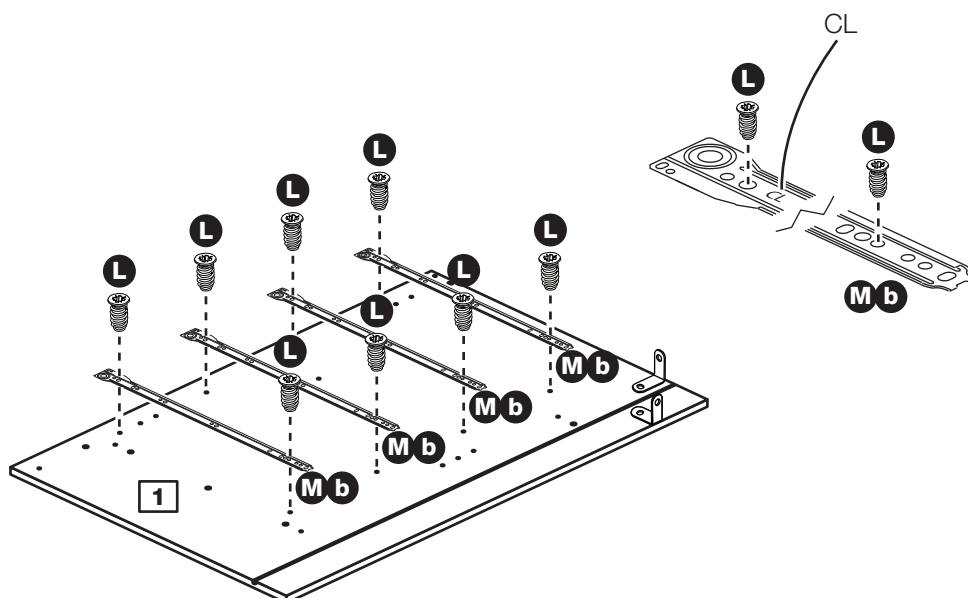


## Step 10

### Fit metal dowels to the left side

Screw 5 metal dowels **B** into the holes shown on the left side **1**.

**Note:** Tighten metal dowels up fully against the panels.

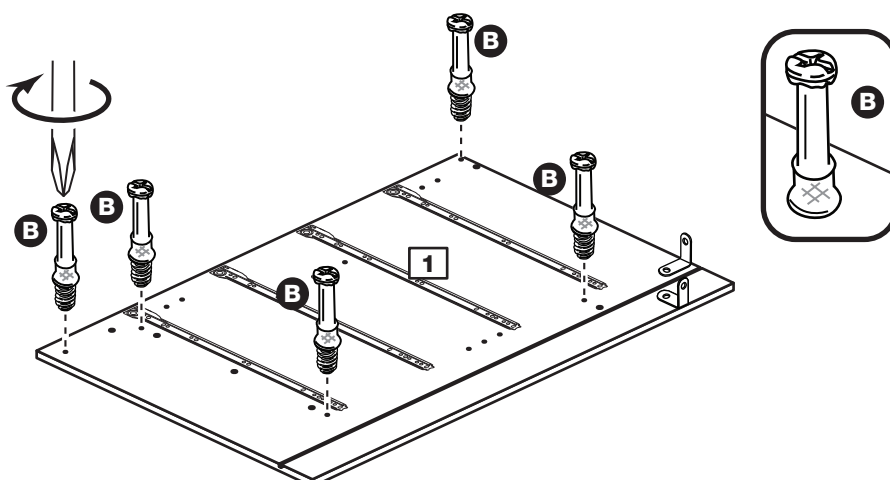

# Assembly Instructions

## Step 11


### Fit 2 brackets to the right side

Fit a bracket **F** to the right side **2**, 100mm down from the back edge, see diagram.


Fit another bracket **F** to the right side **2**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

**Note:** The brackets must be flush with the edges of the panel.



100mm 100mm

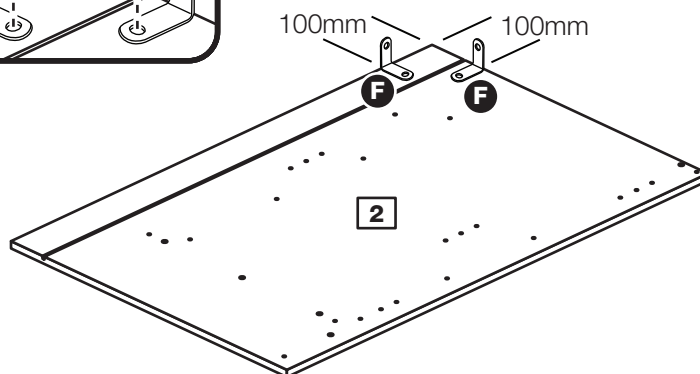


## Step 12

### Fit runners to the right side

Fit the 4 runners **Ma** marked 'CR' to the right side **2**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd screw **L** uses the 4th hole in from the back of the runner.

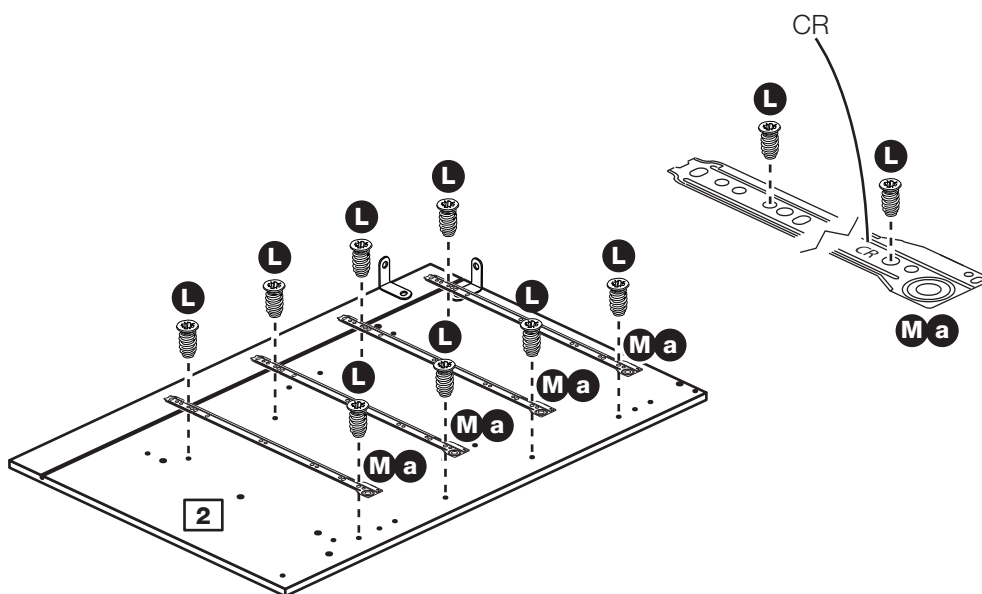


## Step 13

### Fit metal dowels to the right side

Screw 5 metal dowels **B** into the holes shown on the right side **2**.

**Note:** Tighten metal dowels up fully against

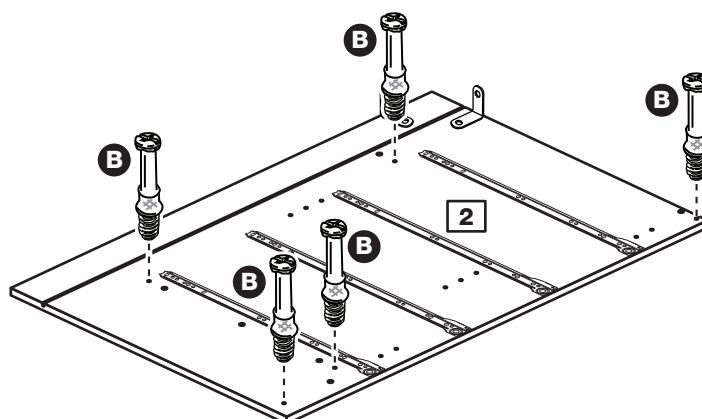



# Assembly Instructions

## Step 14




### Prepare the base

Insert 4 large locking nuts **C** into the base **4** as shown.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

Tap 6 wooden dowels **A** into the base **4** as shown.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

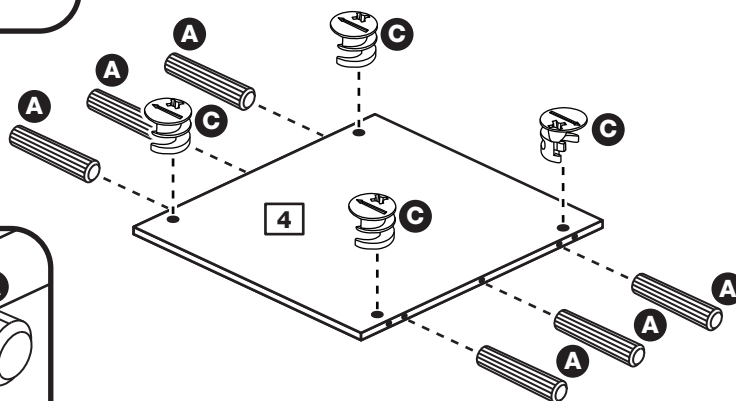



## Step 15

### Fit the base to the right side

Push the base **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the base **4**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

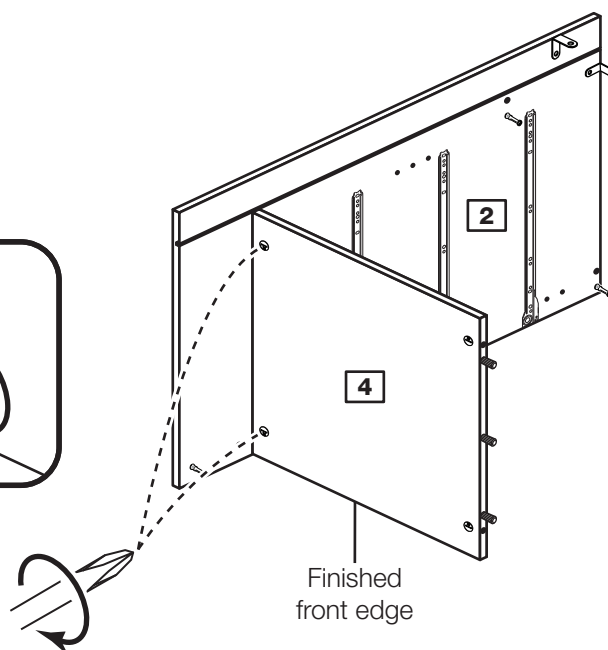


## Step 16

### Prepare the 2 rails and plinth

Insert 2 large locking nuts **C** into each of the 2 rails **5** and plinth **6** as shown.

Tap 2 wooden dowels **A** into the 2 rails **5** and plinth **6** as shown.

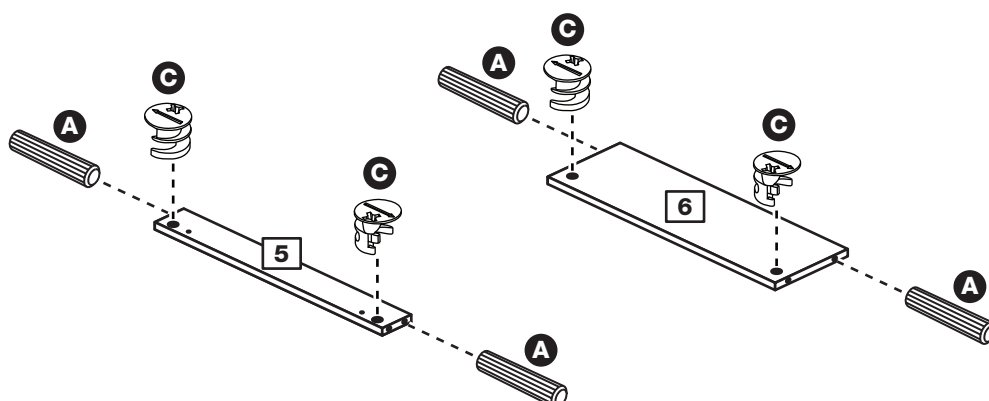

# Assembly Instructions

## Step 17


### Fit the 2 rails and plinth

One at a time, push the 2 rails **5** and plinth **6** onto the right side **2** as shown.

Use a screwdriver to tighten the 3 large locking nuts **C** fitted to the 3 panels, as shown.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

**Note:** Support the rail near the back edge of the unit until the left side has been fitted in the next stage.

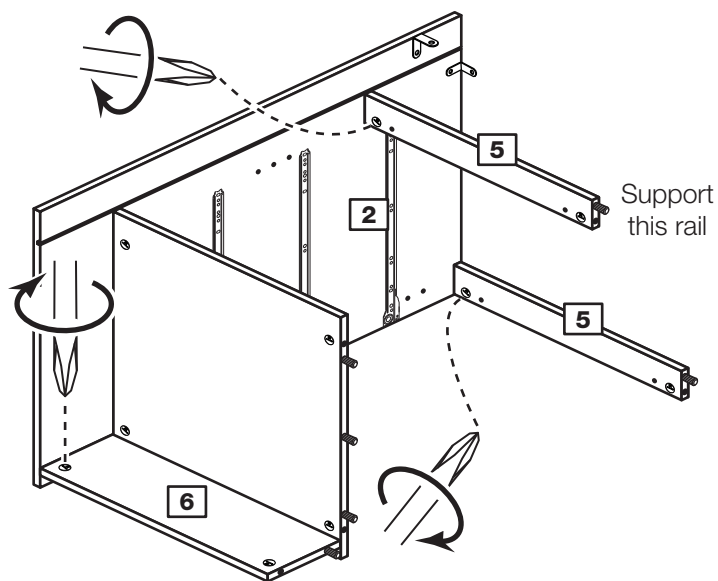


## Step 18

### Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **C** fitted to the base **4**, rails **5** and plinth **6**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

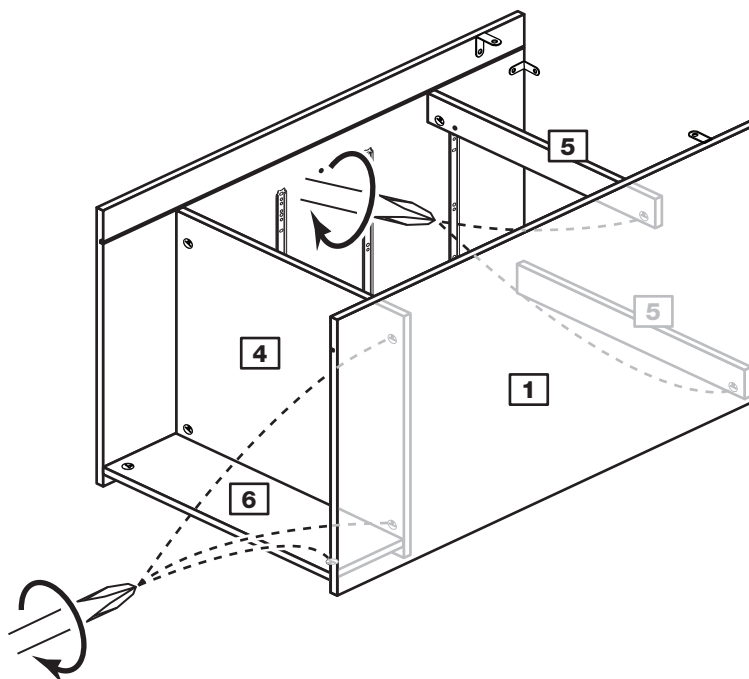

# Assembly Instructions

## Step 19

### Fit the back



**a:** Square up the unit by making sure that measurement **x to x** equals **y to y**.

**b:** Slide the back **12** into the grooves along the left **1** and right **2** sides, as shown.

**c:** Secure the back **12** by tapping 4 nails **E** down into the back edge of the base **4** and 4 nails **E** into the back edge of the rail **5**.

**Stand the unit up for the next stage.**

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

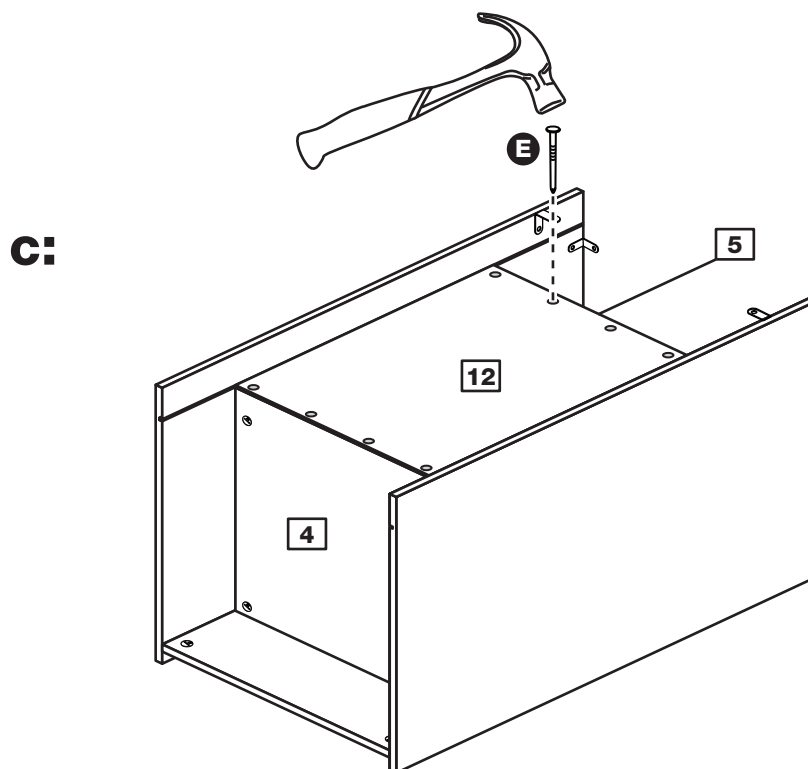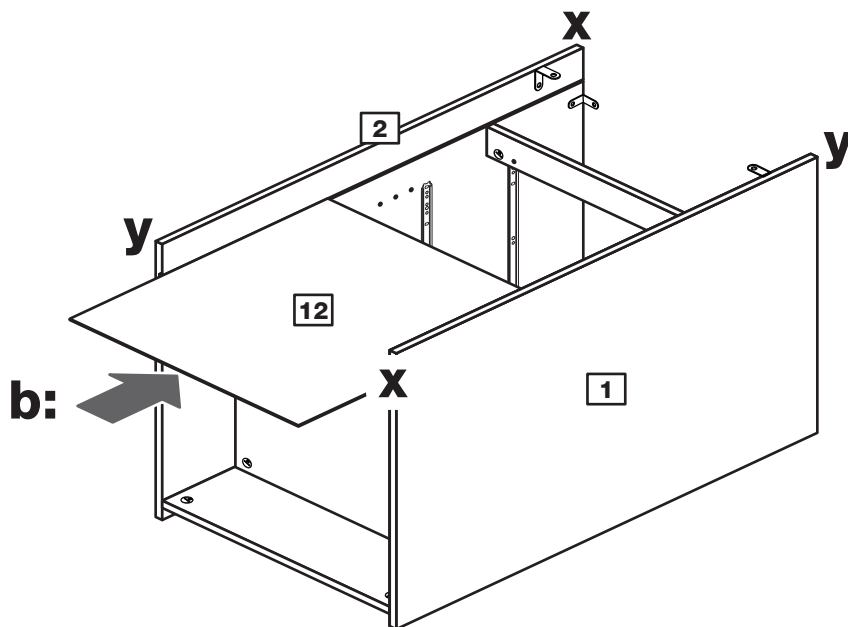


# Assembly Instructions

## Step 20

### Fit the top

Position the top **3** onto the unit, making sure that the back edge is flush with the back edge of the sides **1** and **2**.


Secure the top **3** using screw **H** through the 2 brackets **F** fitted at the top edge of the side panels **1** and **2**.

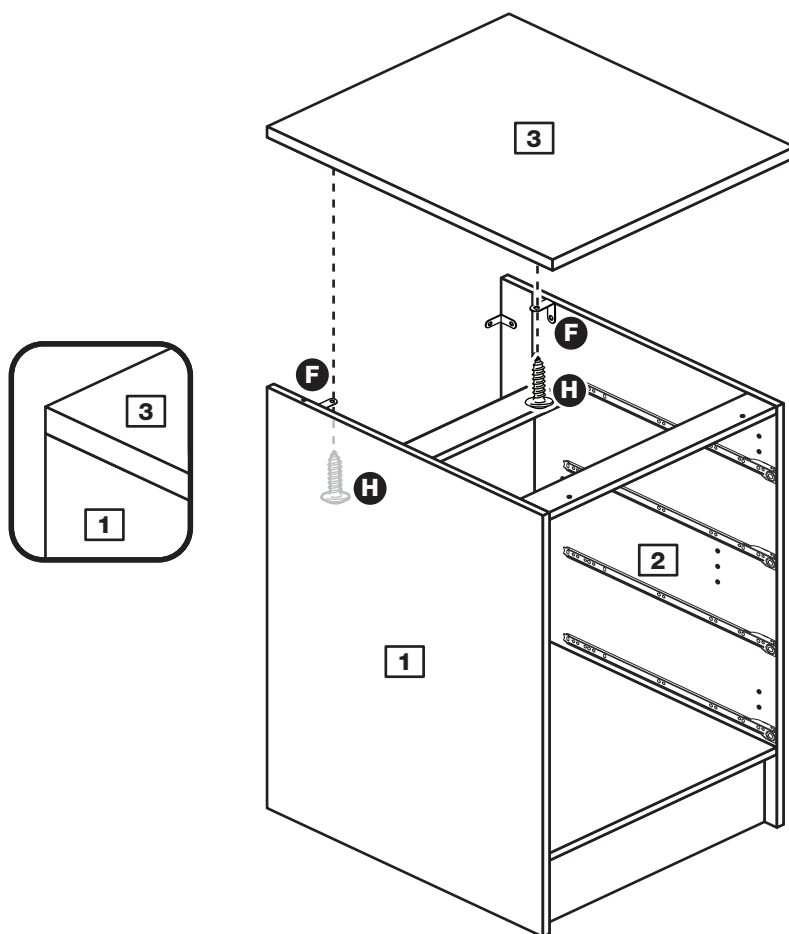

## Step 21

### Secure the front of the top

To secure the front of the top **3**, screw up through the 2 holes in the rail **5** at the front of the unit using screws **G**.

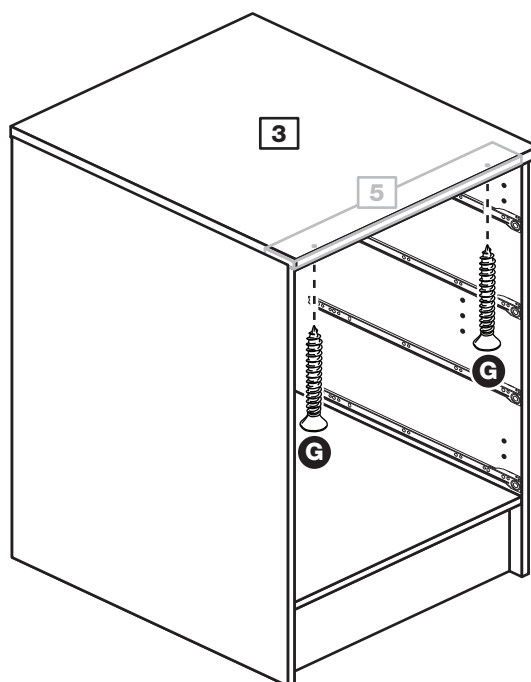

# Assembly Instructions

## Step 22


### Secure the unit to the wall

Using the brackets **F** fitted to the back edge of the sides **1** and **2** screw the unit to the wall.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the Unit to the wall.





**Warning:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

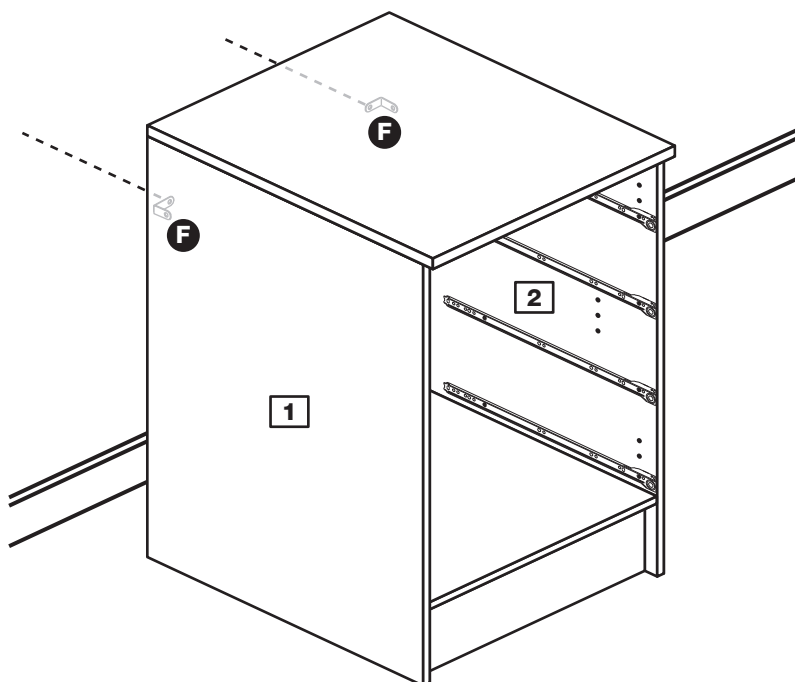

## Step 23

### Fit the drawers

Slide the wheels on the runners fitted to the drawer sides over the wheels on the runners fitted to the side panels and push the drawer into position.

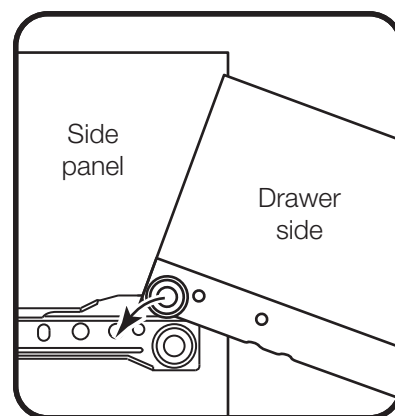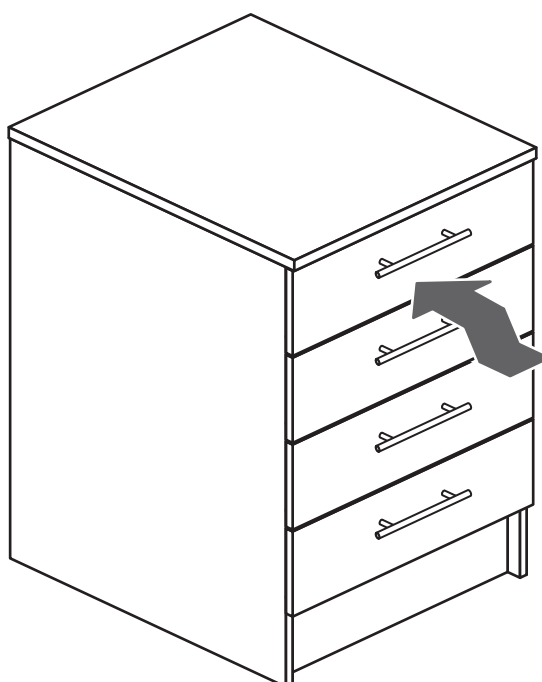


# Assembly Instructions

## Step 24

**Assembly is complete**



**Warning:** The unit is heavy. Lift with care.

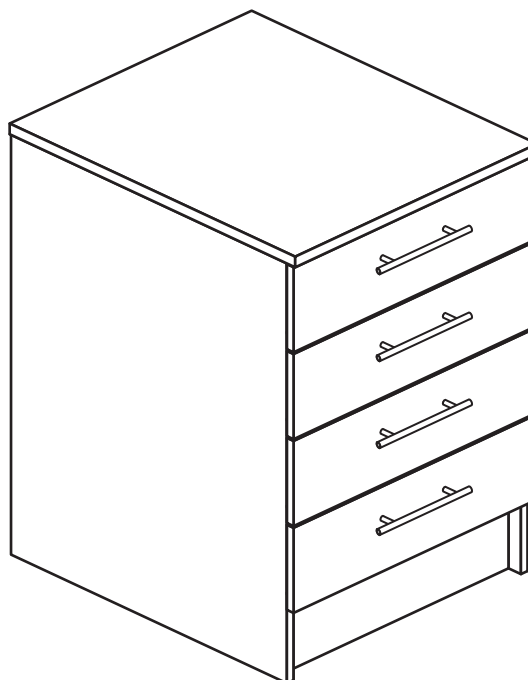

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW







# Athina - 500 Drawer Unit

Assembly Instructions - Please keep for future reference

608/0804

608/0921

608/0866

608/0983

608/2974



## Dimensions

Width - 50cm

Depth - 59cm

Height - 89.5cm



**MADE IN  
BRITAIN**

**Important** - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800**



# Safety and Care Advice

**Important** - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 34kgs. Please lift with care.
  - Check you have all the components and tools listed on pages 2 and 3.
  - Remove all fittings from the plastic bags and separate them into their groups.
  - Keep children and animals away from the work area, small parts could choke if swallowed.
  - Make sure you have enough space to layout the parts before starting.
  - Do not stand or put weight on the product, this could cause damage.
  - Assemble the item as close to its final position (in the same room) as possible.
  - Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).
- 
- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
  - **Safety note:** It is recommended that this unit is secured to a wall using the brackets supplied.
  - Dispose of all packaging carefully and responsibly.

## Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

**Note:** If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


# Components - Panels

If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below

Please check you have all the panels listed below

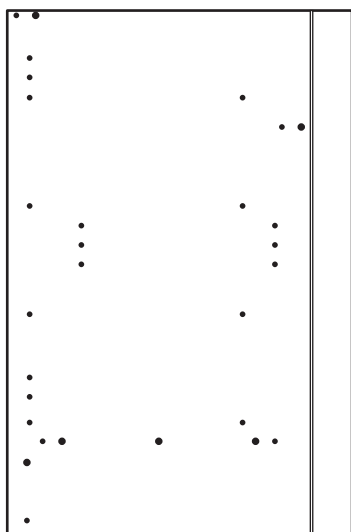


**1** Left Side (D0315B)  
(870 X 570mm)

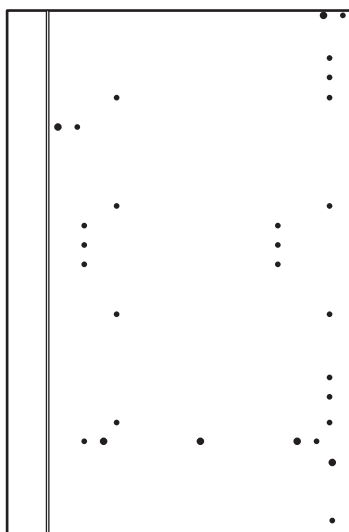


**2** Right Side (D0316B)  
(870 x 570mm)




**3** Top (D0338A)  
(500 x 590mm)



**4** Base (D0319A)  
(470 X 499mm)



**5** Rail (D0321A)  
(470 x 60mm) x 2



**7** Drawer Front (D0318A)  
(497 x 176mm) x 4



**6** Plinth (D0322A)  
(470 x 150mm)




**8** Drawer Back (W422-120)  
(422 x 120mm) x 4




**9** Left Drawer Side (W450-120LH)  
(450 x 120mm) x 4



**10** Right Drawer Side (W450-120RH)  
(450 x 120mm) x 4



**11** Drawer Base (T413)  
(447 x 433mm) x 4



**12** Back (X739)  
(480 x 533mm)




















# Components - Fittings


If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
numbers below

Please check you have all the fittings listed below

**Note:** The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.
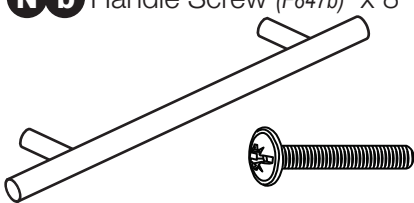
<b>A</b>  Wooden dowel (F22) x 12	<b>B</b>  Metal dowel (F901) x 18	<b>C</b>  Large locking nut (F900) x 10
<b>D</b>  Small locking nut (F3) x 8	<b>E</b>  Nail (F51) x 8	<b>F</b>  Bracket (F945) x 4
<b>G</b>  25mm Screw (F50) x 2	<b>H</b>  13mm Screw (F79) x 6	<b>I</b>  13mm Screw (F63) x 16
<b>J</b>  Door Buffer (F137) x 8	<b>K</b>  Knock-in Peg (F171GY) x 16	<b>L</b>  13mm Screw (F52) x 16
<b>M a</b>  CR Runner (F133) x 4 <b>M b</b>  CL Runner (F134) x 4 <b>M c</b>  DR Runner (F135) x 4 <b>M d</b>  DL Runner (F136) x 4		<b>N a</b> Handle (F847a) x 4 <b>N b</b> Handle Screw (F847b) x 8 

## Tools required



Rule



Scissors



Cross-head screwdriver



Hammer



Eye protection  
(when using a hammer or drill)



Electric drill

Ruler - Use this ruler to help correctly identify the screws

mm 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

# Assembly Instructions

If you have damaged or missing components, call the  
**Customer Helpline: 03456 400800** quoting the reference  
 numbers below


## Step 1

### Prepare 4 drawer fronts

Screw 2 metal dowels **B** into the holes shown on the back of each drawer front **7**.

**Note:** Tighten metal dowels up fully against the panels.

Stick a drawer buffer **J** into the top corners of each drawer front **7**.

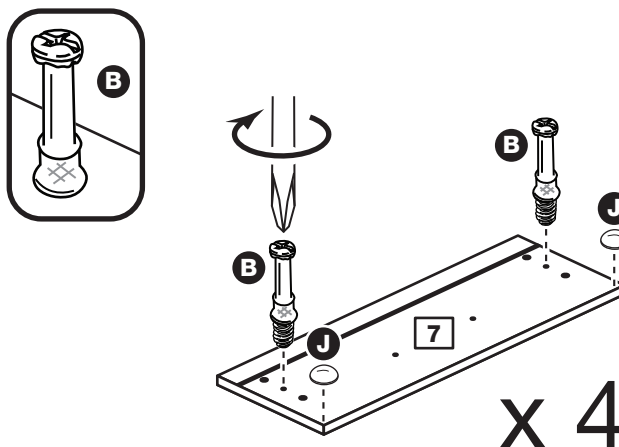


## Step 2

### Prepare the drawer sides

Insert a small locking nut **D** into the hole shown on the left drawer side **9** and right drawer side **10**.

**Note:** The arrow on the locking nut **must** point towards the hole in the edge of the panel.

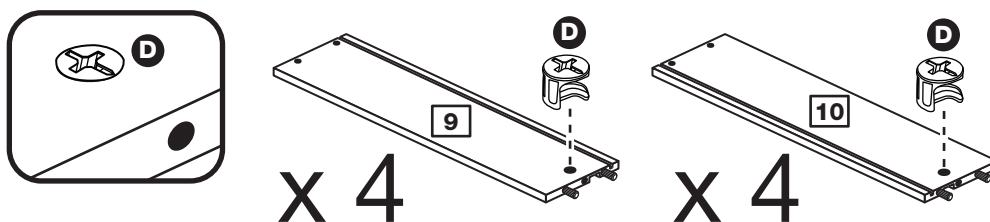


## Step 3

### Attach the drawer sides to the drawer fronts

Push the left drawer side **9** and right drawer side **10** onto the back of the drawer front **7**.

Turn the small locking nuts **D** on the left drawer side **9** and right drawer side **10**.

**Note:** Turn the locking nuts **D** clockwise to secure panels - more than 1/2 a turn.

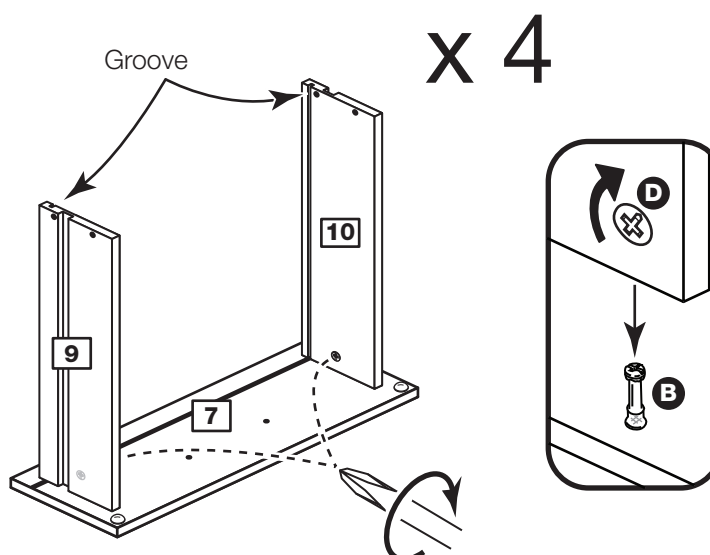


# Assembly Instructions

## Step 4

### Fit the drawer bases

Slide the drawer base **11** down the grooves in the drawer sides **9** and **10** and down into the groove in the drawer front **7**.

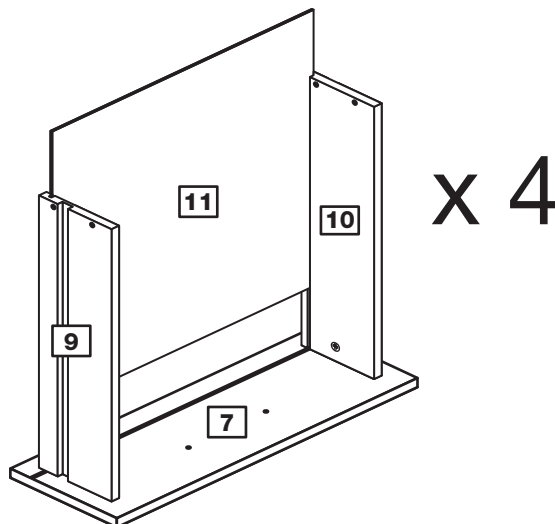


## Step 5

### Fit the drawer backs

Fit the drawer back **8** between the drawer sides **9** and **10**.

Make sure that the drawer base **11** fits into the groove in the drawer back **8**.


Hold the drawer back **8** in position and tap the knock-in pegs **K** through the holes in the drawer sides **9** and **10**.

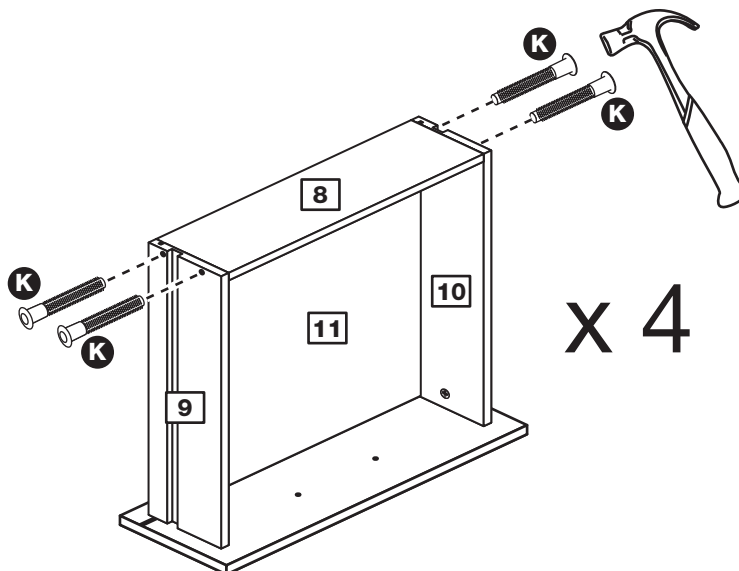

## Step 6

### Attach the handles

Attach a handle **Na** to each drawer front **7** using 2 screws **Nb**.

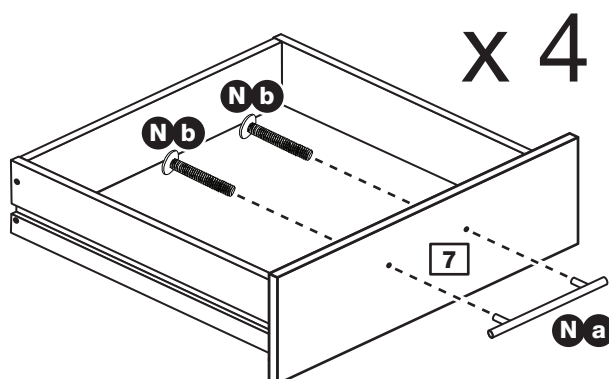

# Assembly Instructions


## Step 7

### Fit runners to the drawers

Turn the 4 drawer assemblies over.

Fit runner **(M c)**, marked with 'DR', to the bottom edge of the right drawer side **(10)**, making sure that it is pushed up against the back of the drawer front **(7)**. Use a bradawl to mark the fixing positions, then secure with 2 screws **(I)**.

Fit runner **(M d)**, marked 'DL', to the bottom edge of the left drawer side **(9)** using the same method.

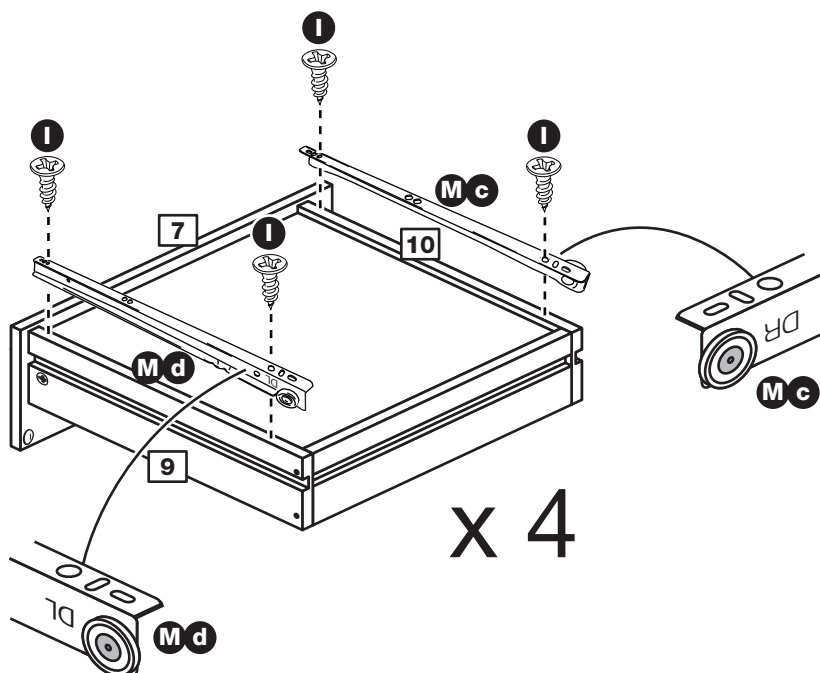

# Assembly Instructions

## Step 8



### Fit 2 brackets to the left side

Fit a bracket **F** to the left side **1**, 100mm in from the back edge, see diagram.

Fit another bracket **F** to the left side **1**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

**Note:** The brackets must be flush with the edges of the panel.

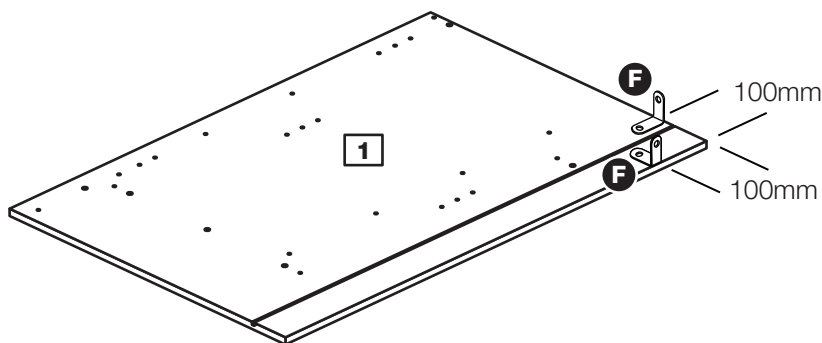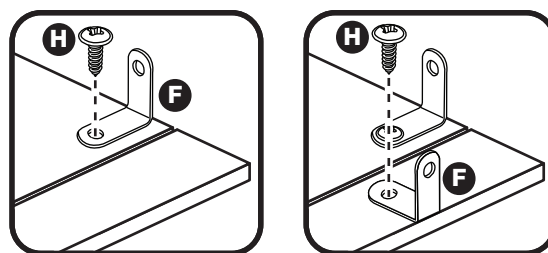


## Step 9

### Fit runners to the left side

Fit the 4 runners **M b** marked 'CL' to the left side **1**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd screw **L** uses the 4th hole in from the back of the runner.

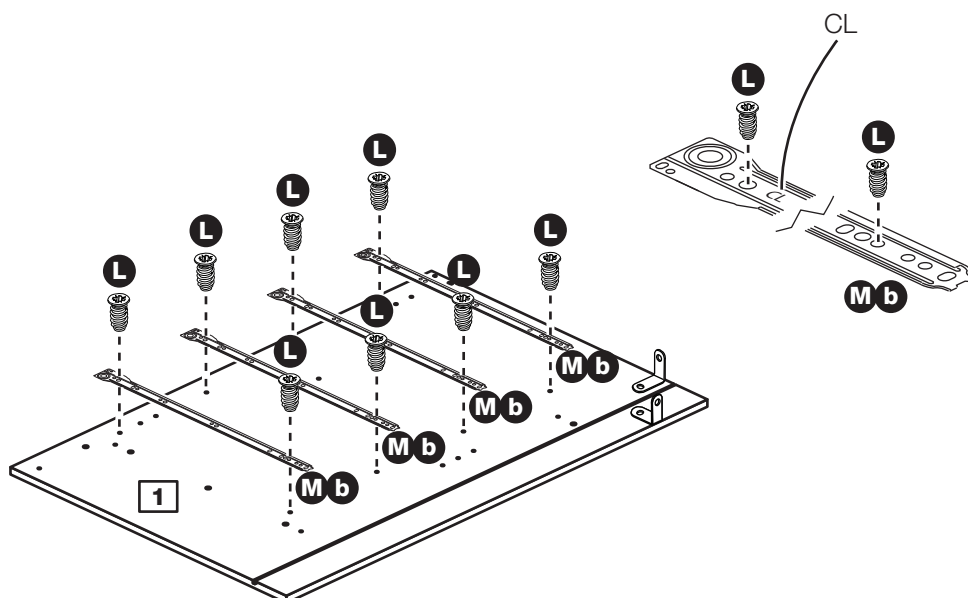


## Step 10

### Fit metal dowels to the left side

Screw 5 metal dowels **B** into the holes shown on the left side **1**.

**Note:** Tighten metal dowels up fully against the panels.

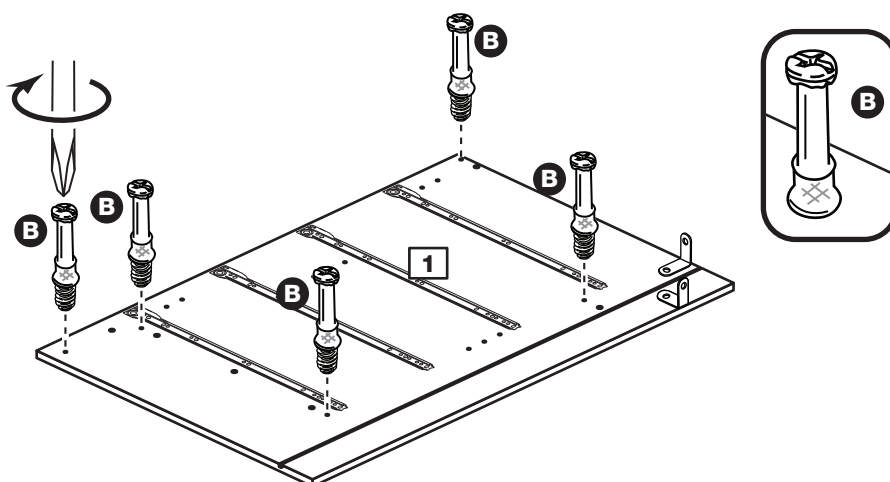



# Assembly Instructions

## Step 11


### Fit 2 brackets to the right side

Fit a bracket **F** to the right side **2**, 100mm down from the back edge, see diagram.


Fit another bracket **F** to the right side **2**, 100mm down from the top edge, see diagram.

Secure each bracket using screw **H**.

**Note:** The brackets must be flush with the edges of the panel.



100mm 100mm

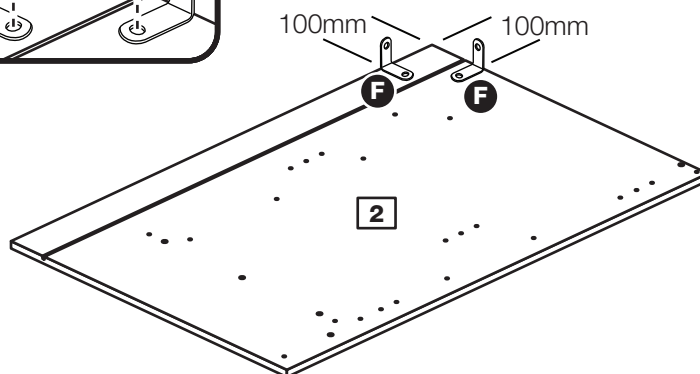


## Step 12

### Fit runners to the right side

Fit the 4 runners **Ma** marked 'CR' to the right side **2**.

The 1st screw **L** uses the 2nd hole in from the front of the runner.

The 2nd screw **L** uses the 4th hole in from the back of the runner.

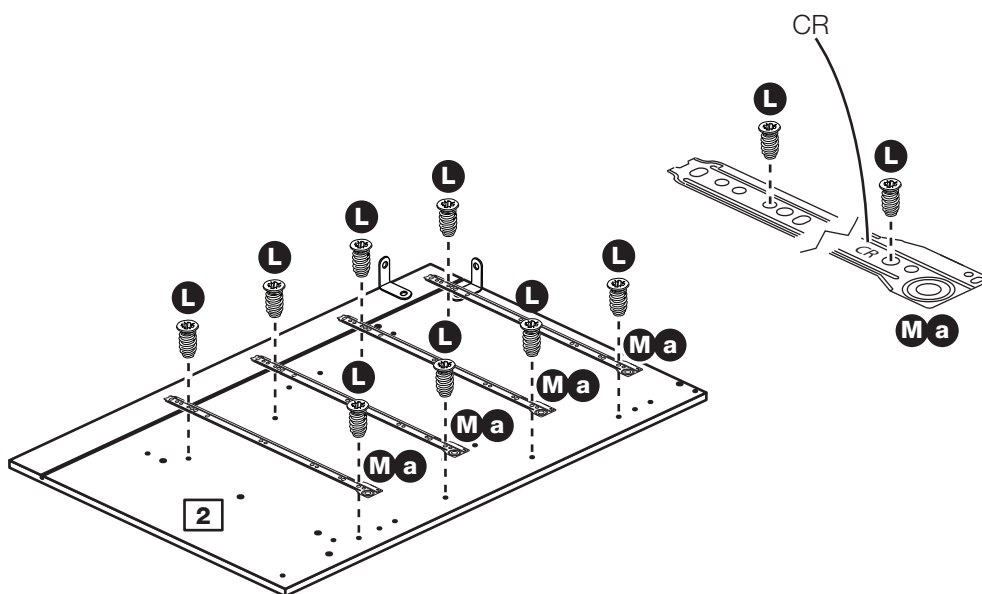


## Step 13

### Fit metal dowels to the right side

Screw 5 metal dowels **B** into the holes shown on the right side **2**.

**Note:** Tighten metal dowels up fully against

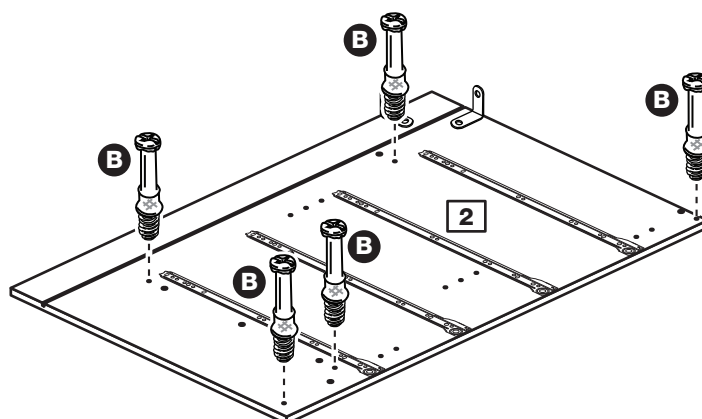

# Assembly Instructions

## Step 14




### Prepare the base

Insert 4 large locking nuts **C** into the base **4** as shown.

**Note:** Arrow on locking nut **must** point towards hole in edge of panel.

Tap 6 wooden dowels **A** into the base **4** as shown.

**Note:** Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

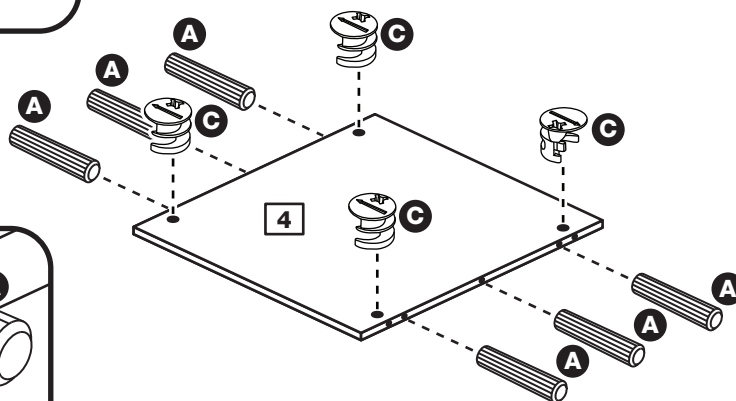



## Step 15

### Fit the base to the right side

Push the base **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **C** fitted to the base **4**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

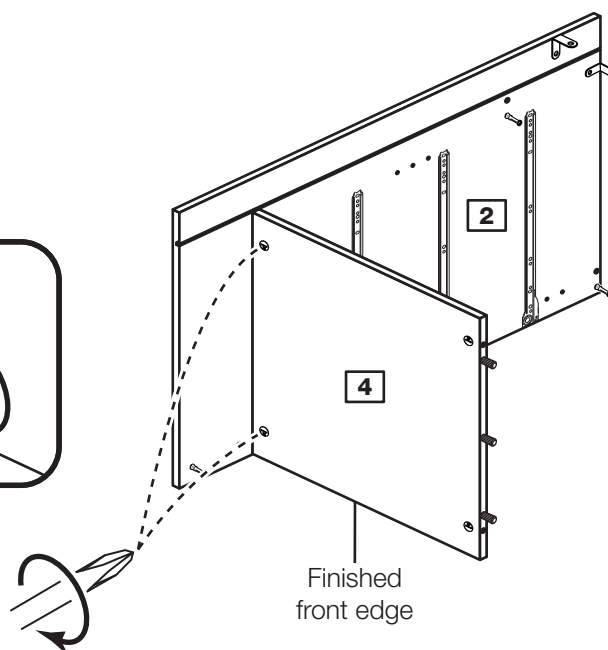


## Step 16

### Prepare the 2 rails and plinth

Insert 2 large locking nuts **C** into each of the 2 rails **5** and plinth **6** as shown.

Tap 2 wooden dowels **A** into the 2 rails **5** and plinth **6** as shown.

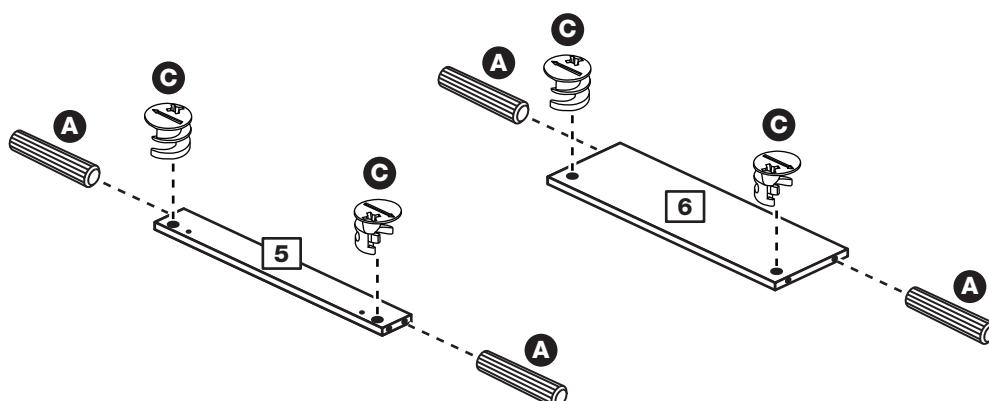

# Assembly Instructions

## Step 17


### Fit the 2 rails and plinth

One at a time, push the 2 rails **5** and plinth **6** onto the right side **2** as shown.

Use a screwdriver to tighten the 3 large locking nuts **C** fitted to the 3 panels, as shown.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

**Note:** Support the rail near the back edge of the unit until the left side has been fitted in the next stage.

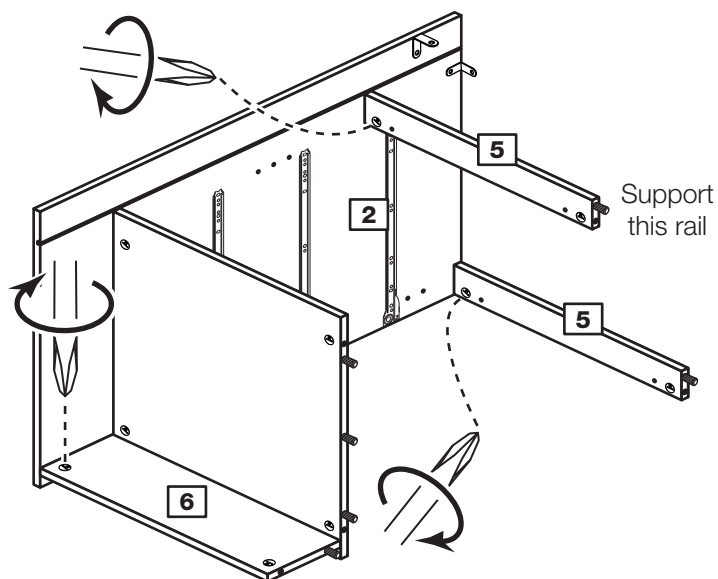


## Step 18

### Fit the left side

Push the left side **1** onto the assembly.

Use a screwdriver to tighten the 5 large locking nuts **C** fitted to the base **4**, rails **5** and plinth **6**.

**Note:** Turn the large locking nuts **C** as far as they will go - more than 1/2 a turn.

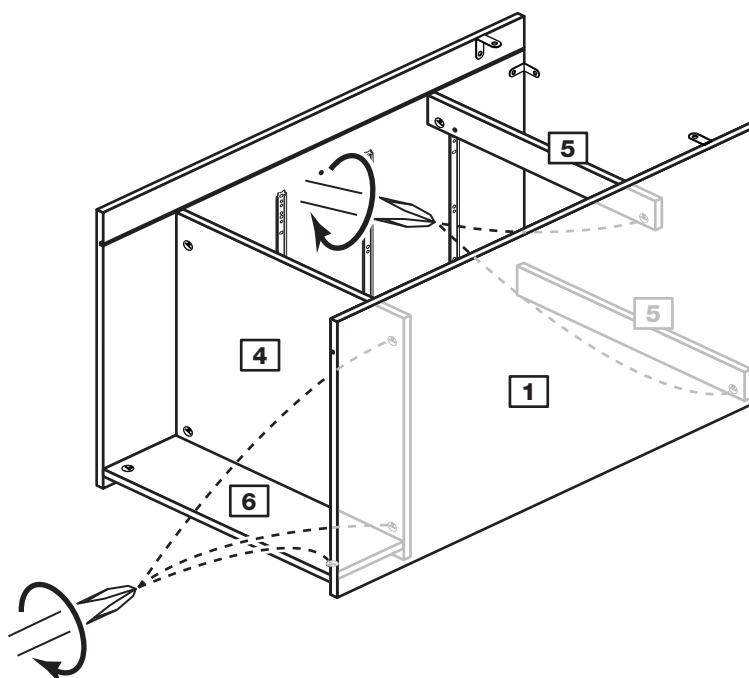

# Assembly Instructions

## Step 19

### Fit the back



**a:** Square up the unit by making sure that measurement **x to x** equals **y to y**.

**b:** Slide the back **12** into the grooves along the left **1** and right **2** sides, as shown.

**c:** Secure the back **12** by tapping 4 nails **E** down into the back edge of the base **4** and 4 nails **E** into the back edge of the rail **5**.

**Stand the unit up for the next stage.**

**a:** The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

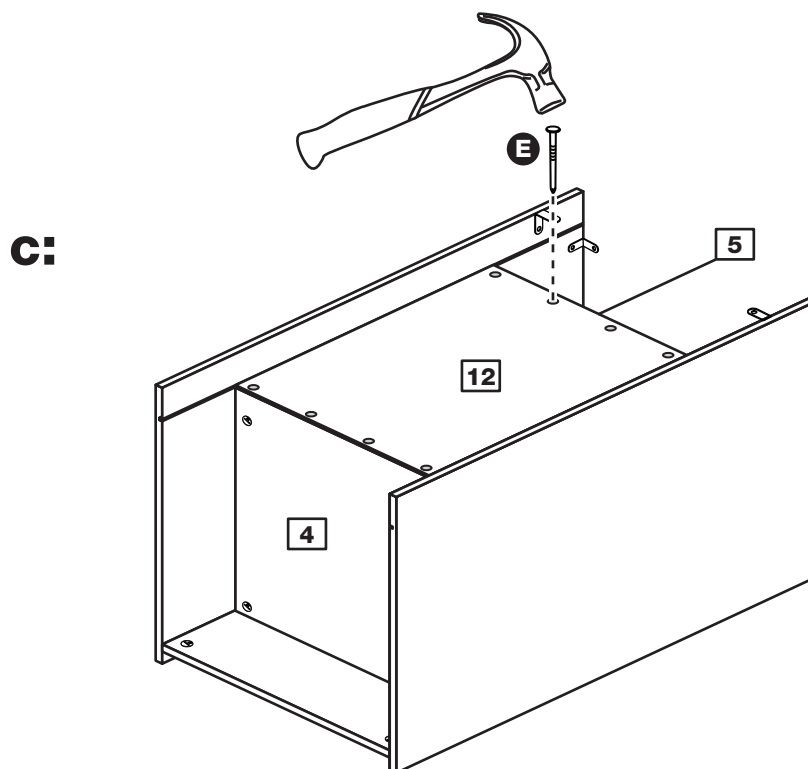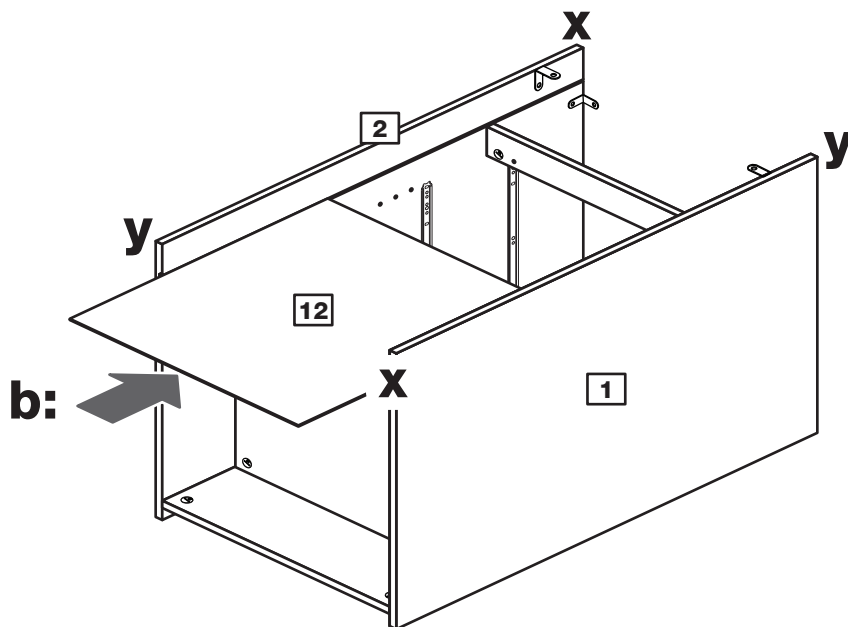


# Assembly Instructions

## Step 20

### Fit the top

Position the top **3** onto the unit, making sure that the back edge is flush with the back edge of the sides **1** and **2**.


Secure the top **3** using screw **H** through the 2 brackets **F** fitted at the top edge of the side panels **1** and **2**.

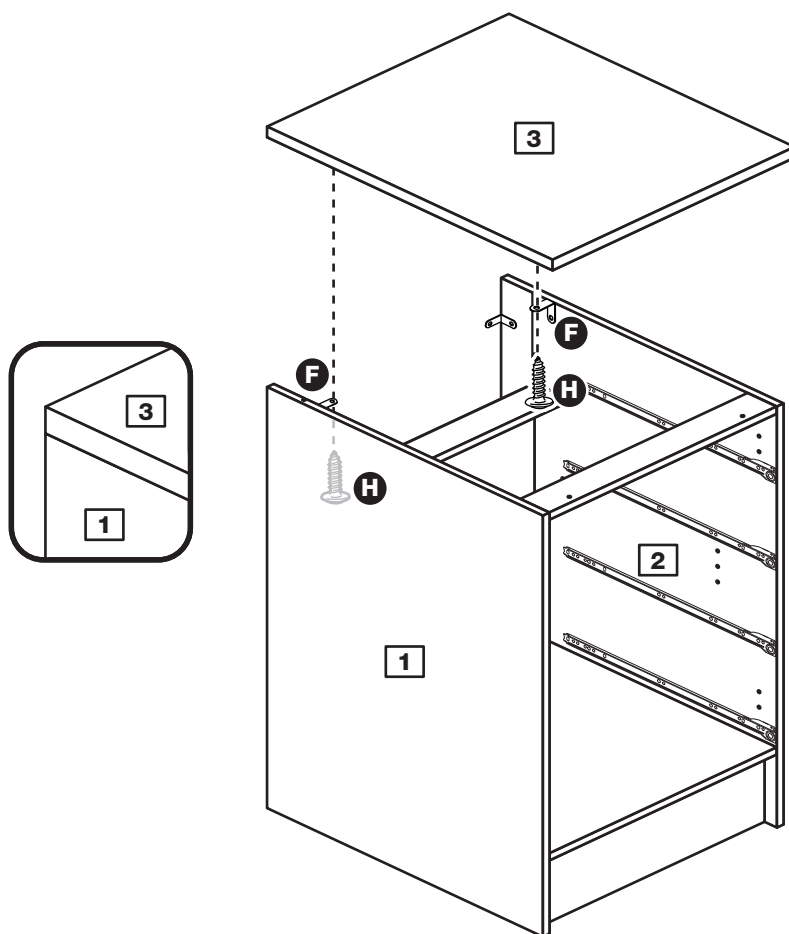

## Step 21

### Secure the front of the top

To secure the front of the top **3**, screw up through the 2 holes in the rail **5** at the front of the unit using screws **G**.

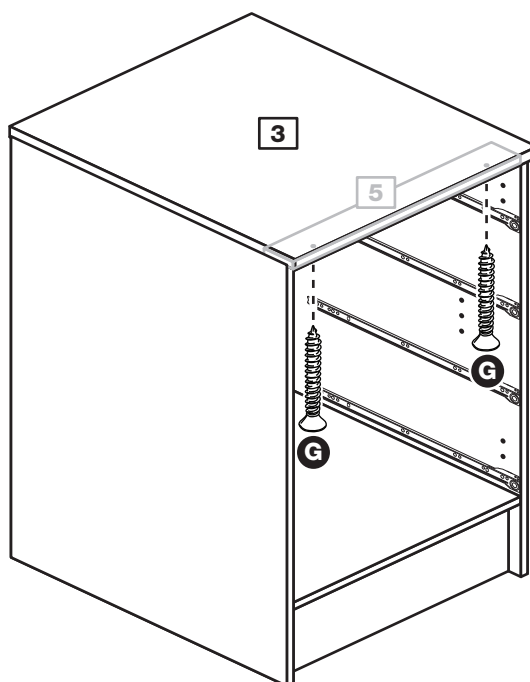

# Assembly Instructions

## Step 22


### Secure the unit to the wall

Using the brackets **F** fitted to the back edge of the sides **1** and **2** screw the unit to the wall.

Fixings are not supplied as they will need to suit the wall type, and the length of screw will depend on the distance of the back of the Unit to the wall.





**Warning:** Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

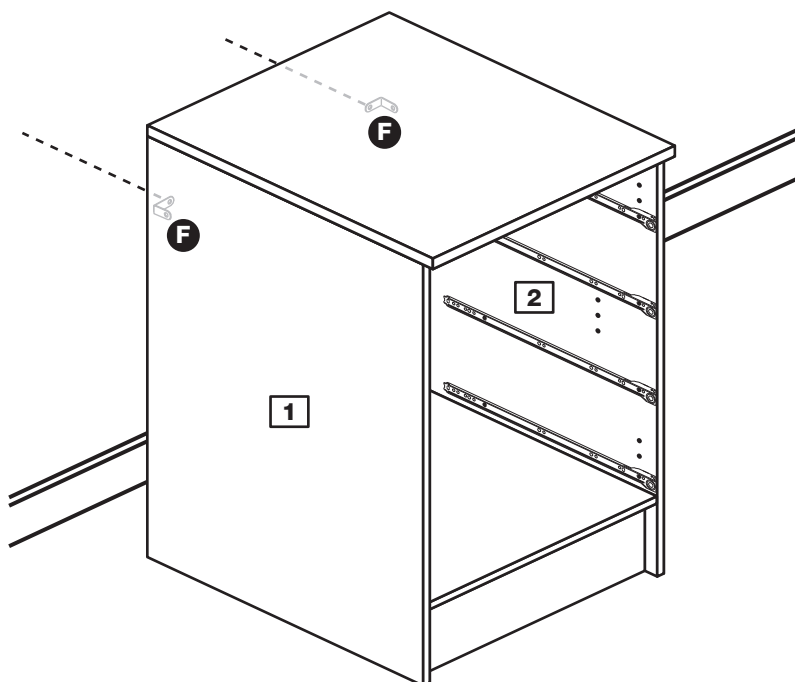

## Step 23

### Fit the drawers

Slide the wheels on the runners fitted to the drawer sides over the wheels on the runners fitted to the side panels and push the drawer into position.

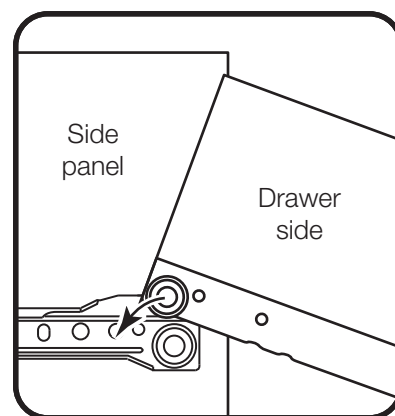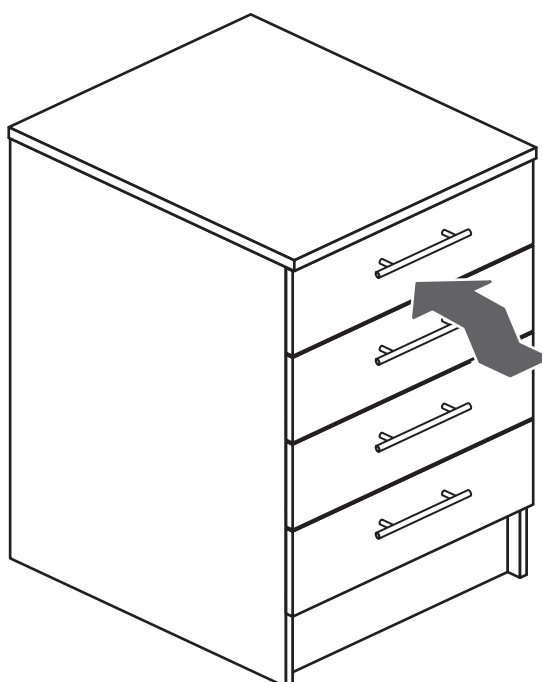


# Assembly Instructions

## Step 24

**Assembly is complete**



**Warning:** The unit is heavy. Lift with care.

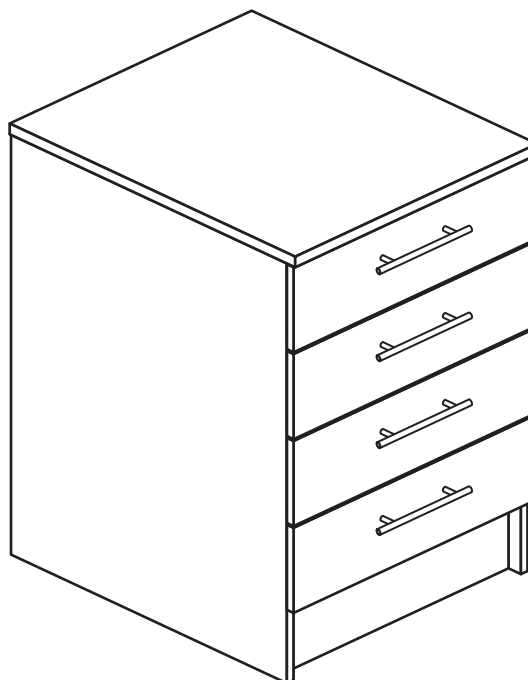

If you need help or have damaged or missing parts, call the **Customer Helpline: 03456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

