


Anderson - Tall Bookcase

Assembly Instructions - Please keep for future reference

609/6489

609/6472

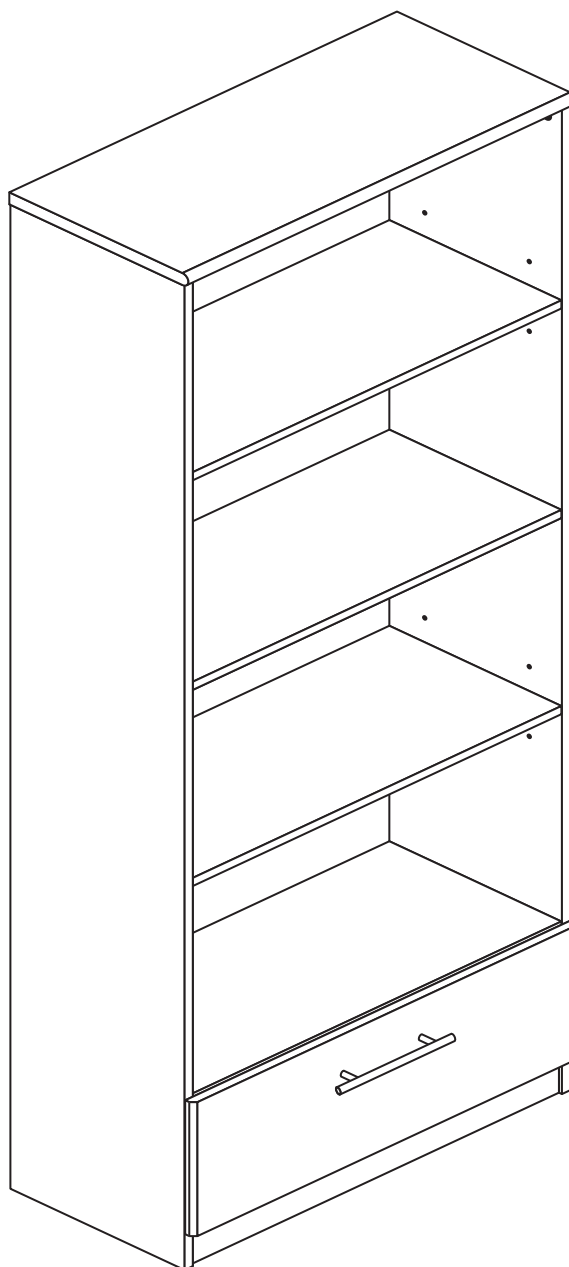

Dimensions

Width - 71.5cm

Depth - 33.5cm

Height - 183.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 32kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the panels listed below

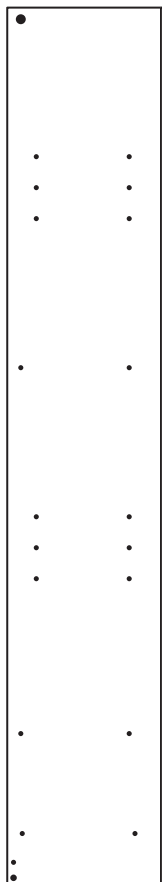

1 Left Side (D1540A)
(1809 x 320mm)

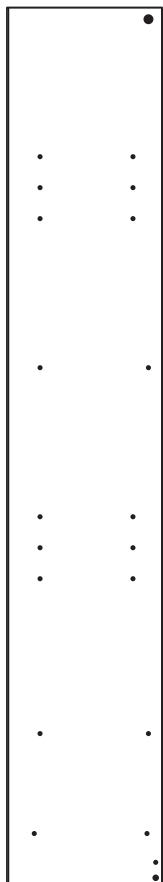


2 Right Side (D1541A)
(1809 x 320mm)




3 Top (D1539A)
(712 x 326mm)




4 Horizontal (D1544A)
(678 x 316mm) x 2




5 Shelf (D1545A)
(677 x 316mm) x 2




6 Plinth (D1543A)
(678 x 60mm)



7 Drawer Front (D1542A)
(706 x 246mm)




8 Left Drawer Side (W415LH)
(320 x 150mm)




9 Right Drawer Side (W415RH)
(320 x 150mm)



10 Drawer Back (W527)
(626 x 150mm)



11 Drawer Base (T527)
(637 x 317mm)

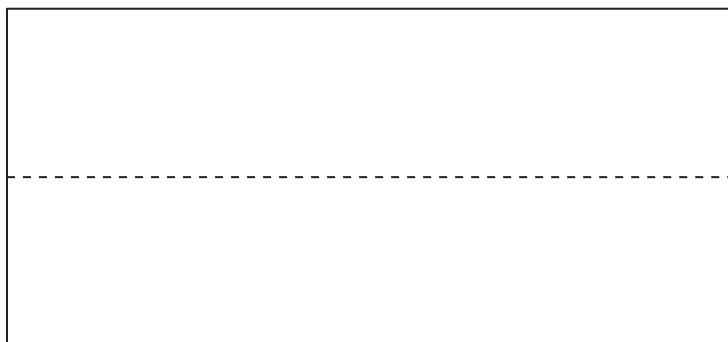

12 Back (X887)
(1527 x 696mm)




















Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.
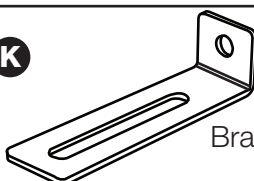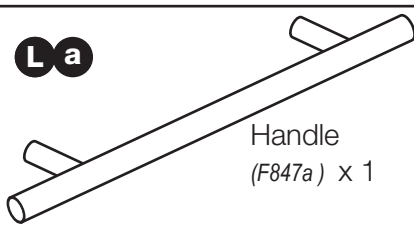
<p>A </p> <p>Wooden dowel (F22) x 4</p>	<p>B </p> <p>Metal dowel (F901) x 14</p>	<p>C </p> <p>Shelf stud (F110) x 8</p>
<p>D </p> <p>Nail (F51) x 30</p>	<p>E </p> <p>Large locking nut (F900) x 12</p>	<p>F </p> <p>Small locking nut (F3) x 2</p>
<p>G </p> <p>13mm Screw (F52) x 4</p>	<p>H </p> <p>13mm Screw (F79) x 1</p>	<p>I </p> <p>13mm Screw (F63) x 4</p>
<p>J </p> <p>Knock-in Peg (F171) x 4</p>	<p>K </p> <p>Bracket (F327) x 1</p>	<p>L a </p> <p>Handle (F847a) x 1</p> <p>L b </p> <p>Handle Screw (F847b) x 2</p>
<p>M a  L Runner (F961) x 1</p> <p>M b  R Runner (F962) x 1</p> <p>M c  L Runner (F963) x 1</p> <p>M d  R Runner (F964) x 1</p>		

Tools required




Rule



Cross-head screwdriver



Scissors



Hammer



Eye protection (when using a hammer or drill)



Electric drill (do not use for fitting screws)

Ruler - Use this ruler to help correctly identify the screws

mm 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below

Step 1

Prepare the drawer front

Screw 2 metal dowels **B** into the holes shown on the back of the drawer front **7**.

Note: Tighten metal dowels up fully against the panels.

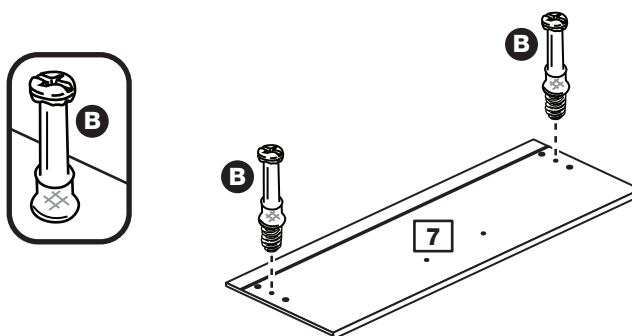


Step 2

Prepare the drawer sides

Insert a small locking nut **F** into the hole shown on the left drawer side **8** and right drawer side **9**.

Note: Arrow on locking nut **must** point towards hole in edge of panel.

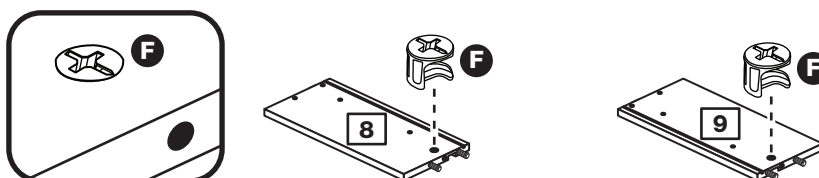


Step 3

Attach the drawer sides to the drawer front

Push the left drawer side **8** and right drawer side **9** onto the back of the drawer front **7**.

Turn the small locking nuts **F** on the left drawer side **8** and right drawer side **9**.

Note: Turn the locking nuts **F** clockwise to secure panels - more than 1/2 a turn.

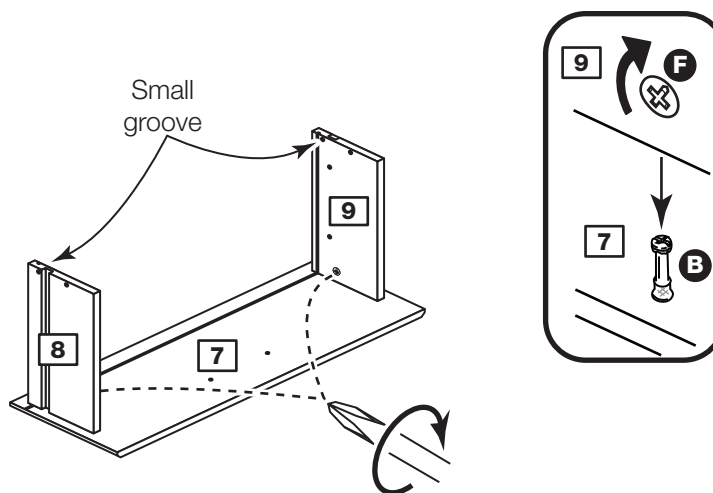


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **11** down the grooves in the drawer sides **8** and **9** and down into the groove in the drawer front **7**.

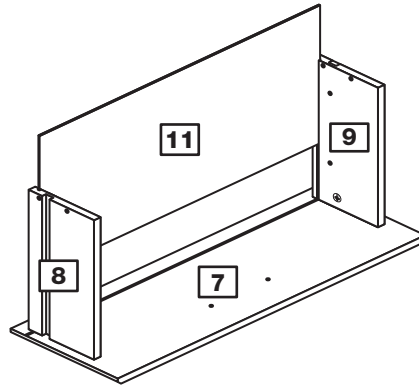


Step 5

Fit the drawer back

Fit the drawer back **10** between the drawer sides **8** and **9**.

Make sure that the drawer base **11** fits into the groove in the drawer back **10**.


Hold the drawer back **10** in position and tap the knock-in pegs **J** through the holes in the drawer sides **8** and **9**.

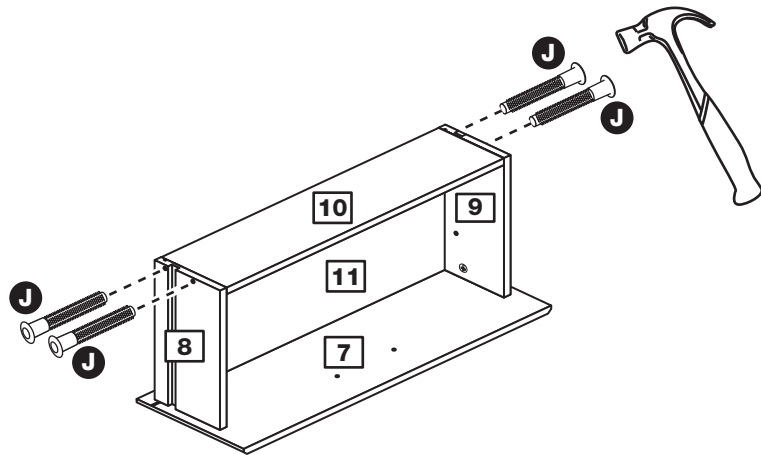

Step 6

Attach the handle

Attach the handle **L a** to the drawer front **7** using 2 screws **L b**.

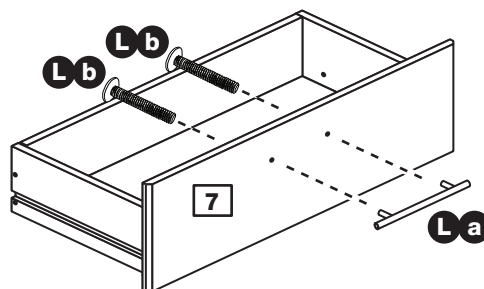

Assembly Instructions

Step 7


Fit runners to the drawers

Fit the runner **Mc** to the bottom edge of the left drawer side **8**, as shown, making sure that it is pushed up against the back of the drawer front **7**. Use a bradawl to mark the fixing positions, then secure with 2 screws **I**.

Fit the runner **Md** to the bottom edge of the right drawer side **9** using the same method.

Runners must be pushed up against the drawer front

Turn the drawer over

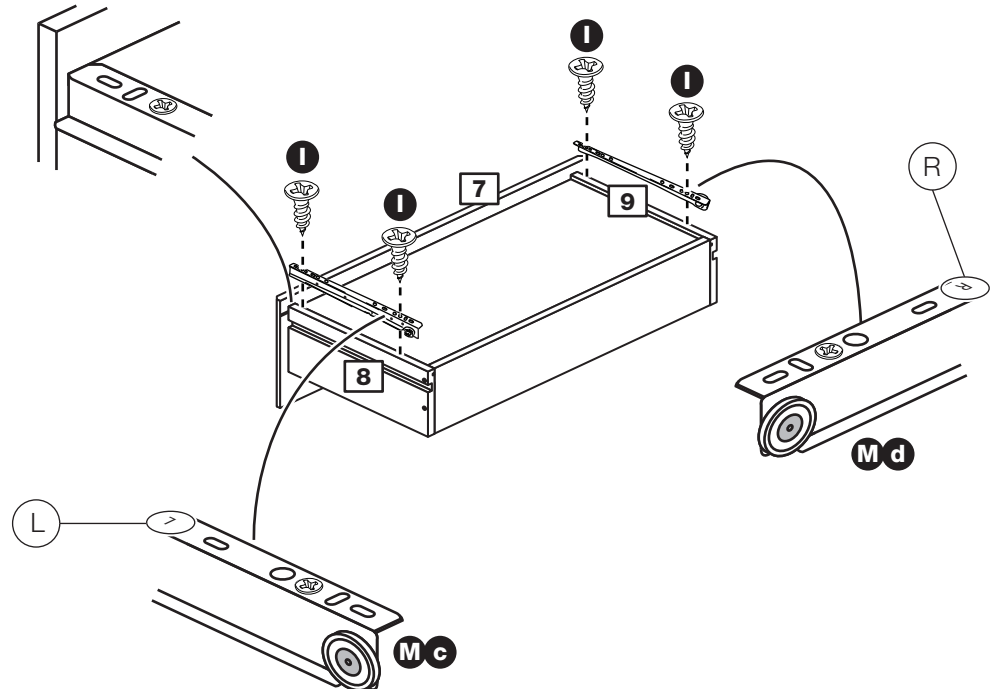

Step 8

Prepare the left side

Tap a wooden dowel **A** into the left side **1**.



Screw 5 metal dowels **B** into the left side **1**.

Insert a large locking nut **E** into the left side **1**.


Fit the runner **Ma** to the left side **1**.

The 1st screw **G** uses the 2nd hole in from the front of the runner **Ma**.


The 2nd screw **G** uses the hole that lines up with the other panel hole.

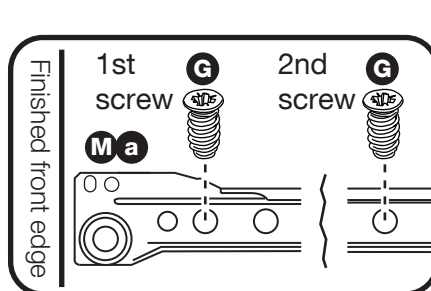

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

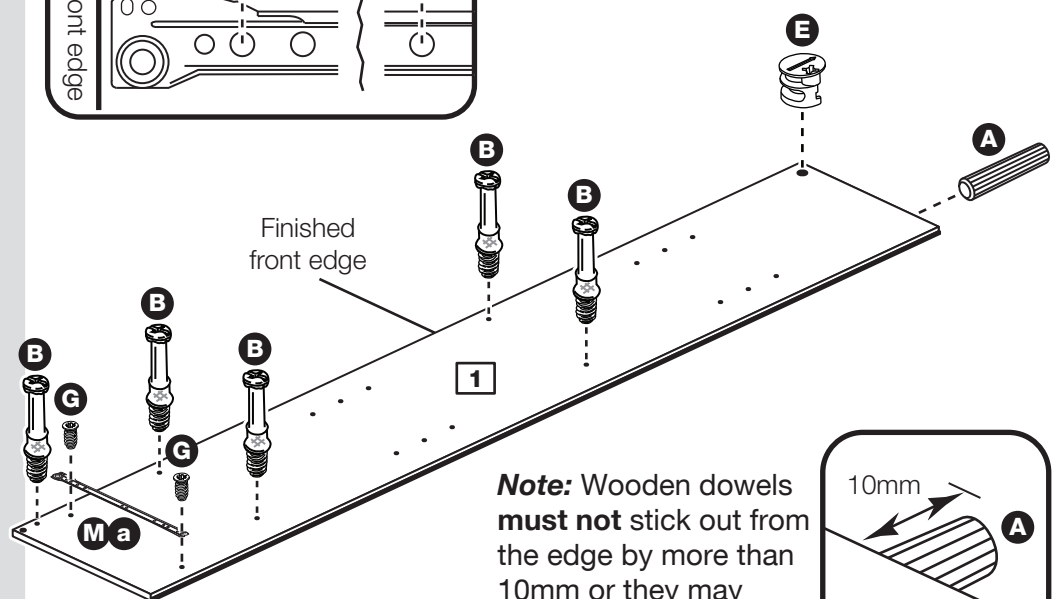

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.



Assembly Instructions

Step 9

Prepare the right side

Tap a wooden dowel **A** into the right side **2**.


Screw 5 metal dowels **B** into the right side **2**.

Insert a large locking nut **E** into the right side **2**.

Fit the runner **Mb** to the right side **2**.

The 1st screw **G** uses the 2nd hole in from the front of the runner **Mb**.


The 2nd screw **G** uses the hole that lines up with the other panel hole.

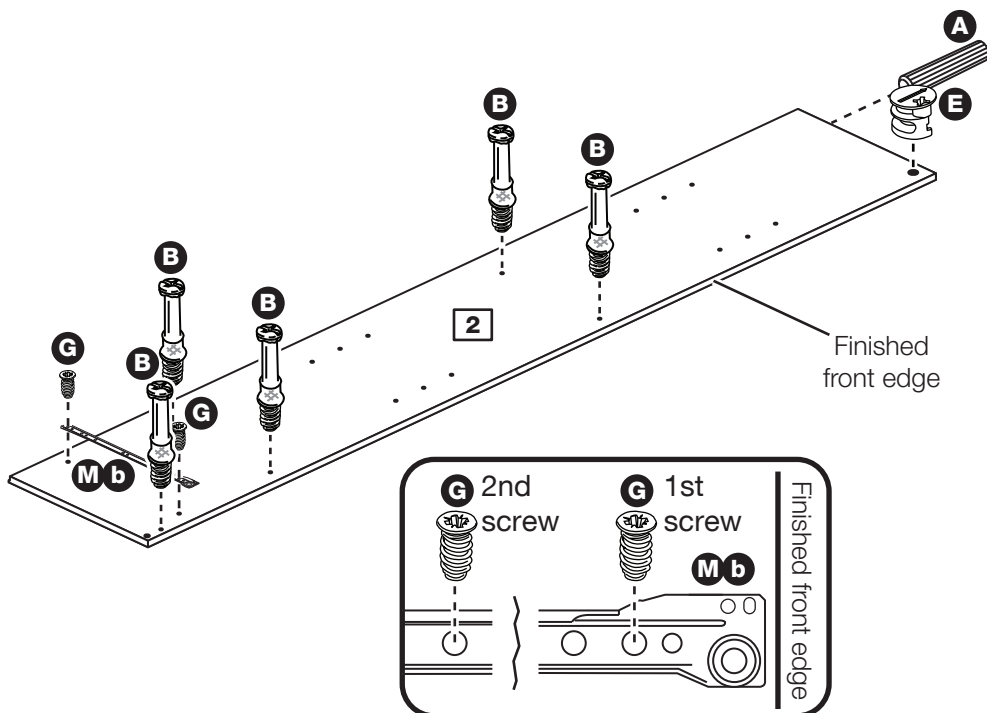

Step 10

Prepare the 2 horizontals

Insert 4 large locking nuts **E** into each of the horizontals **4**.

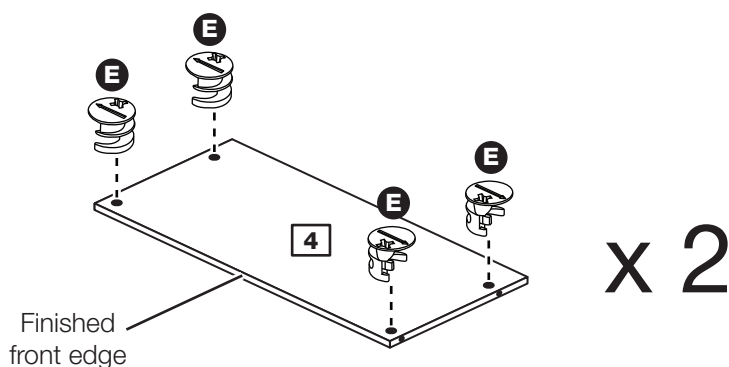

Assembly Instructions


Step 11

Join the right side and horizontals

Push the 2 horizontals **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to each of the 2 horizontals **4**.

Note: Turn the large locking nuts **E** as far as they will go - more than 1/2 a turn.

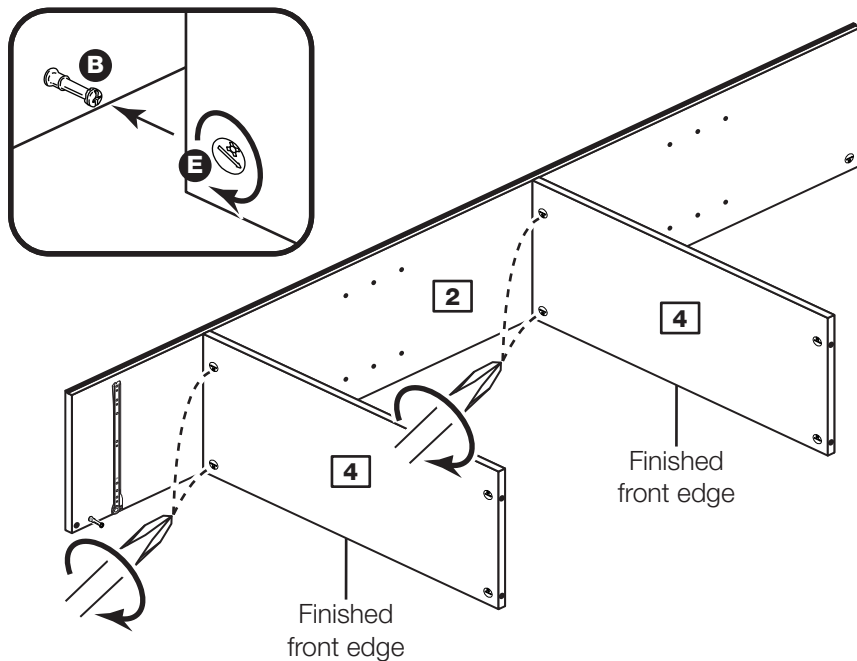


Step 12

Prepare the plinth

Tap 2 wooden dowels **A** into the plinth **6**.

Insert 2 large locking nuts **E** into the plinth **6**.

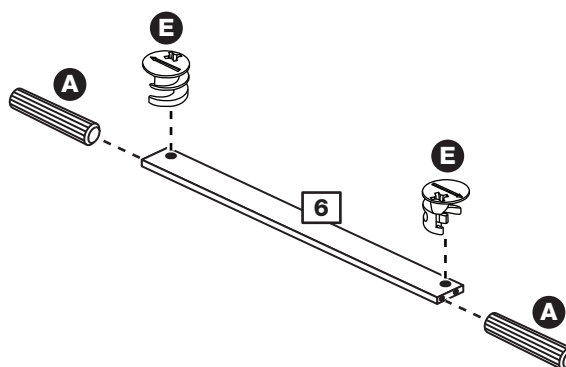


Step 13

Fit the plinth

Push the plinth **6** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **E** fitted to the plinth **6**.

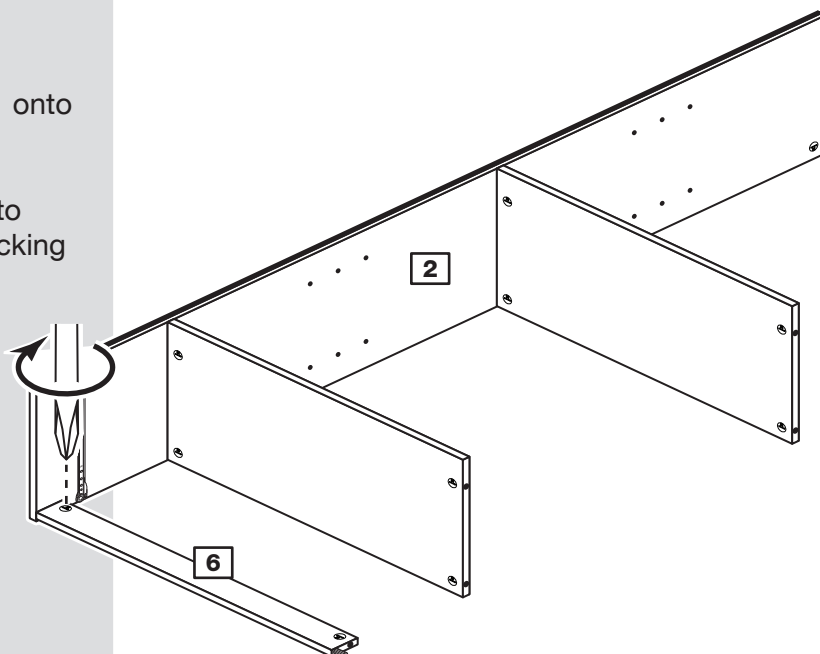


Assembly Instructions

Step 14

Fit the left side

Push the left side **1** onto the assembly.


Use a screwdriver to tighten the 5 large locking nuts **E** fitted to the 2 horizontals **4** and the plinth **6**.

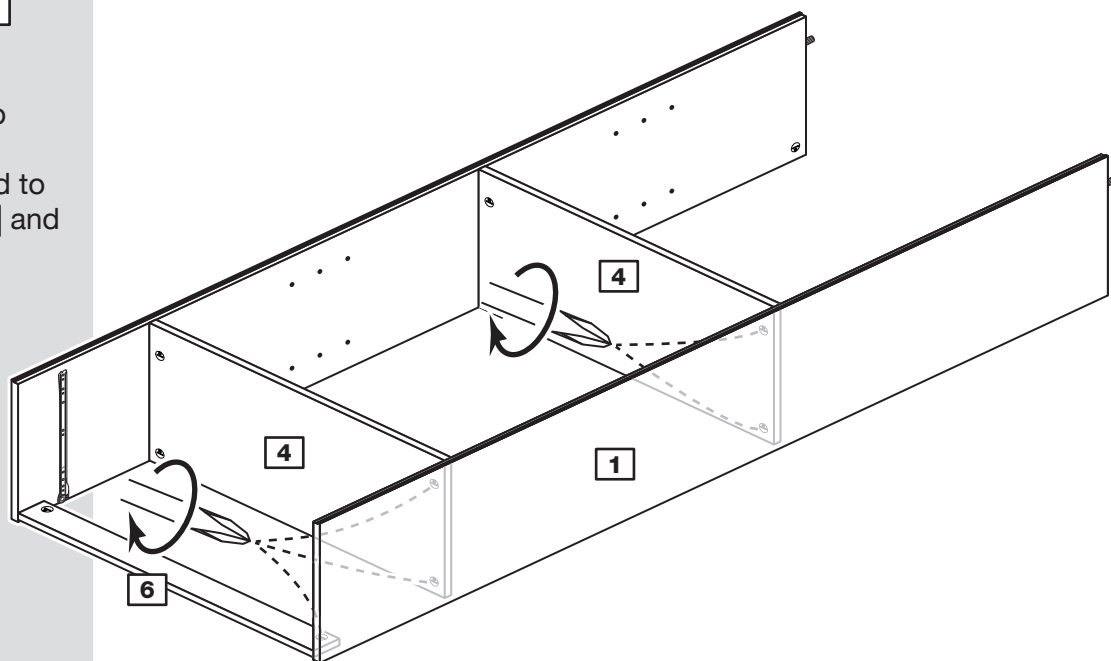

Step 15

Prepare the top

Screw 2 metal dowels **B** into the top **3**.

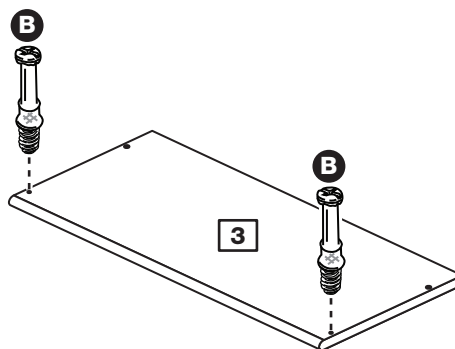


Assembly Instructions

Step 16

Fit the top

Push the top **3** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to the left side **1** and right side **2**.

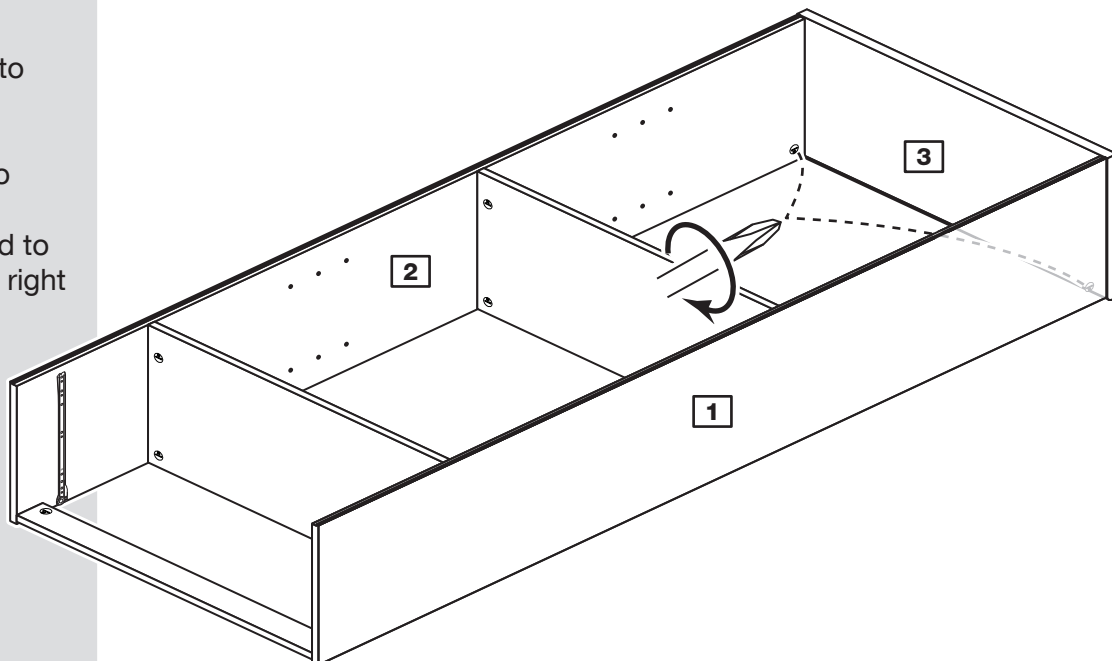

Step 17

Fit the back

a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.



b: Place the back **12** onto the unit.

Nail **D** around the outside edges of the back **12**.

Note: Nails should be spaced about 150mm apart.

Stand the unit up for the next step.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

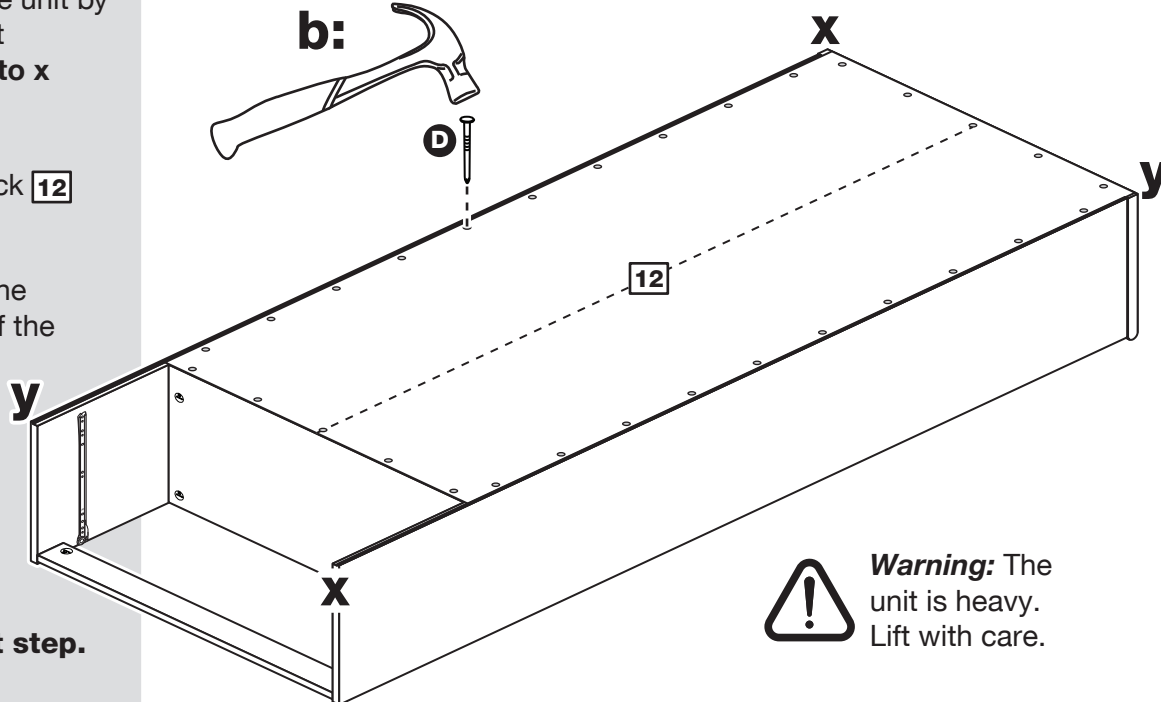

Warning: The unit is heavy. Lift with care.

Assembly Instructions

Step 18

Attach bracket to top

To prevent possible overbalancing, we recommend that this unit is secured to a suitable wall by use of the bracket **K** fitted to the top of the unit.


Fixings are not supplied, as they will need to suit the wall type and the length of screw will depend on the distance from the back of the unit to the wall.

Fix the bracket **K** loosely onto the top of the unit using screw **H** and mark the wall for the wall fixing.

Swivel the bracket **K** away from the wall and drill a hole in the wall using a suitable drill bit and fit your wall fixing.

Swivel the bracket **K** back and fix the bracket to the wall, then tighten Screw **H**.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

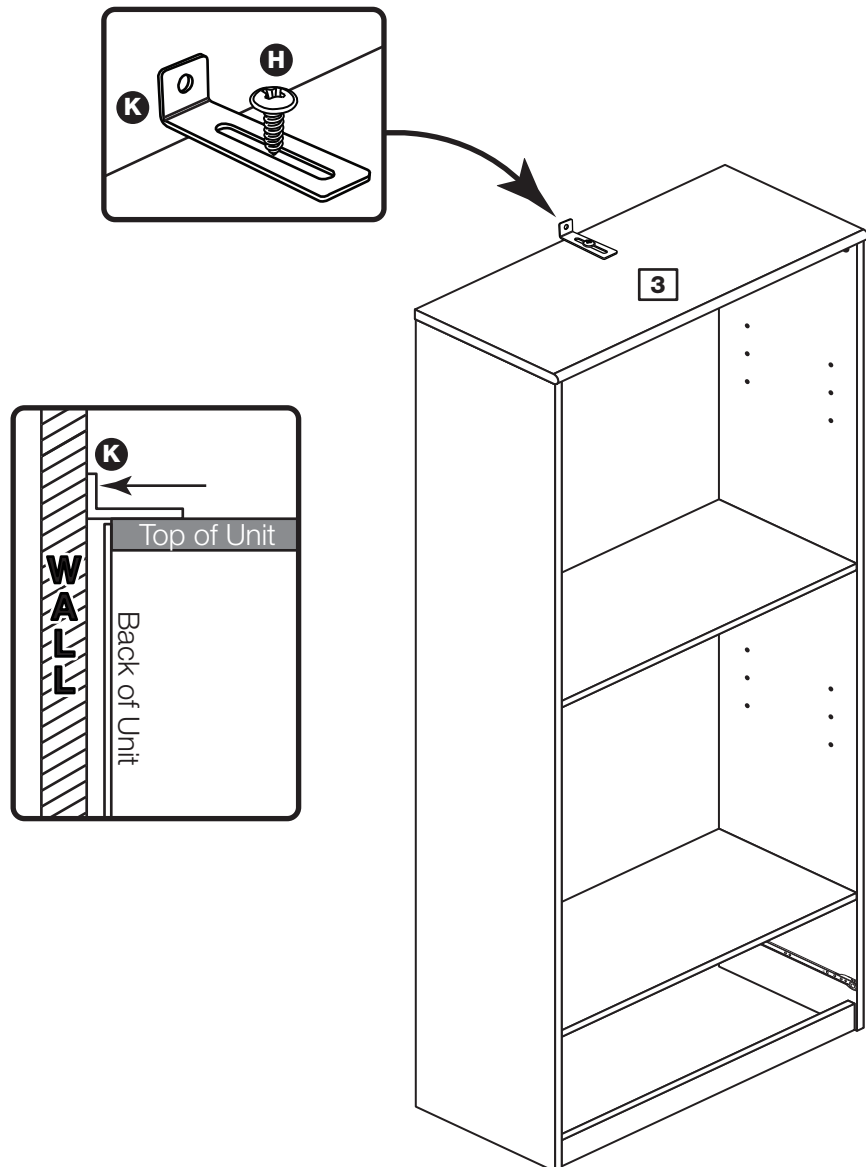


Assembly Instructions

Step 19

Fit the shelf studs


For each of the 2 shelves **5**, insert 4 shelf studs **C** at the required height.

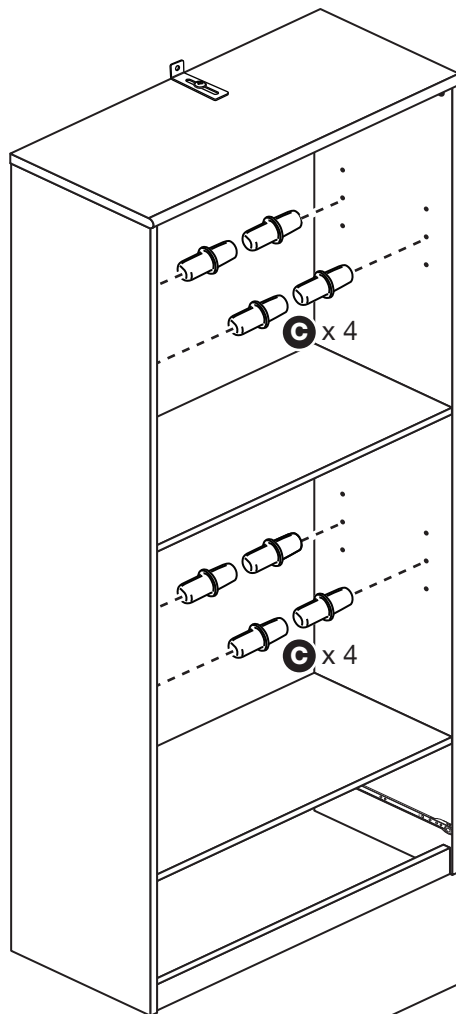

Step 20

Fit the shelves

Lower the 2 shelves **5** down onto the shelf studs **C**.

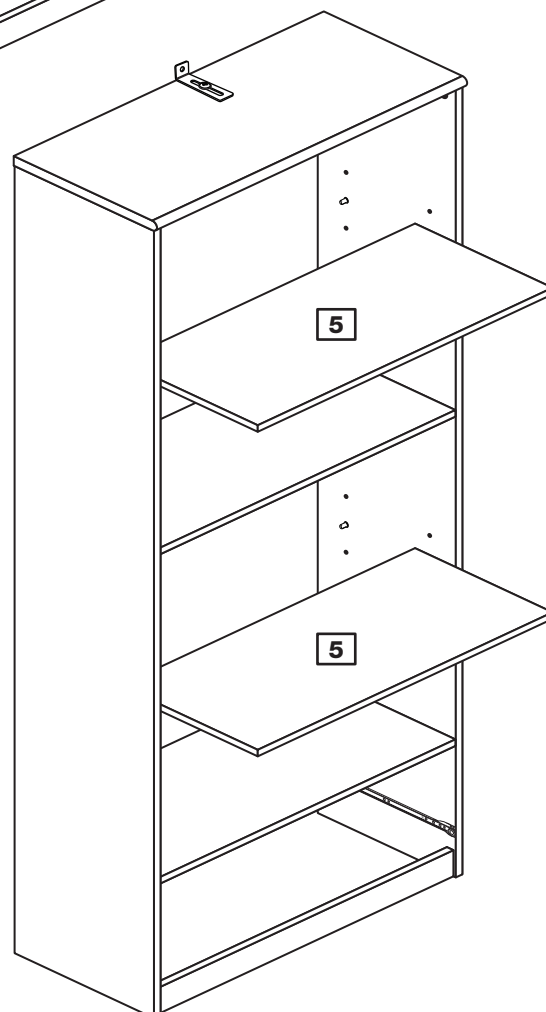

Assembly Instructions

Step 21



Fit the drawer

Slide the wheels on the runners fitted to the drawer sides over the wheels on the runners fitted to the side panels and push the drawer into position.

Assembly is complete



Warning: The unit is heavy. Lift with care.

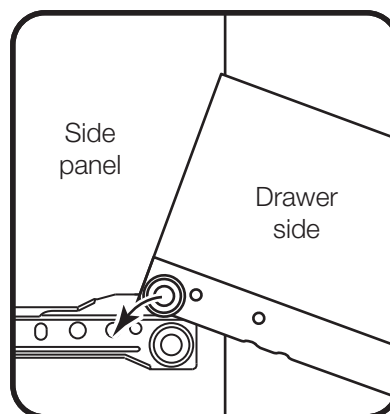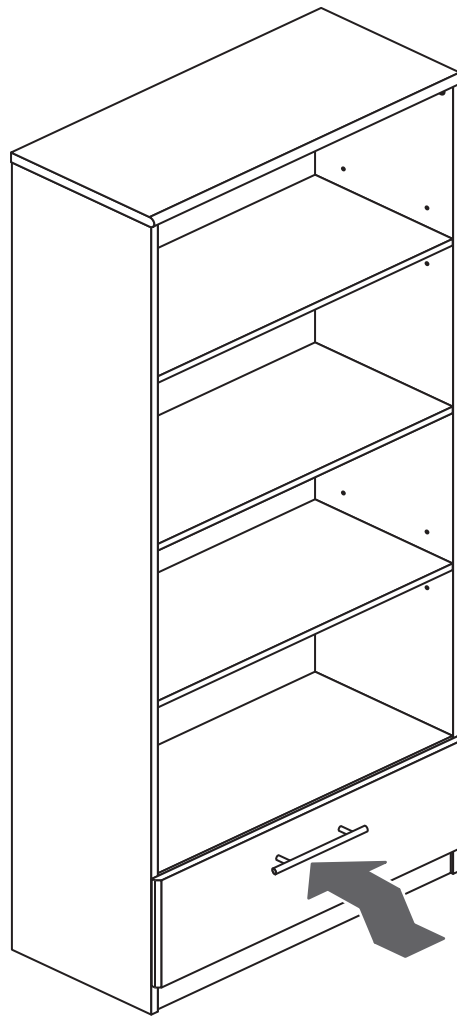

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.


Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

Anderson - Tall Bookcase

Assembly Instructions - Please keep for future reference

609/6489

609/6472

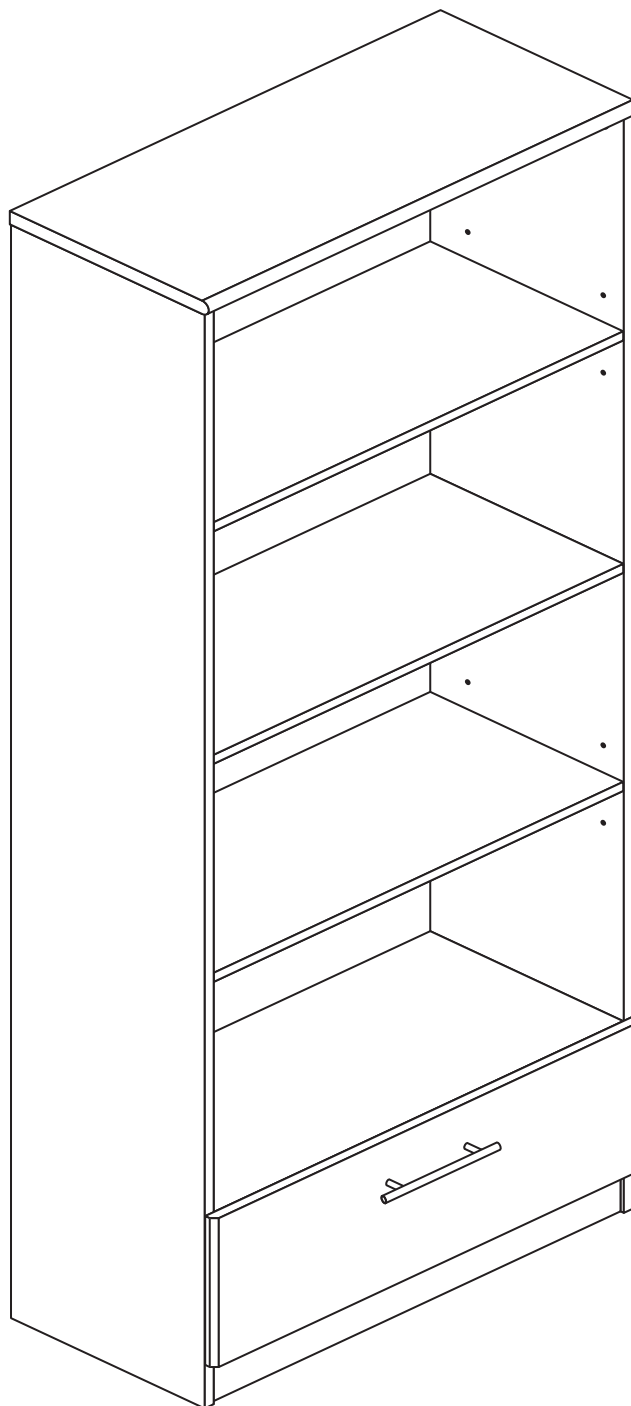

Dimensions

Width - 71.5cm

Depth - 33.5cm

Height - 183.5cm



**MADE IN
BRITAIN**

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- **Warning:** This unit weighs approximately 32kgs. Please lift with care.

- Check you have all the components and tools listed on pages 2 and 3.

- Remove all fittings from the plastic bags and separate them into their groups.

- Keep children and animals away from the work area, small parts could choke if swallowed.

- Parts of the assembly will be easier with 2 people.

- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product, this could cause damage.

- Assemble the item as close to its final position (in the same room) as possible.

- Assemble on a soft level surface to avoid damaging the unit or your floor (use opened out unit carton).



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.

- **Safety note:** It is recommended that this unit is secured to a wall using the bracket supplied.

- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

- From time to time check that there are no loose screws on this unit.


- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the panels listed below

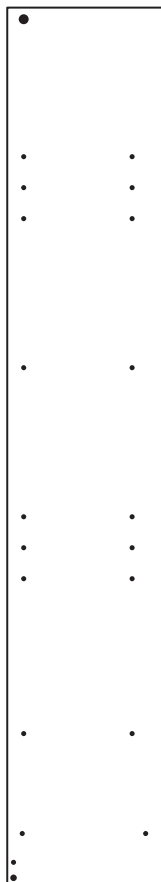


1 Left Side (D2287A)
(1809 x 320mm)

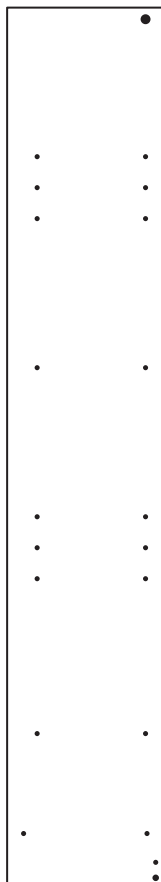


2 Right Side (D2288A)
(1809 x 320mm)




3 Top (D2286A)
(712 x 329mm)




4 Horizontal (D2289A)
(678 x 319mm) x 2




5 Shelf (D2290A)
(677 x 319mm) x 2




6 Plinth (D2292A)
(678 x 60mm) x 2



7 Drawer Front (D2291A)
(706 x 246mm)




8 Left Drawer Side (W415LH)
(320 x 150mm)




9 Right Drawer Side (W415RH)
(320 x 150mm)



10 Drawer Back (W527)
(626 x 150mm)



11 Drawer Base (T527)
(637 x 317mm)

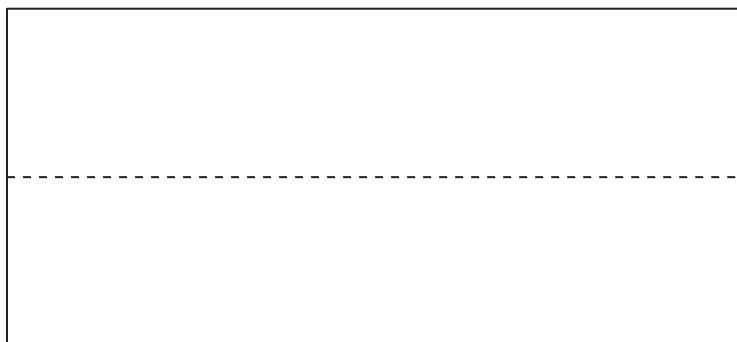

12 Back (X887)
(1527 x 696mm)




















Components - Fittings

If you have damaged or missing components, call the **Customer Helpline: 08456 400800** quoting the reference numbers below

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.
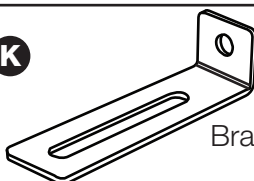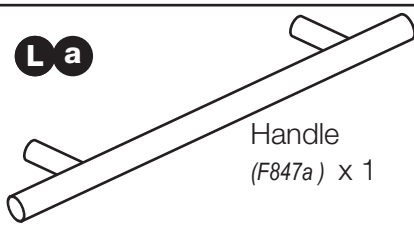
<p>A </p> <p>Wooden dowel (F22) x 4</p>	<p>B </p> <p>Metal dowel (F901) x 14</p>	<p>C </p> <p>Shelf stud (F110) x 8</p>
<p>D </p> <p>Nail (F51) x 30</p>	<p>E </p> <p>Large locking nut (F900) x 12</p>	<p>F </p> <p>Small locking nut (F3) x 2</p>
<p>G </p> <p>13mm Screw (F52) x 4</p>	<p>H </p> <p>13mm Screw (F79) x 1</p>	<p>I </p> <p>13mm Screw (F63) x 4</p>
<p>J </p> <p>Knock-in Peg (F171) x 4</p>	<p>K </p> <p>Bracket (F327) x 1</p>	<p>L a </p> <p>Handle (F847a) x 1</p> <p>L b </p> <p>Handle Screw (F847b) x 2</p>
<p>M a  L Runner (F961) x 1</p> <p>M b  R Runner (F962) x 1</p> <p>M c  L Runner (F963) x 1</p> <p>M d  R Runner (F964) x 1</p>		

Tools required



Rule



Cross-head screwdriver



Scissors



Hammer




Eye protection (when using a hammer or drill)



Electric drill (do not use for fitting screws)

Ruler - Use this ruler to help correctly identify the screws

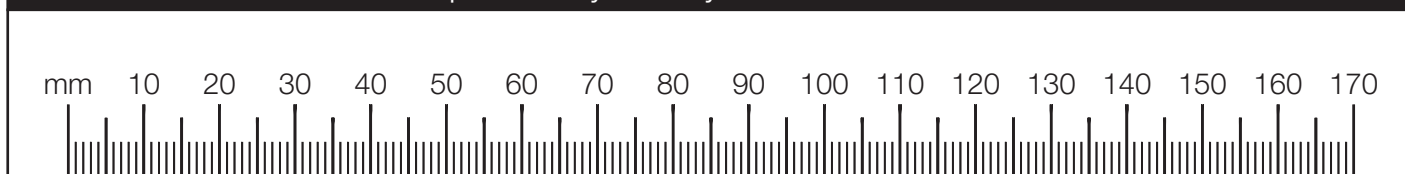

Assembly Instructions


If you have damaged or missing components, call the
Customer Helpline: 08456 400800 quoting the reference
numbers below

Step 1

Prepare the drawer front

Screw 2 metal dowels **B** into the holes shown on the back of the drawer front **7**.

Note: Tighten the metal dowels up fully against the panels.

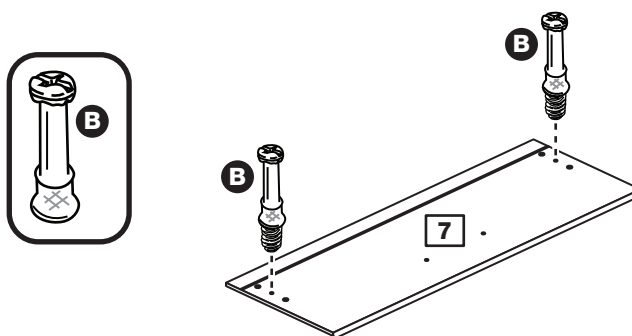


Step 2

Prepare the drawer sides

Insert a small locking nut **F** into the hole shown on the left drawer side **8** and right drawer side **9**.

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

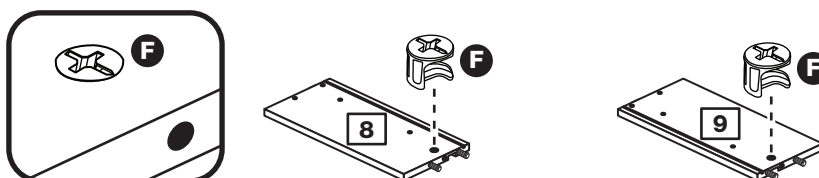


Step 3

Attach the drawer sides to the drawer front

Push the left drawer side **8** and right drawer side **9** onto the back of the drawer front **7**.

Turn the small locking nuts **F** on the left drawer side **8** and right drawer side **9**.

Note: Turn the locking nuts **F** clockwise to secure panels - more than 1/2 a turn.

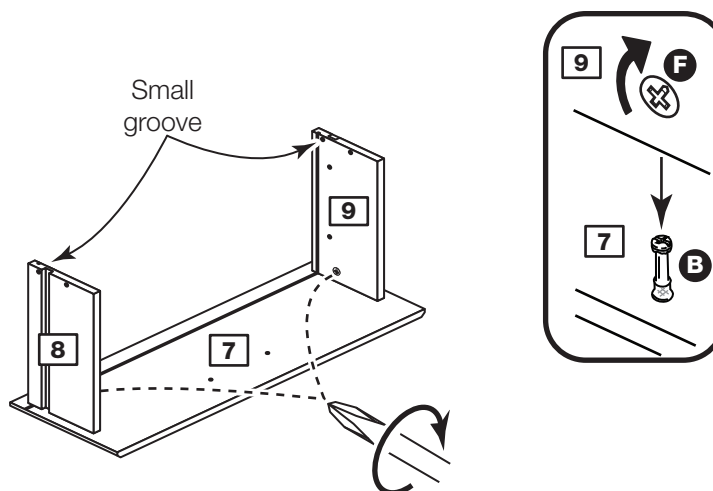


Assembly Instructions

Step 4

Fit the drawer base

Slide the drawer base **11** down the grooves in the drawer sides **8** and **9** and down into the groove in the drawer front **7**.

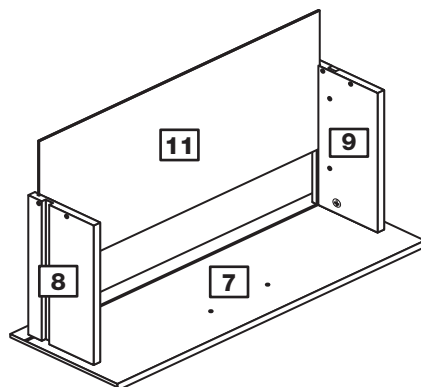


Step 5

Fit the drawer back

Fit the drawer back **10** between the drawer sides **8** and **9**.

Make sure that the drawer base **11** fits into the groove in the drawer back **10**.


Hold the drawer back **10** in position and tap the knock-in pegs **J** through the holes in the drawer sides **8** and **9**.

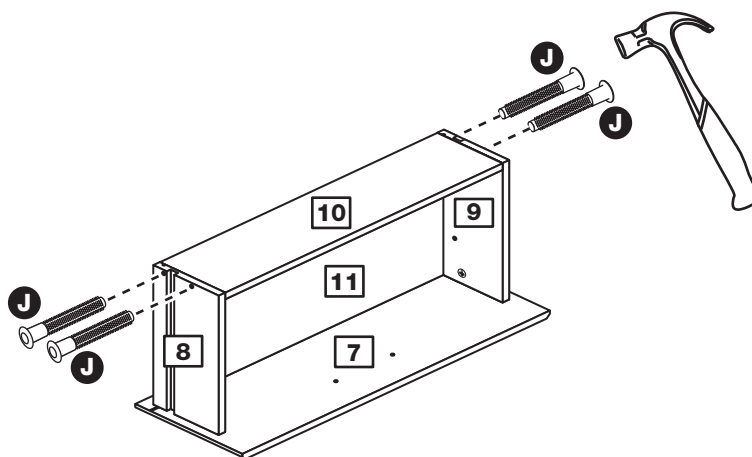

Step 6

Attach the handle

Attach the handle **L a** to the drawer front **7** using 2 screws **L b**.

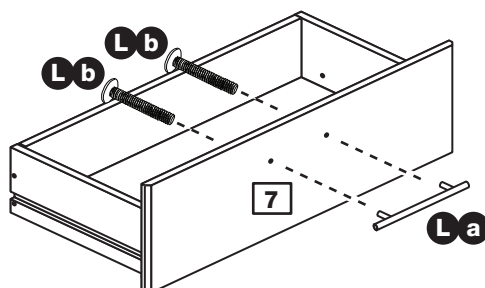

Assembly Instructions

Step 7


Fit runners to the drawers

Fit the runner **Mc** to the bottom edge of the left drawer side **8**, as shown, making sure that it is pushed up against the back of the drawer front **7**. Use a bradawl to mark the fixing positions, then secure with 2 screws **I**.

Fit the runner **Md** to the bottom edge of the right drawer side **9** using the same method.

Runners must be pushed up against the drawer front

Turn the drawer over

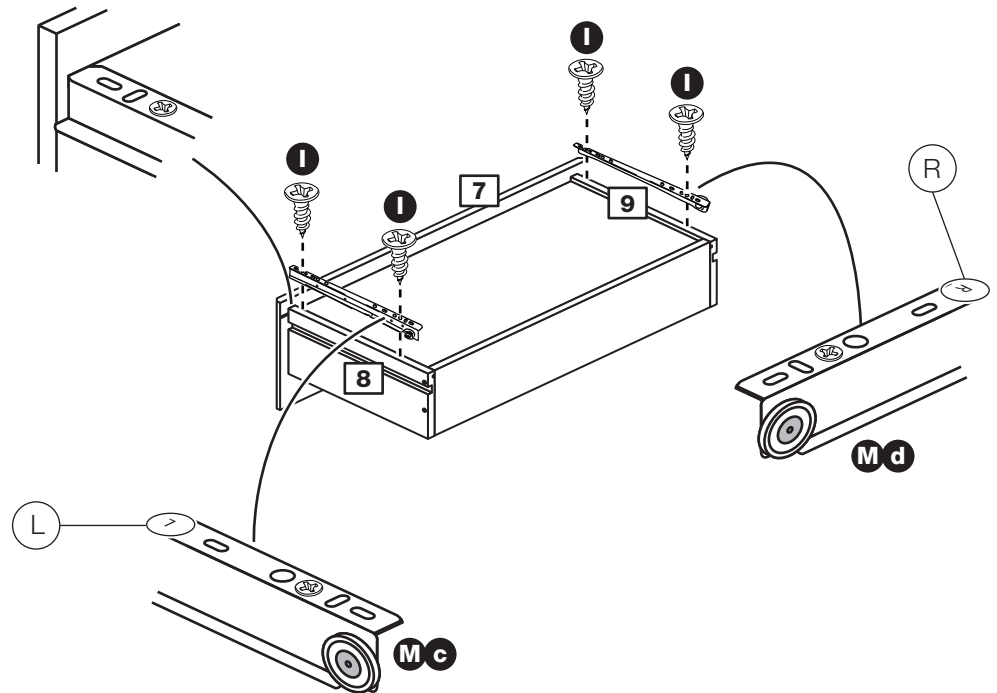

Step 8

Prepare the left side

Tap a wooden dowel **A** into the left side **1**.


Screw 5 metal dowels **B** into the left side **1**.

Insert a large locking nut **E** into the left side **1**.

Fit the runner **Ma** to the left side **1**.

The 1st screw **G** uses the 2nd hole in from the front of the runner **Ma**.

The 2nd screw **G** uses the hole that lines up with the other panel hole.

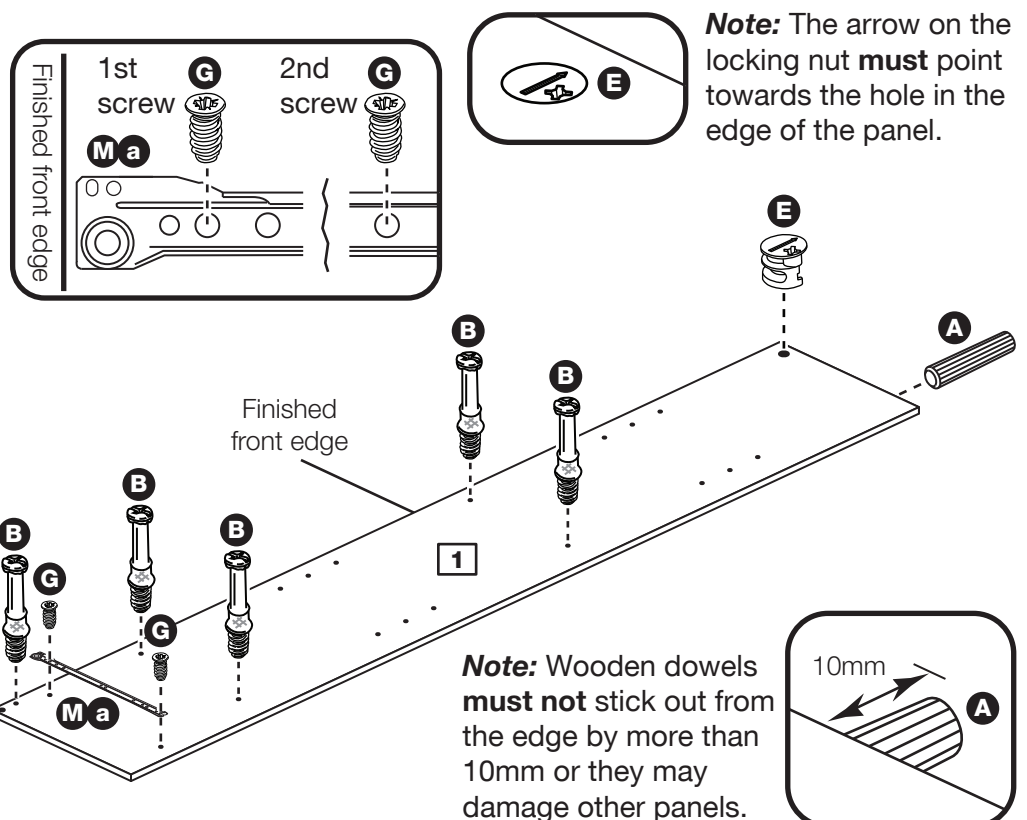

Note: The arrow on the locking nut **must** point towards the hole in the edge of the panel.

Note: Wooden dowels **must not** stick out from the edge by more than 10mm or they may damage other panels.

Assembly Instructions

Step 9

Prepare the right side

Tap a wooden dowel **A** into the right side **2**.


Screw 5 metal dowels **B** into the right side **2**.

Insert a large locking nut **E** into the right side **2**.

Fit the runner **Mb** to the right side **2**.

The 1st screw **G** uses the 2nd hole in from the front of the runner **Mb**.


The 2nd screw **G** uses the hole that lines up with the other panel hole.

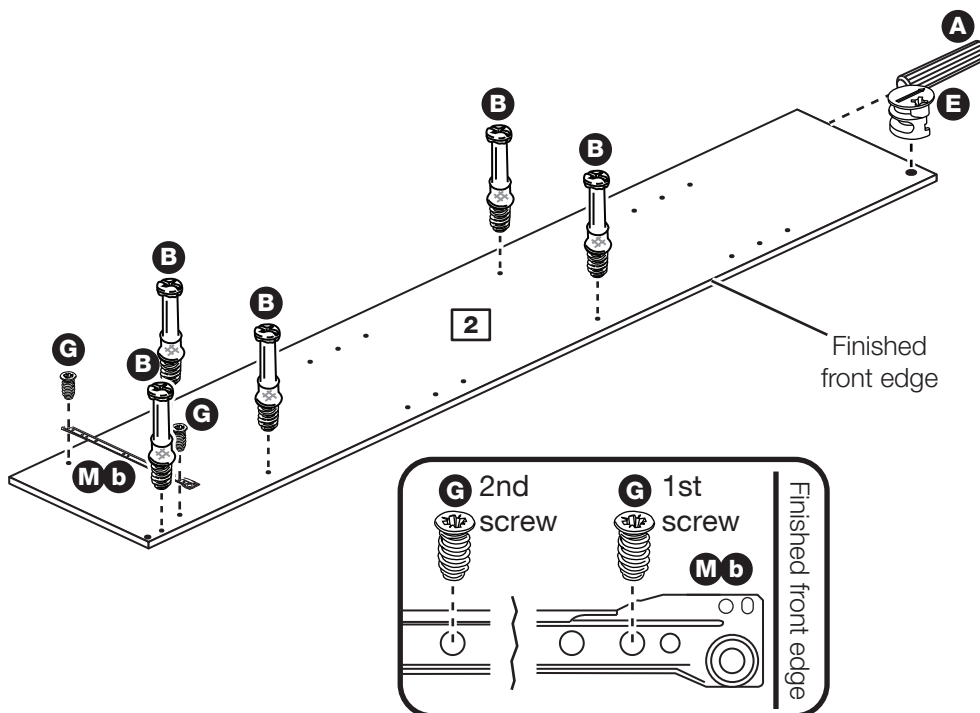

Step 10

Prepare the 2 horizontals

Insert 4 large locking nuts **E** into each of the horizontals **4**.

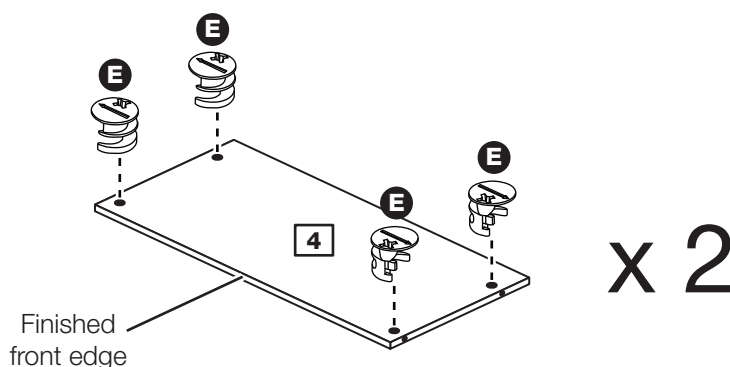

Assembly Instructions


Step 11

Join the right side and horizontals

Push the 2 horizontals **4** onto the right side **2**.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to each of the 2 horizontals **4**.

Note: Turn the large locking nuts **E** as far as they will go - more than 1/2 a turn.

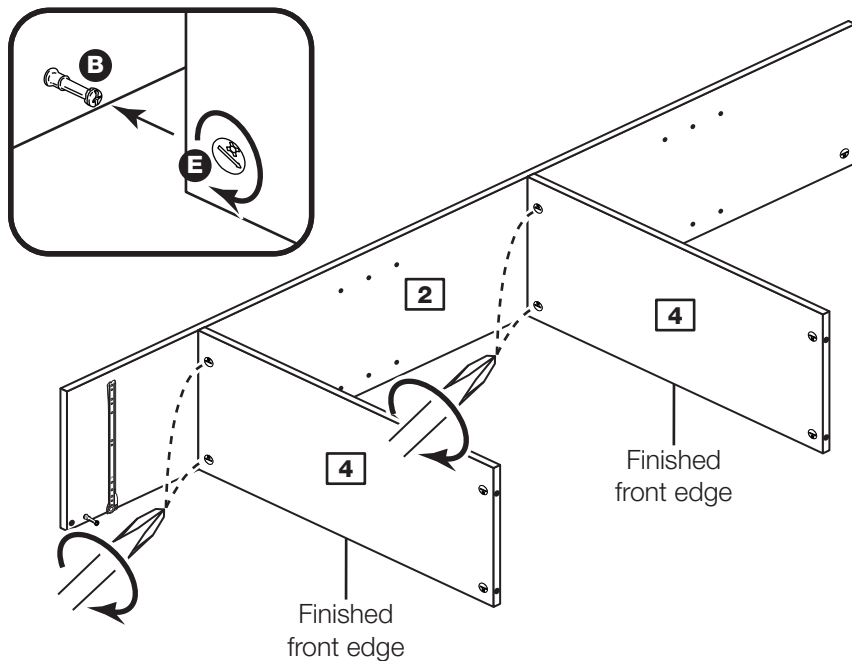


Step 12

Prepare the plinth

Tap 2 wooden dowels **A** into the plinth **6**.

Insert 2 large locking nuts **E** into the plinth **6**.

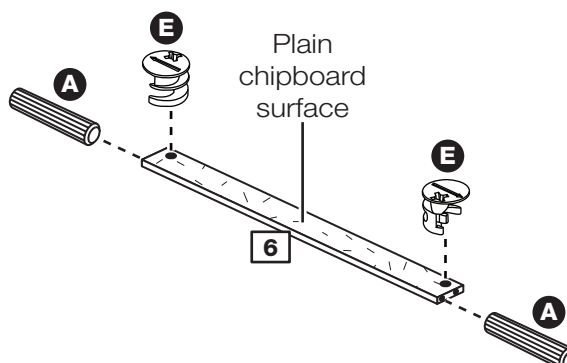


Step 13

Fit the plinth

Push the plinth **6** onto the right side **2**.

Use a screwdriver to tighten the large locking nut **E** fitted to the plinth **6**.

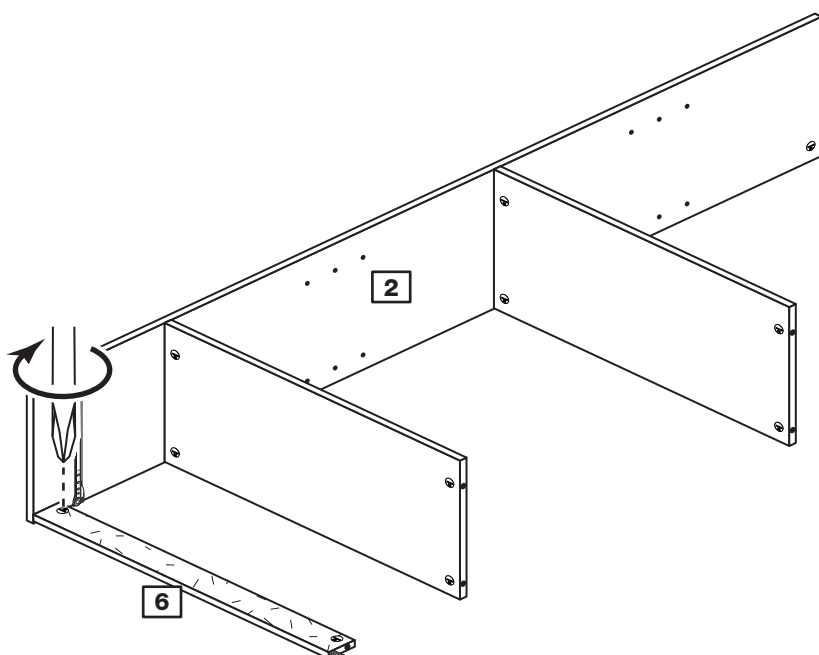


Assembly Instructions

Step 14

Fit the left side

Push the left side **1** onto the assembly.


Use a screwdriver to tighten the 5 large locking nuts **E** fitted to the 2 horizontals **4** and the plinth **6**.

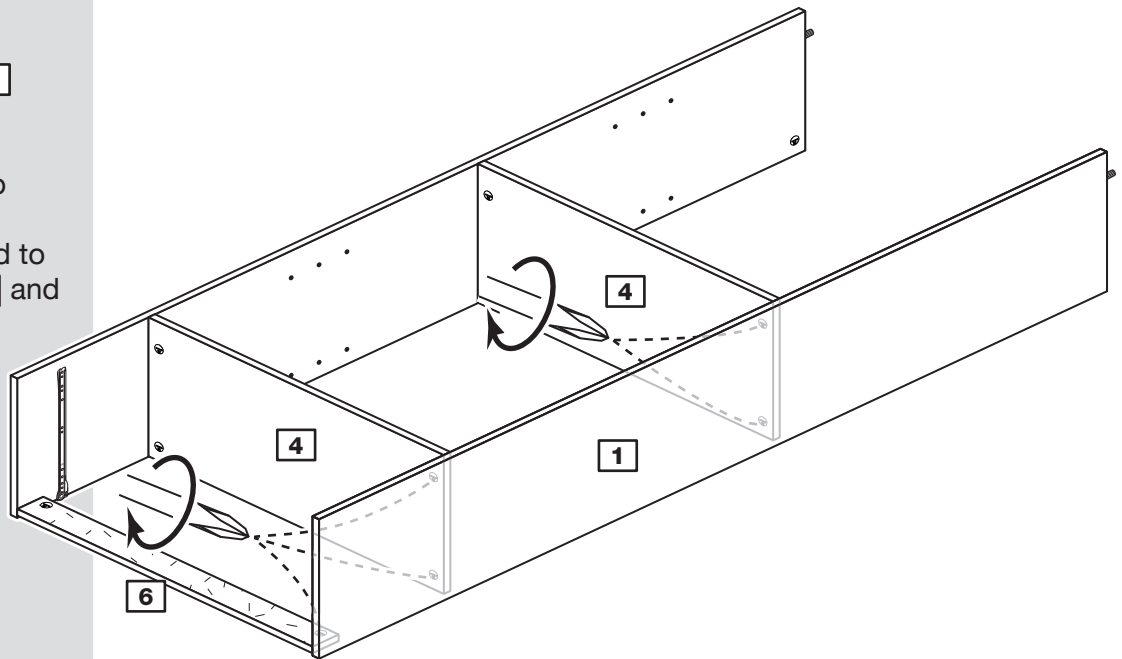

Step 15

Prepare the top

Screw 2 metal dowels **B** into the top **3**.

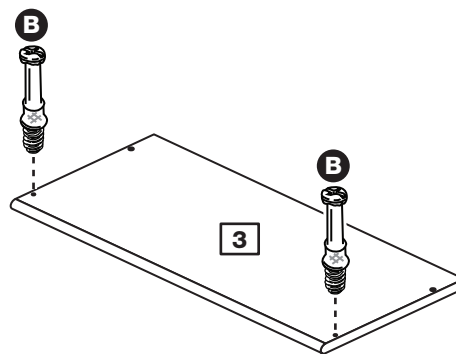


Assembly Instructions

Step 16

Fit the top

Push the top **3** onto the assembly.

Use a screwdriver to tighten the 2 large locking nuts **E** fitted to the left side **1** and right side **2**.

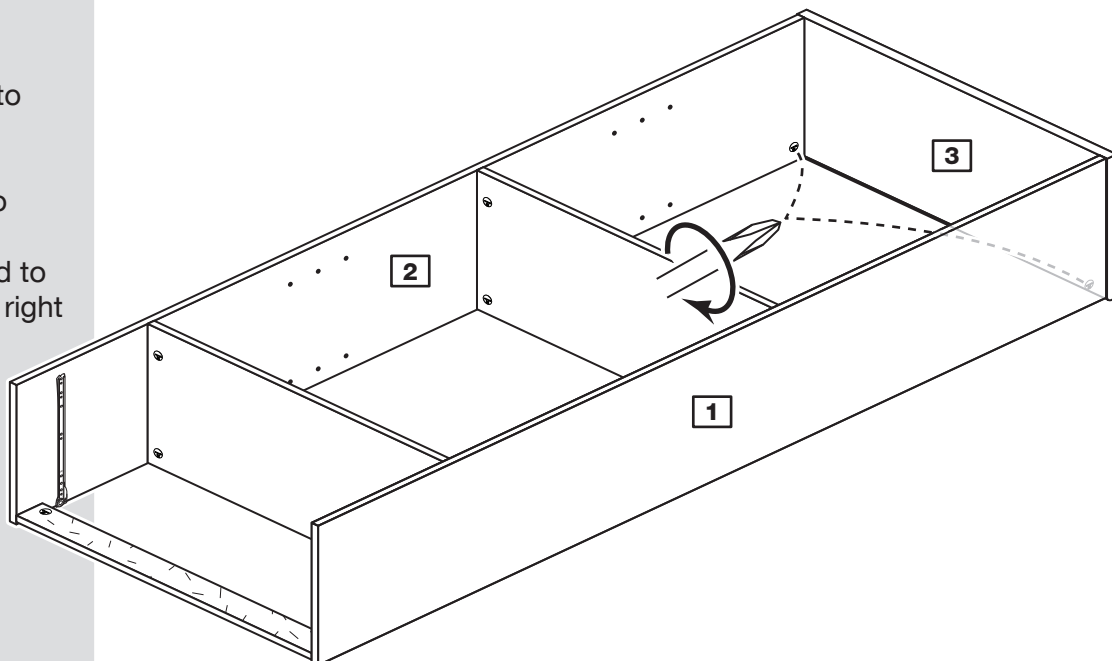

Step 17

Fit the back

a: Square up the unit by making sure that measurement **x** to **x** equals **y** to **y**.


b: Place the back **12** onto the unit.

Nail **D** around the outside edges of the back **12**.

Note: Nails should be spaced about 150mm apart.

Stand the unit up for the next step.

a: The measurement from top corner X to bottom corner X must be equal to the measurement from top corner Y to bottom corner Y

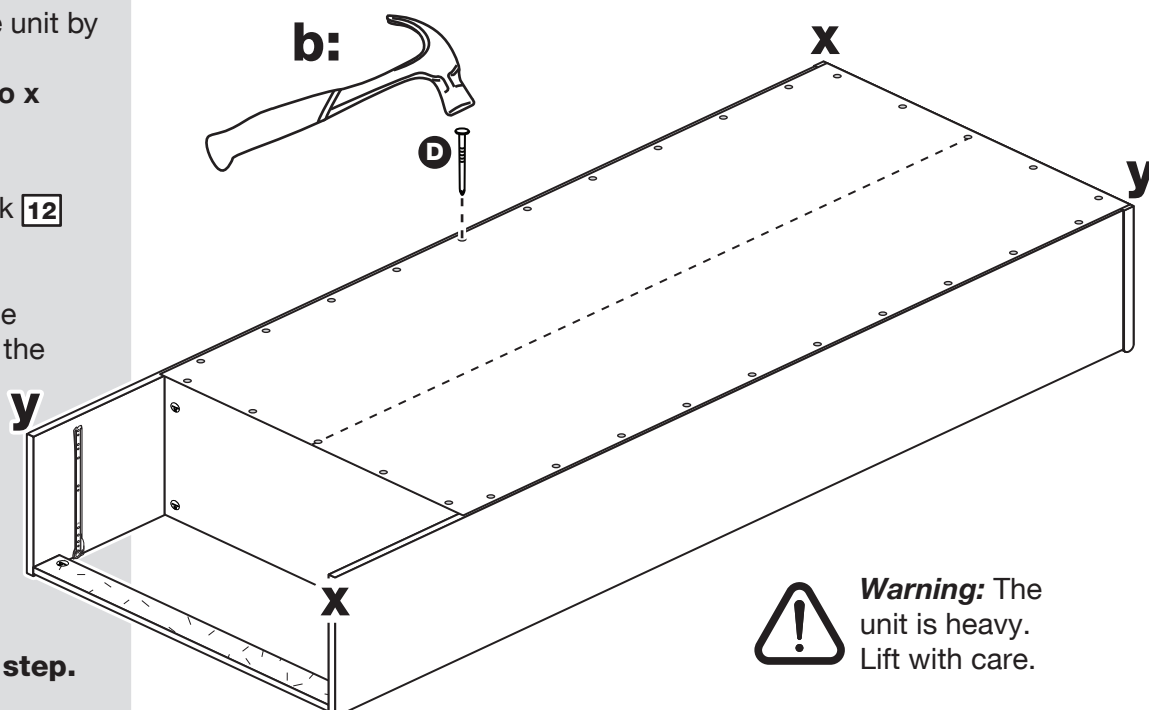

Warning: The unit is heavy. Lift with care.

Assembly Instructions

Step 18

Attach bracket to top

To prevent possible overbalancing, we recommend that this unit is secured to a suitable wall by use of the bracket **K** fitted to the top of the unit.


Fixings are not supplied, as they will need to suit the wall type and the length of screw will depend on the distance from the back of the unit to the wall.

Fix the bracket **K** loosely onto the top of the unit using screw **H** and mark the wall for the wall fixing.

Swivel the bracket **K** away from the wall and drill a hole in the wall using a suitable drill bit and fit your wall fixing.

Swivel the bracket **K** back and fix the bracket to the wall, then tighten Screw **H**.

Note: Take care when drilling the wall that you do not drill into any pipes, wires etc. If in doubt, consult an expert.

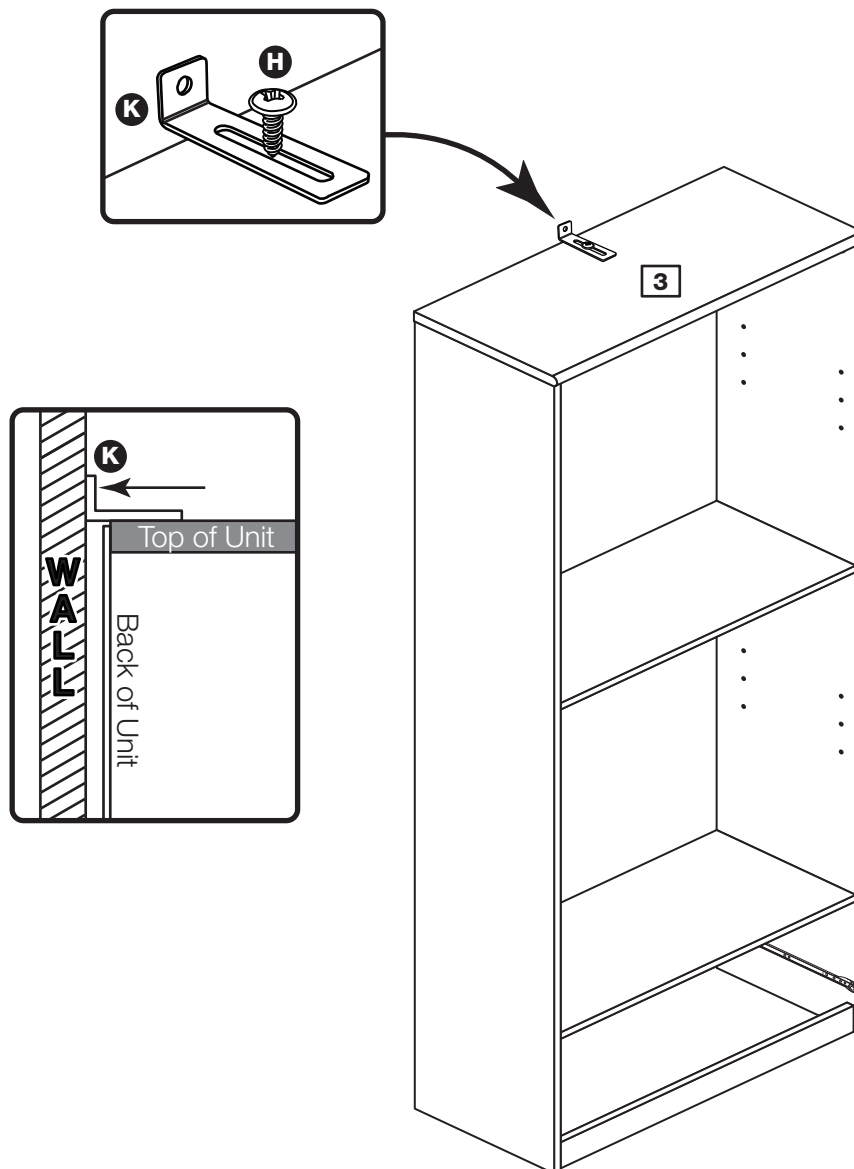


Assembly Instructions

Step 19

Fit the shelf studs


For each of the 2 shelves **5**, insert 4 shelf studs **C** at the required height.

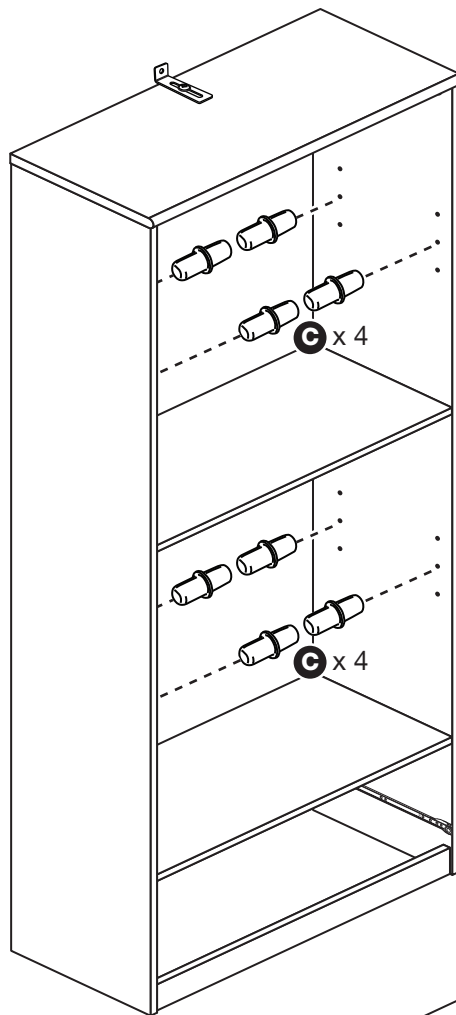

Step 20

Fit the shelves

Lower the 2 shelves **5** down onto the shelf studs **C**.

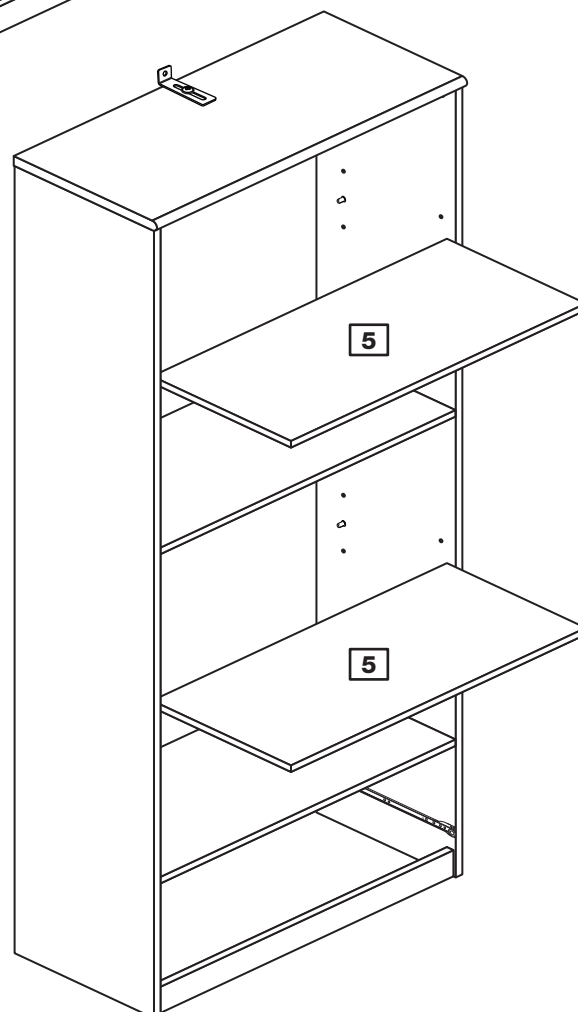

Assembly Instructions

Step 21



Fit the drawer

Slide the wheels on the runners fitted to the drawer sides over the wheels on the runners fitted to the side panels and push the drawer into position.

Assembly is complete



Warning: The unit is heavy. Lift with care.

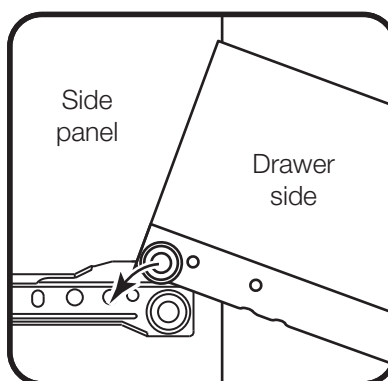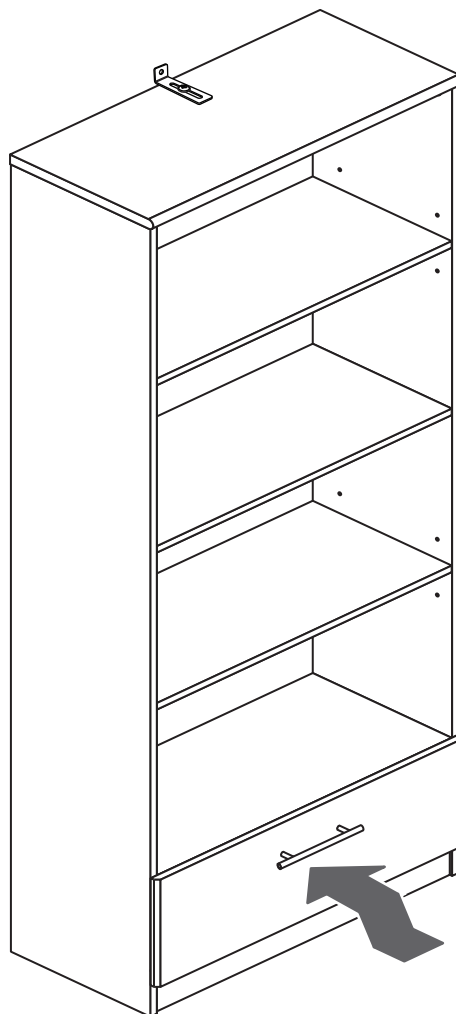

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800** and quote the reference numbers on the component pages.

Argos Ltd, 489-499 Avebury Boulevard, Central Milton Keynes, MK9 2NW

