and affect how they link to each other. indoors. Thick walls and doors reduce the units' range units is about 250 metres outdoors and about 50 metres The maximum range between your Parent and Baby

What's the range?

they are now ready to use. The Parent and Baby unit are automatically linked so



Parent unit on.

Press the 👅 button and hold for Z seconds to turn the

teedback sounds.


from the Baby unit. Any closer and you might get audio Before you do, move the Parent unit at least one metre

After the Parent unit has charged for 12 hours you can

extra length and securing it. Keep the power cord out of baby's reach by looping any

up to turn it on.

5) Slide the Off (C) on button on the side of the Baby unit



mains power socket and switch the socket on. 🚯 Plug the cable into the Baby unit, then plug it into the


the time. It should also be at least one metre away from where you're going to be monitoring your baby most of 3 Place the Baby unit near a power socket in the room

turn it off while it's charging. To charge the Parent unit in the shortest amount of time,

minutes to charge enough for you to use it for a When the battery gets very low, it'll take about 30

used it for a long time, it'll take 12 hours to fully charge. The first time you use the Parent unit, or if you haven't

Teave to charge for 12 hours.



mains power socket and switch the socket on. 1 Plug the cable into the Parent unit, then plug it into the

dn jəs buijjən

det in touch with our helpdesk.

5. Do not take the product apart. If you need repairs,

plugs match the local power output.

4. If you travel abroad, check the voltage on your unit's

inside the cot, bed or playpen.

3. Never cover either unit, put them in moist places or

reach - at least one metre away.

2. Make sure all cables and units are out of your baby's

adult supervision.

It isn't a substitute for responsible and proper

1. Your baby monitor is designed as just an aid.

Important safety notices

or give us a call on **0808 100 6554***. opposite. If you need any help, go to bt.com/producthelp But first things first. To get set up, just follow the steps

tor your baby's every breath, gurgle and wriggle. pe able to relax knowing you can watch and listen Thanks for buying a BT Baby Monitor. You'll soon

Welcome

Troubleshooting

My Parent/Baby unit isn't working. What should I do? Check that:

- 1 power cables are plugged in and switched on at the wall socket
- 2 the Baby unit is plugged in and the Parent unit battery is fully charged (for 12 hours)
- 3 both units are turned on
- 4 the Parent unit isn't too far from the Baby unit (large obstructions or other electrical devices might affect the signal between the Parent and Baby unit).
- 5 unplugging the power cables, waiting about 15 seconds, and then plugging them back in can help.

My Parent/Baby unit is making a high-pitched noise. What should I do?

The units might be too close together. Make sure they're at least one metre apart, even when you're using the Talk button.

Why is my Parent unit beeping? The Parent unit beeps when:

- the Baby unit is turned off
- the units are too far apart try moving them closer together (but not closer than one metre)
- the battery in the Parent unit isn't charged try charging it for 12 hours
- Other electronic items, like TVs and mobile phones, are causing interference – try moving the Baby unit away from things like that.

Why is the Parent unit not making any sounds even though there's noise coming from my baby's room?

- the Parent unit might not be fully charged make sure it's charged (for 12 hours).
- the speaker volume might be switched off.
- the Parent unit might be out of range of the Baby unit try moving it closer (but not closer than one metre).
- large obstructions or other electrical devices might be affecting the signal between the Parent and Baby units). Try moving the Baby unit away from obstructions, including electrical appliances like TVs or mobile phones.

Need some help?

Frequently asked questions are available online.



L bt.com/producthelp

If you cannot find the answer to your question online, call our free Helpline. Our dedicated advisors are more likely to be able to help you than the retailer where you bought your baby monitor.



0808 100 6554*

This user guide is also available in other formats: large print, Braille and audio CD. Call the helpline for a copy.

* Calls made from within the UK mainland network are free. Mobile and international call costs may vary.

General information

Guarantee

Your Video Baby Monitor 3000 is quaranteed for a period of 24 months from the date of nurchase.

Subject to the terms listed below, the guarantee will provide for the repair of, or at BT's or its agent's discretion the option to replace the Video Baby Monitor 3000, or any component thereof, which is identified as faulty or below standard. or as a result of inferior workmanship or materials. Products over 28 days old from the date of purchase may be replaced with a refurbished or repaired product.

The conditions of this guarantee are:

- The quarantee shall only apply to defects that occur within the 24 month guarantee period.
- Proof of purchase is required.
- The equipment is returned to BT or its agent as instructed.

This guarantee does not cover any faults or defects caused by accidents, misuse, fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents.

This guarantee does not affect your statutory rights.

To find out what to do, if your monitor is in or outside of the 24 month guarantee. go to bt.com/producthelp



How to recycle your equipment

The symbol shown here and on th product means that the product is classed as electrical or electronic equipment, so DO NOT put it in your normal rubbish bin.

It's all part of the Waste Flectrical and Electronic Equipment (WEEE) Directive to recycle products in the best way – to be kinder to the planet, get rid of dangerous things more safely and bury less rubbish in the around.

You should contact your retailer or supplier for advice on how to dispose of this product in an environmentally

Radio Equipment Directive Declaration of Conformity

Hereby, British Telecommunications plc declares that the radio equipment type BT Video Baby Monitor 3000 (088304) is in compliance with Directive 2014/53/EU.

This device has been evaluated for and shown compliant with European Guidelines when installed and operated with a minimum distance of 16mm between the unit and your body.

The item code for both power supply units is 089009 (BLJ06W050060P1-B). The full text of the FII declaration of conformity is available at the following internet address: bt.com/producthelp

Radio transmission information

Frequency range 2415.375 -2471.625MHz Max power 89.54mW (19.52dBm)

© British Telecommunications plc 2017. Registered Office: 81 Newgate Street, London EC1A 7AJ. Registered in England No. 1800000 Designed and produced by The Art & Design Partnership (ADP). Printed in China / Issue 5 / ADP12-17



Video Baby Monitor 3000 **User Guide**

Using the Parent unit

σ Turn on and off

Press and hold of for 2 seconds to turn on and off.

Menu Using the menu

- Press Menu to open the main menu. Scroll through the menu options using and . When the menu option you want is displayed, press OK . Use or very to scroll through the sub menus and press ok to select.
- Press Menu to exit the menu and return to the main monitoring screen.

(x) Monitoring volume and mute (x

There are 8 volume settings.

- 1. In normal monitor mode (X1), press or very to change the volume.
- 2. Press OK to confirm.
- 3. To turn the sound off completely, turn the volume down to 0. 🕻 will be displayed on top of the screen.

• Screen brightness

There are 8 brightness levels. The default is 4.

- 1. In normal monitor mode (X1), press or to select the brightness level.
- 2. Press ok to confirm.

Lullabies

There are 5 lullabies to choose from or you can play all 5 in sequence.

- 1. Press Menu, o is displayed, press OK
- 2. Press or to choose the lullaby 1-5 or press to play all five, then press OK.
- 3. Press or to select the volume from 1–3 and press or
- 4. To stop the lullaby playing, select **②**.


Talk to your baby

To give your baby some words of comfort, press and hold down Talk on the Parent unit and speak into the Parent unit's microphone. The θ icon will be displayed at the bottom right corner. Release the button when you've finished speaking.

♠ Zoom in and out

- 1. Press Menu, then press ✓ to display ♠ and press OK.
- 2. Press or to select the zoom level (X1 or X2), then press or to save.
- 3. Press Menu to return to the main monitoring screen.
- 4. Whilst in X2 mode, press A, V, or to move the image.
- 5. To adjust the volume or screen brightness when in X2 zoom mode, press Menu and select the () or O option and press OK


Get to know your Baby unit

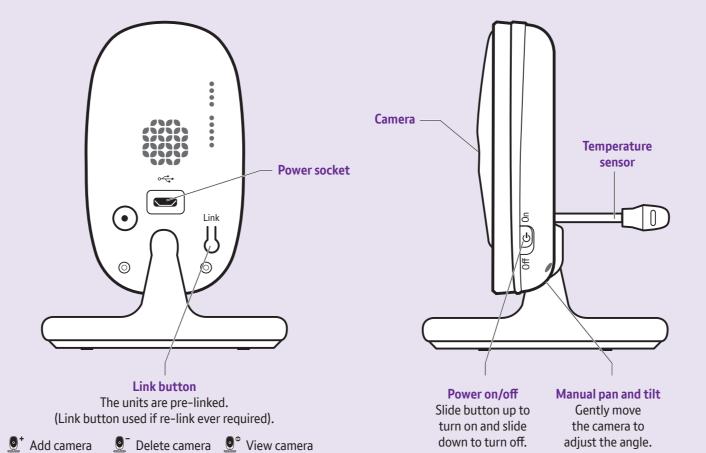

down to turn off.

adjust the angle.

Get to know your Parent unit

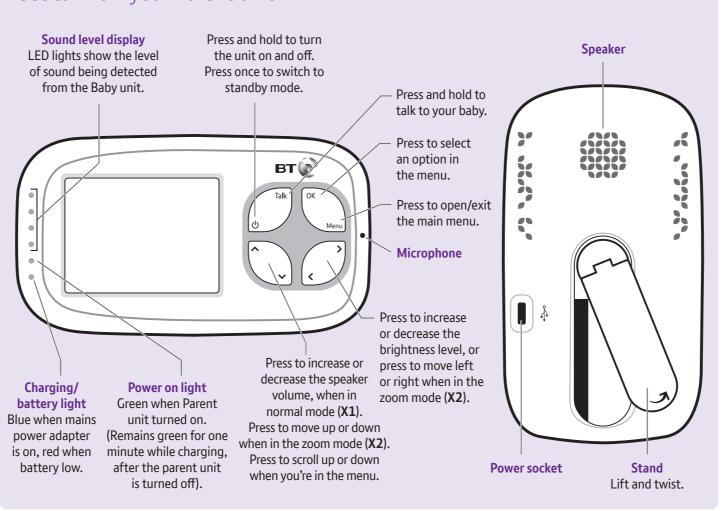

Set a reminder

You can set an alert to remind you of something you need to do, for example when your baby's next feed is due. You can set it for 2, 4 or 6 hours.

- 1. Press Menu, then press to display (2) and press OK
- 2. Press or to select the reminder time (2H, 4H or 6H), then press or to save. The will be displayed on the top right of the screen.
- 3. To cancel the alert, select **②**.

Set the screen to turn on and off automatically

You can set the screen to turn on by pressing any button. On this setting, the screen will turn off automatically when no button is pressed during 1, 3 or 5 minutes.

- 1. Press Menu, then press to display III and press OK
- 2. Press and to select 1, 3 or 5 minutes and press or
- 3. To turn the screen back on at any time, press any button. If you want to set the screen on all the time, set the screen setting \triangleright to off \bigcirc .

GB Turn sound activated screen mode on or off

When set to On, the screen will turn on if noise is detected from the Baby unit. If it's set to Off, the screen will stay off even if noise is detected. To use this feature, you need to set the standby mode first to 1, 3 or 5 minutes as described above.

- 1. Press Menu, then press v to display (dB) and press OK.
- 2. Press and to select (for On) or (for Off) and press or
- 3. To turn the screen back on at any time, press the

Temperature sensor

The reading from the temperature sensor will be displayed at the top of the Parent unit screen.

To change the temperature display from C to F:

- 1. Press Menu, then press to display & and press OK.
- 2. Press or to select °C or °F, then press ok

Other screen icon descriptions

Yill Signal strength

Sound on

1 Baby unit switched on

← Mute

Q1 Camera identification number e.g. Camera 1 Battery status (Full battery shown, scrolling when charging)

Using the Baby unit

off Gon Turn on and off

1. Slide the Off C- On button on the side of the unit up to turn On and press down to turn Off.

(Night vision

So that you can see your baby at night, the Baby unit automatically uses the light from its infrared LED lights to capture images in a dark room. Because of that, it can only show images in black and white. The (icon will be displayed at the top of the screen.