


Matrix Black Large Sideboard

Simplified Assembly Instructions - Please keep for future reference

614/2151

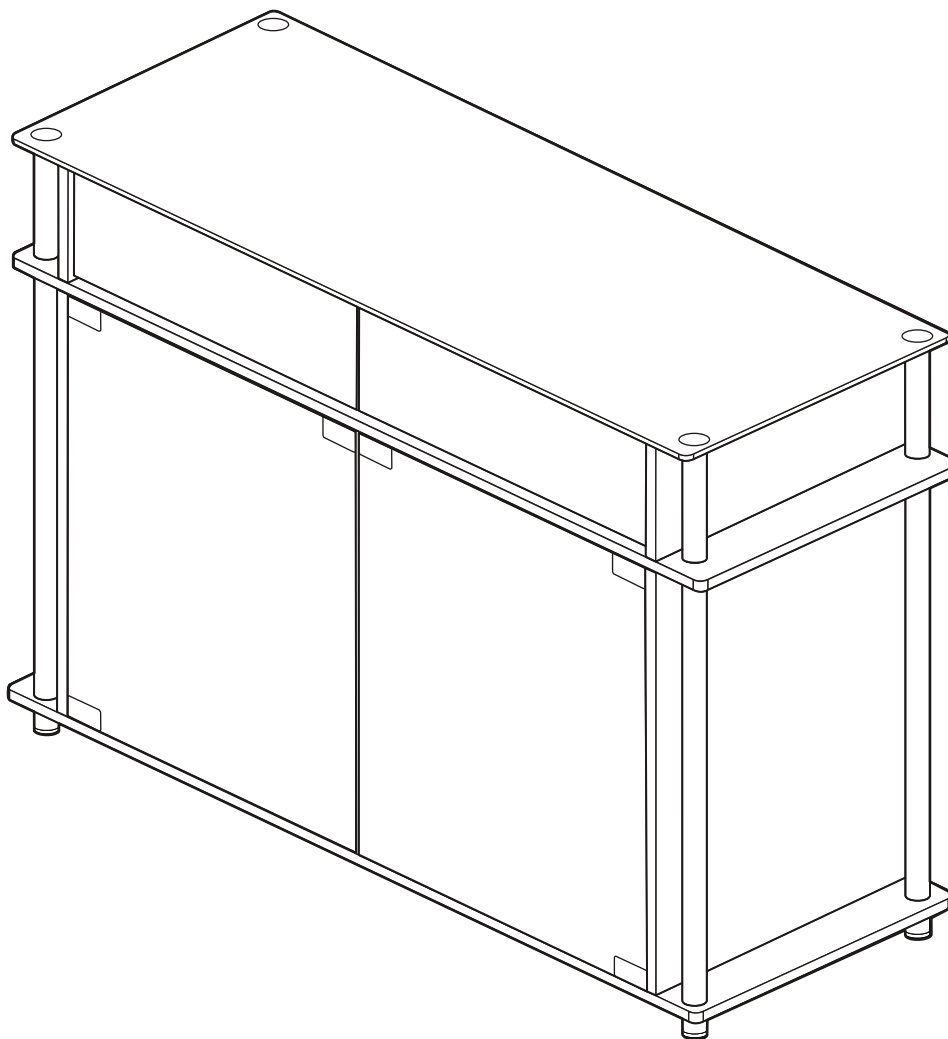

Dimensions

Width - 120cm

Depth - 40cm

Height - 80cm

Important - Please read these instruction fully before starting assembly

If you need help or have damaged or missing parts, call the **Customer Helpline: 08456 400800**




Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/drivers **for inserting screws**, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Keep These Instructions For Future Reference

- This product complies with BS EN14749:2005
- Argos plc
489-499 Avebury Boulevard
Central Milton Keynes
MK9 2NW
- Batch No./Date of manufacture:

Warning

- Do not place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulating material is used to prevent such items from coming into contact with the glass.
- Do not sit or stand upon the glass surface(s).
- If a glass component is chipped or broken, stop using the product and consult the manufacturer or supplier.
- Do not use the glass as a chopping surface. Do not strike the glass with hard or pointed items.

Note: if required the next page can be cut out and used as reference throughout the assembly. Keep this page with these instructions for future reference.

Components - Panels

Please check you have all the panels listed below



1 Top right side panel x 1
(40 x 15cm)




2 Top left side panel x 1
(40 x 15cm)



3 Top middle panel x 1
(36.8 x 15cm)




4 Top back panel x 1
(106.5 x 15cm)

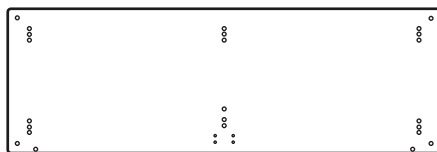

5 Top panel x 1
(120 x 40cm)



6 Supporting panel x 2
(52.5 x 3.5cm)

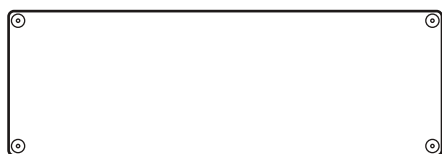


7 Glass Top x 1
(120 x 40cm)




8 Metal tube x 4
(14 x 3.8cm)




9 Metal tube x 4
(58 x 3.8cm)




10 Divider x 1
(58 x 34cm)



11 Lower left side panel x 1
(58 x 40cm)




12 Lower right side panel x 1
(58 x 40cm)

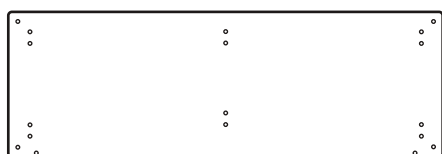

13 Bottom panel x 1
(120 x 40cm)



14 Feet x 5
(3.8 x 3.2cm)

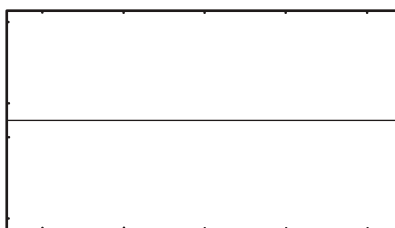


15 Back Panel x 1
(109 x 60.5cm)



Components - Panels


Please check you have all the panels listed below




16 Shelf x 1
(52.4 x 34cm)




17 Shelf x 1
(52.4 x 34cm)



18 Glass door x 1
(57 x 52.7cm)




19 Drawer back panel x 2
(47.5 x 8cm)




20 Drawer left side panel x 2
(35 x 8cm)




21 Drawer right side panel x 2
(35 x 8cm)



22 Drawer bottom x 2
(48.5 x 33.5cm)



23 Left drawer front panel x 1
(53 x 12.7cm)



24 Right drawer front panel x 1
(53 x 12.7cm)























Components - Fittings


If you have damaged or missing components, call the **Customer Helpline: 08456 400800**

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  12mm Screw x 8	B  Right side runner x 2	C  37mm cam pillar x 12
D  Left side runner x 2	E  9.5mm Cam x 6	F  38mm Screw x 18
G  25mm Plastic dowel x 24	H  32mm Screw x 4	I  55mm Screw x 8
J  Easy door assembly spring x 4	K  Door catch set x 1	L  12.5mm Cam x 6
M  25mm Screw x 1	N  Nail x 20	O  Wall mounting strap x 2
P  Supporter x 8	Q  Left hinge set x 2	R  Right hinge set x 2
S  Counterplate set x 2	T  30mm Screw x 16	

Tools required




Crosshead screwdriver
(not included)



Hammer
(not included)

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions


Step 1

Attaching runner

Place runner **B** onto right side panel **1** by using 2 pcs of screw **A**.




Note: If panels have any transparent protection film, remove from **ALL** panels before starting.

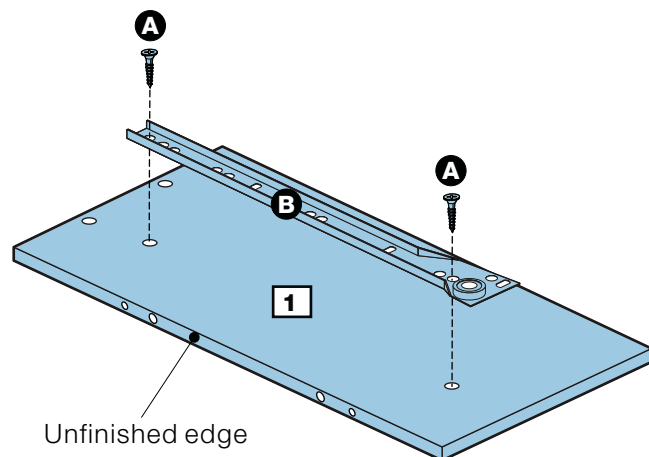

Step 2

Attaching cam pillar


Fix 2 pcs of cam pillars **C** onto right side panel **1**.

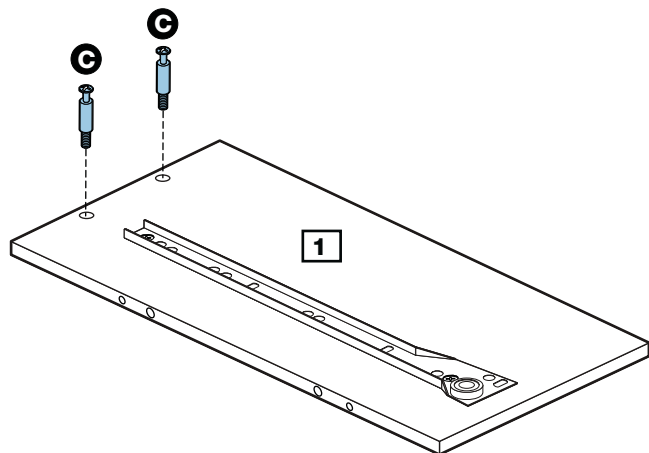

Step 3

Attaching runner


Place runner **D** onto left side panel **2** by using 2 pcs of screw **A** to fix as shown.

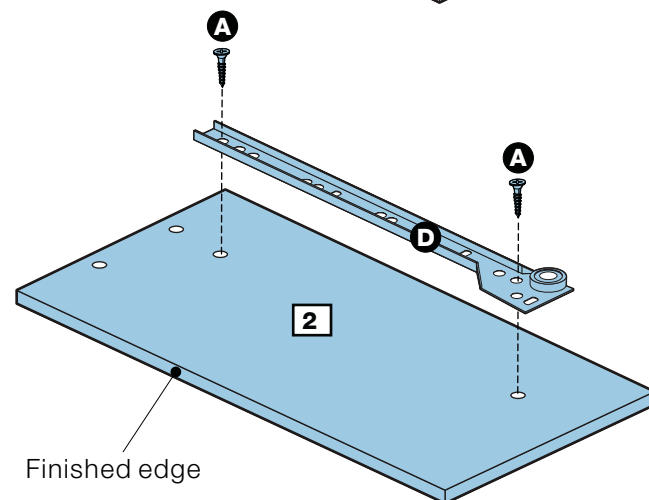

Step 4

Attaching cam pillar

Fix 2 pcs of cam pillars **C** onto left side panel **2**.

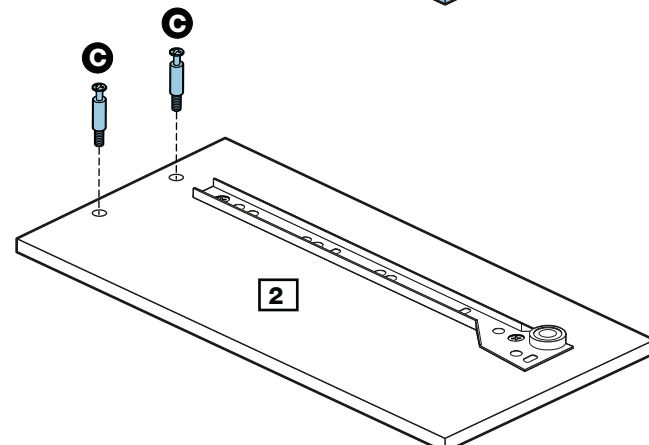


Assembly Instructions

Step 5

Attaching runner


Place runner **D** onto top middle panel **3** by using 2 pcs of screw **A**.

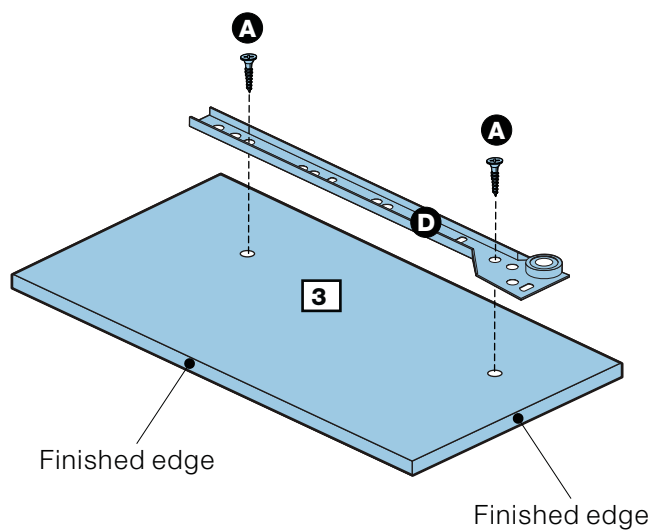

Step 6

Attaching runner


Place runner **B** onto the other side of top middle panel **3** by using 2 pcs of screw **A**.

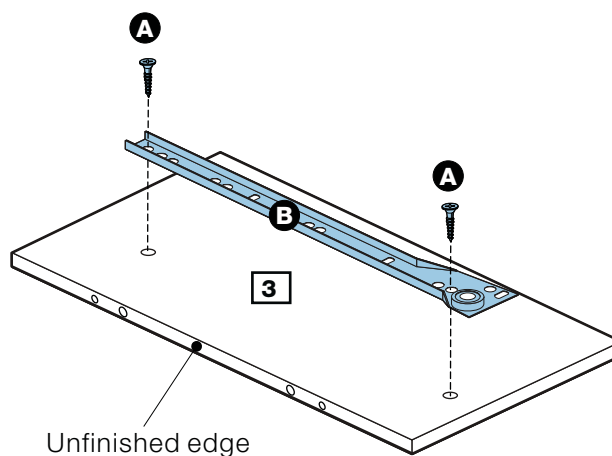

Step 7

Attaching panel

Fix top back panel **4** between side panel **1** & **2**.

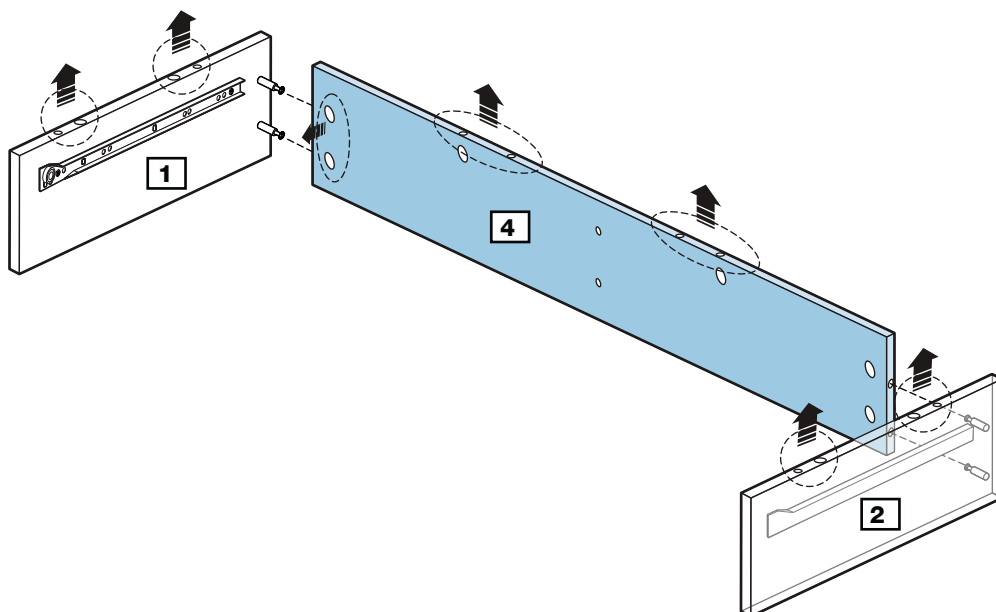


Assembly Instructions

Step 8


Attaching cam

a: Insert 4 pcs of cam

E onto the top back panel **4**.

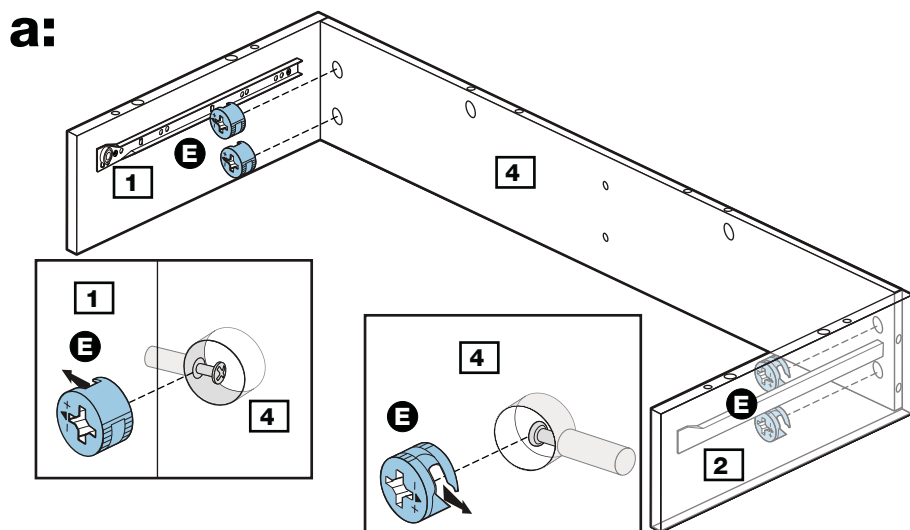

b: Please adjust the arrow on cam to the correct position as shown.

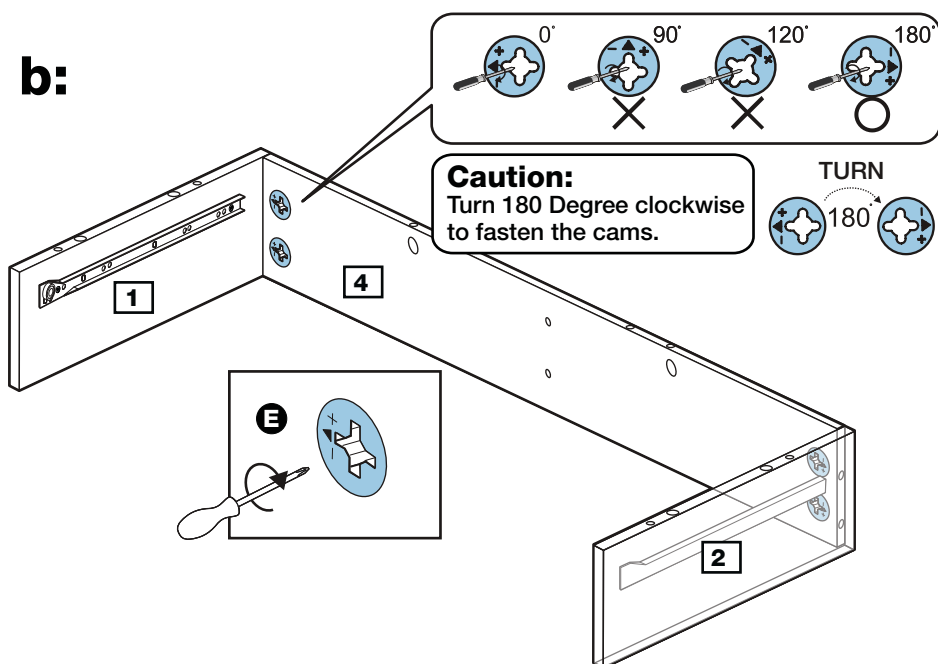


Step 9

Attaching panel

Fix top middle panel **3** onto top back panel **4** by using 2 pcs of screw

F.

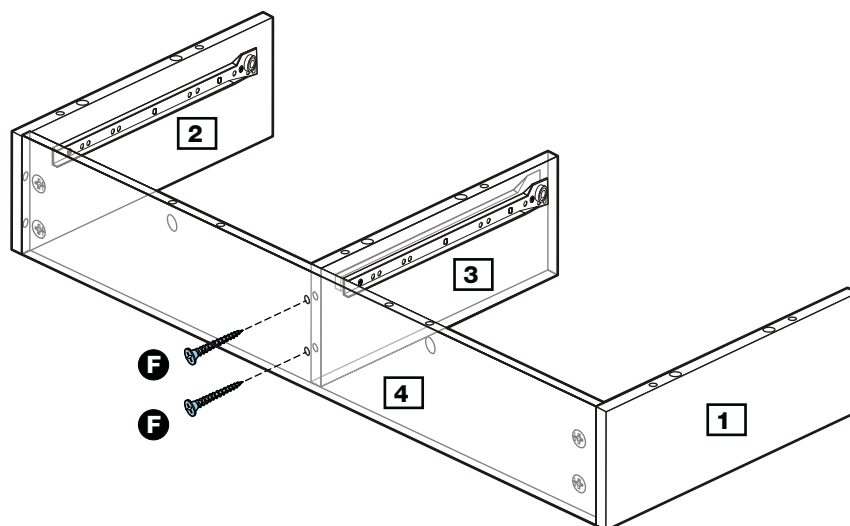


Assembly Instructions

Step 10

Fitting dowels


Insert 12 pcs of plastic dowels **G** into top panel **5**.

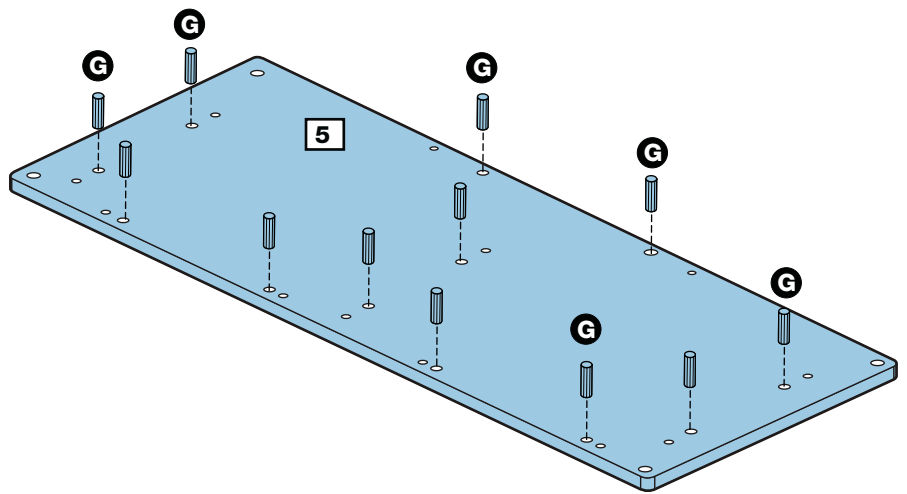

Step 11

Attaching cam pillar


Fix 2 pcs of cam pillars **C** onto top panel **5**.

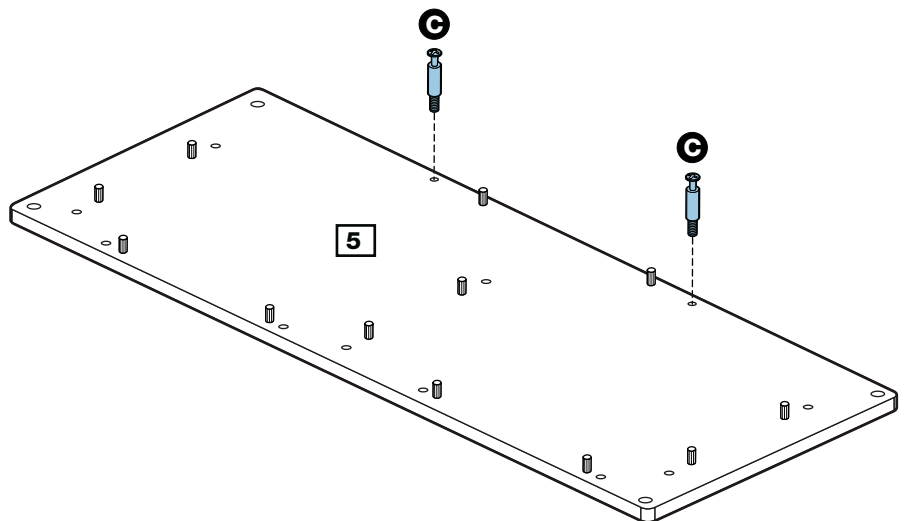

Step 12

Attaching panel

Fix 2 pcs of supporting panel **6** onto top panel **5** by using 4 pcs of screw **F**.

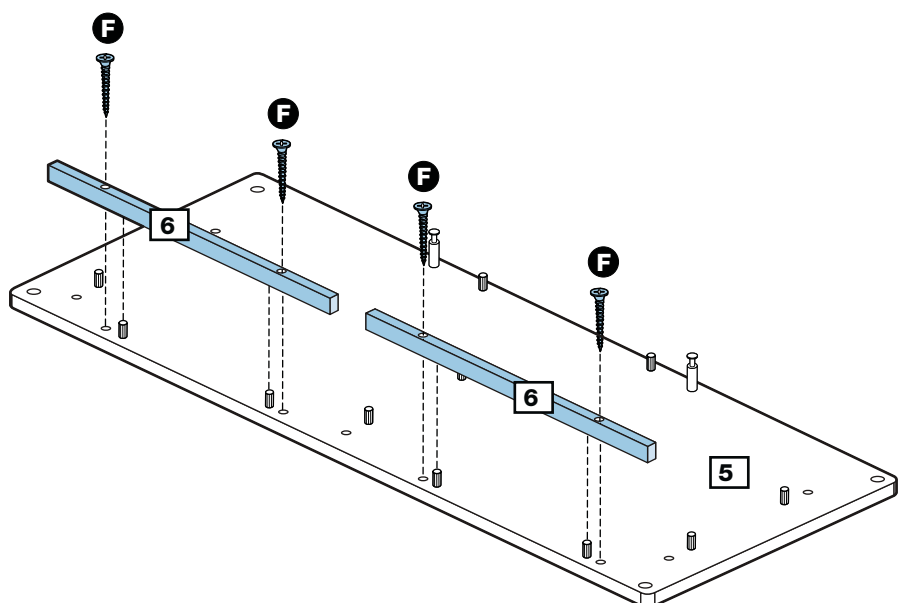

Assembly Instructions

Step 13


Attaching panel

Two people are needed here.

Fix panel 5 onto panels **1** **2** **3** **4** by using 6 pcs of screw **F**.



Warning:
The unit is heavy.
Lift with care.

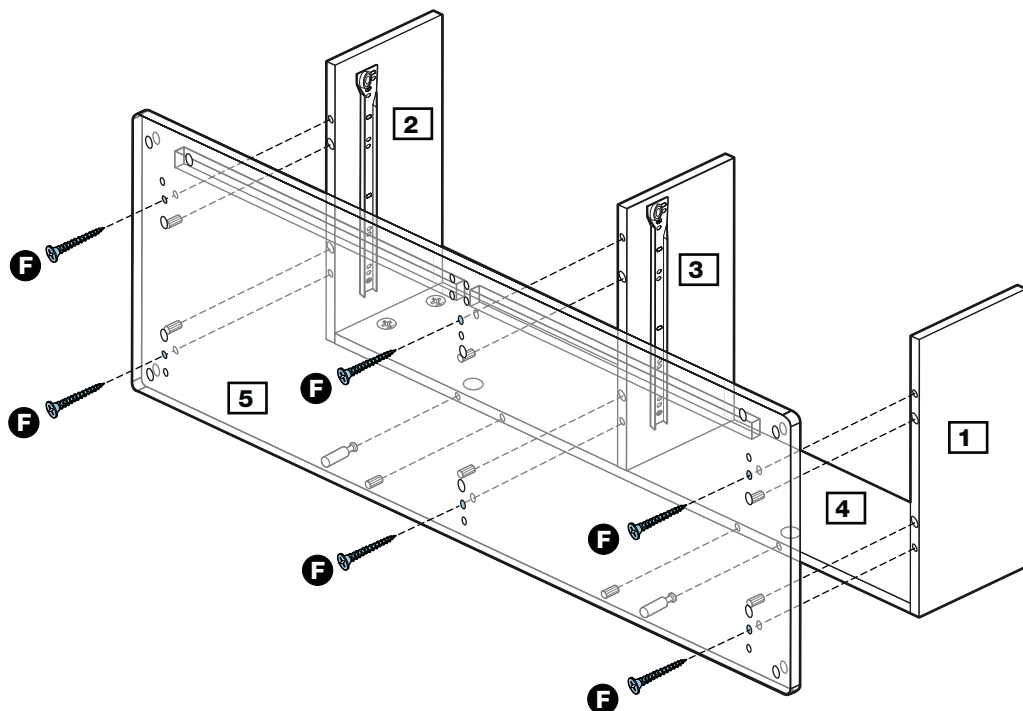


Step 14

Attaching cam


a: Insert 2 pcs of cam **E** onto the top back panel **4**.

a:

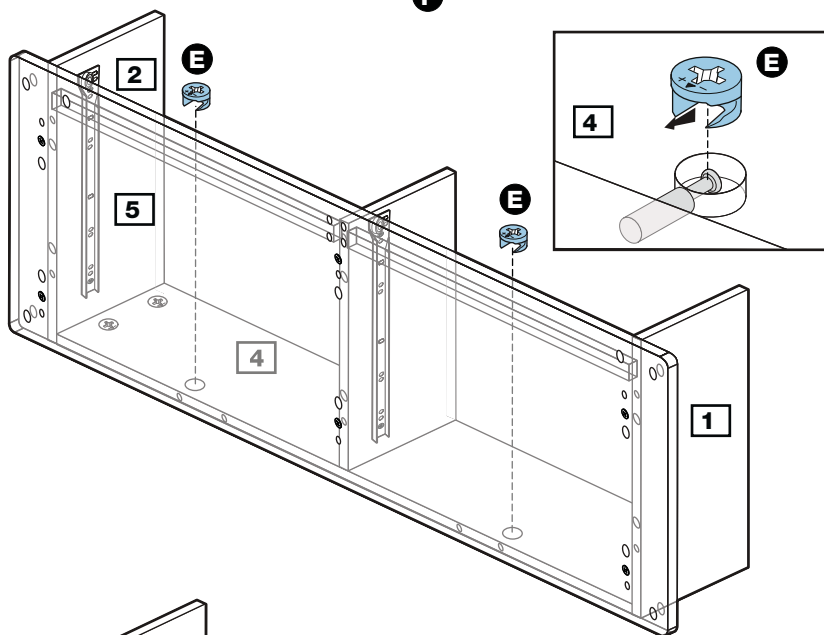

b: Please adjust the arrow on cam to the correct position as shown.

b:

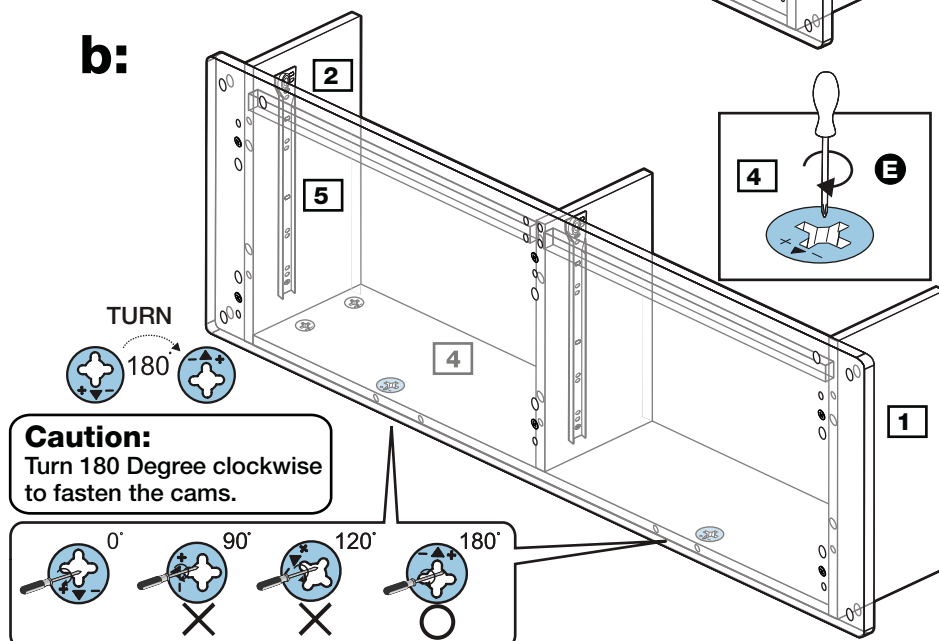


Assembly Instructions

Step 15

Attaching screws


Fix 4 pcs of screw **H** onto glass top **7**.

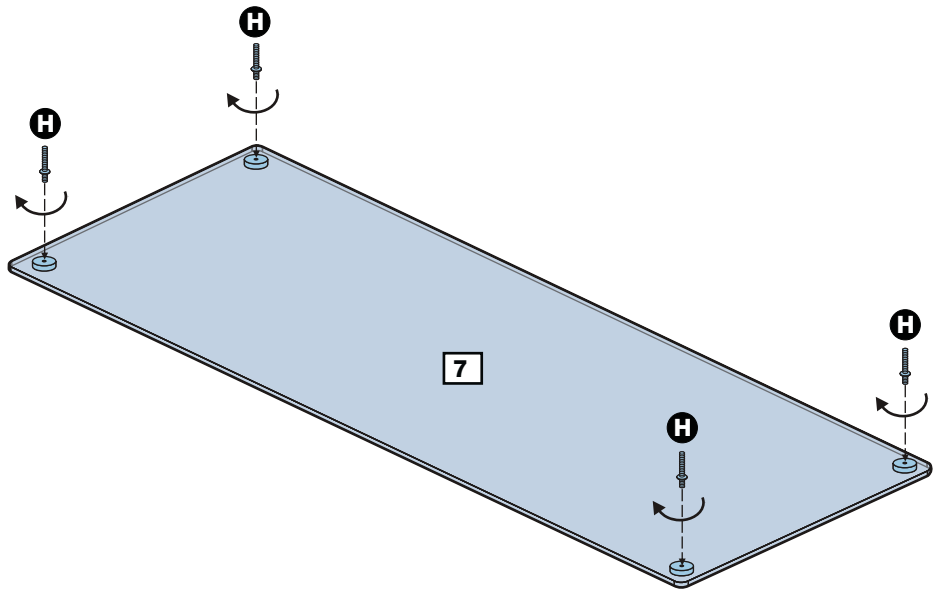

Step 16

Attaching metal tube


Fix 4 pcs of metal tube **8** onto the screw **H**.

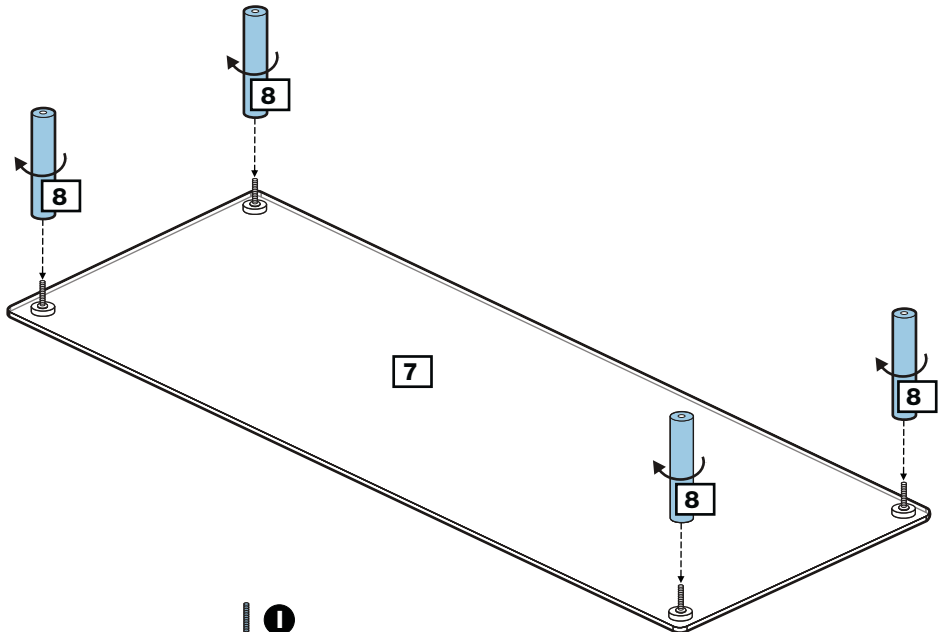

Step 17

Attaching screw

Fix 4 pcs of screw **I** onto metal tubes **8**.

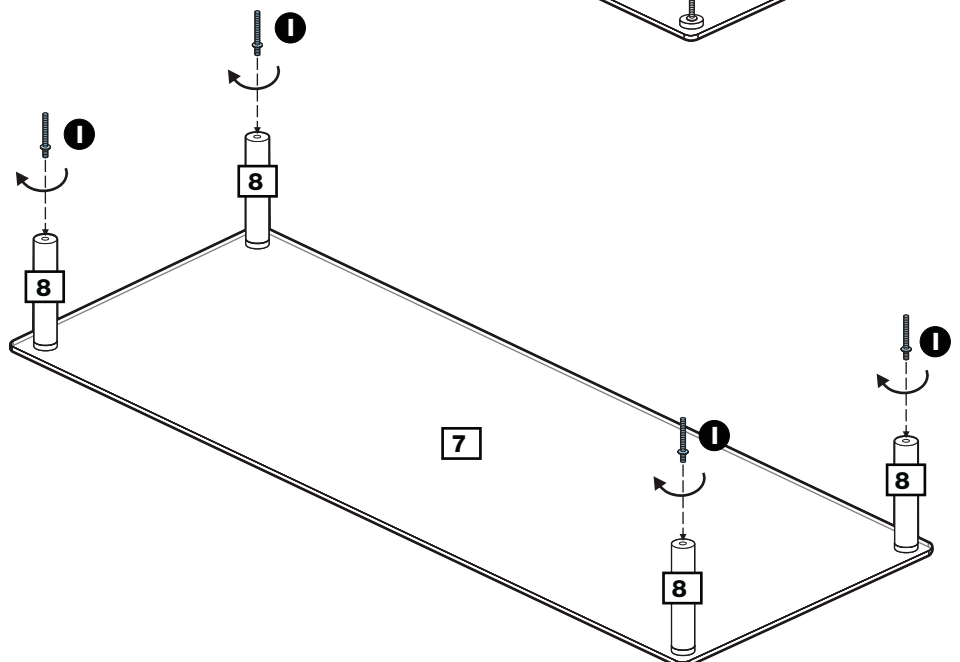

Assembly Instructions

Step 18


Attaching panel

Two people are required here.

Fix the top panel **5** onto the 4 pcs of metal tube **8**.




Warning:
The unit is heavy.
Lift with care.

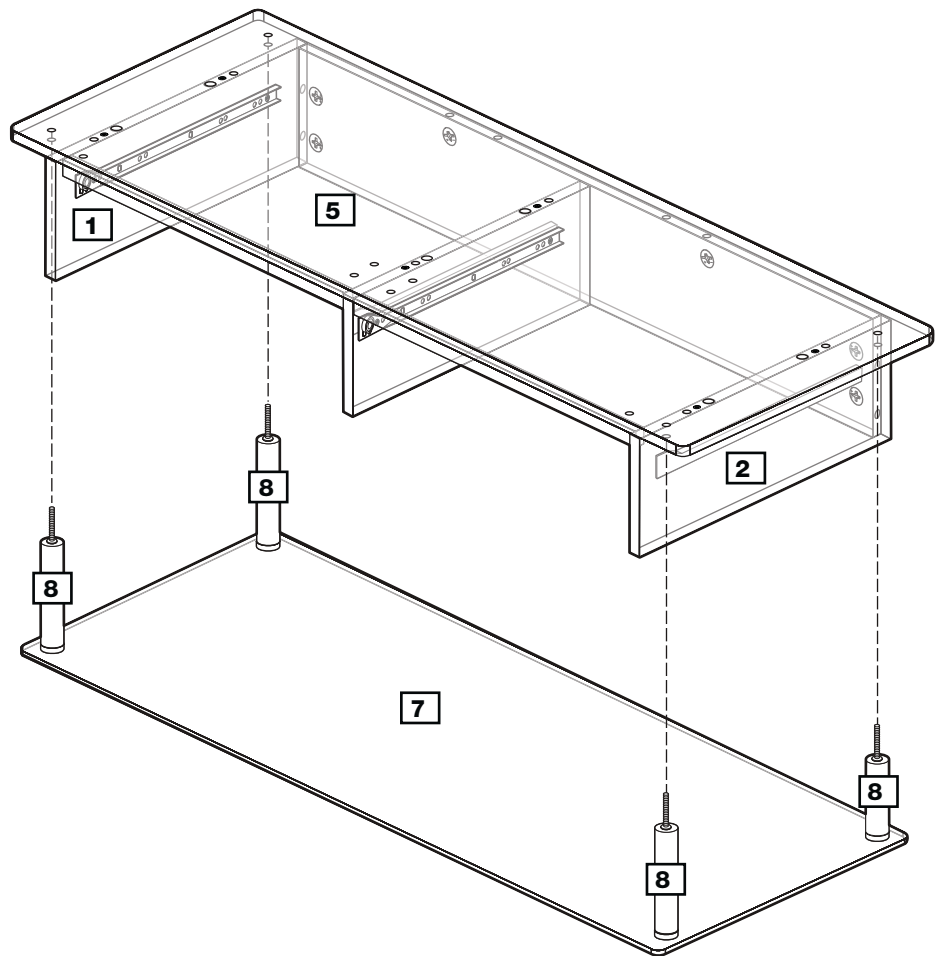

Step 19

Fitting dowels

Insert 6 pcs of plastic dowel **G** into panel **5**.

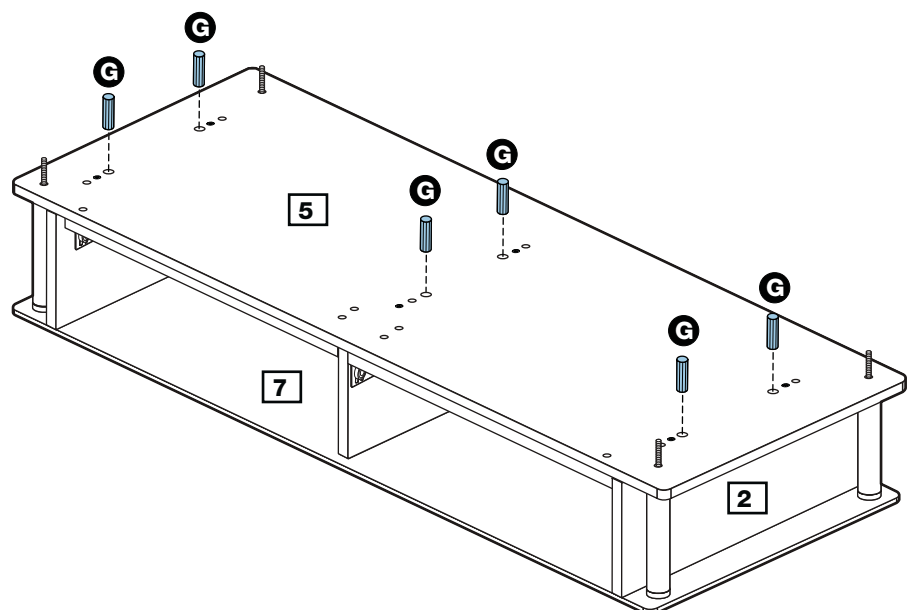


Assembly Instructions

Step 20

Attaching cam pillar


Fix 6 pcs of cam pillars **C** onto top panel **5**.

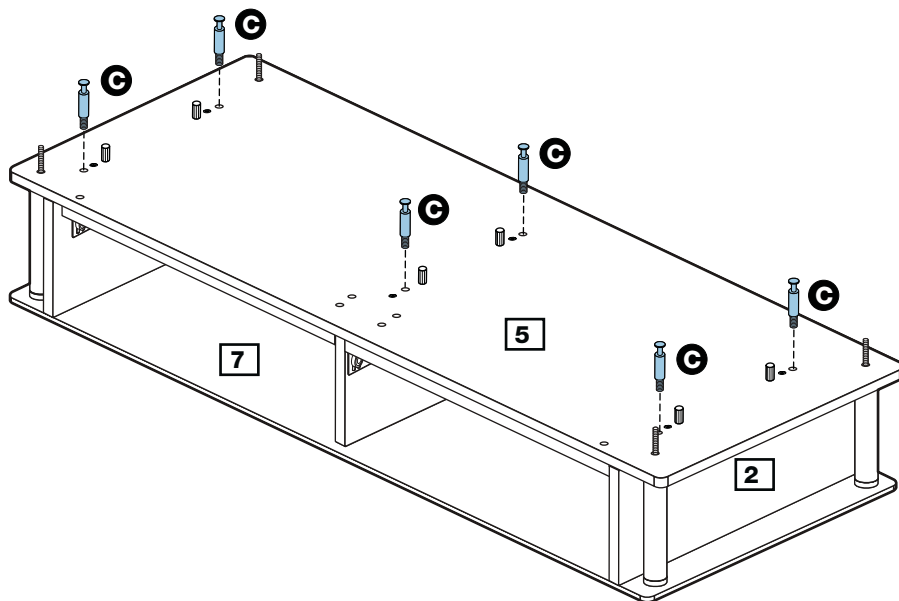

Step 21

Inserting door assembly spring


Insert 2 pcs of door assembly spring **J** onto the top panel **5**.

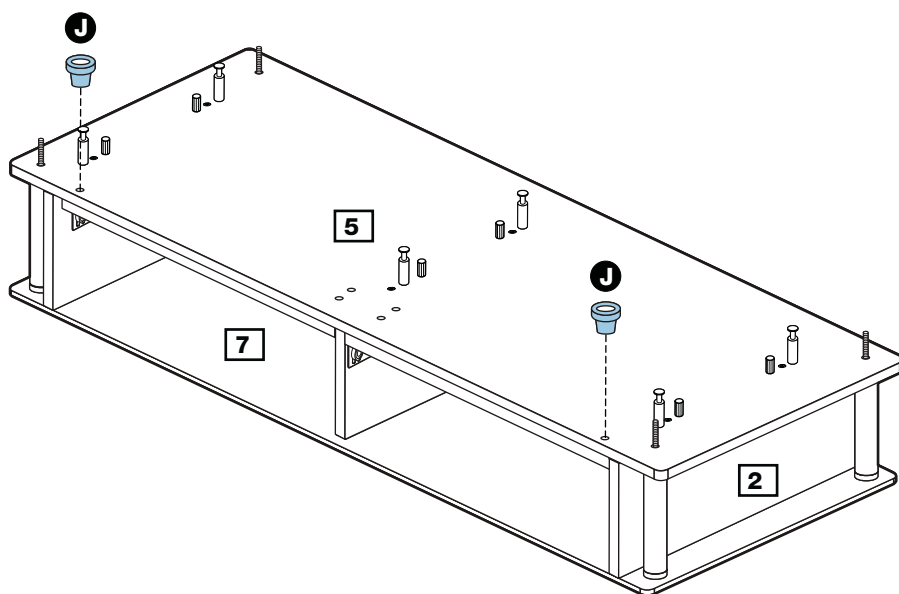

Step 22

Attaching door catch set

Fix door catch set **K** onto the top panel **5** as shown.

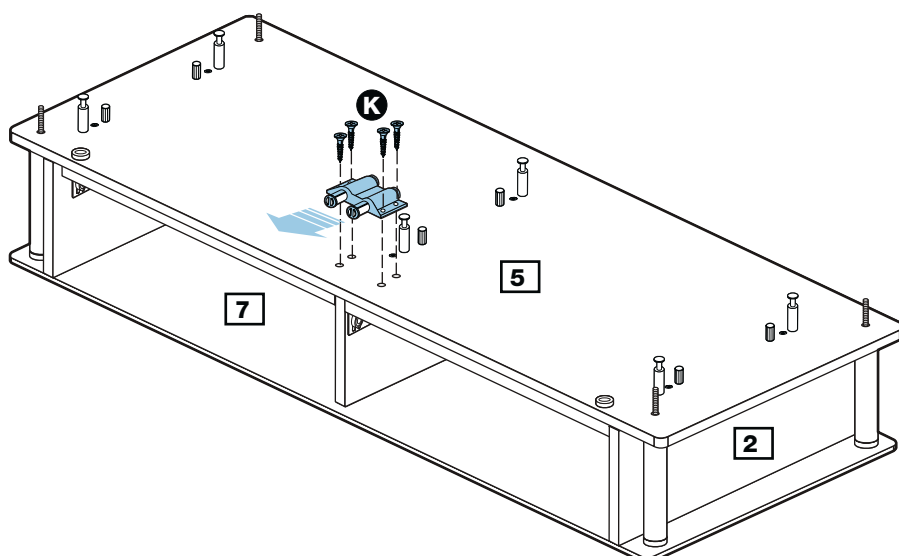


Assembly Instructions

Step 23

Attaching metal tube


Attach 4 pcs of metal tube **9** onto 4 pcs of screw **1**.

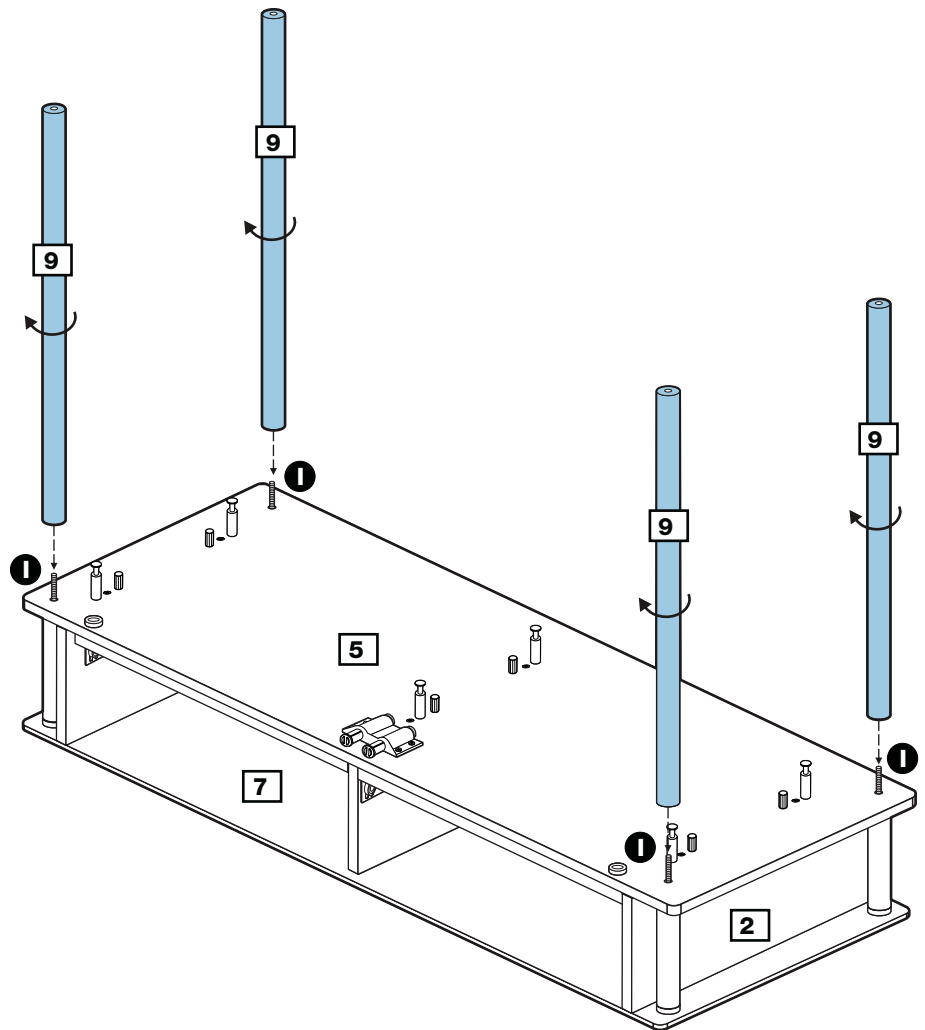

Step 24

Attaching divider panel

Attach divider panel **10** onto panel **5**.

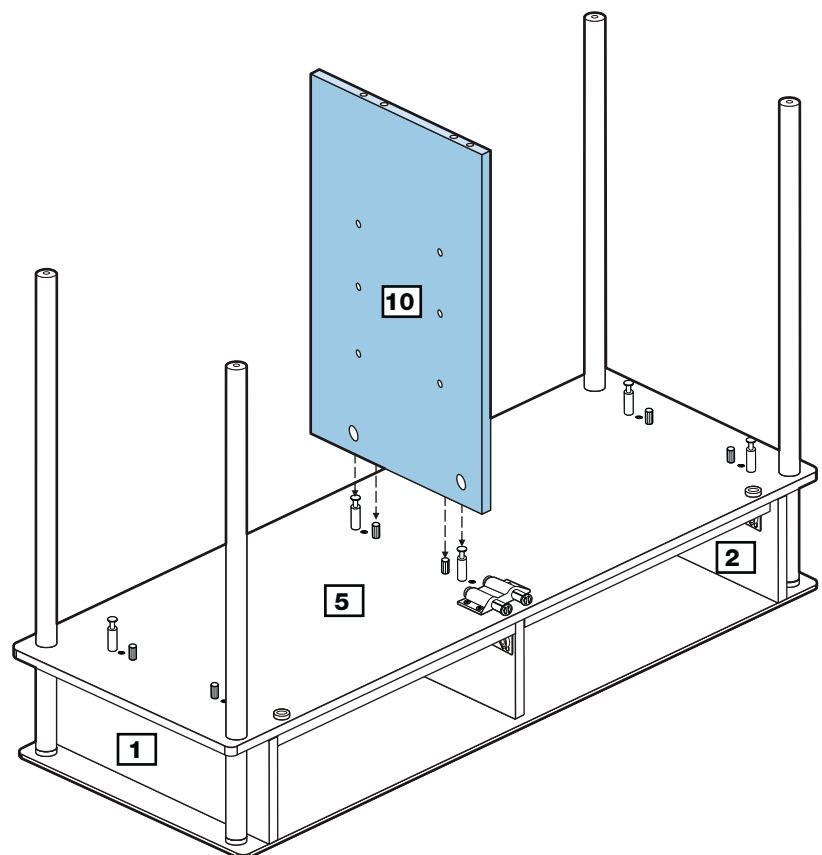


Assembly Instructions

Step 25

Attaching cams


a: Insert 2 pcs of cam **L** onto divider **10**.

a:

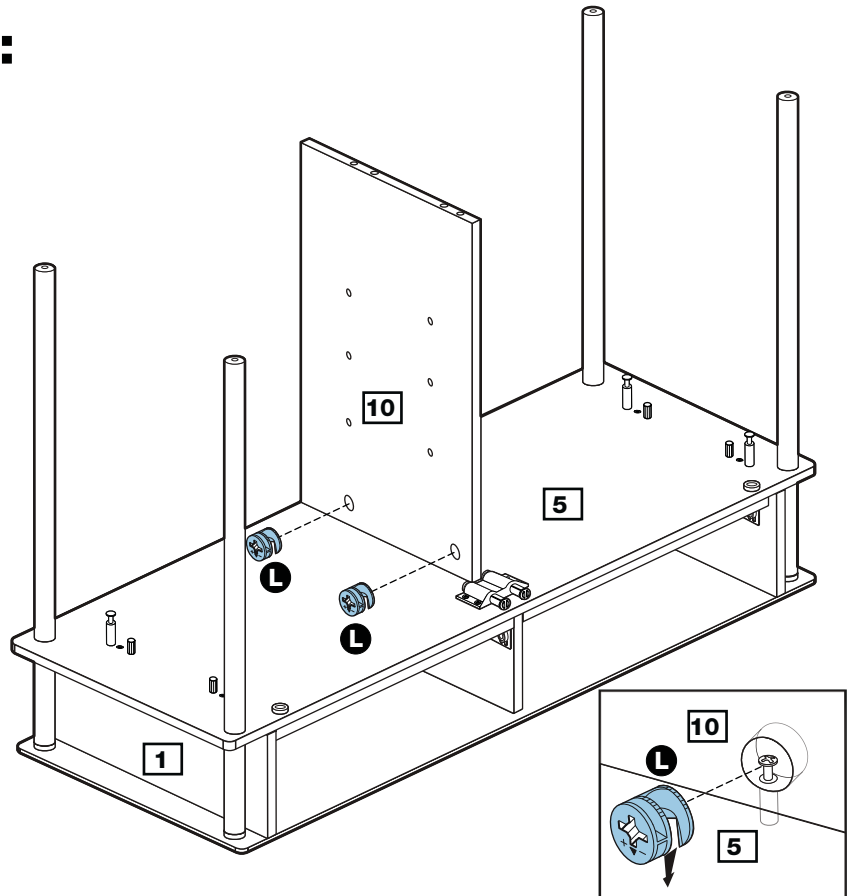

b: Please adjust the arrow on cam to the correct position as shown.

b:

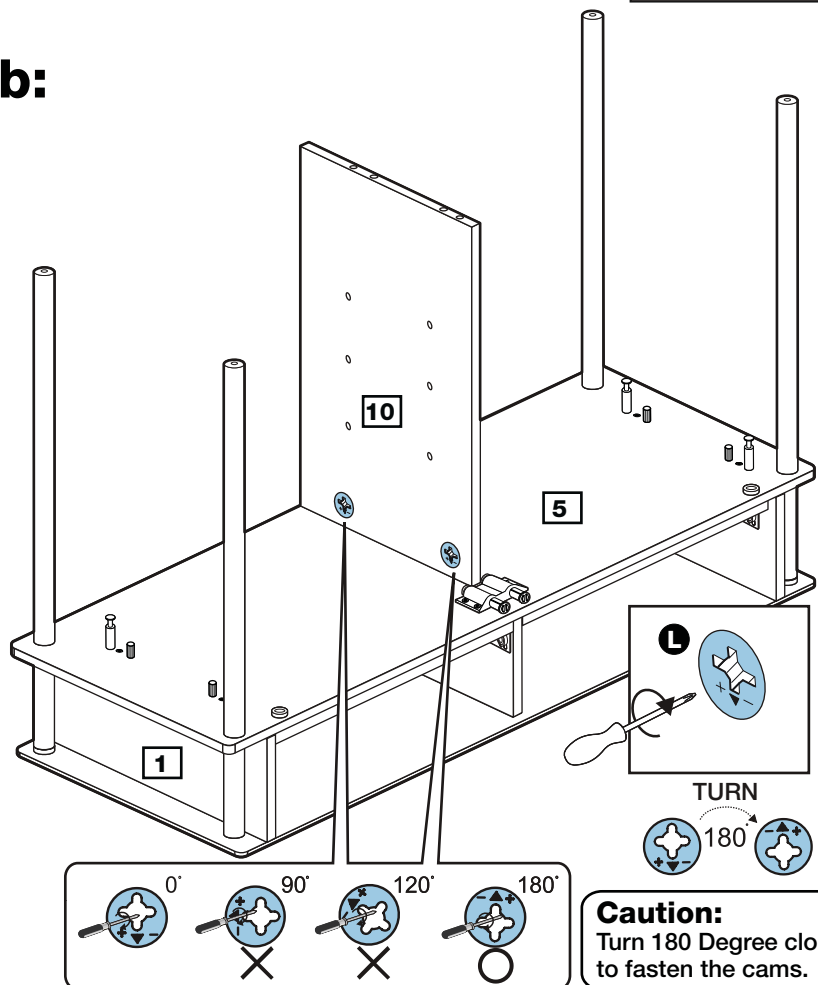


Caution:
Turn 180 Degree clockwise to fasten the cams.

Assembly Instructions

Step 26

Attaching side panel

Attach side panel **11**
onto panel **5** as
shown.

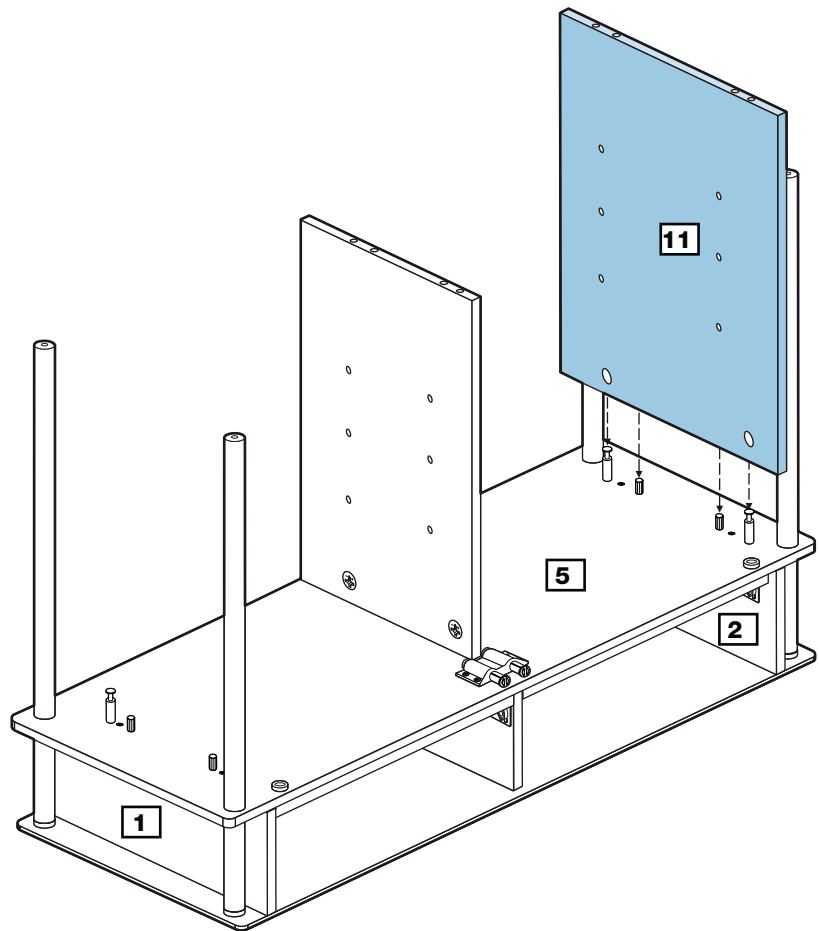


Step 27

Attaching cams

a: Insert 2 pcs of cam
L onto the side panel
11.

a:

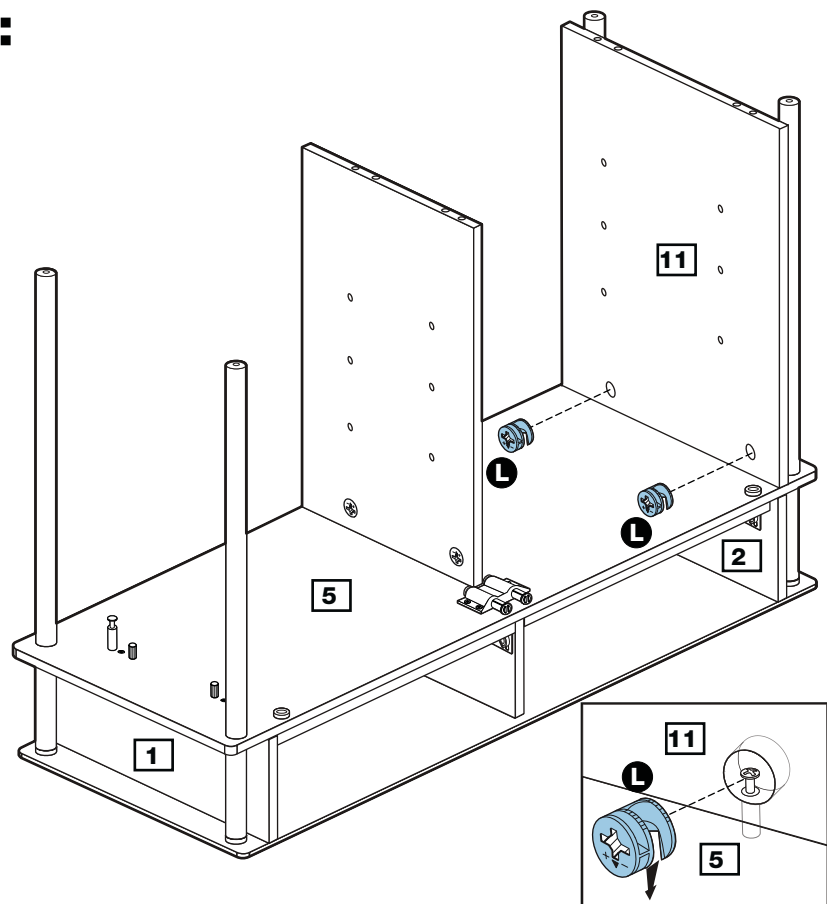


Continued on next page.

Assembly Instructions

Step 27 - continued

b: Please adjust the arrow on cam to the correct position as shown.


b:

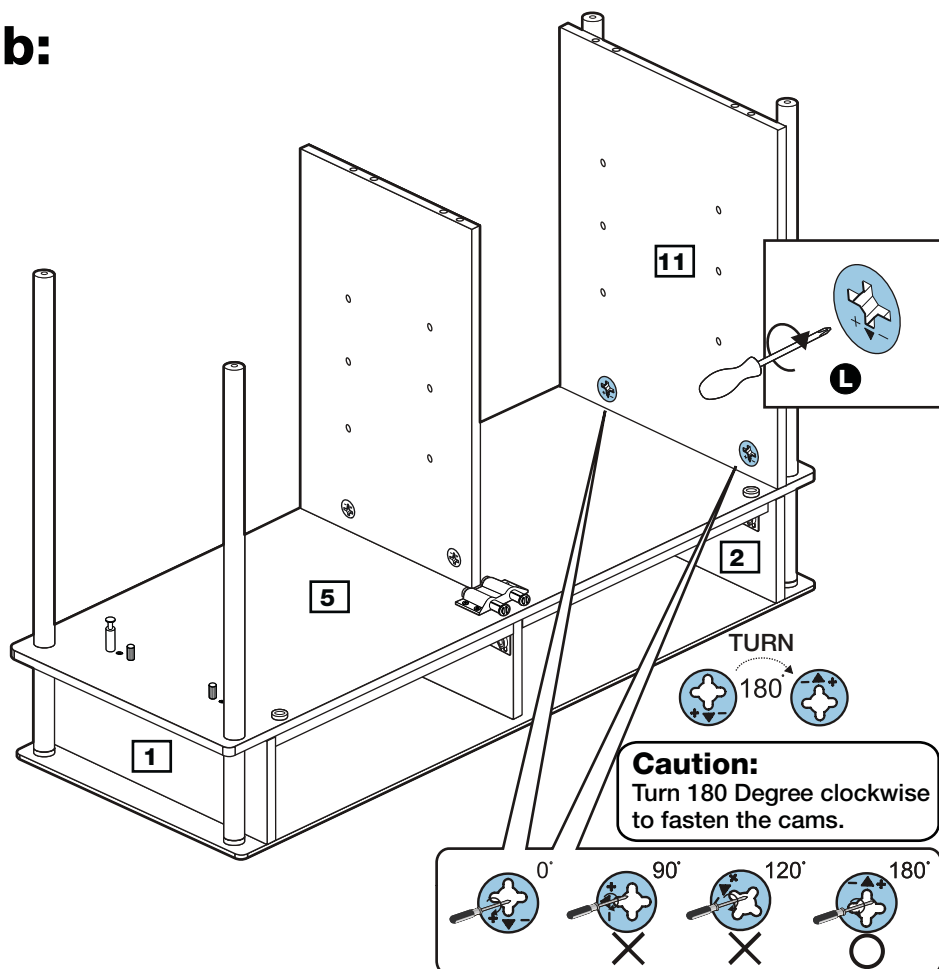

Step 28

Attaching side panel

Attach side panel **12** onto panel **5** as shown.

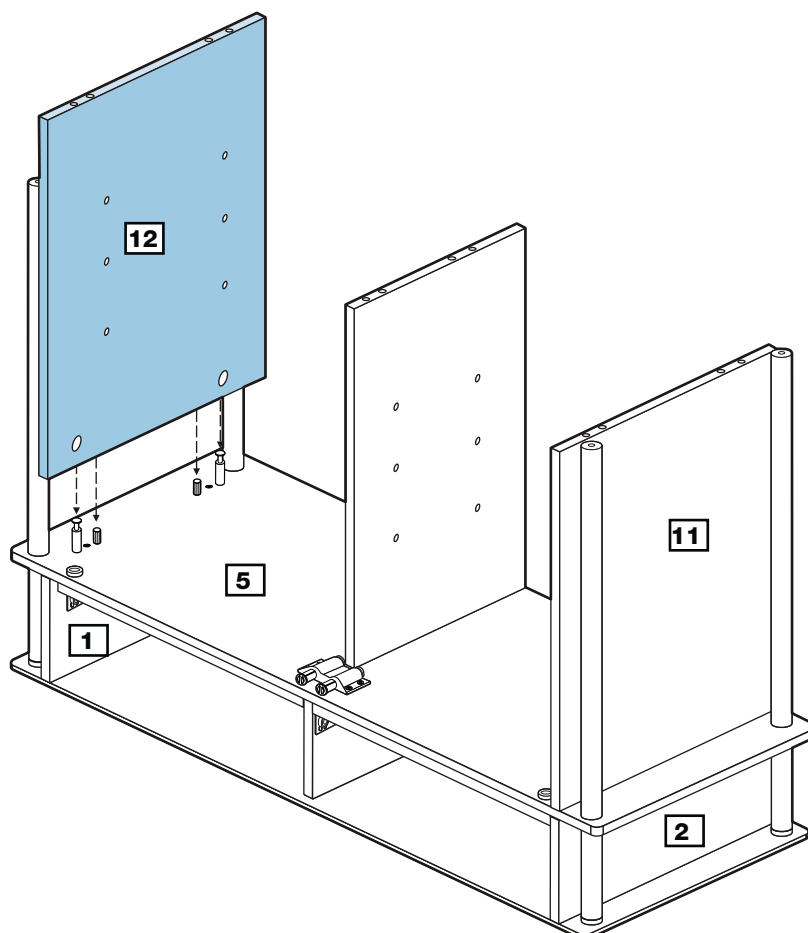

Assembly Instructions


Step 29

Attaching cam

a: Insert 2 pcs of cam


L onto the side panel **12**.

a:

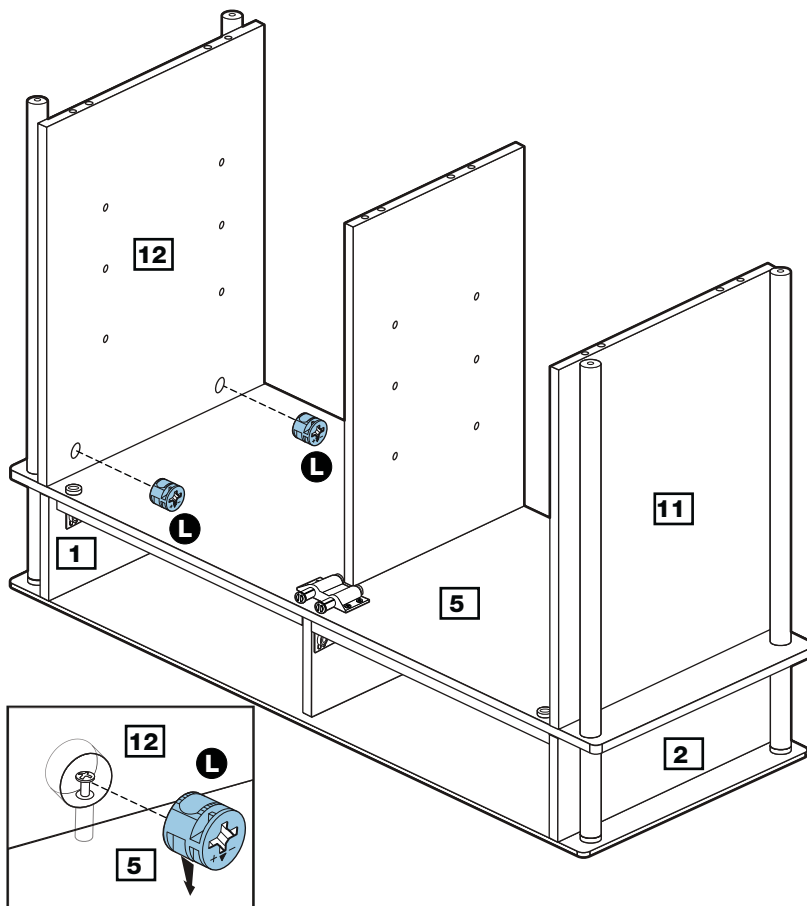

b: Please adjust the arrow on cam to the correct position as shown.

b:

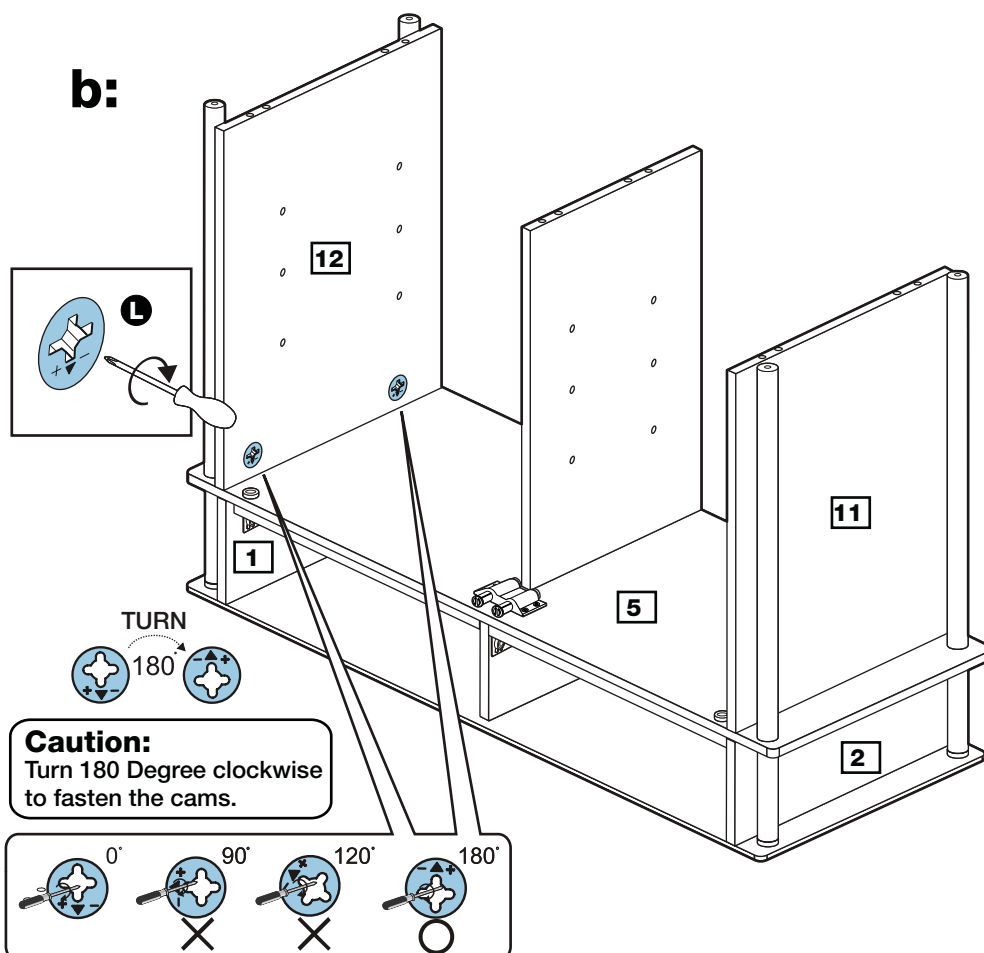


Assembly Instructions

Step 30

Fitting dowels


Insert 6 pcs of plastic dowel **G** into panel **10** **11** **12** .

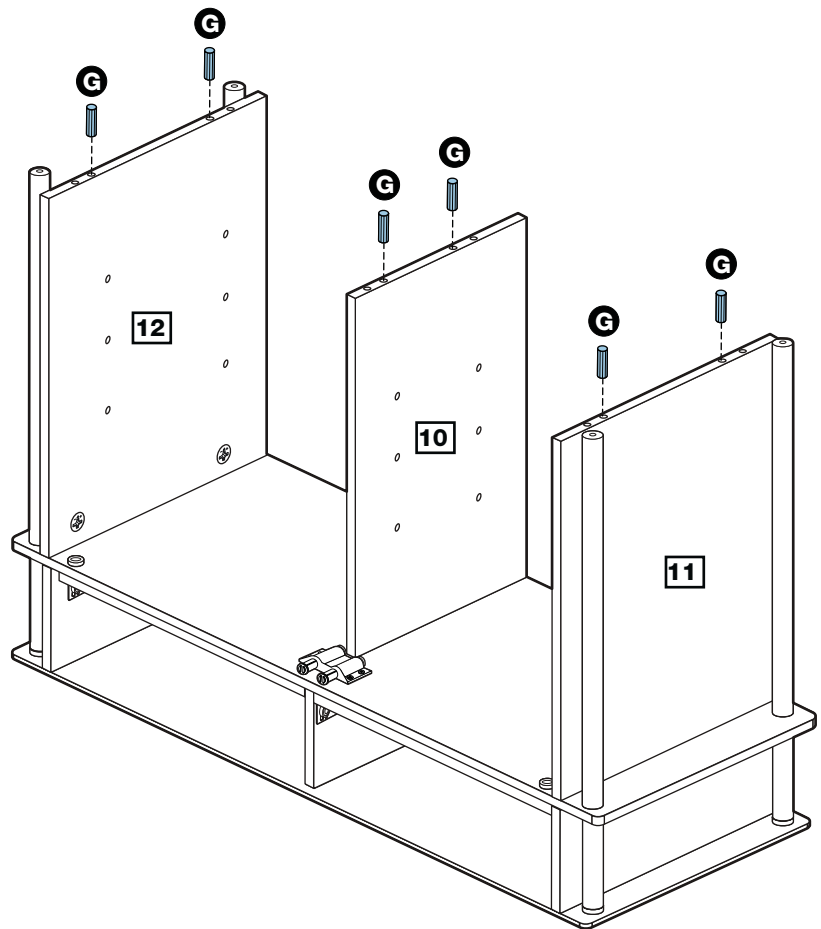

Step 31

Insert door assembly spring

Insert 2 pcs of door assembly spring **J** onto the bottom panel **13** .

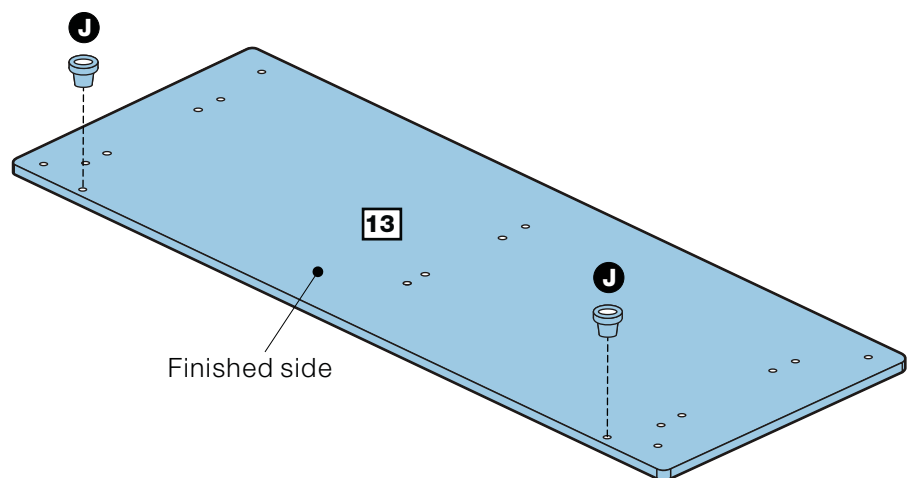

Assembly Instructions

Step 32


Attaching panel

Two people are required here.

Attach the bottom panel **13** onto panels **10** **11** **12**.




Warning:
The unit is heavy.
Lift with care.

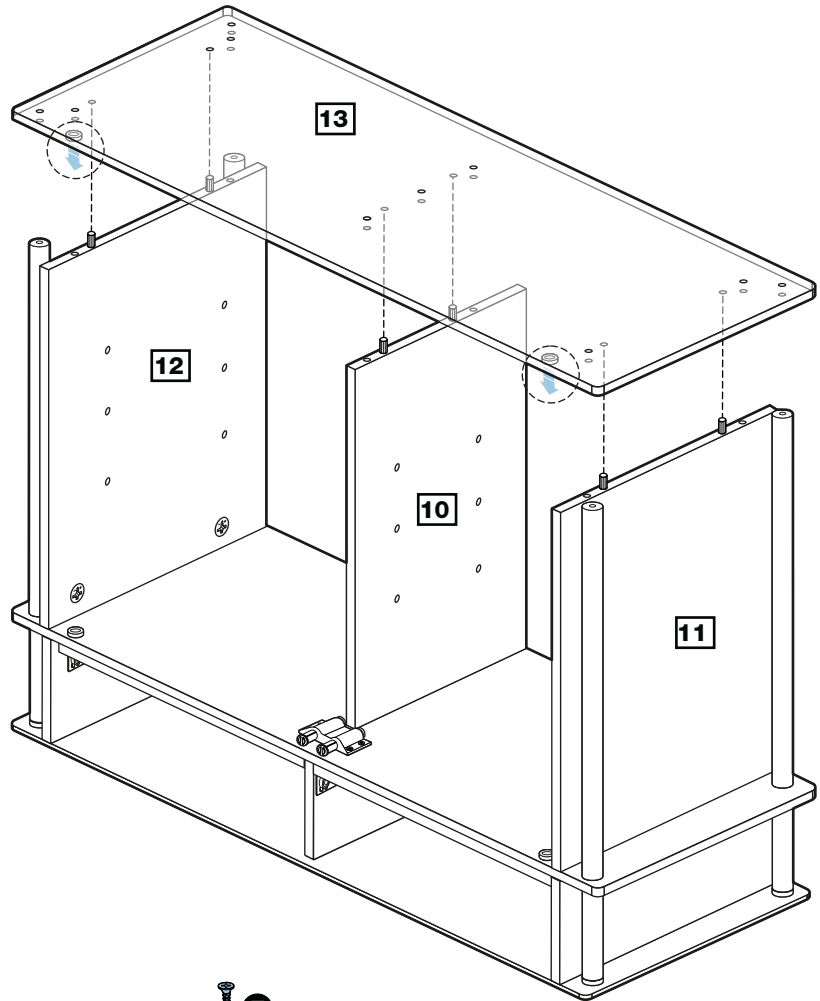

Step 33

Attaching screws

Fix 6 pcs of screw **F** onto the bottom panel **13**.

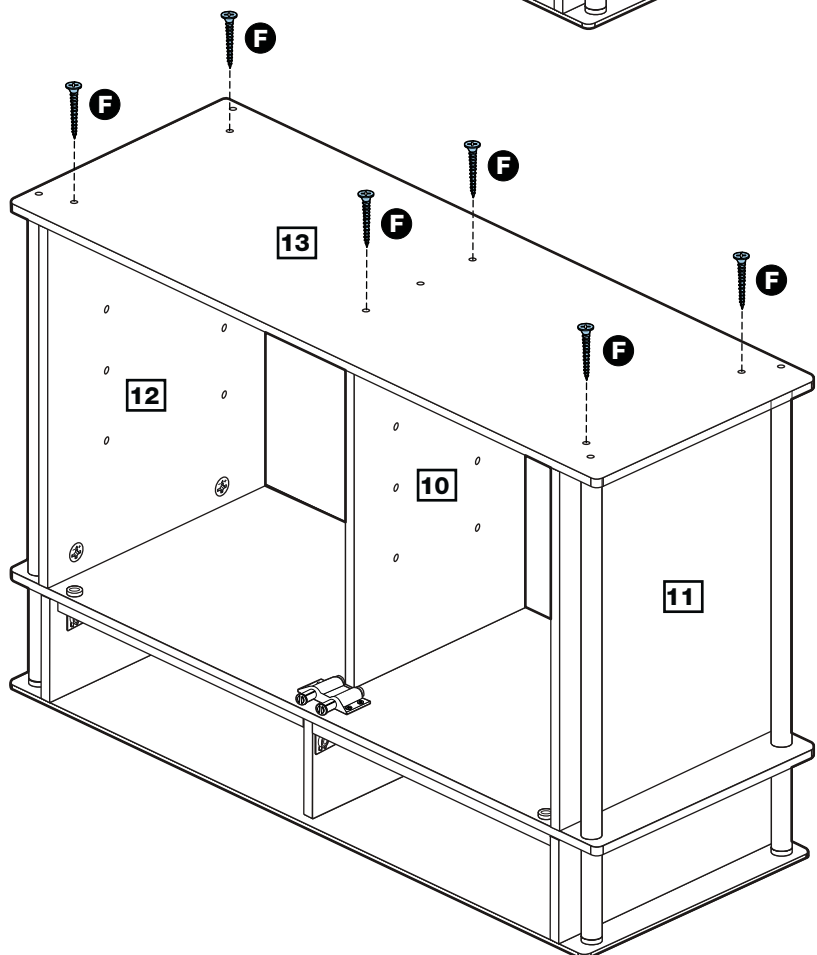


Assembly Instructions

Step 34

Attaching screw


Fix 4 pcs of screw **I** and 1 pc of screw **M** onto panel **13** as shown.

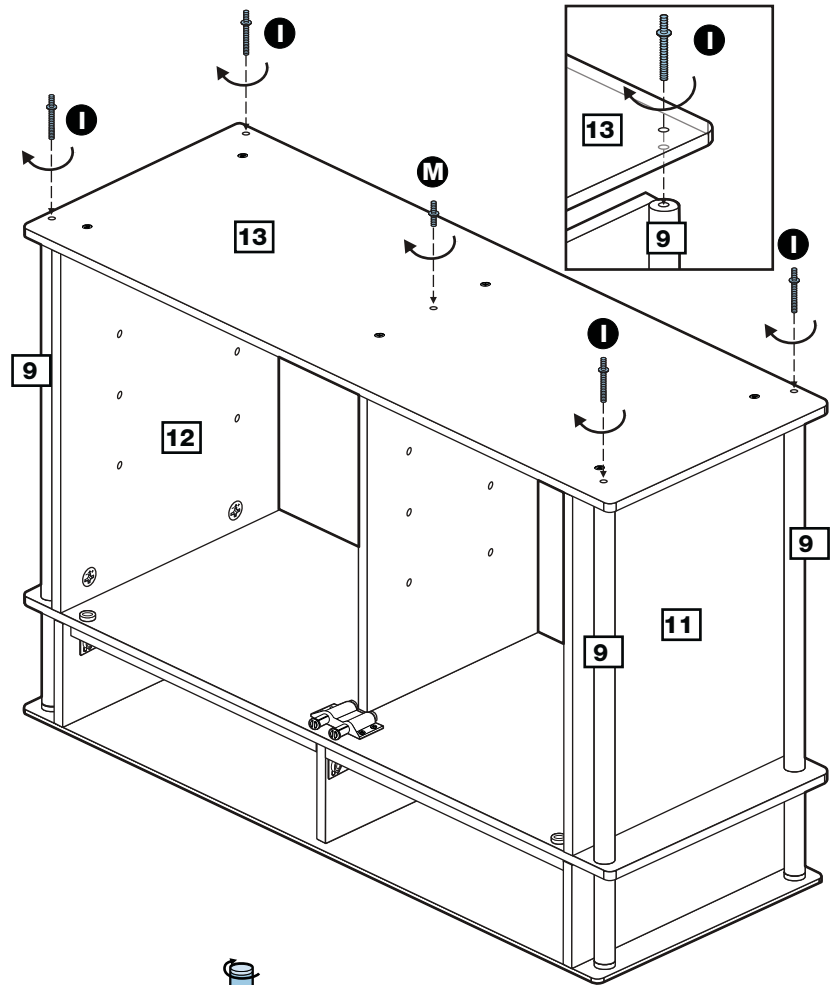

Step 35

Attaching foot

Fix 5 pcs of stand feet **14** onto screws **I** & **M** on panel **13**.

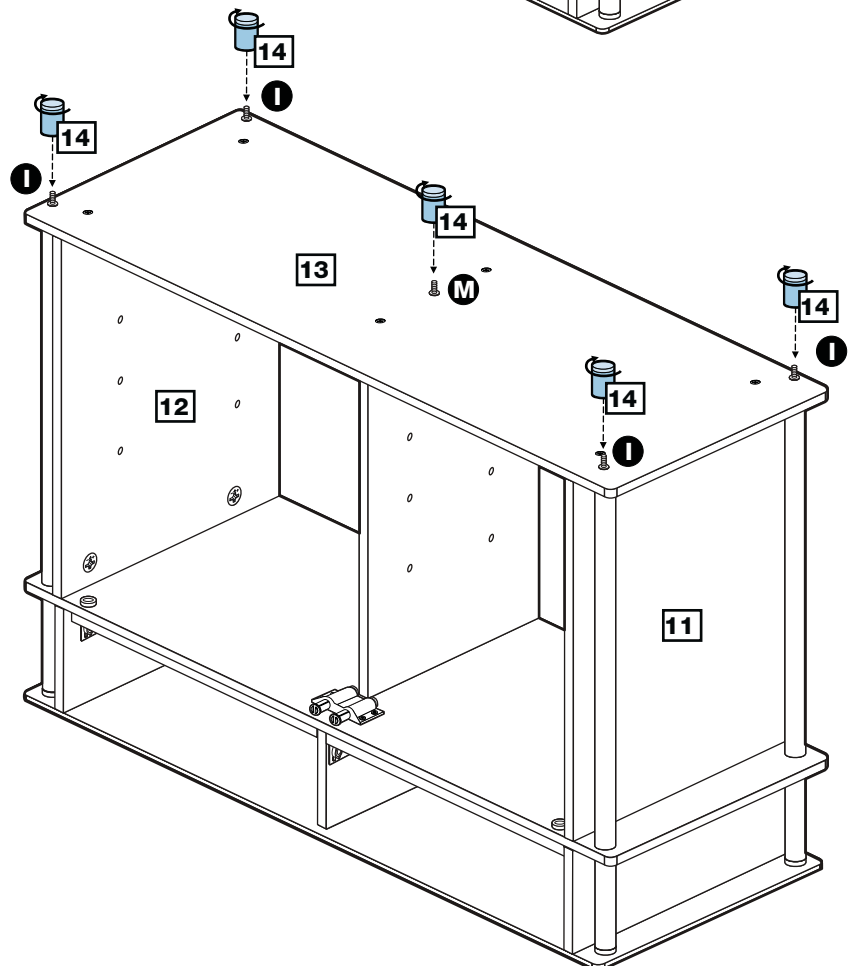


Assembly Instructions

Step 36

Attaching back panel

Place back panel **15** onto the by using 20 pcs of nails **N** with hammer as shown.

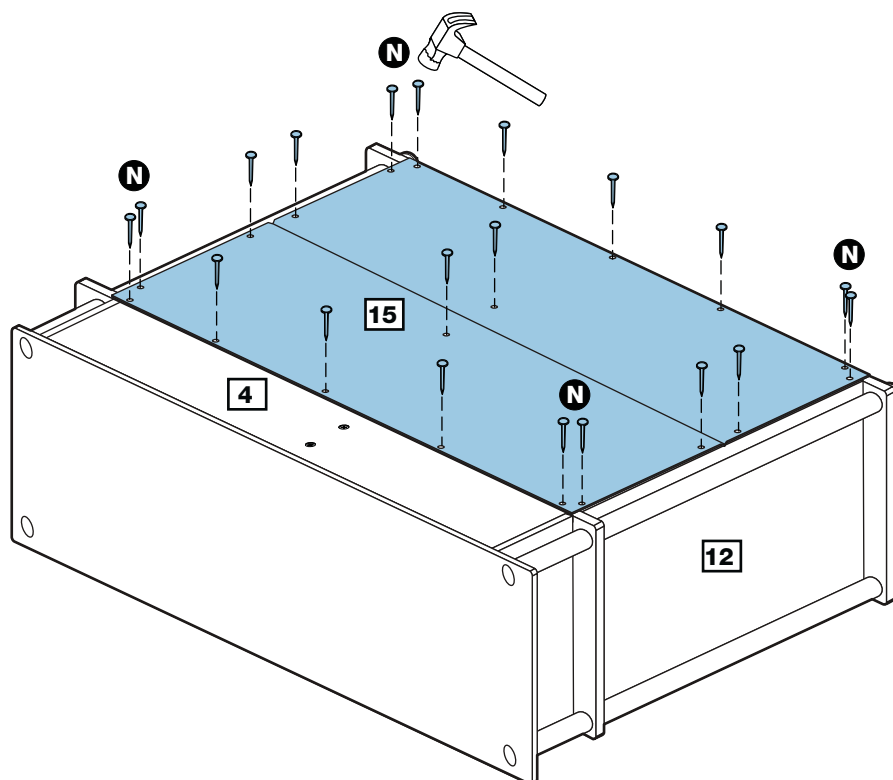


Step 37

Attaching wall mounting strap

Attach 2 pcs of wall mounting strap **O** onto back panel **4** by using the screws supplied.



Warning:
The unit is heavy.
Turn with care.

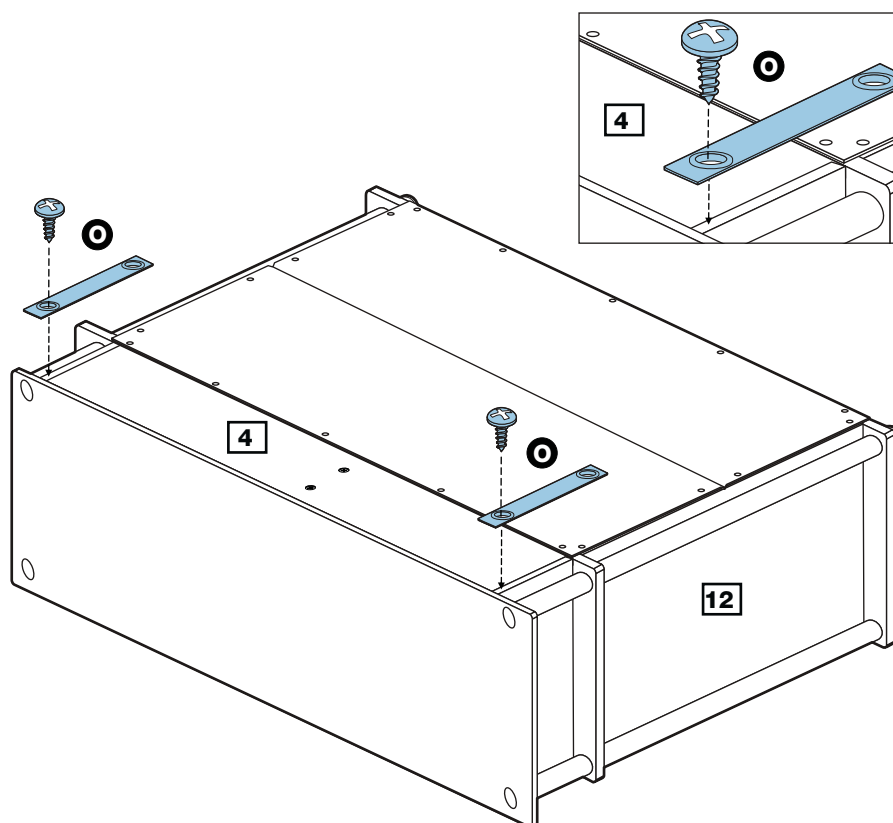


Assembly Instructions

Step 38

Fitting shelf support


Insert 8 pcs of shelf support **P** at the proper position of panel **10** **11** and **12** .

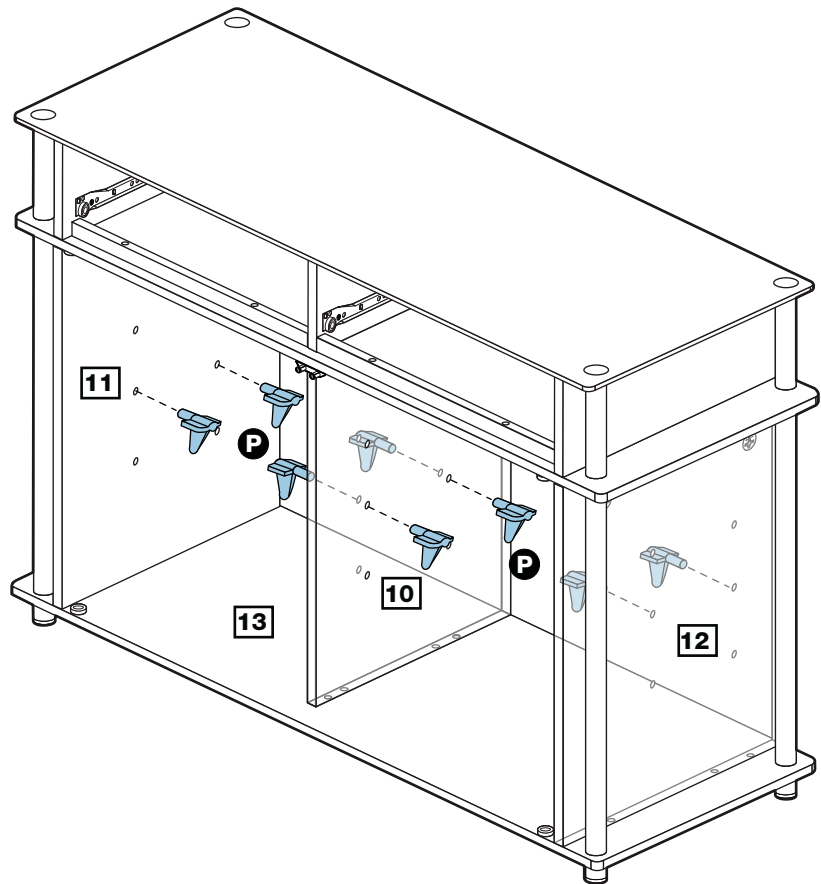

Step 39

Attaching shelf

Place the shelf **16** & **17** onto the unit.

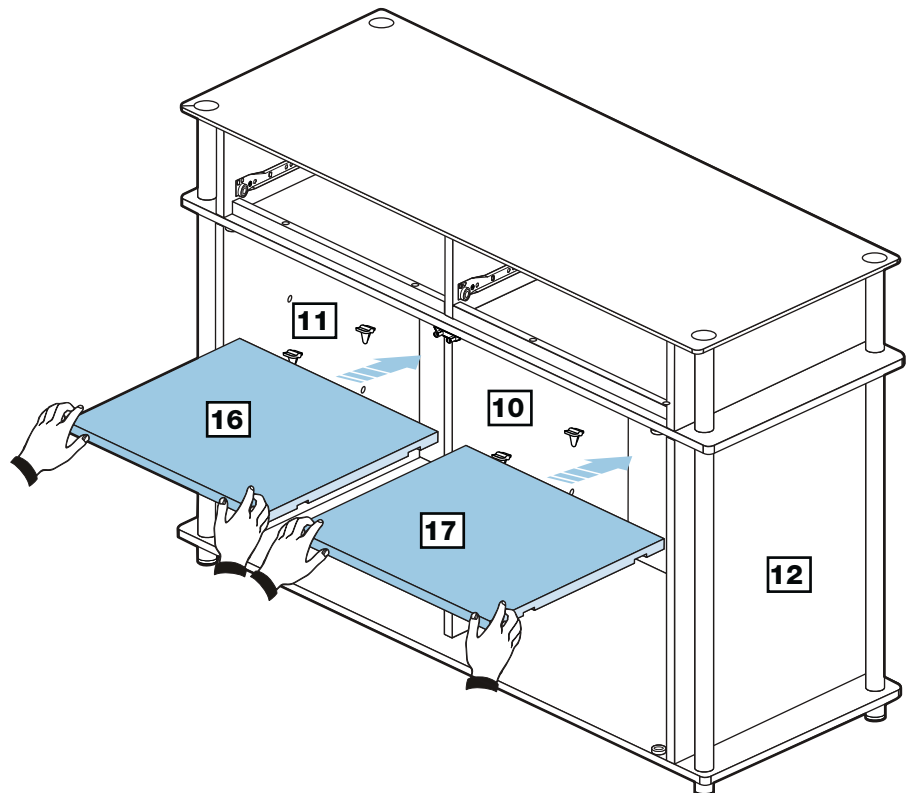

Assembly Instructions

Step 40


Door assembly

Please ensure you are facing the frosted side of the glass **18** as shown.


Incorrect assembly will result failure on assembly step 43.

a: Peel off the cover layer and attach parts **Q** as shown.


b: Peel off the cover layer and attach parts **R** as shown.

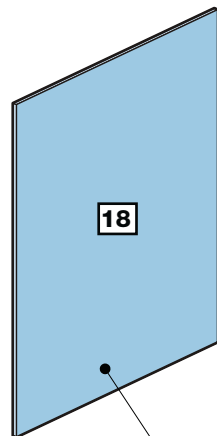

Frosted side

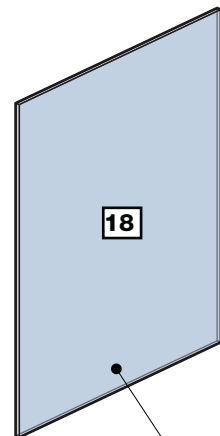

Unfrosted side

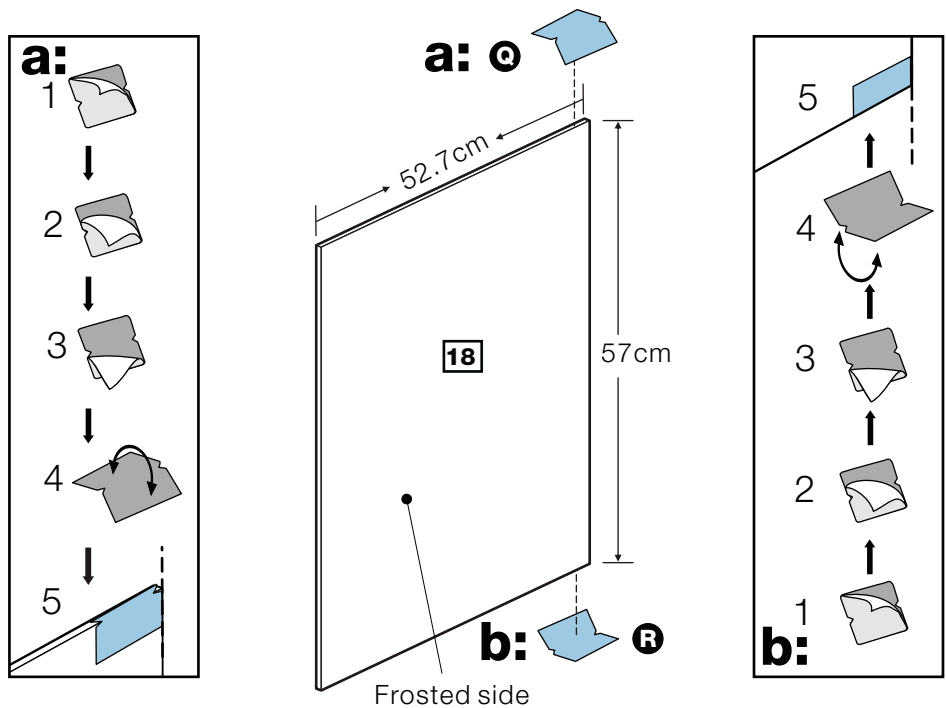


Step 41

Attaching door hinge


Please make sure the parts **Q** as shown is the correct one for assembly at this stage.

CAUTION:

Before tighten the glass with the parts **Q**, please ensure the parts **Q** align to the edge of the glass door.

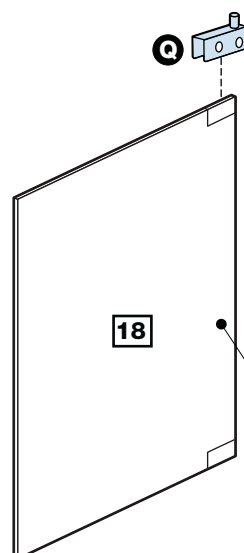

Frosted side

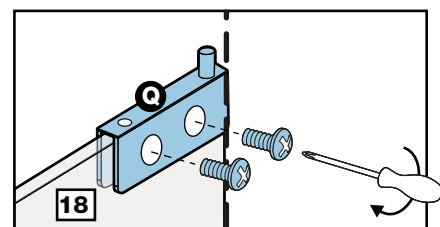


Assembly Instructions

Step 42

Attaching door hinge

Attach parts **R** onto the bottom panel **13**.

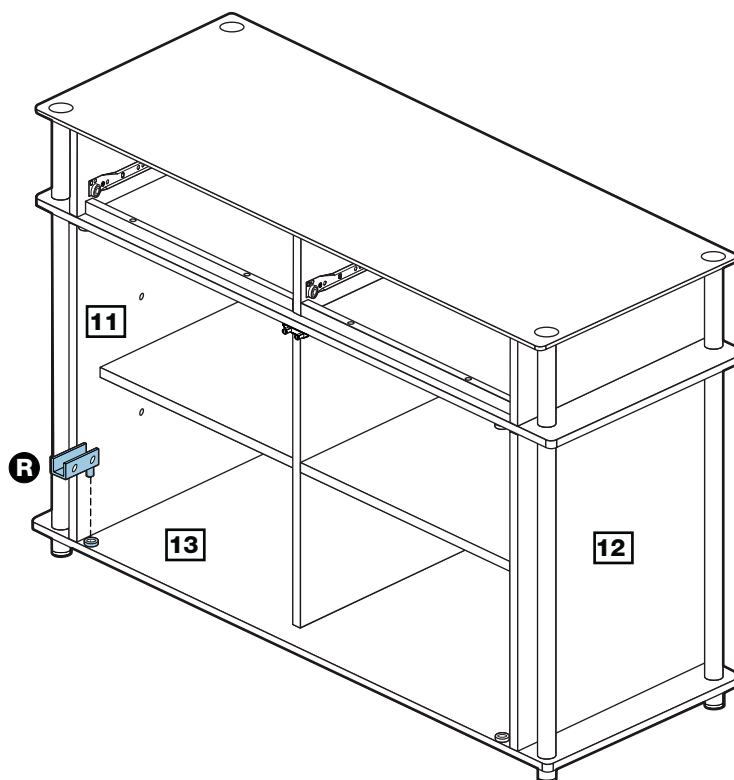


Step 43

Attaching door

Two people are required here.

a: Insert part **Q** underneath panel **5**.

b: Slide glass door into parts **R** onto bottom panel **13**.

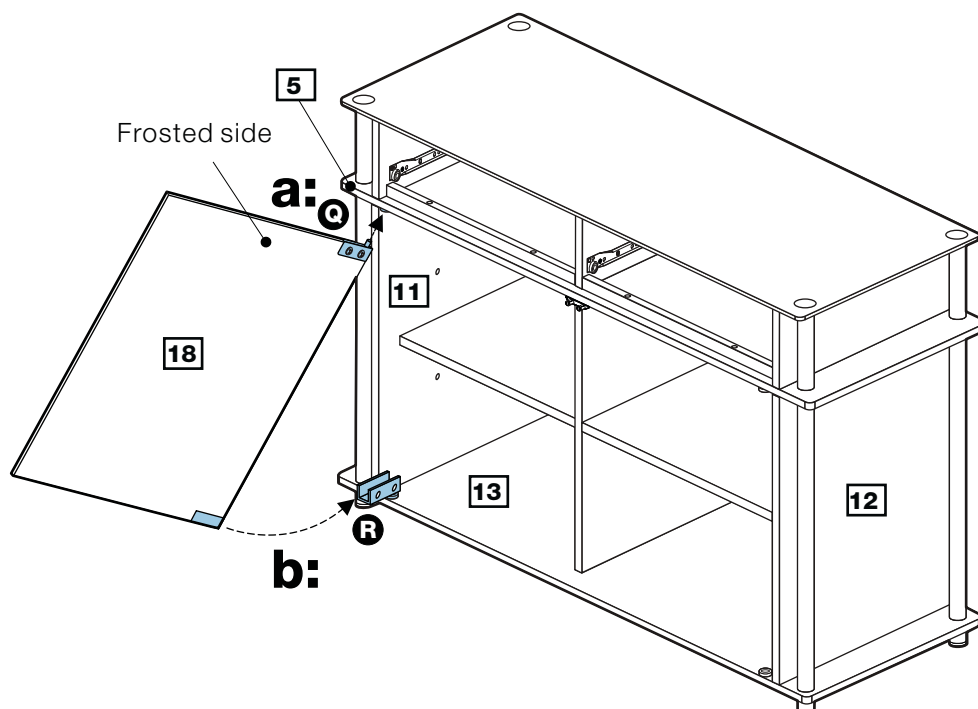


Assembly Instructions

Step 44

Attaching door

Two people are required here.

Before tighten the glass with parts **R**, please ensure the parts **R** align to the glass door **18**.

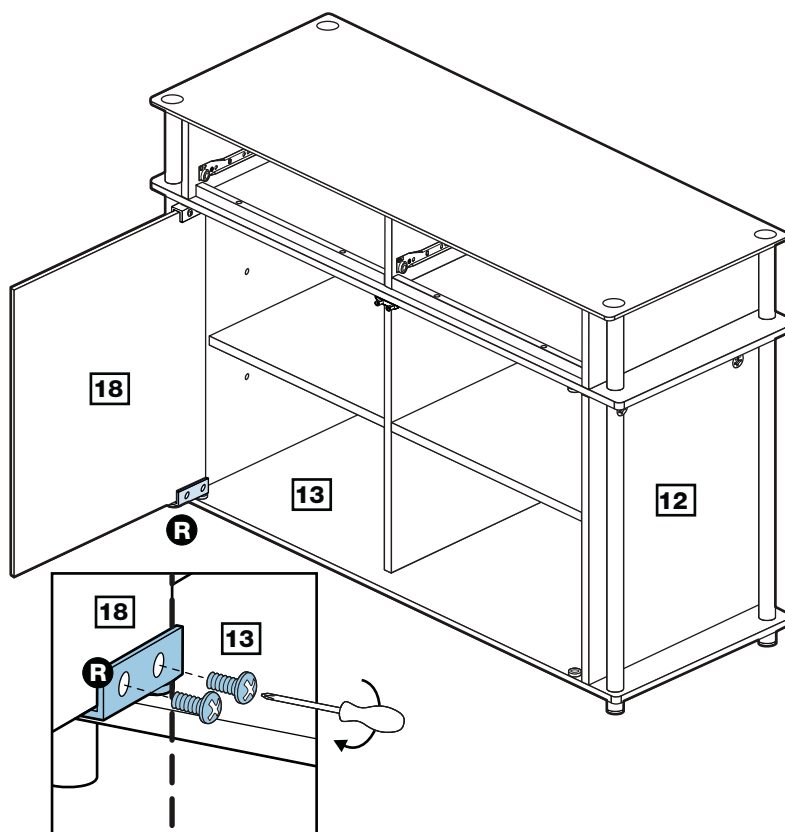


Step 45

Door assembly

Please ensure you are facing the frosted side of the glass **18** as shown.

a: Peel off the cover layer and attach parts **R** as shown.

b: Peel off the cover layer and attach parts **Q** as shown.

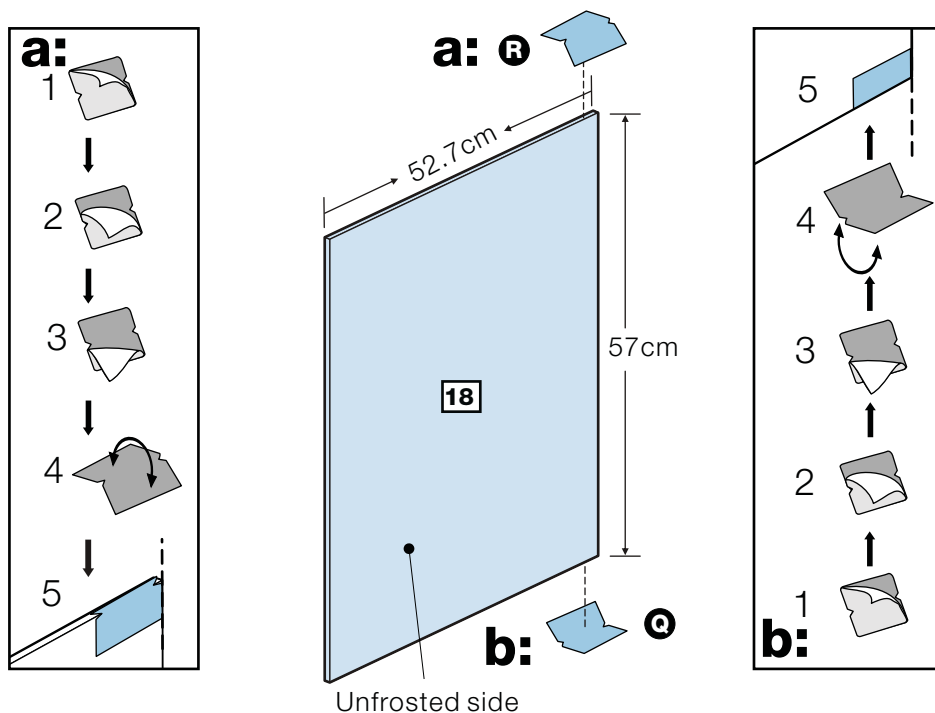

Assembly Instructions


Step 46

Attaching door hinge

Please make sure the parts **R** as shown is the correct one for assembly at this stage.

CAUTION:


Before tighten the glass with the parts **R**, please ensure the parts **R** align to the edge of the glass door.

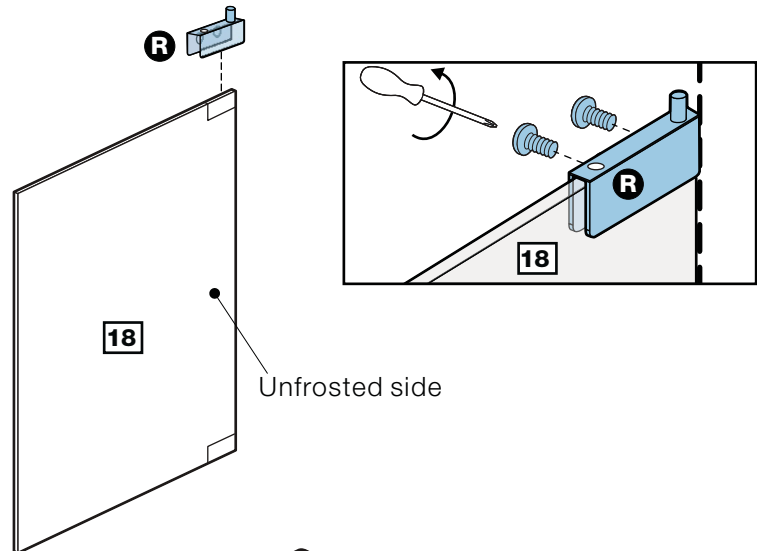

Step 47

Attaching door hinge

Attach parts **Q** onto the bottom panel **13**.

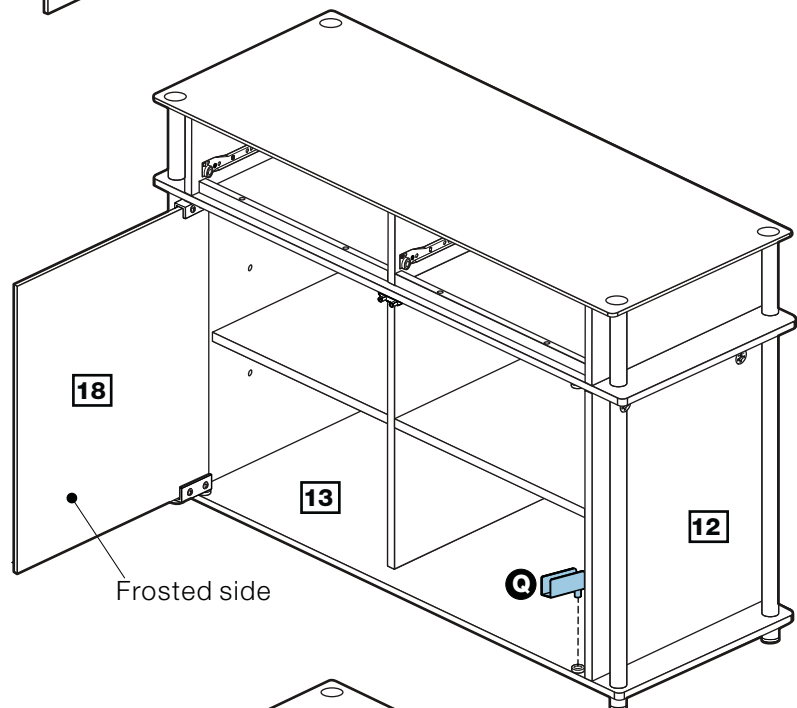


Step 48

Attaching door

Two people are required here.

a: Insert part **R** underneath panel **5**.

b: Slide glass door into parts **Q** onto bottom panel **13**.

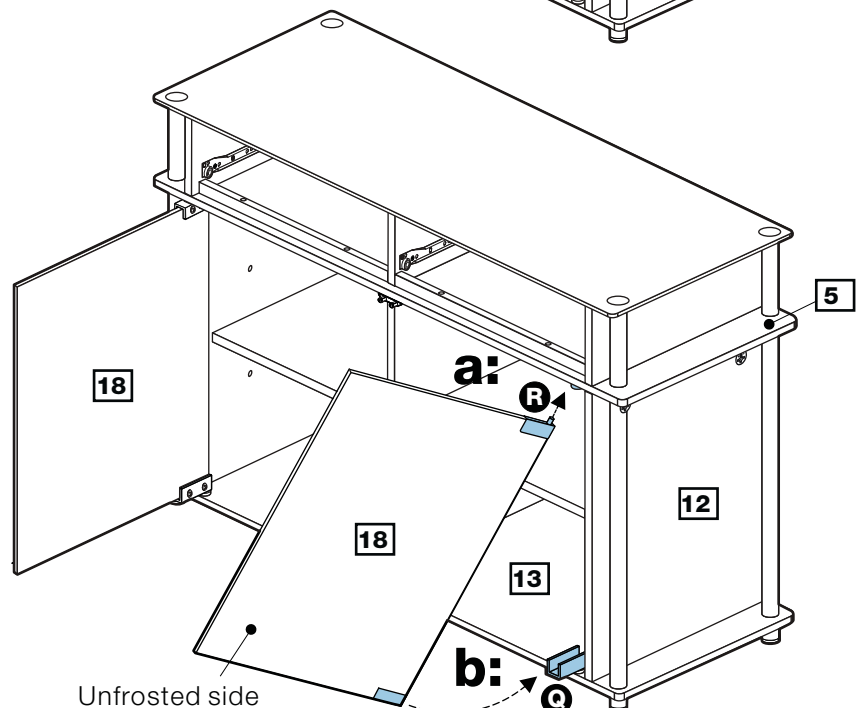


Assembly Instructions

Step 49

Attaching door

Two people are required here.


Before tighten the glass with parts **Q**, please ensure the parts **Q** align to the glass door **18**.

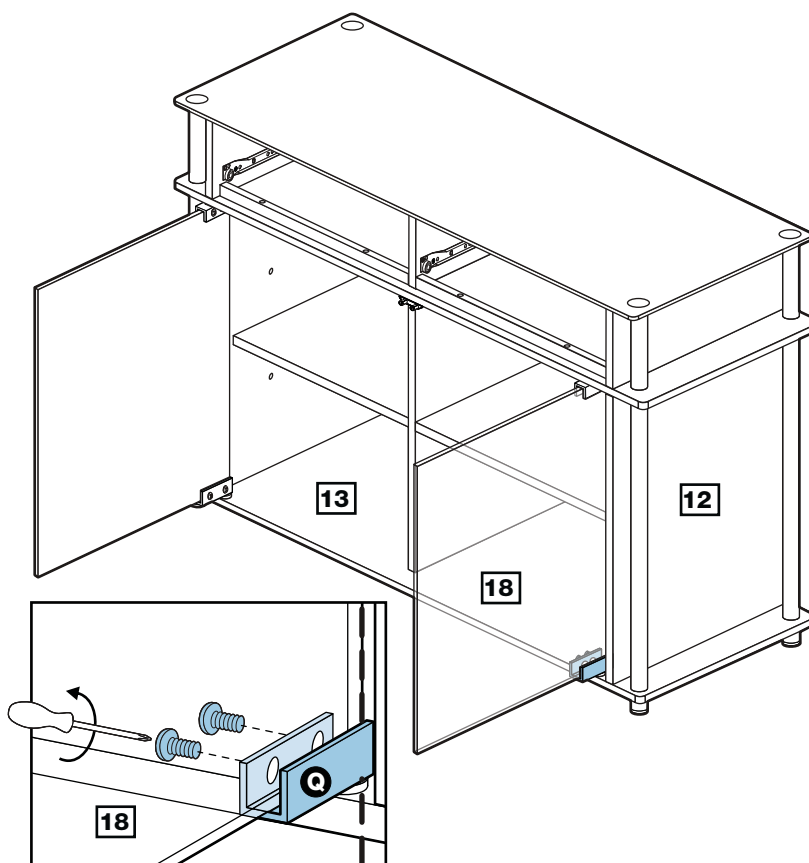

Step 50

Attaching counterplate set

Remove the underlying layer of the sticker **S** and attach to the glass door at the position as shown.

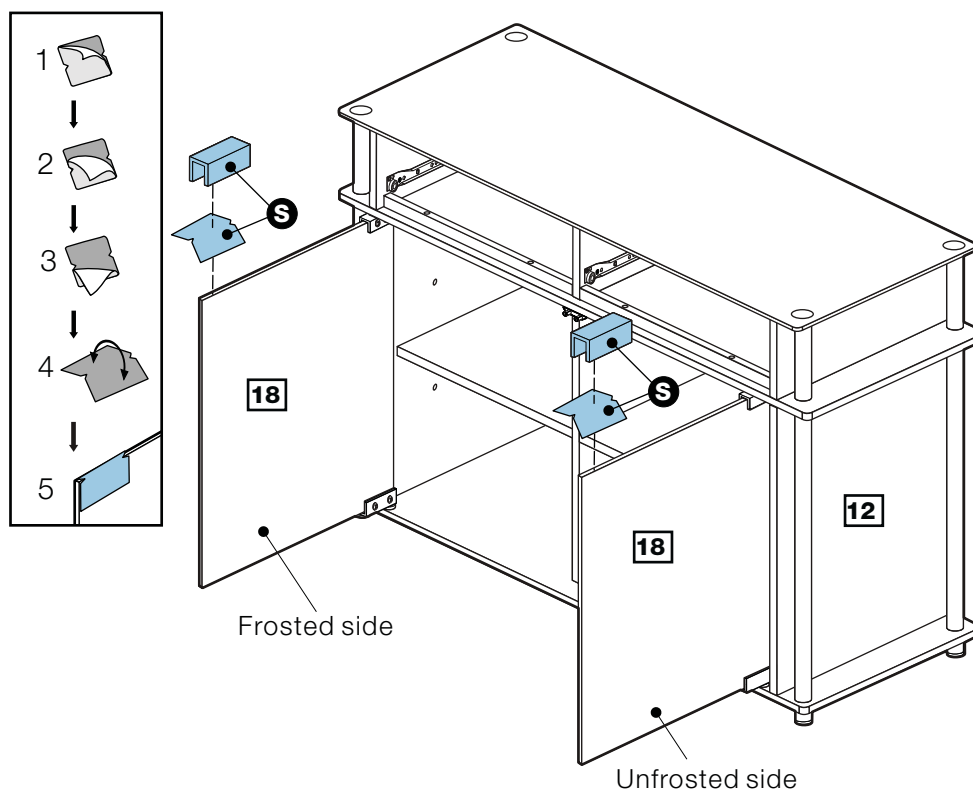


Assembly Instructions

Step 51

Attaching drawer panels


Attach drawer side panel **20** to drawer back panel **19** by using 2 pcs of screw **T**.

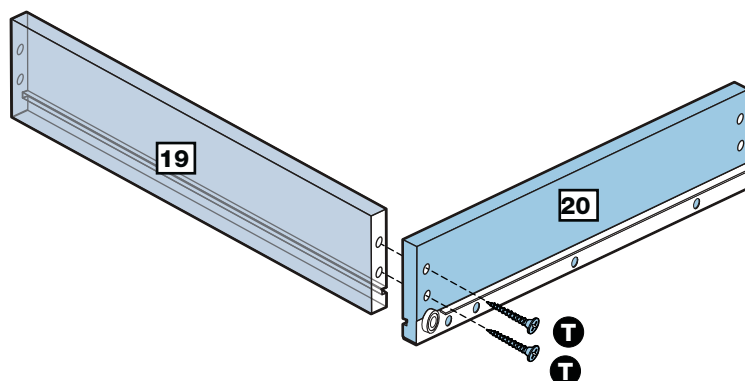

Step 52

Attaching drawer panels


Attach drawer side panel **21** to drawer back panel **19** by using 2 pcs of screw **T**.

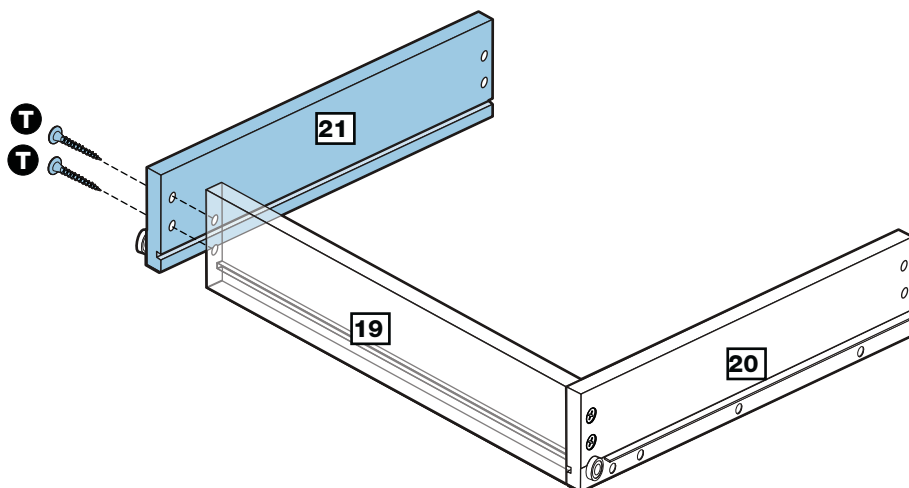

Step 53

Attaching drawer panels

Slide drawer bottom panel **22** into the drawer unit as shown.

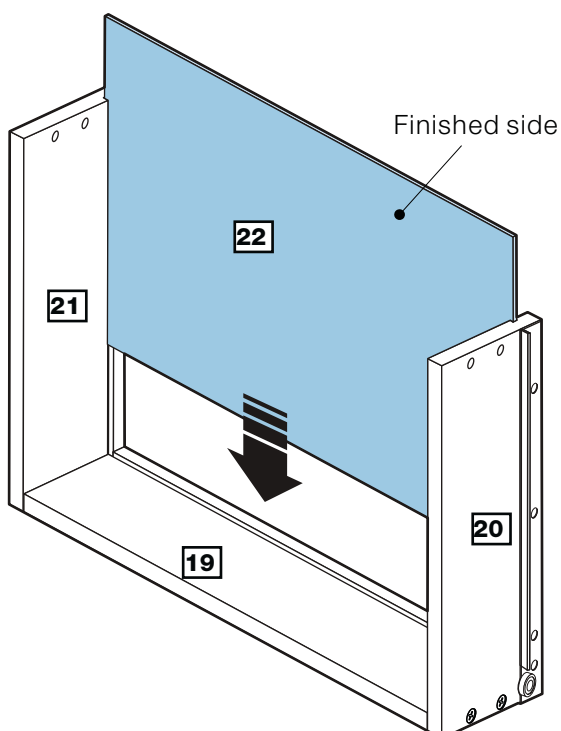


Assembly Instructions

Step 54

Attaching drawer front panel


Attach drawer front panel **23** onto the drawer unit.

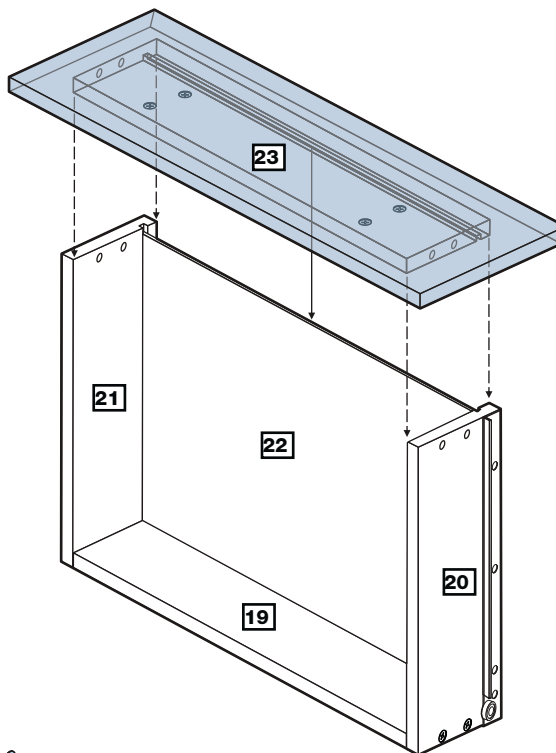


Step 55

Fixing drawer front panel

a: Fixing drawer front panel by using 4 pcs of screw **T**.

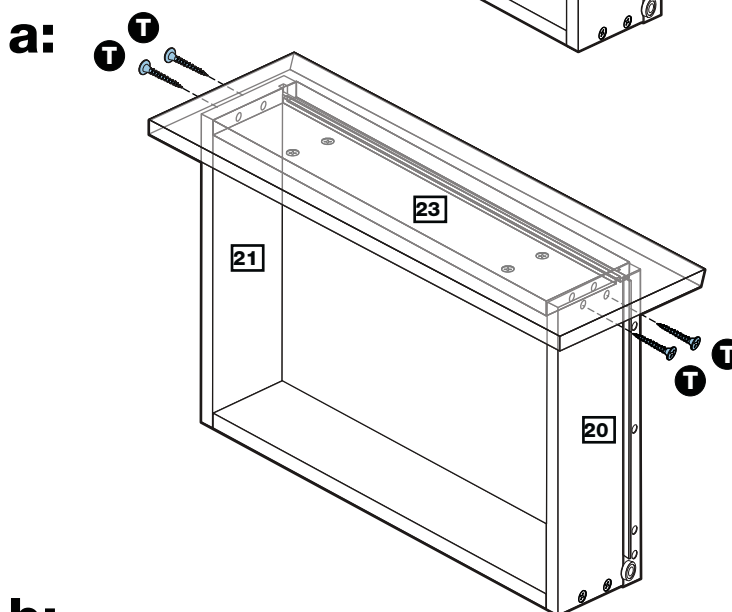

b: Repeat step 51 to step 55 for right hand side drawer as shown.

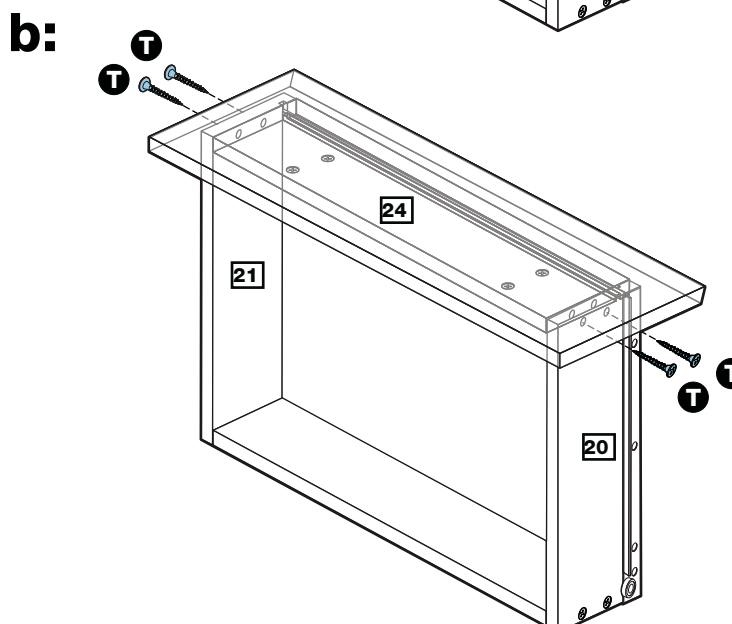


Assembly Instructions

Step 56


Fixing drawers


Slide 2 x drawers into the unit as shown.

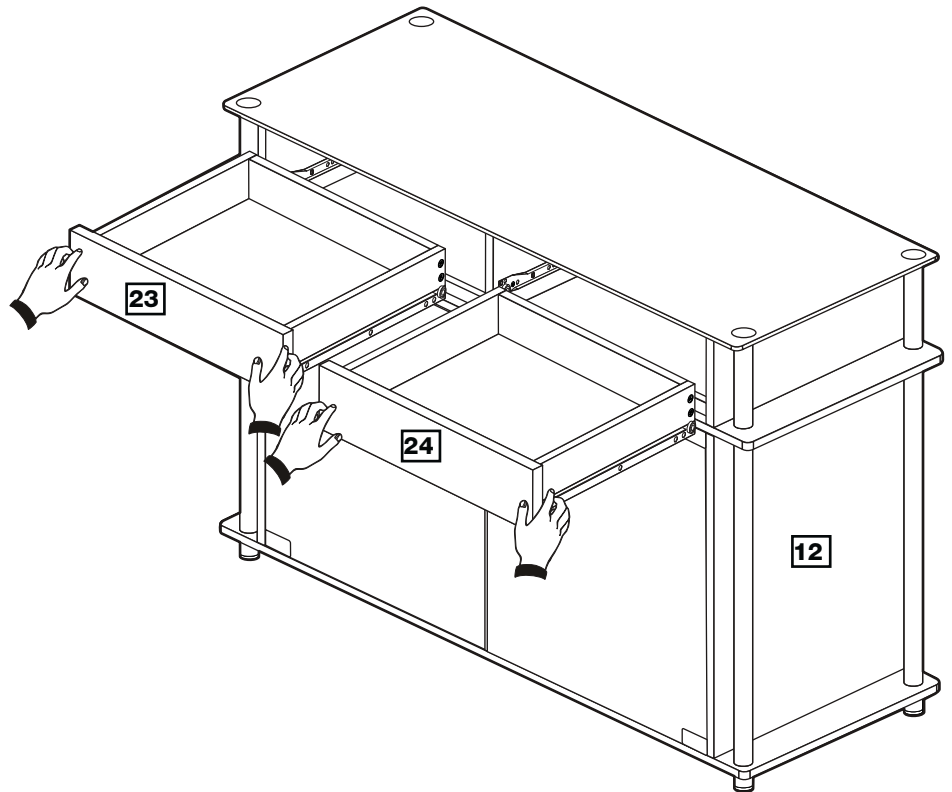

Step 57

Prepare wall mount strap

Pull the wall mount strap  upward as shown.

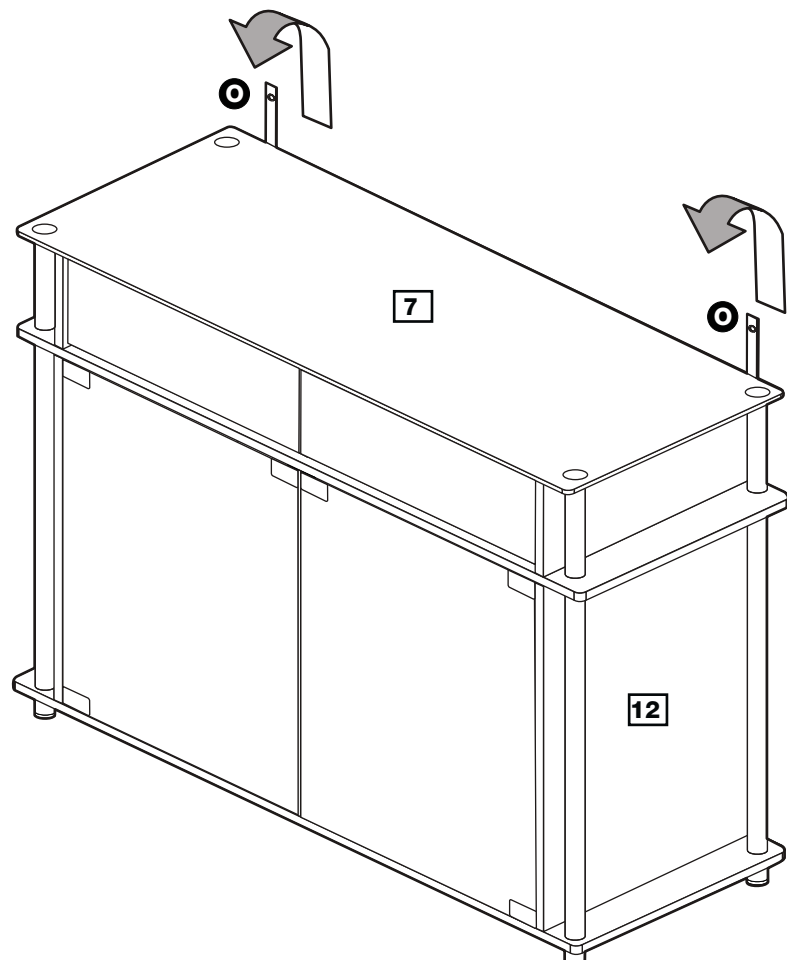


Assembly Instructions

Step 58

Fixing to wall

It is recommended that the unit is fixed to a wall for safety concern.

Please ensure the wall strap  fix on top of the unit by using screws.

With help, move the unit into position.



Warning:

The unit is heavy.

Lift with care.

Marking the fixing holes position on wall and then remove the unit.

Drill 6mm hole and insert wall plug.







Warning:

Before drilling, check wall for hidden pipes and cables.

Reposition the unit and fix wall strap to the wall plug by using screws.

Note: Wall plug supplied are for solid wall only.

The correct type of fixing must be used for your wall, seek professional advice if in doubt.

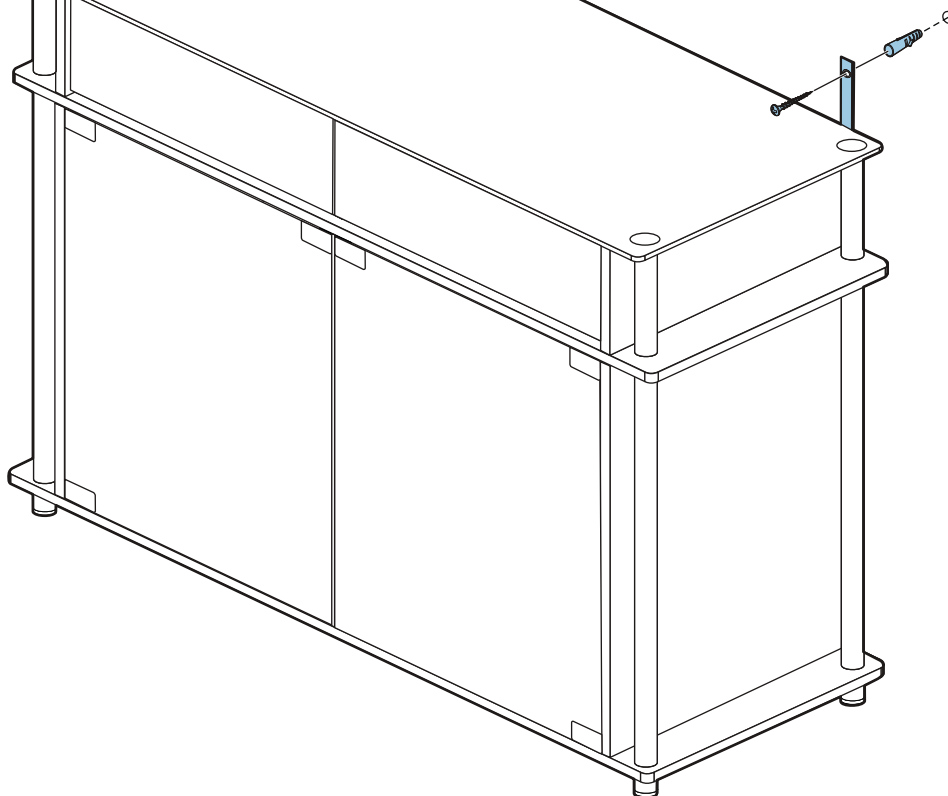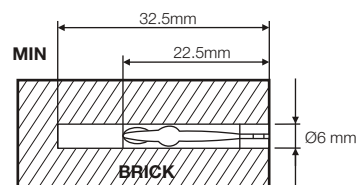

If you need help or have damaged or missing parts, call the Customer Helpline: 08456 400800

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:** Always use a larger screw and wall plug if you are not sure.
- 2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

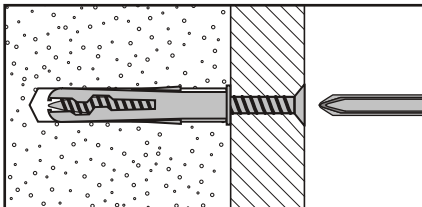


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

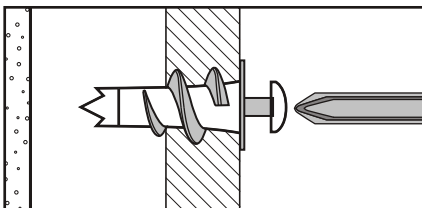


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

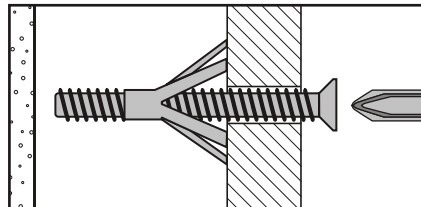


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

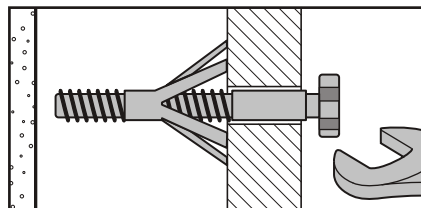


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

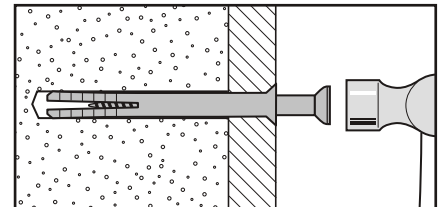

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

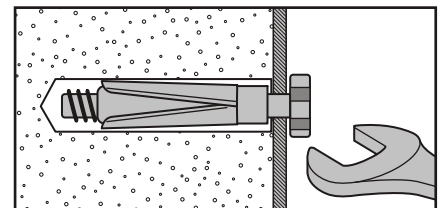

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.


Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.

Matrix Large Sideboard

Assembly Instructions - Please keep for future reference

6142151

haygena

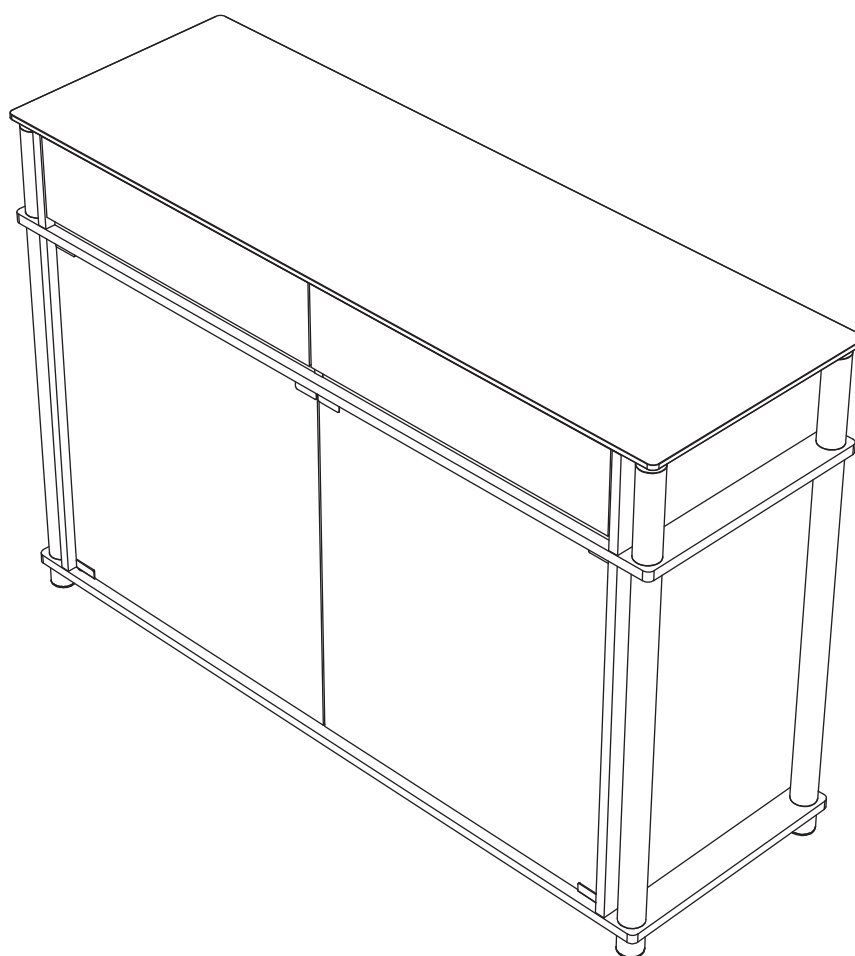

Dimensions

Width - 120cm

Depth - 40cm

Height - 80cm

Important - Please read these instructions fully before starting assembly

If you need help or have damaged or missing parts, call the Customer Helpline : 08456 400800



Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand on the panels, this could cause damage.
- Assemble the unit as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- We do not recommend the use of power drill/ drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers.
- Dispose of all packaging carefully and responsibly.
- Warning: The unit weighs approximately 53.5kgs. Please lift with care.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Note: If required the next page can be cut out and used as a reference throughout the assembly. Keep this page with these instructions for future reference.


Components - Panels

If you have damaged or missing components,
call the Customer Helpline : 08456 400800


Please check you have all the panels listed below




1 Top right side panel
(39.9 x 15.1 cm)




2 Top left side panel
(39.9 x 15.1cm)



3 Top middle panel
(36.7 x 15.1cm)

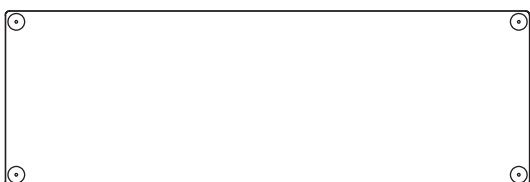


4 Glass Top (120 x 40cm)

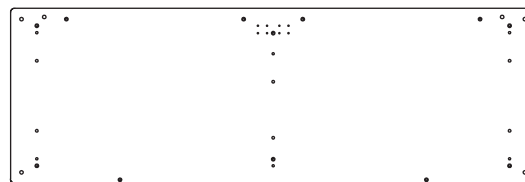


5 Top panel (120 x 40cm)




6 Bottom panel (120 x 40cm)




7 Top back panel (106.5 x 15.1cm)




8 Lower right side panel
(58 x 39.9cm)



9 Lower left side panel
(58 x 39.9cm)



10 Lower middle panel
(58 x 34cm)

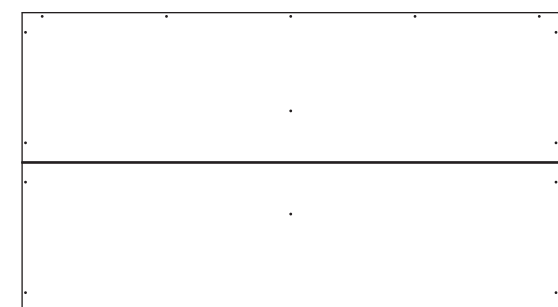


11 Back panel (109.4 x 61cm)



12 Supporting panel x 2
(52.4 x 3.5cm)



13 Shelf x 2
(52.5 x 33.9cm)



14 Metal tube x 4
(58 x 3.8cm)



15 Metal tube x 4
(14 x 3.8cm)




16 Metal tube x 4
(3.2 x 3.8cm)



Components - Panels

If you have damaged or missing components,
call the Customer Helpline : 08456 400800

Please check you have all the panels listed below



17 Left drawer front panel
(52.8 x 13cm)



18 Right drawer front panel
(52.8 x 13cm)



19 Left drawer side panel x 2
(34 x 8cm)




20 Right drawer side panel x 2
(34 x 8cm)




21 Drawer back panel x 2
(47.6 x 8cm)



22 Drawer bottom x 2
(48.6 x 33.8cm)



23 Glass door x 2
(57.2 x 52.8cm)




























24 Foot
(3.2 x 3cm)




Components - Fittings

Please check you have all the fittings listed below


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

A  Locking Pin x 18	B  15mm Locking nut x 10	C  12mm Locking nut x 8
D  Dowel 30mm x 24	E  12mm Screw x 8	F  38mm Screw x 9
G  15mm Screw x 32	H  Left drawer runner x 2	I  Left side runner x 2
J  Right drawer runner x 2	K  Right side runner x 2	L  Shelf support x 8
M  45mm Screw x 20	N  Wall plug x 2	O  Wall strap x 2
P  15mm Screw x 2	Q  25mm Screw x 2	R  Right hinge set x 2
S  Left hinge set x 2	T  Counterplate x 2	U  Door catch set x 2
V  Door catch set screw x 8	W  Ease door assembly spring x 4	X  55mm Screw x 12
Y  Pad x 2		

Tools required

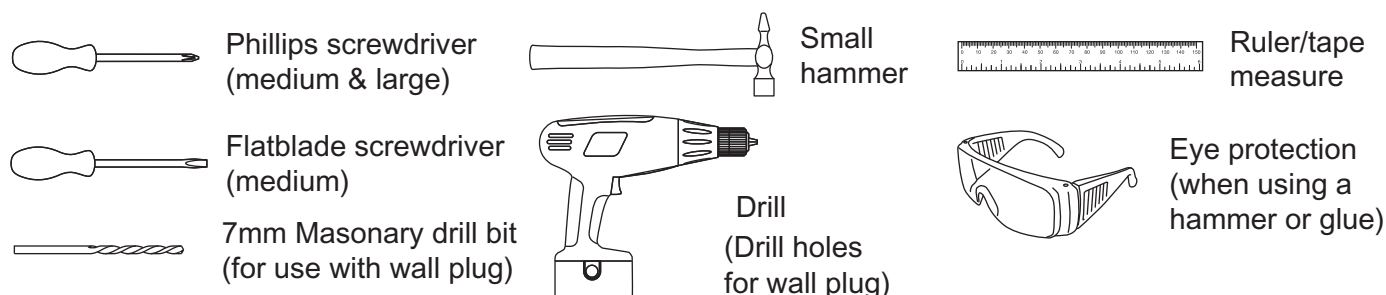

Ruler - Use this ruler to help correctly identify the screws



Assembly Instructions


Step 1

Attaching runner

Fix runner **I** onto
Top left side panel **2**
by using 3 pcs of
Screw **G**.



Note: If panels
have any
transparent
protection film,
remove from **ALL**
panels before
starting.

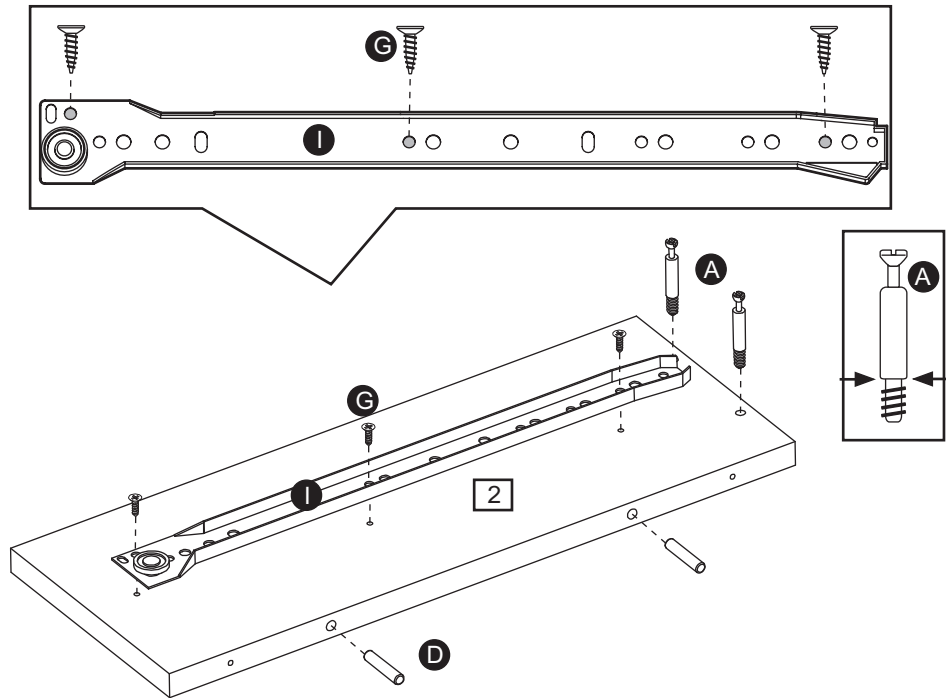

Step 2

Attaching Locking pin

Fix 2 pcs of Locking pin
A and Dowel **D** into
Top left side panel **2**.

Step 3


Attaching runner

Fix runner **K** onto
Top right side panel **1**
by using 3 pcs of
Screw **G** to fix as shown.

Step 4

Attaching Locking pin

Fix 2 pcs of Locking pin
A and Dowel **D** into Top
right side panel **1**.

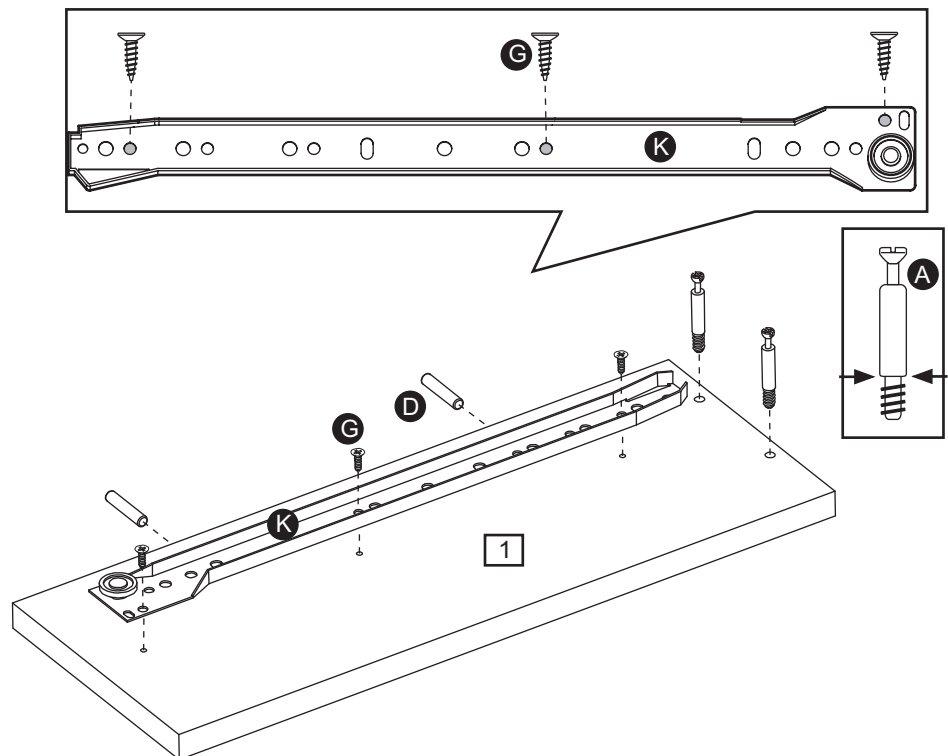


Assembly Instructions

Step 5

Attaching runner


Fix runner **K** onto
Top middle panel **3**
by using 3 pcs
of Screw **G**.

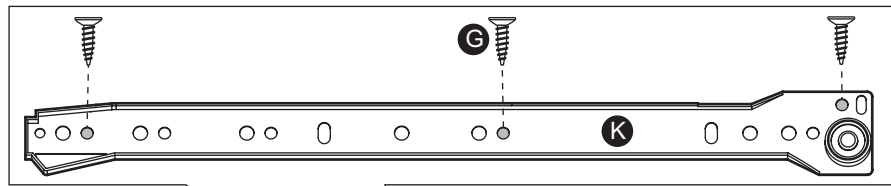

Step 6

Attaching runner


Fix runner **I** onto
Top middle panel **3**
by using 3 pcs of Screw
G. Insert Dowel **D** into
Top middle panel **3**.

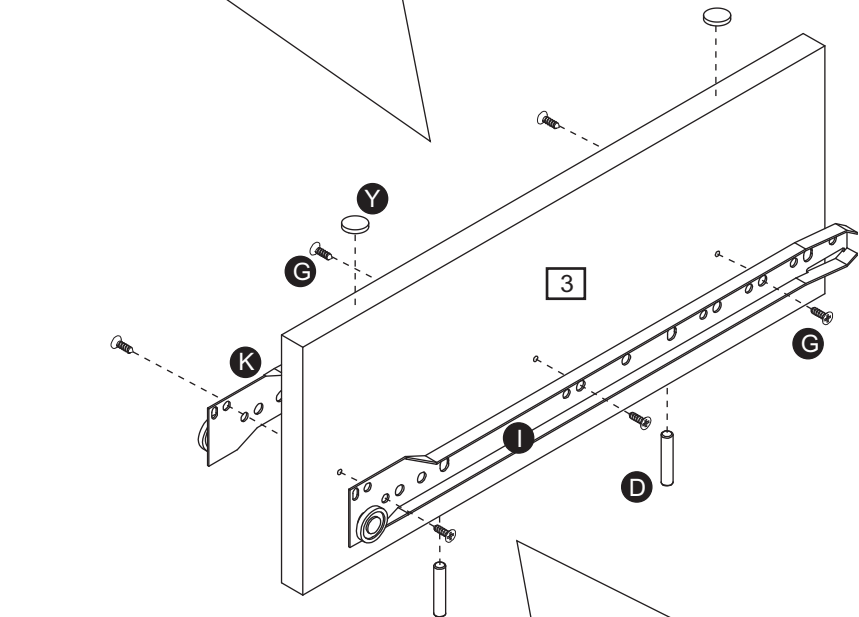

Step 7

Stick Pad



Fix Stick Pad **Y** onto
Top middle panel **3**.

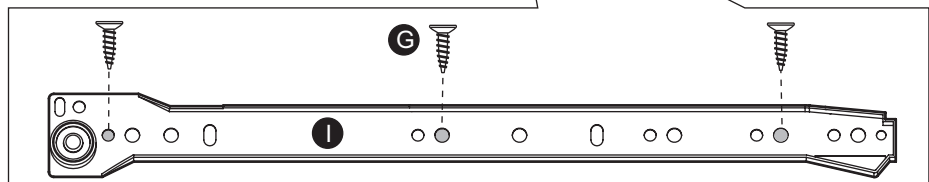

Step 8

Attaching panel

Fix Top back panel
with side panel **1** & **2**.
Insert Dowel **D** into Top
back panel **7**.

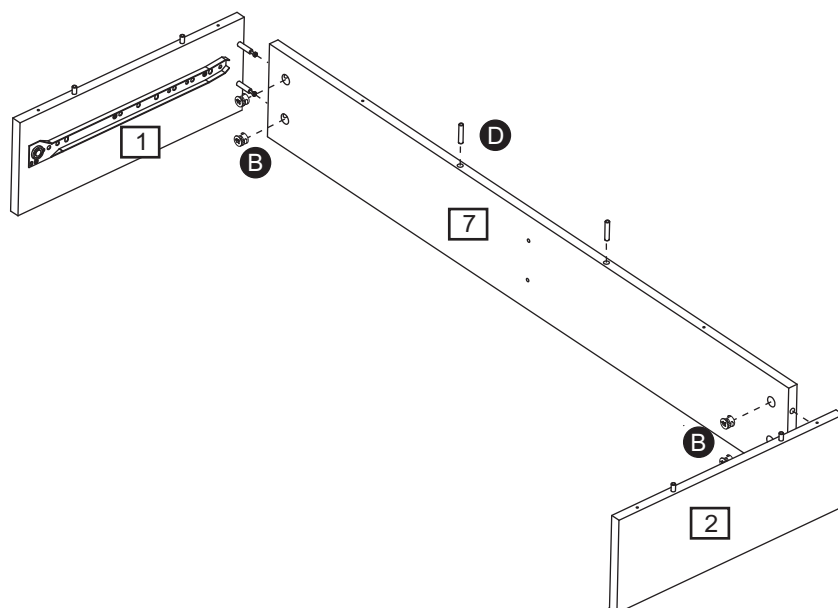

Assembly Instructions

Step 9

Attaching panel


Fix Top middle panel **3** onto the unit by using 2 pcs of Screw **M**.



Warning:

The unit is heavy.

Lift with care.

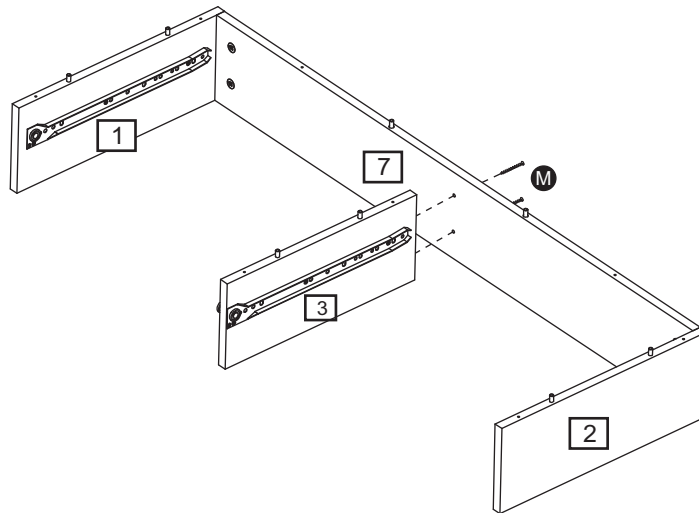


Step 10

Attaching panel

Two people are needed here.

Fix top **5** onto panels **1** **2** **3** **7** by using 8 pcs of Screw **M**.

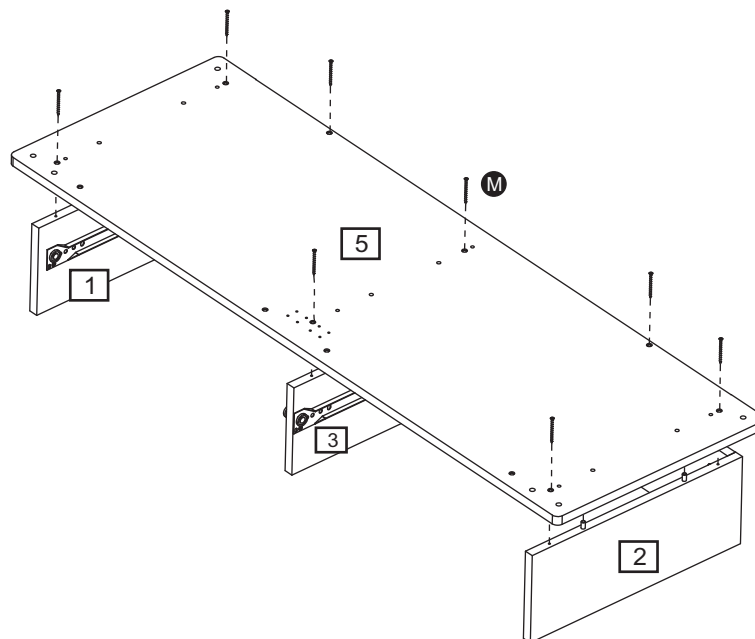


Step 11

Attaching panel

Insert 2 pcs of dowel **D** onto the Supporting panel **12**.

Fix Supporting panel **12** onto the unit with Screw **F**.

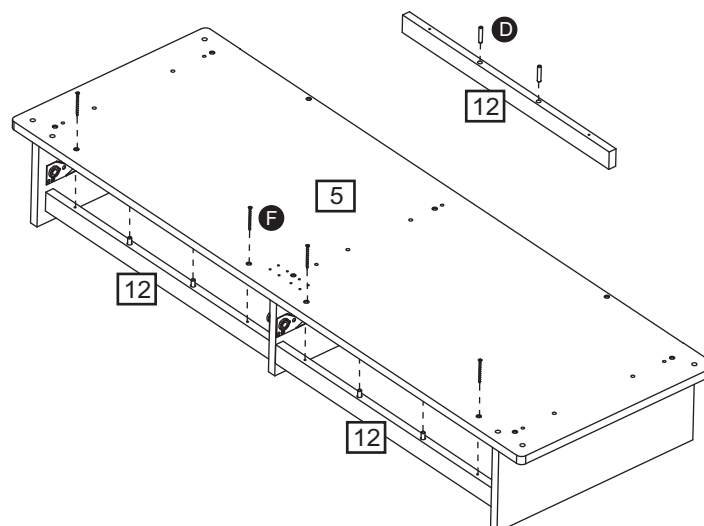


Assembly Instructions

Step 12

Attaching Screws


Fix 4 pcs of Screw (X) onto glass top [4].

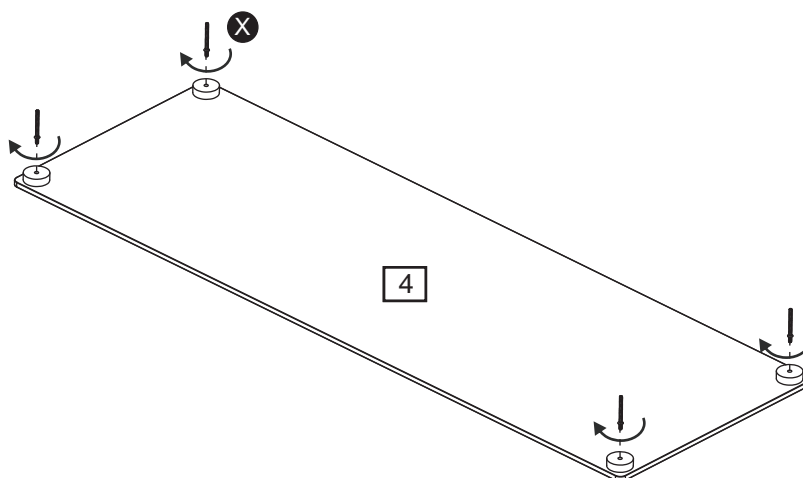

Step 13

Attaching Metal tube


Fix 4 pcs of metal tube [15] onto the Screw (X).

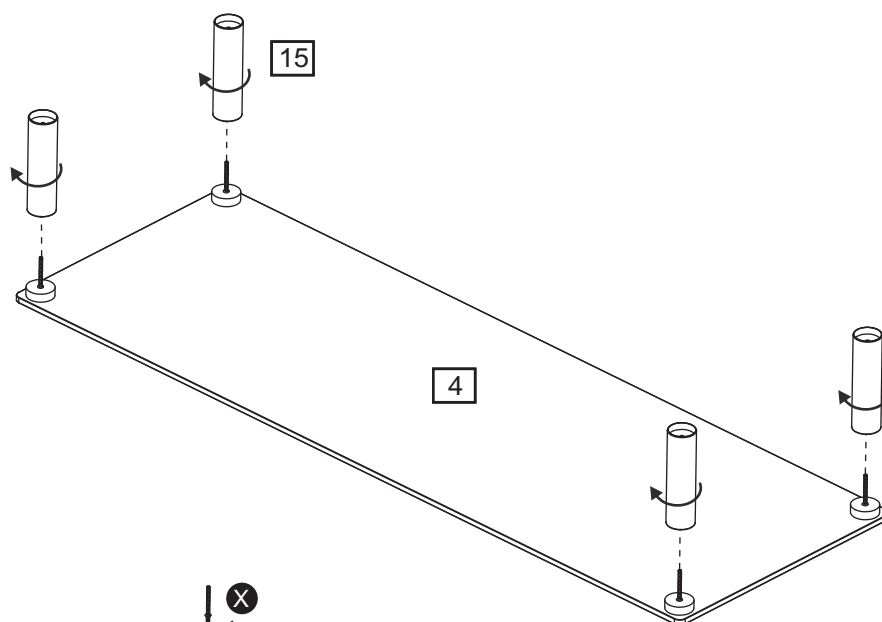

Step 14

Attaching Screw

Fix 4 pcs of screw (X) onto glass top [4].

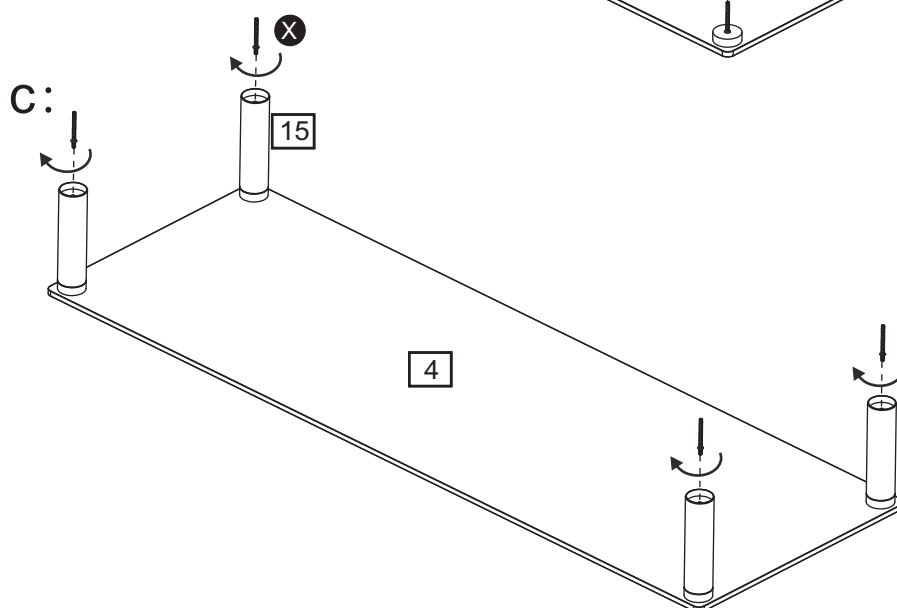

Assembly Instructions

Step 15

Attaching panel

Two people are needed here.


Fix the top panel **5** onto the 4 pcs of metal tube **15**.



Warning:

The unit is heavy.


Lift with care.

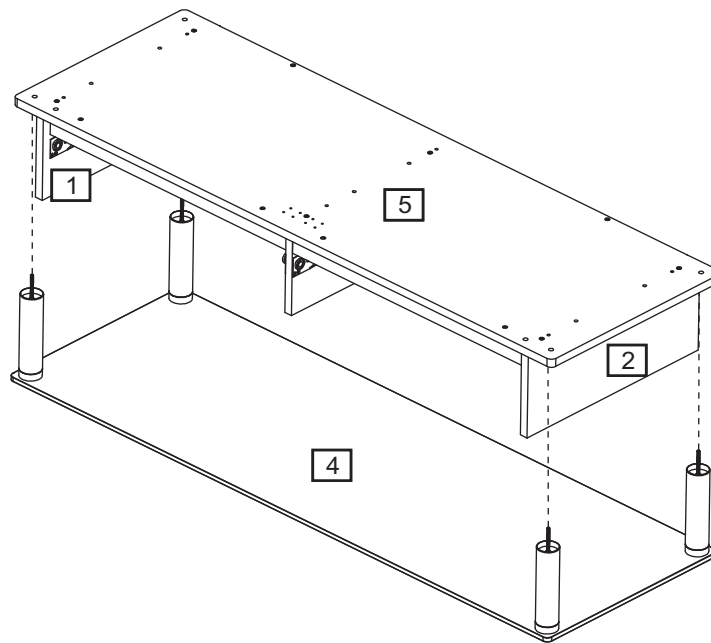

Step 16

Attaching locking pin

Insert Locking pin **A** into panel **5**.

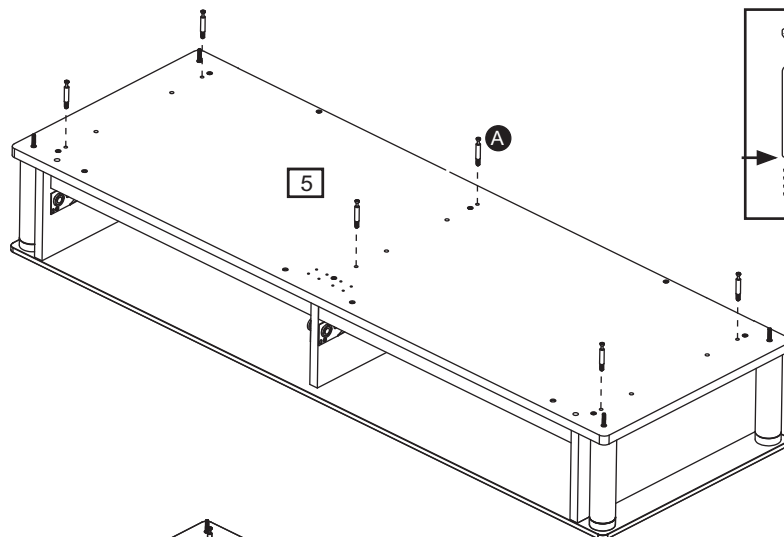


Step 17

Attaching door catch set

Fix door catch set **U** onto the Top panel **5** with Screw **V** as shown.

Insert 2 pcs of Door assembly spring **W** onto the Top panel **5**.

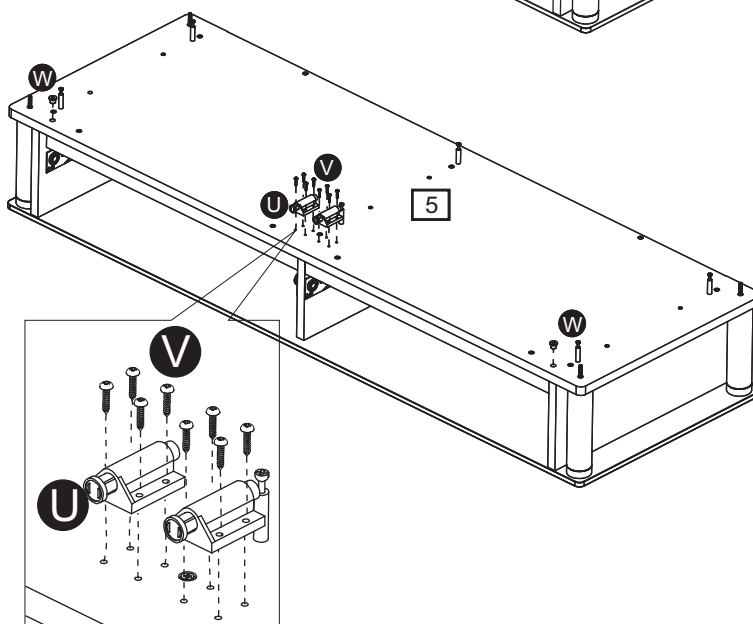


Assembly Instructions

Step 18

Attaching Metal tube


Fix attach 4 pcs of metal tube **14** onto 4 pcs of Screw **X**.

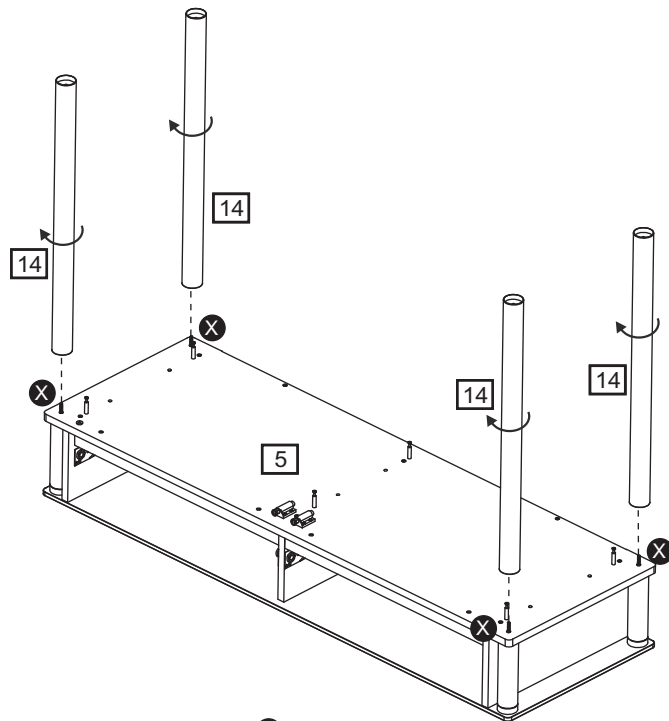

Step 19

Attaching Dowel


Insert Dowel **D** into panel **8** **9** **10**.

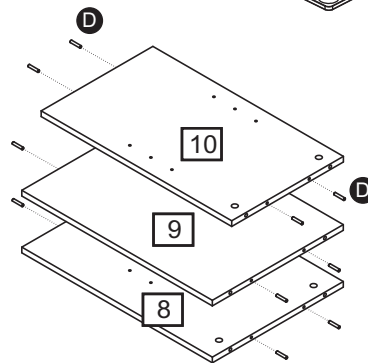

Step 20

Attaching side panel

Fix side panel **8** **9** and middle panel **10**.

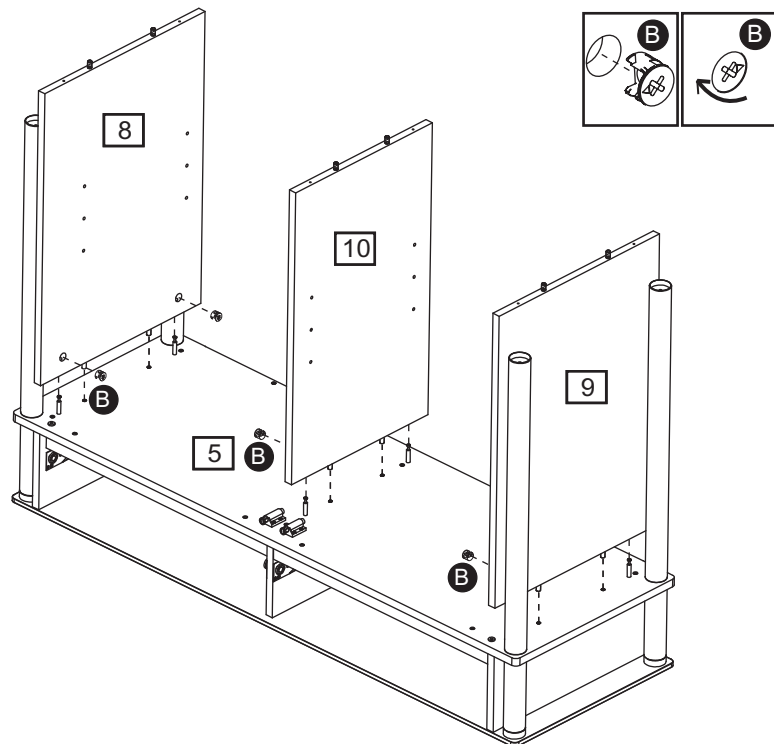


Assembly Instructions

Step 21

Attaching Screws

Fix 4 pcs of screw **X** onto metal tubes **14**.

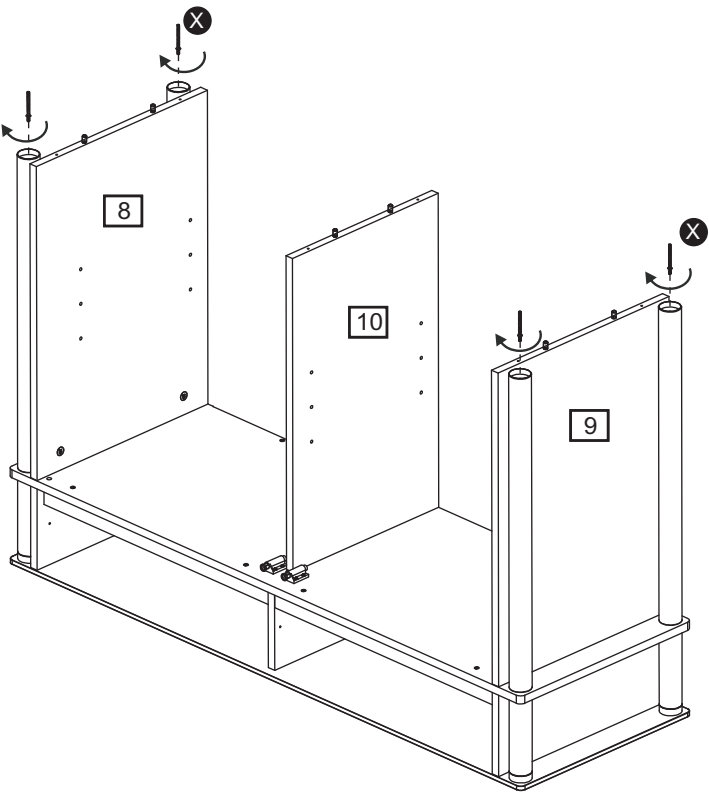


Step 22

Attaching Panel

Fix Insert Door assembly spring **W** onto Bottom panel **6**.

Attaching Foot **24** onto


Bottom panel **6** with Screw **F**.

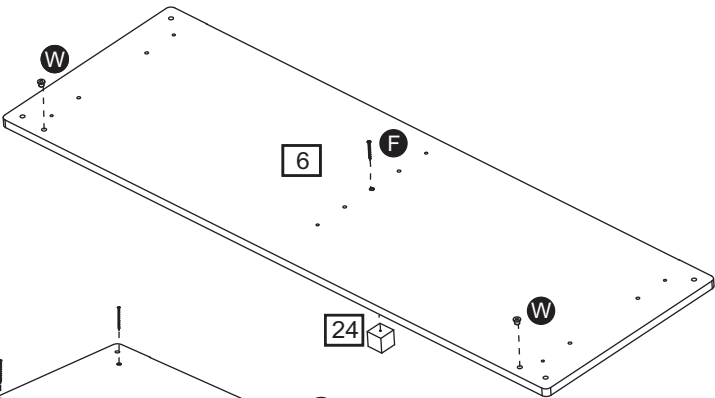

Step 23

Attaching Panel

Fix Bottom panel **6** onto the unit with Screw **M**.

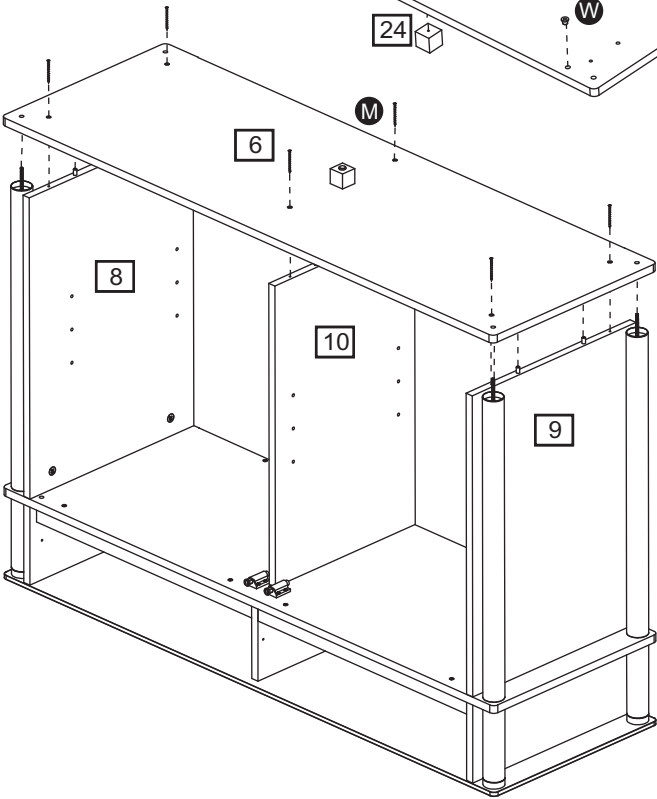


Assembly Instructions

Step 24

Attaching Metal tube

Screwing Metal tube


16 onto panel 6.

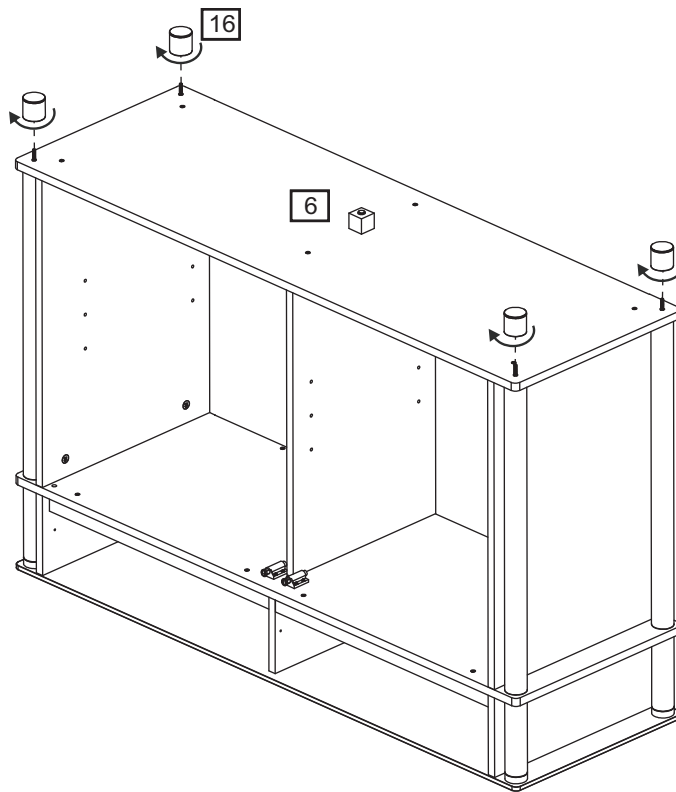

Step 25

Attaching back panel

Fix back panel 11 onto
this unit by using 20 pcs
Screw G.

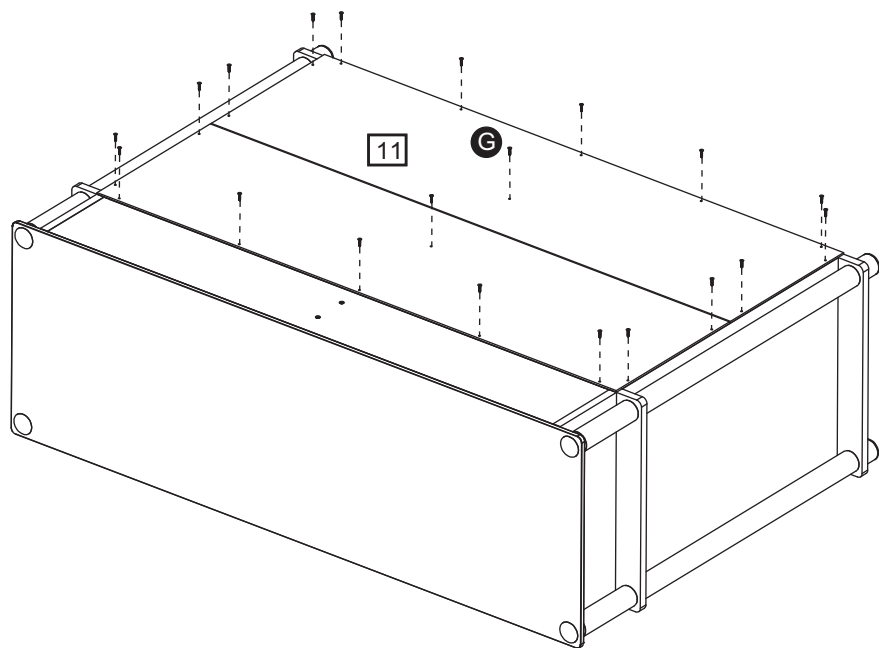

Assembly Instructions

Step 26

Attaching wall mounting strap


Fix Wall strap **O** onto Top back panel **7** by using the Screw **P**.



Warning:

The unit is heavy.

Lift with care.

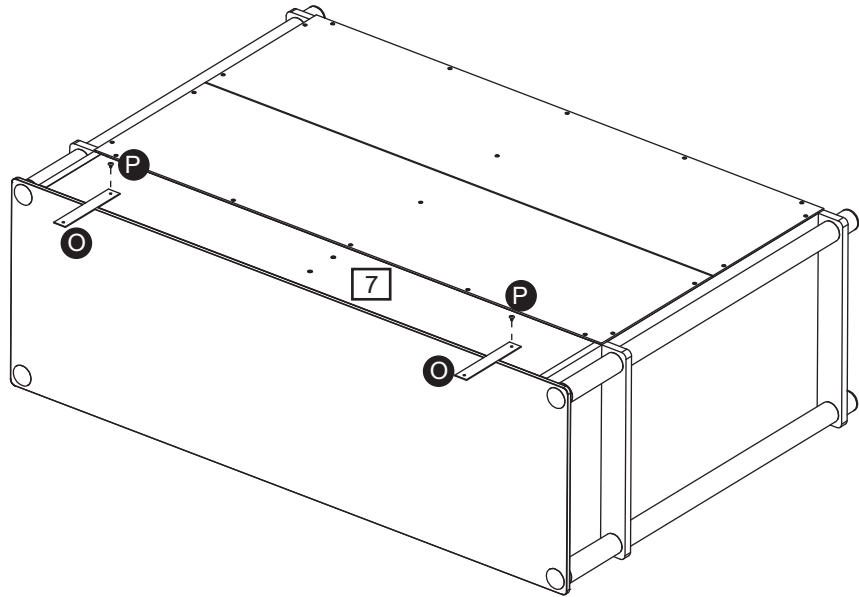


Step 27

Attaching shelf

Insert 8 pcs of shelf support **L** at the proper position of panel **8** **9** **10**

Place the shelf **13** onto the unit.

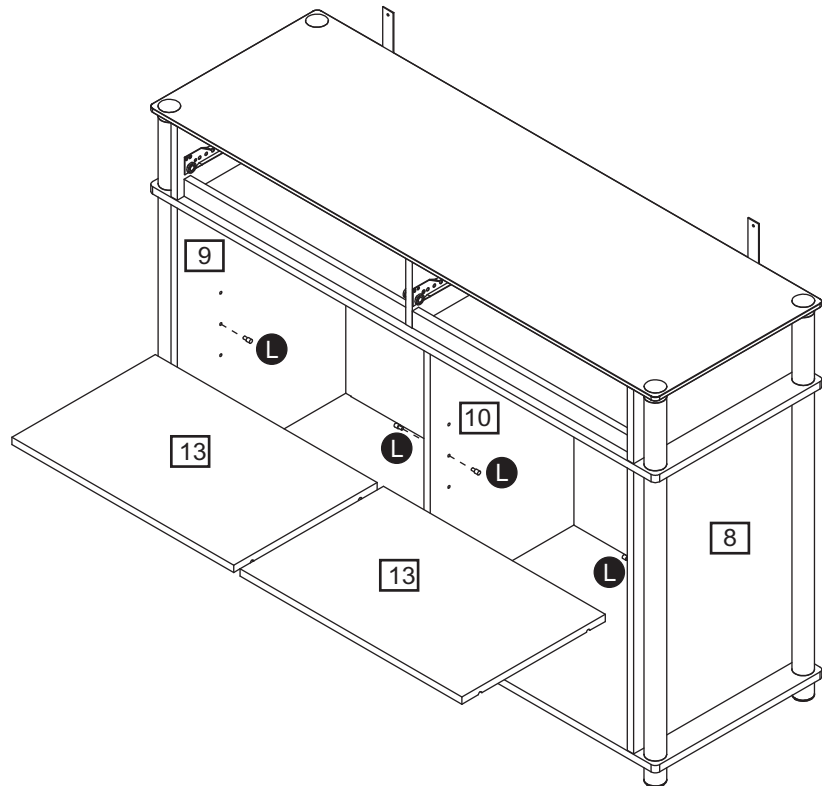

Assembly Instructions


Step 28

Attaching door hinge

Make sure the parts **R** **S** as shown is the correct one for assembly at this stage.

CAUTION:

Before tighten the glass with the parts **R** **S** ,
Please ensure the parts, align to the edge of the glass door **23** .

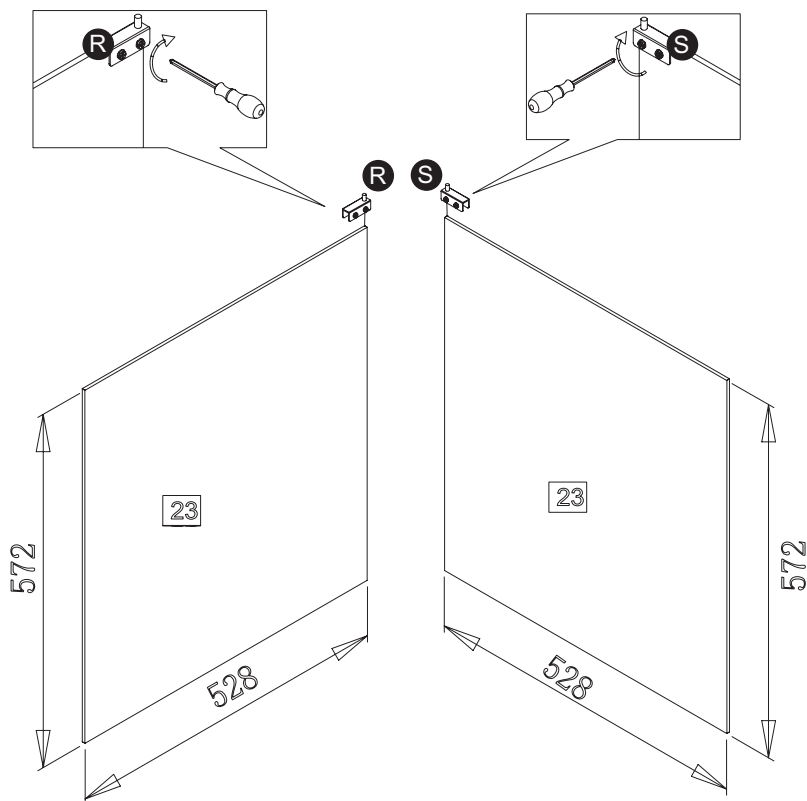


Step 29

Attaching door

Two people are required here.

a: Attach glass door **23** onto the unit.

b: Fix by tools as shown.

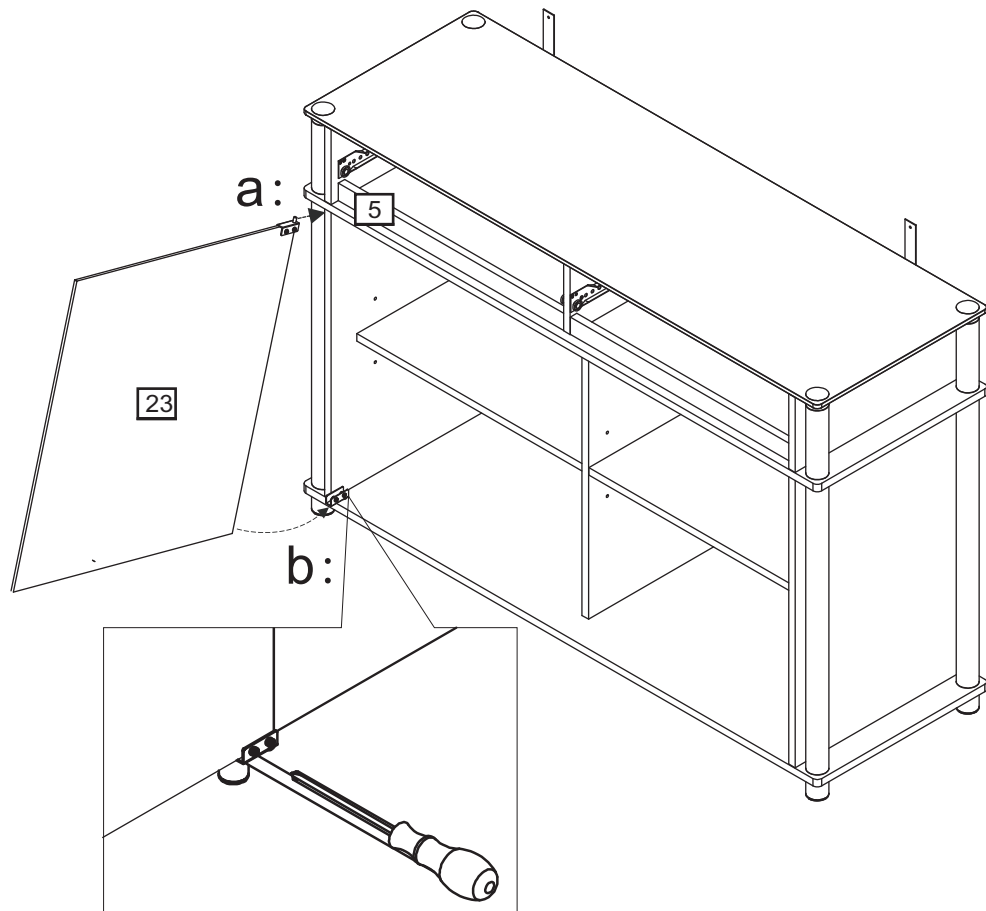

Assembly Instructions


Step 30

Attaching door

Two people are required here.

a: Before tighten the glassl with parts **S** align to the glass door **23**.

a:

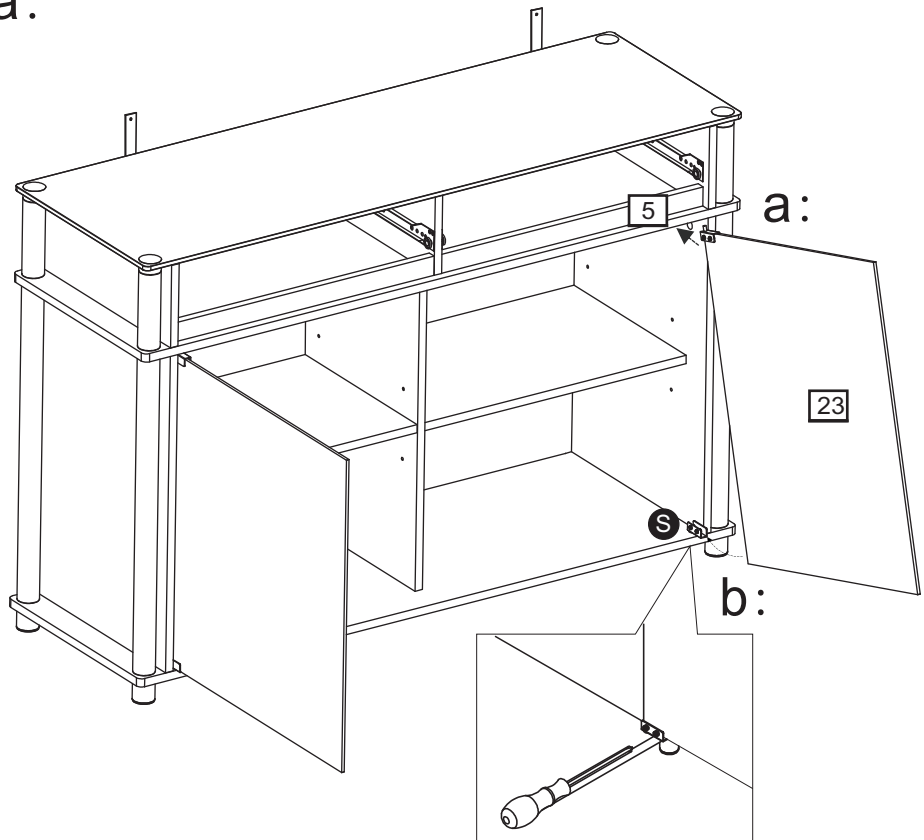

Step 31



Door assembly

Two people are required here.

b: Make ensure you are facing the frosted side of the glass door **23** as shown.

Peel off the cover layer and attach parts **T** as shown.

b:

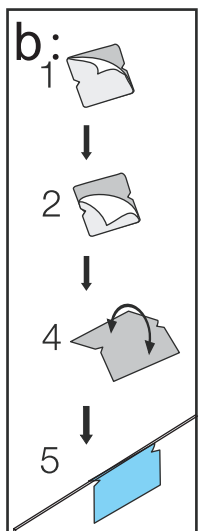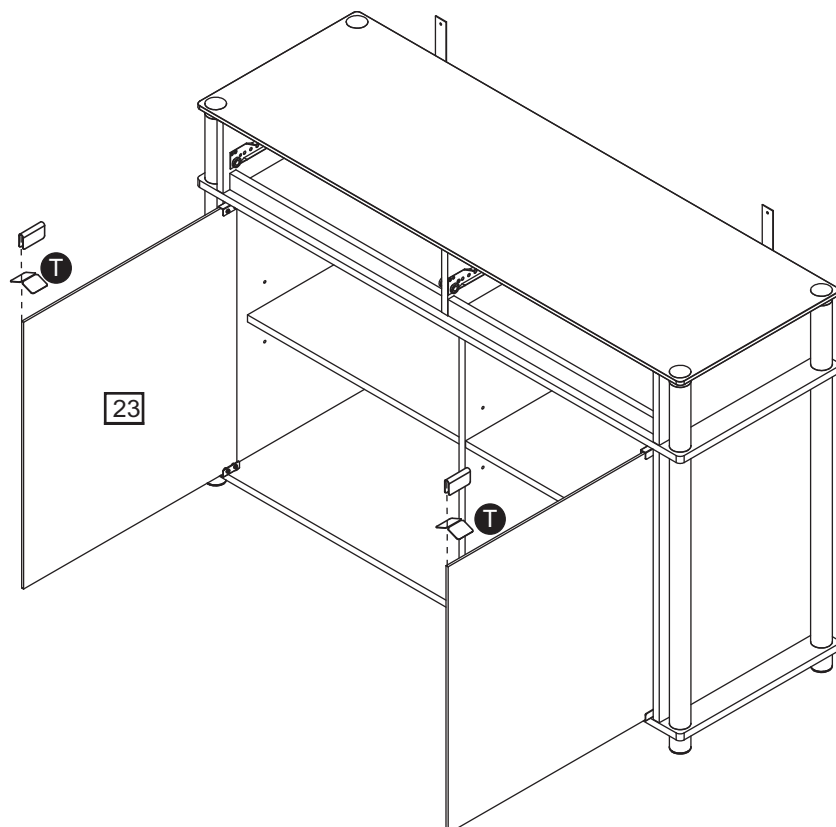

Assembly Instructions

Step 32

Fitting drawers




a: Use Screws **E** to fix Left drawer runner **H** onto the Drawer left **19**.

b: Use Screws **E** to fix Right drawer runner **J** onto the Drawer right **20**.

c: Use Screws **F** to fix Drawer left **19** Drawer right **20** onto Drawer back **21**.

d: Screwing Locking pins **A** into Drawer front **17** **18**.

e: Slide Drawer bottom **17** into the unit.
Use Locking nuts **C** to fix Drawer front **23** onto the unit.
Use Screws **G** to fix Drawer knob **U** onto the unit.

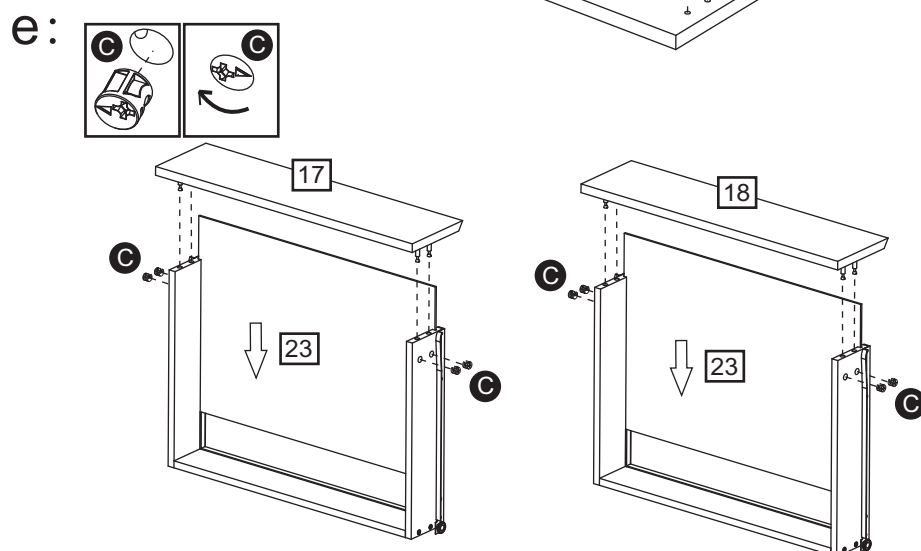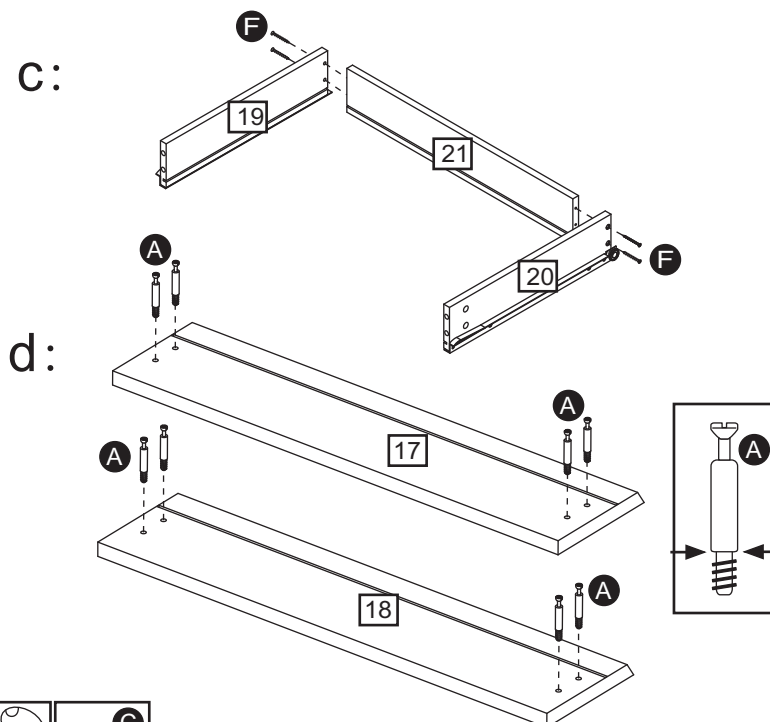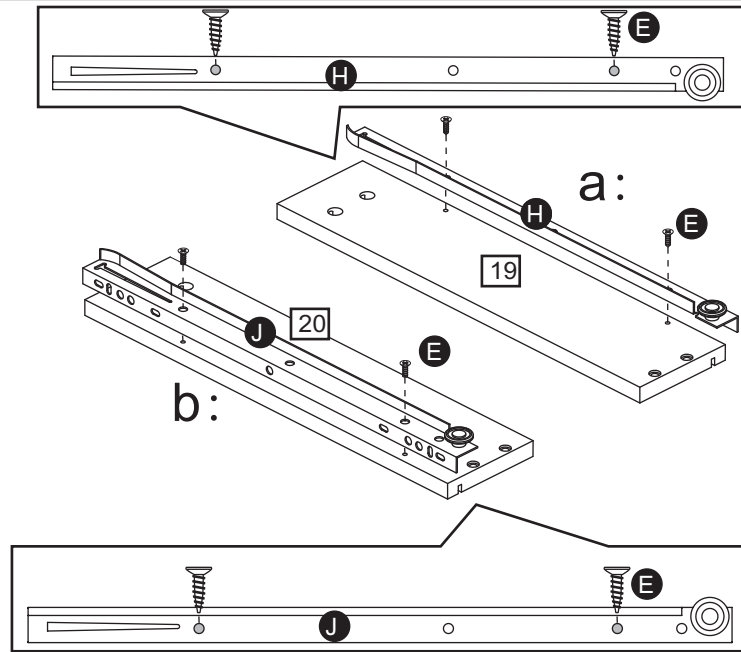


Assembly Instructions

Step 33

Fitting drawers

Sliding 2 drawers 17 18
into the unit as shown.

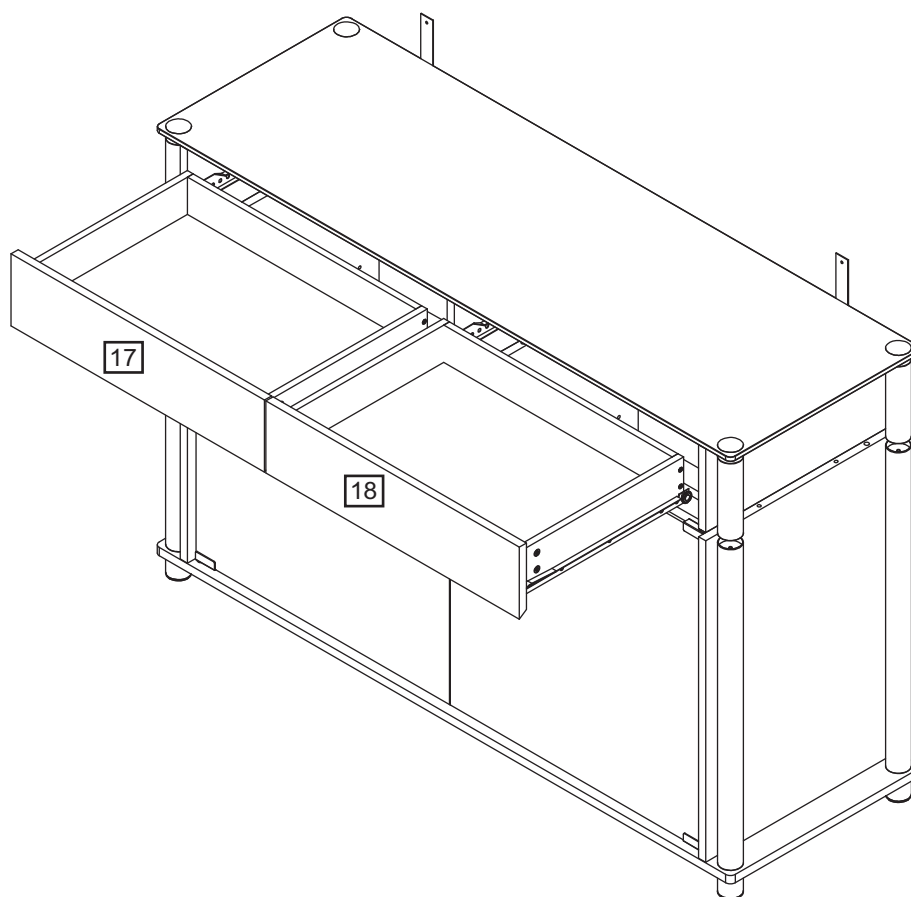

Assembly Instructions

Step 9

Fixing to wall

Note: It would be useful to ask someone to help you at this stage.


It is strongly recommended that the unit is attached to the wall using Wall strap

ⓐ.



Important: When drilling into walls always check that there are no hidden wires or pipes etc. Make sure that the screws and wall plugs supplied are suitable for supporting the unit. Consult a qualified tradesperson if you are not sure.


a: With help, place the unit in the intend position.

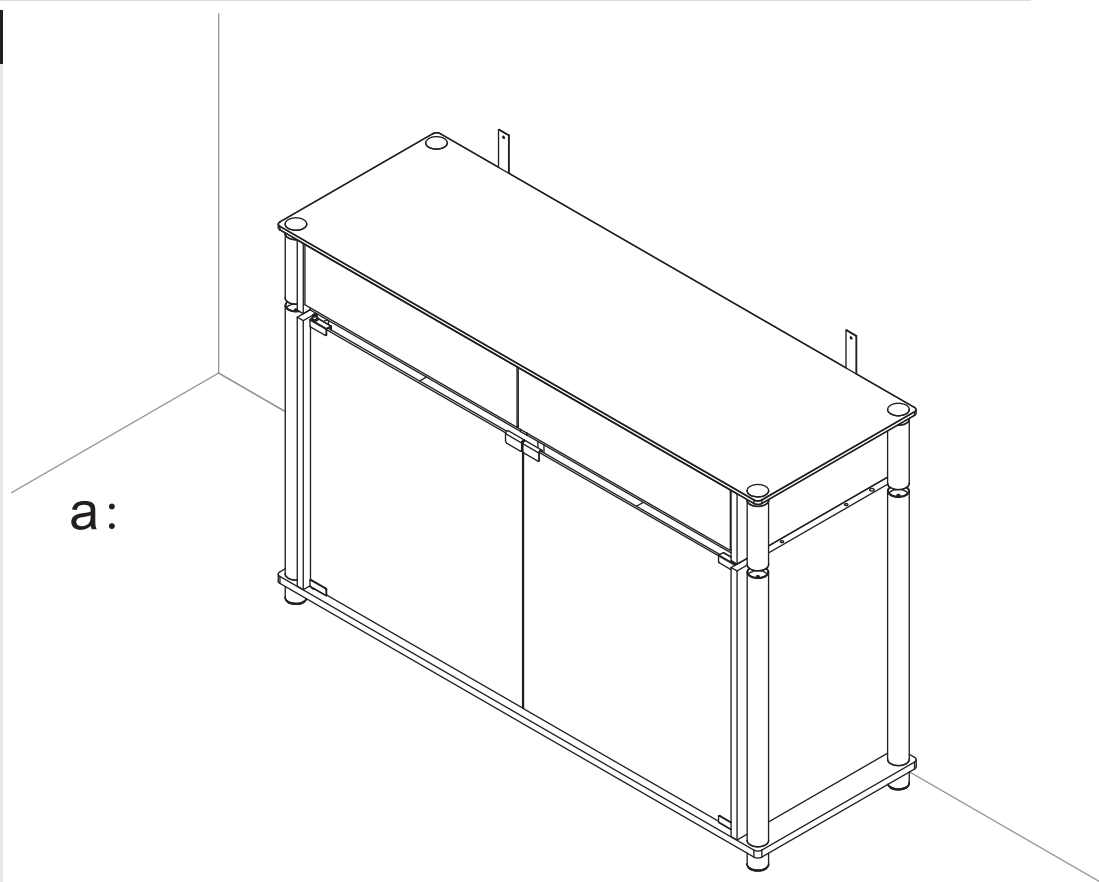

b: Drill a hole in the wall at an appropriate position and insert Wall plug ⓑ (Masonry walls only).

To secure the unit, fix Wall strap ⓐ to the wall using Screw ⓐ (Masonry walls only).

b:

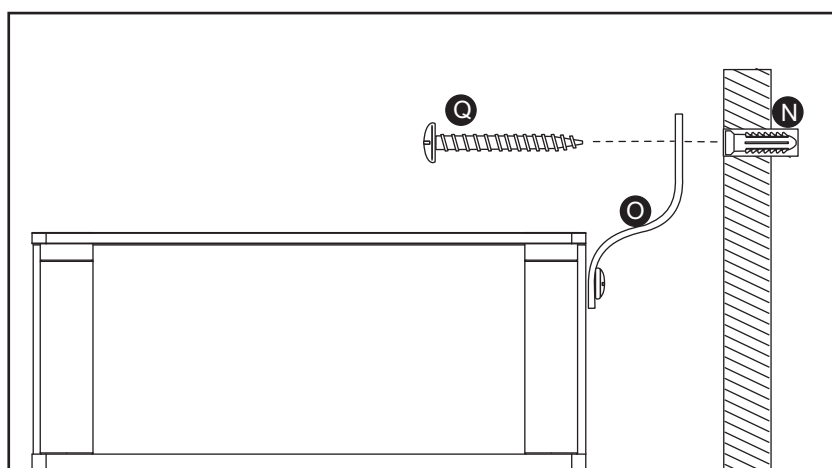

Assembly is complete.

If you need help or have damaged or missing parts, call the Customer Helpline : 08456 400800

A Guide to - Wall Mounting & Fixings

Important note:

If plastic wall plugs are supplied with your product:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.


Failure of the product due to using incorrect fixings is the responsibility of the installer.



Important: When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:**  Always use a larger screw and wall plug if you are not sure.
- 2:** Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3:** Ensure you drill the hole horizontally, do not force the drill or enlarge the hole.
- 4:** Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5:** Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

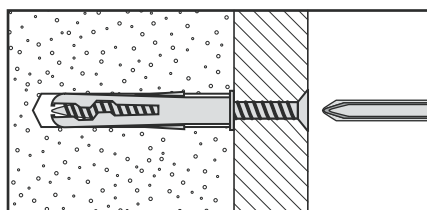


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.2 "Plasterboard" wall plug

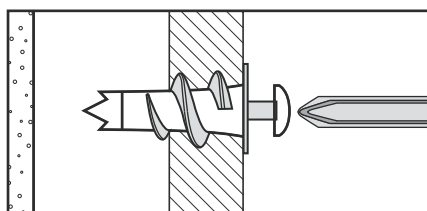


For use when attaching light loads on to plasterboard partitions.

No.3 "Cavity Fixing" wall plug

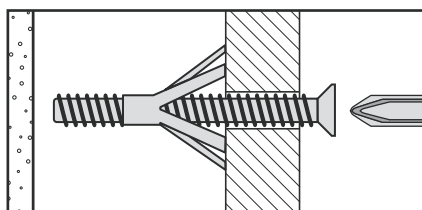


For use with plasterboard partitions or hollow wooden doors.

No.4 "Cavity Fixing-Heavy Duty" wall plug

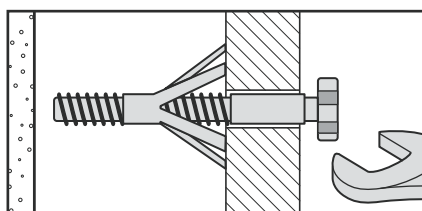


For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.5 "Hammer Fixing" wall plug

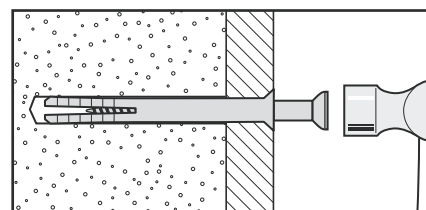

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.6 "Shield Anchor" wall plug Heavy loads

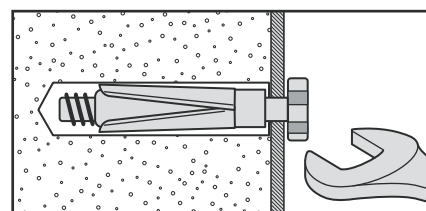

For use with heavier loads such as TV & HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: Always check the fitting and location to ensure your safety in and around the home.

Fitting: From time to time check the fitting to ensure the wall plugs or screws do not become loose.